

Inca 1000



An 8-channel amplifier delivering up to 125 W per channel for installed audio applications.

**POWER**

125 W per channel
(4 Ω /8 Ω)

**INPUT TYPE**

Analog, Digital

**COMPUTER CONTROL**

DSP

**NUMBER OF CHANNELS**

8 channels

The Inca 1000 is a 19-inch rack amplifier designed for space-conscious installations, supplied in a compact 1U format with integrated rack ears. It is ideal for distributed audio systems, supporting both low-impedance and 70V/100V applications within a single unit.

Delivering 8 x 125 W, with up to 4 x 250 W using PowerShare, the Inca 1000 gives installers the flexibility to distribute power according to the needs of each system.

Integrated matrix DSP, built-in Wi-Fi and browser-based control make setup and configuration straightforward across a wide range of installation environments. Pre-loaded Void Acoustics presets further simplify installation and system tuning.

Adjustable user controls allow installers to set appropriate levels of access once the system is commissioned, while giving end users simple, easy-to-use controls for everyday operation.

KEY FEATURES

Full matrix DSP embedded and controlled via Web Browser

Master / Slave functionality with S/PDIF link to multiple amplifiers

Compatibility with 70/100 V Hi-Z or low impedance loads

Automatic power sharing to optimise power for asymmetric loads

Compact form factor with versatile wall/desktop or rack mounting options

Compatible with the Void Acoustics preset library

Fast installation via Wi-Fi and intuitive control software

Quick configuration and reliable operation across a wide range of installation environments

SPECIFICATIONS

Channel Handling

Number of output channels:	8
Number of input channels:	10 (8 analogue, 2 digital)

Audio

Frequency Response	20 Hz - 20 kHz (+0/-0.8 dB (8 Ω load, 3 dB below rated power)
Signal To Noise-Ratio	>106 dB (A-weighted, 20 Hz - 20 kHz, 8 Ω load)
Output Circuitry	UMAC™ Class D - full bandwidth PWM modulator with ultra-low distortion
THD+N (typical)	< 0.05% (20 Hz - 20 kHz, 8 Ω load, 3 dB below rated power)
Protection Circuits	Short circuit -, DC -, Undervoltage -, Temperature - and Overload protection

Construction

Dimensions	44.5 x 440 x 322 mm 1.8 x 17.3 x 12.7 in
Weight	3.8 kg (8.4 lbs)

Output Stage


Total System Power	1000 W
Output Power @ 4/8 Ω	8 x 125 W
Output Power @ 70/100 V*	4 x 250 W
Powershare (up to) Across all channel**	4 x 250 W
Output Voltage	45 Vrms (S.E) - 70/100 V (Hi-Z)

*100 V line mode operates @ -1 dB ($\approx$ 90 V)

**Inca 1000 may only Powershare across Ch1/2 and Ch3/4

AC Mains Power

Power supply	UREC™ universal mains switch mode power supply with Power Factor Correction (PFC) and standby converter
Nominal voltage	Universal Mains, 100 V - 240 V, 50 Hz - 60 Hz
Power Consumption	300 W
Standby Consumption	< 0.5 W
Operating Temperature	0-40°C
Power Ratings	1% THD @ 120 Vac and 230 Vac

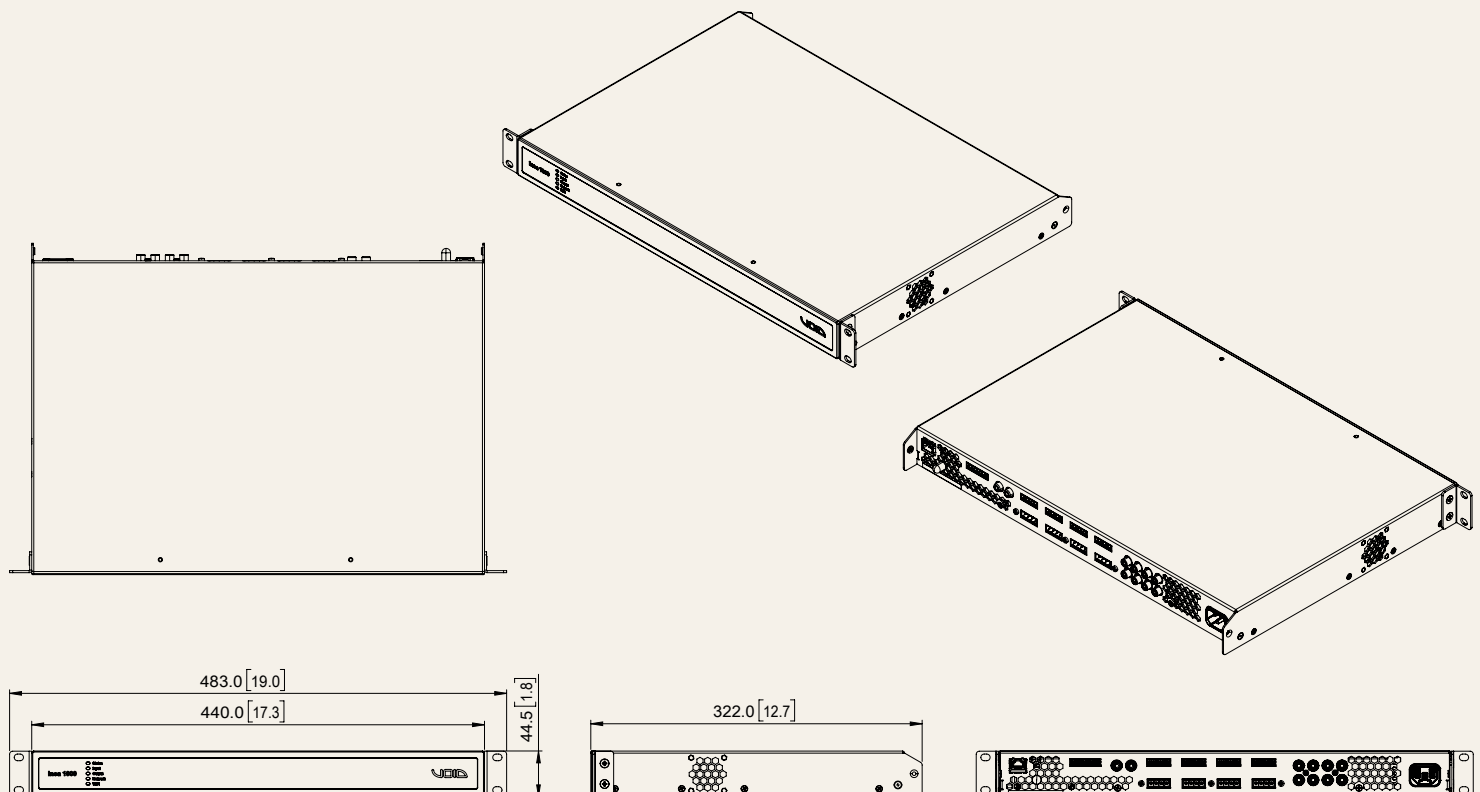

© 2026 Void Acoustics Research Ltd.

This information is subject to change without notice. For the latest online version, visit: voidacoustics.com Void Acoustics and the Void logo are registered trademarks of Void Acoustics Research Ltd. in the United Kingdom, USA and other countries; all other Void trademarks are the property of Void Acoustics Research Ltd.