

Inca 2000



A 4-channel amplifier delivering up to 500 W per channel for installed audio applications.

**POWER**

500 W per channel (2 Ω /4 Ω)
250 W per channel (8 Ω)

**INPUT TYPE**

Analog, Digital

**COMPUTER CONTROL**

DSP

**NUMBER OF CHANNELS**

4 channels

The Inca 2000 is a 19-inch rack amplifier designed for distributed audio installations, supplied in a 2U format with integrated rack ears. It is ideal for distributed audio systems, supporting both low-impedance and 70V/100V applications within a single unit.

Delivering up to 4 $\times$ 500 W and 2000 W of total system power, the Inca 2000 is the most powerful amplifier in the Inca Series. With up to 2 $\times$ 1000 W, it combines flexible, reliable performance with updated Inca Series styling.

Built-in Wi-Fi and browser-based control make setup and configuration straightforward across a wide range of installation environments. Pre-loaded Void Acoustics presets further simplify installation and system tuning.

Adjustable user controls allow installers to set appropriate levels of access once the system is commissioned, while giving end users simple, easy-to-use controls for everyday operation.

KEY FEATURES

Full matrix DSP embedded and controlled via Web Browser

Master / Slave functionality with S/PDIF link to multiple amplifiers

Compatibility with 70/100 V Hi-Z or low impedance loads

Compact form factor with versatile wall/desktop or rack mounting options

Compatible with the Void Acoustics preset library

Fast installation via Wi-Fi and intuitive control software

Quick configuration and reliable operation across a wide range of installation environments

SPECIFICATIONS

Channel Handling

Number of output channels:	4
Number of input channels:	6 (4 analogue, 2 digital)

Audio

Frequency Response	20 Hz - 20 kHz (+0/-0.5 dB (8 Ω load, 3 dB below rated power)
Signal To Noise-Ratio	>108 dB (A-weighted, 20 Hz - 20 kHz, 8 Ω load)
Output Circuitry	UMAC™ Class D - full bandwidth PWM modulator with ultra-low distortion
THD+N (typical)	< 0.05% (20 Hz - 20 kHz, 8 Ω load, 3 dB below rated power)
Protection Circuits	Short circuit -, DC -, Undervoltage -, Temperature - and Overload protection

Construction

Dimensions	88.9 x 440 x 322 mm 3.5 x 17.3 x 12.7 in
Weight	7.3 kg (16.1 lbs)


Output Stage

Total System Power	2000 W
Output power @ 2 Ω	4 x 500 W (SE)*
Output power @ 4 Ω	4 x 500 W (SE)* 2 x 1000 W (BTL)**
Output power @ 8 Ω	4 x 250 W (SE)* 2 x 1000 W (BTL)**
Output Power @ 70/100V	2 x 1000 W (BTL)**
Output Voltage	45 Vrms (S.E) - 90 Vrms (BTL) - 70/100 V (Hi-Z)

*SE = Single Ended **BTL = Bridge Tied Load

AC Mains Power

Power supply	UREC™ universal mains switch mode power supply with Power Factor Correction (PFC) and standby converter
Nominal voltage	Universal Mains, 100 V - 240 V, 50 Hz - 60 Hz
Power Consumption	700 W
Standby Consumption	< 0.5 W
Operating Temperature	0-40°C
Power Ratings	1% THD @ 120 Vac and 230 Vac

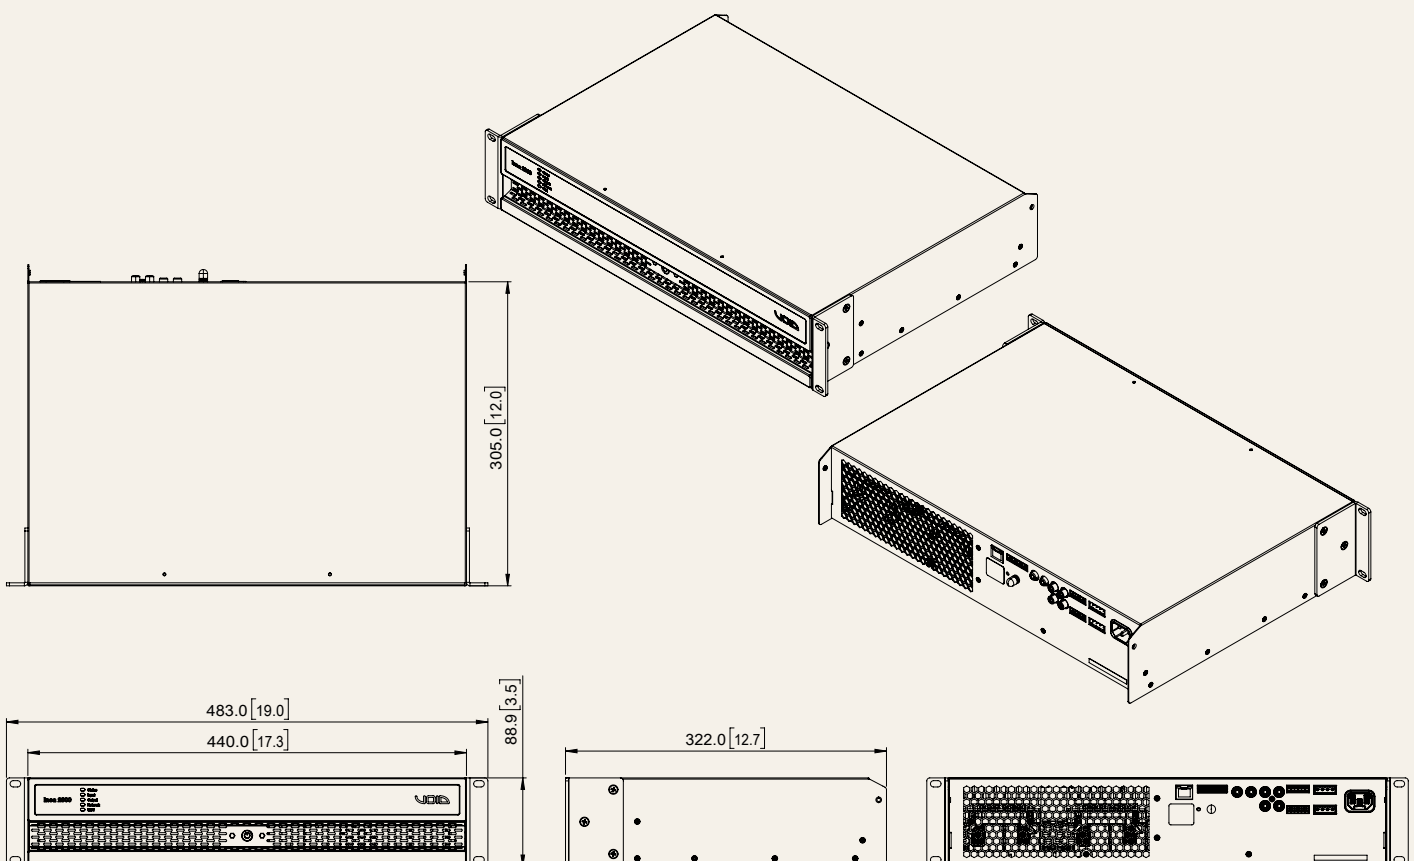

© 2026 Void Acoustics Research Ltd.

This information is subject to change without notice. For the latest online version, visit: voidacoustics.com Void Acoustics and the Void logo are registered trademarks of Void Acoustics Research Ltd. in the United Kingdom, USA and other countries; all other Void trademarks are the property of Void Acoustics Research Ltd.