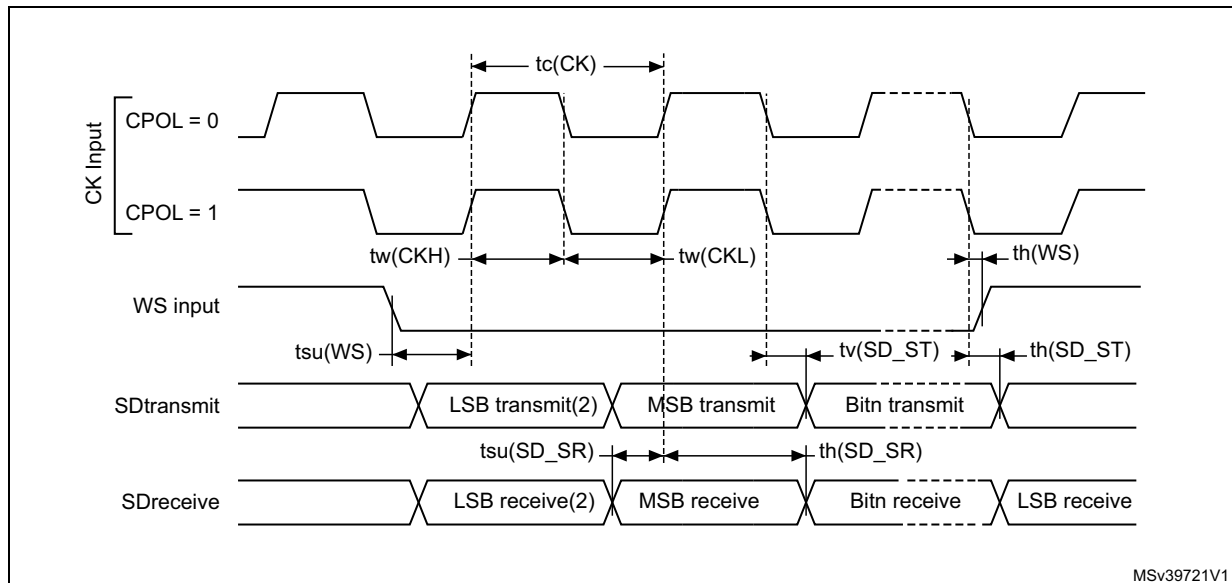


Table 65. I²S characteristics

Symbol	Parameter ⁽¹⁾	Conditions	Min	Max	Unit
$t_{h(SD_ST)}$	Data output hold time	Slave transmitter (after enable edge)	9	-	ns
$t_{h(SD_MT)}$		Master transmitter (after enable edge)	1	-	ns

1. Evaluated by characterization. Not tested in production.

Figure 30. I²S slave timing diagram (Philips protocol)

MSv39721V1

1. Measurement points are done at CMOS levels: $0.3 \times V_{DDIO1}$ and $0.7 \times V_{DDIO1}$.
2. LSB transmit/receive of the previously transmitted byte. No LSB transmit/receive is sent before the first byte.