


Stereo buffer / mono average / AC outputs / PIN GUIDE

IN = into this board OUT = from this board I/O = both directions GND = 0 V 3V3 = 3.3 V

BACK / READ FROM THIS SIDE

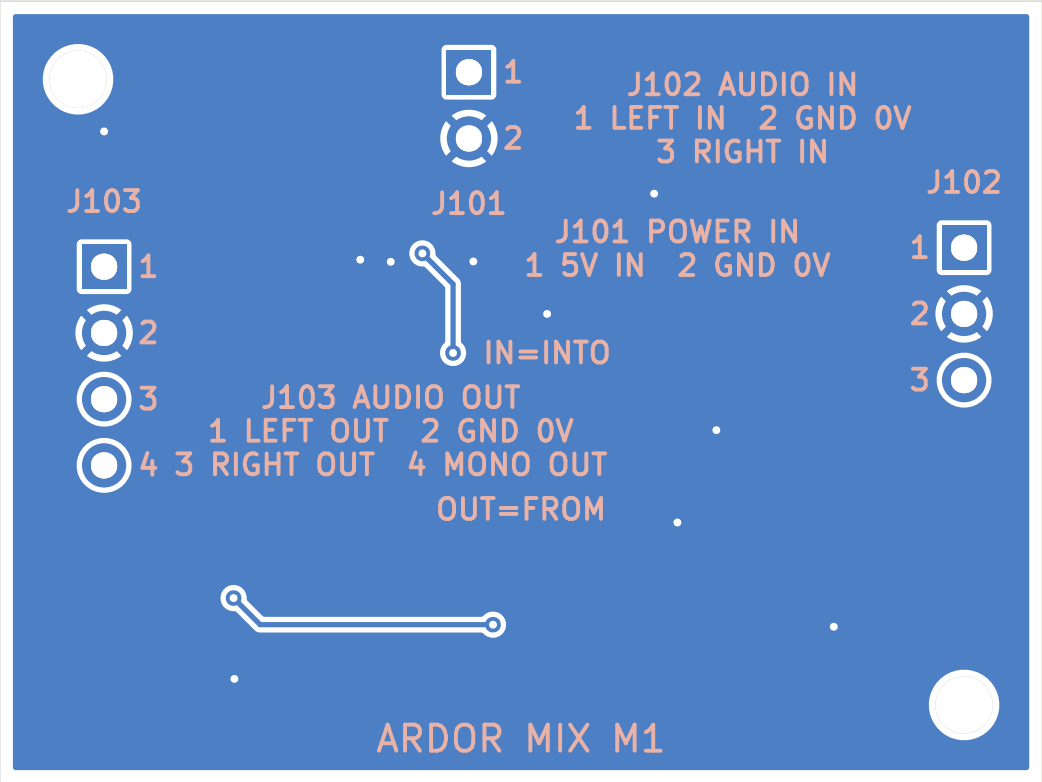

J101 / 5V POWER INPUT

1: 5V IN / POWER INPUT

Positive output of the matching regulated supply.

2: GND 0V / GROUND

Host or cable ground / 0 V.

J103 / BUFFERED STEREO + MONO AUDIO OUTPUT

1: LEFT OUT / OUTPUT

Left line input of another device, $\geq 10k$ load.

2: GND 0V / GROUND

Host or cable ground / 0 V.

3: RIGHT OUT / OUTPUT

Right line input of another device, $\geq 10k$ load.

4: MONO OUT / OUTPUT

Mono line input, $\geq 10k$ load. Signal is $(L+R)/2$.

J102 / STEREO AUDIO INPUT FROM SOURCE

1: LEFT IN / INPUT

DAC/codec left audio output, ≤ 1 Vrms.

2: GND 0V / GROUND

Host or cable ground / 0 V.

3: RIGHT IN / INPUT

DAC/codec right audio output, ≤ 1 Vrms.

The square connector pad is pin 1.

Match the connector name and pin number.

Connector assignments differ between modules.

H1 / H2: mounting holes; no electrical connection.

Small via holes are not wire connectors.

Use the connector pin table before you connect power.

Use ASSEMBLY.md for the short procedure. Disconnect the power supply before solder work or jumper changes.