

Mono line output / relay mute / internal amp feed / HAND ASSEMBLY

T1 | HAND ASSEMBLY | SEE PIN GUIDE AT RIGHT


PIN GUIDE: IN = Into this board / OUT = out / I/O = both / GND = 0 V

J101 / PWR + ENABLE IN
1: 5V IN 2: GND 0V
3: ENABLE IN

J503 / LINE OUT
1: LINE OUT 2: GND 0V

J102 / AUDIO IN
1: AUDIO IN 2: GND 0V

J502 / AMP AUDIO OUT
1: AUDIO OUT 2: GND 0V

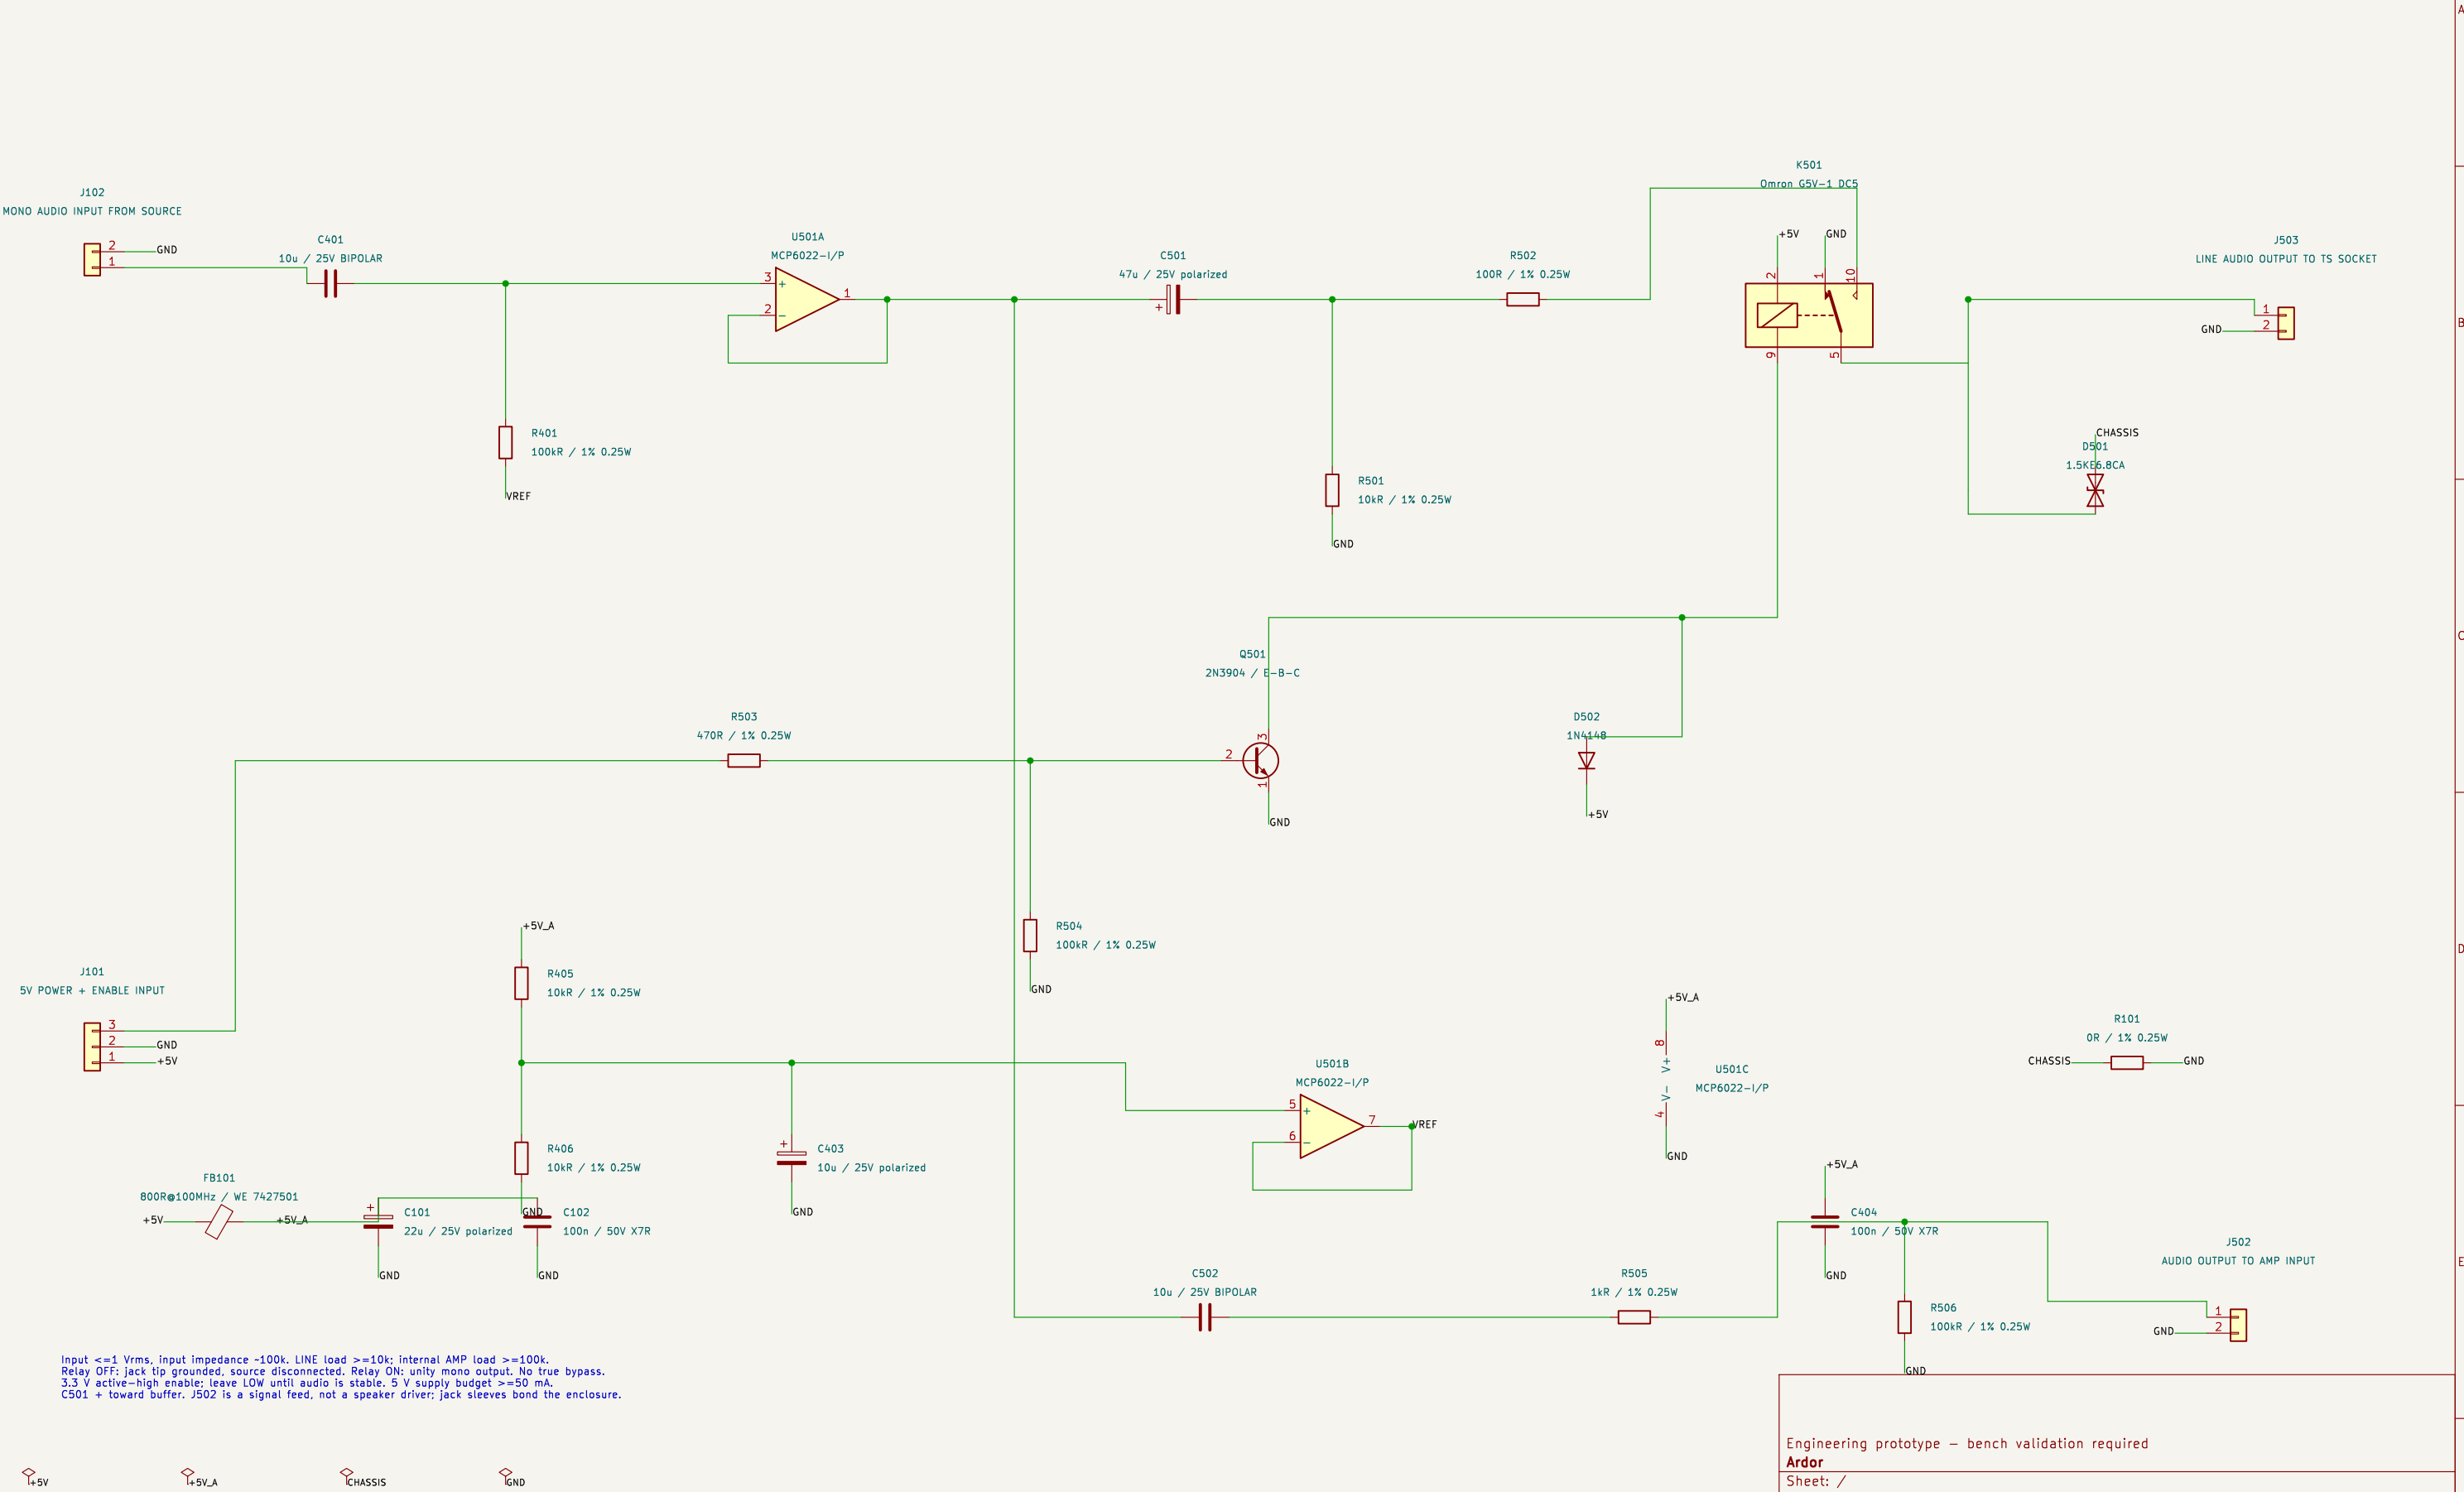

Input <=1 Vrms, input impedance ~100k. LINE load >=10k; internal AMP load >=100k.
Relay OFF: jack tip grounded, source disconnected. Relay ON: unity mono output. No true bypass.
3.3 V active-high enable: leave LOW until audio is stable. 5 V supply budget >=50 mA.
C501 + toward buffer. J502 is a signal feed, not a speaker driver; jack sleeves bond the enclosure.

Engineering prototype – bench validation required

Ardor

Sheet: /
File: Ardor_Line_Out_THT.kicad_sch

Title: Mono line output / relay mute / internal amp feed / HAND ASSEMBLY

Size: A3	Date: 2026-10-08	Rev: T1
KiCad E.D.A. 9.0.2		Id: 1/1