


Mono line output / relay mute / internal amp feed / PIN GUIDE

IN = into this board OUT = from this board I/O = both directions GND = 0 V 3V3 = 3.3 V

BACK / READ FROM THIS SIDE

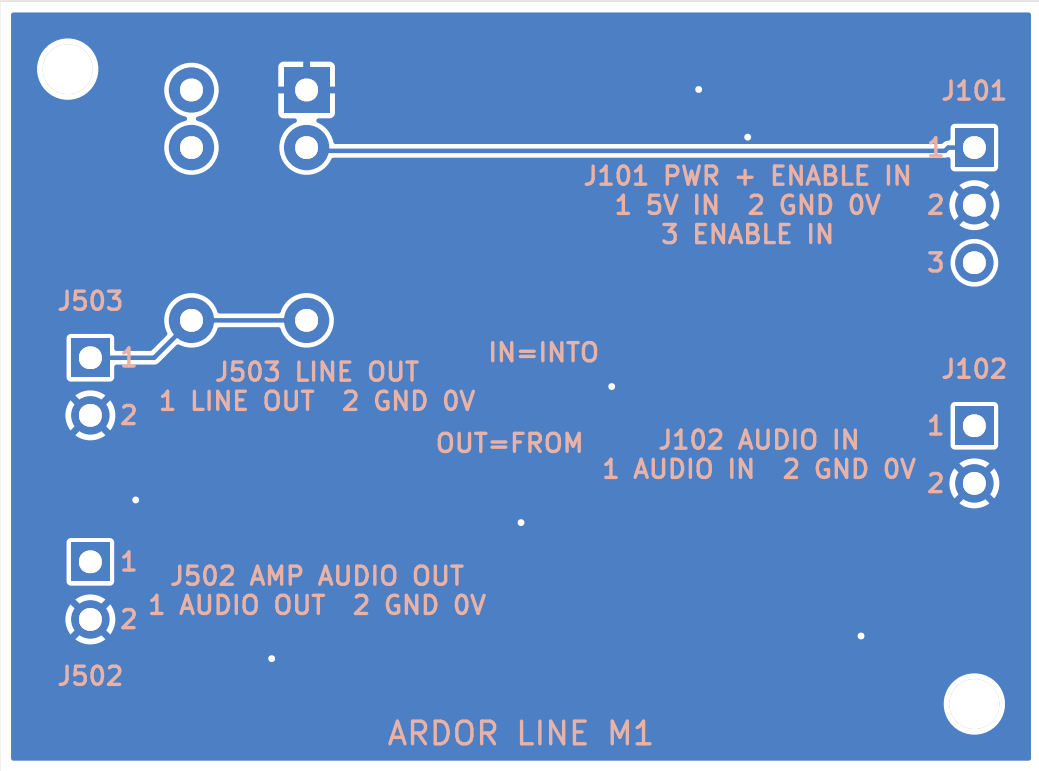

J101 / 5V POWER + ENABLE INPUT

1: 5V IN / POWER INPUT

Positive output of the matching regulated supply.

2: GND 0V / GROUND

Host or cable ground / 0 V.

3: ENABLE IN / CONTROL INPUT

Host control output. Keep LOW until audio and supply are stable.

J502 / AUDIO OUTPUT TO AMP INPUT

1: AUDIO OUT / OUTPUT

Signal input of a separate amplifier, $\geq 100k$. NOT a speaker.

2: GND 0V / GROUND

Host or cable ground / 0 V.

Audio signal only. Never connect a speaker here.

J102 / MONO AUDIO INPUT FROM SOURCE

1: AUDIO IN / INPUT

Mono DAC/codec audio output, ≤ 1 Vrms.

2: GND 0V / GROUND

Host or cable ground / 0 V.

J503 / LINE AUDIO OUTPUT TO TS SOCKET

1: LINE OUT / OUTPUT

TS socket tip; line load $\geq 10k$. Grounded when relay is off.

2: GND 0V / GROUND

TS socket sleeve; enclosure bond.

The square connector pad is pin 1.

Match the connector name and pin number.

Connector assignments differ between modules.

H1 / H2: mounting holes; no electrical connection.

Small via holes are not wire connectors.

Use the connector pin table before you connect power.

Use ASSEMBLY.md for the short procedure. Disconnect the power supply before solder work or jumper changes.