SealPro S45 | Technical Data Sheet

General product information

Product name: SealPro S45

Product code: SPS-045

Manufacturer: Example Materials Lab (fictional)

Category: Silicone sealing compound

Product description

SealPro S45 is a fictional single-component sealant.

This document intentionally varies terminology and units across sections.

The specification is fictional and intended only for extraction practice.

Selected technical properties (narrative format)

Dynamic viscosity: 18000 cP; Test method: ASTM D2196; Conditions: 25 C; Substrate: n/a

Density: 1.22 g/mL; Test method: ISO 2811-1; Conditions: 23 C; Substrate: n/a

Shore A hardness: 28 points; Test method: ISO 868; Conditions: 7 d; Substrate: cured sheet

Important

These selected values have explicit names, units, methods and test conditions.

Other information uses tables or plots on later pages.

Additional technical performance results

Values and units appear together. Methods and substrate differ by test.

Parameter	Reported	Test method	Conditions	Substrate
Elongation @ break	350 %	ISO 37	23 C; cured 7 d	dumbbell
Tensile resistance	2.2 MPa	ISO 37	23 C	cured sample
Skin formation	14 minutes	Lab SM-07	23 C / 50% RH	n/a
Curing speed	3 mm / 24 h	Lab CS-01	23 C / 50% RH	n/a

Note: Different parameter labels may require review by material scientists.

Some labels, like tensile resistance, may need expert mapping to a standard ontology.

Cure depth versus elapsed time

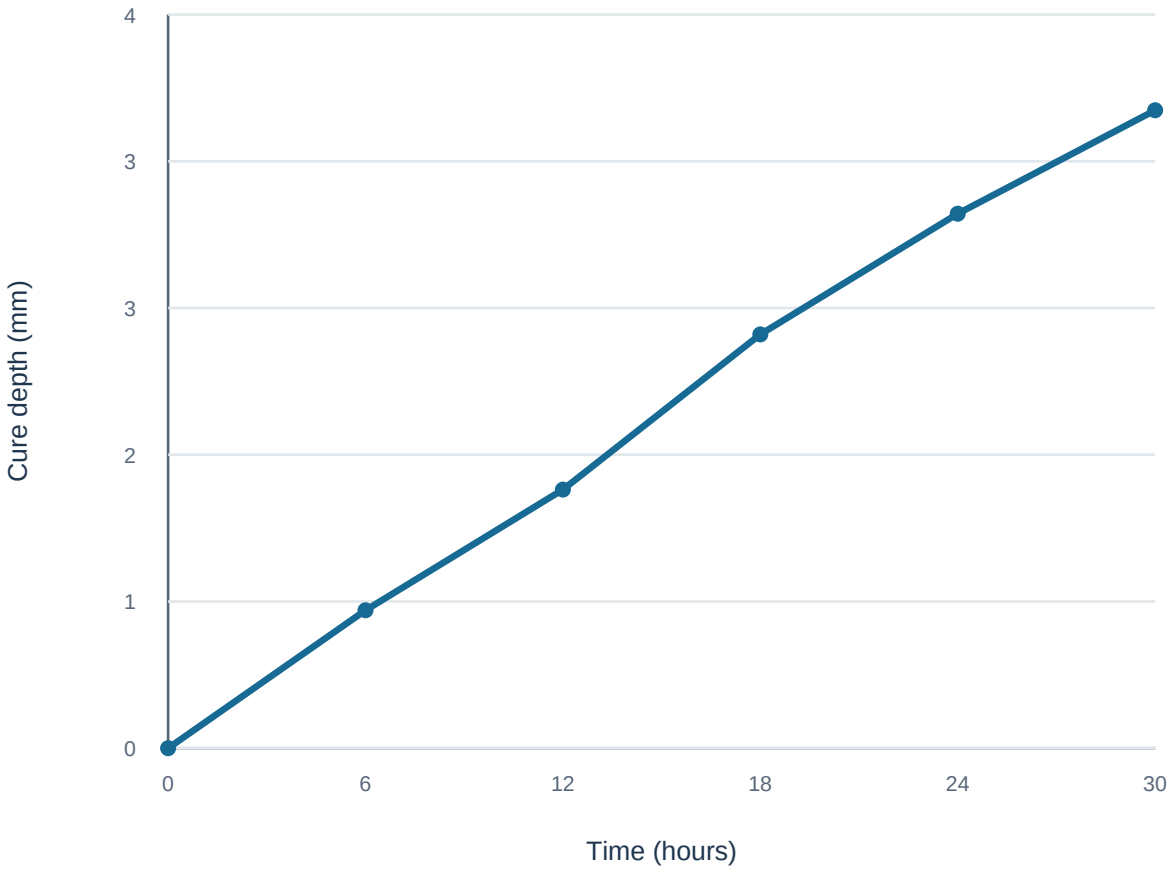

The curve is plotted as a picture; exact point values are not listed in a table.

Any numerical values read from the plot are visual estimates.