CoataShield C80 | Technical Data Sheet

General product information

Product name: CoataShield C80

Product code: CSC-080

Manufacturer: Example Materials Lab (fictional)

Category: Protective industrial coating

Product description

CoataShield C80 is a fictional protective coating used in this demo.

The document intentionally contains a different kind of viscosity.

Comparing viscosity values without considering methods and conditions is unsafe.

Selected technical properties (narrative format)

Kinematic viscosity: 520 mm2/s; Test method: ISO 3104; Conditions: 40 C; Substrate: n/a

Solids content: 68 %; Test method: ISO 3251; Conditions: 105 C; Substrate: wet coating

Dry film thickness: 120 um; Test method: ISO 2808; Conditions: 7 d; Substrate: steel

Important

These selected values have explicit names, units, methods and test conditions.

Other information uses tables or plots on later pages.

Additional technical performance results

Values and units appear together. Methods and substrate differ by test.

Parameter	Reported	Test method	Conditions	Substrate
Touch dry time	25 min	ASTM D1640	23 C / 50% RH	steel
Viscosity, flow cup	88 s	ISO 2431	23 C, cup 4	n/a
Pencil hardness	3H	ISO 15184	7 d	steel
Gloss (60 degrees)	82 GU	ISO 2813	23 C	coated panel

Note: Different parameter labels may require review by material scientists.

Dynamic viscosity, kinematic viscosity and flow-cup time are not interchangeable.

Kinematic viscosity versus temperature

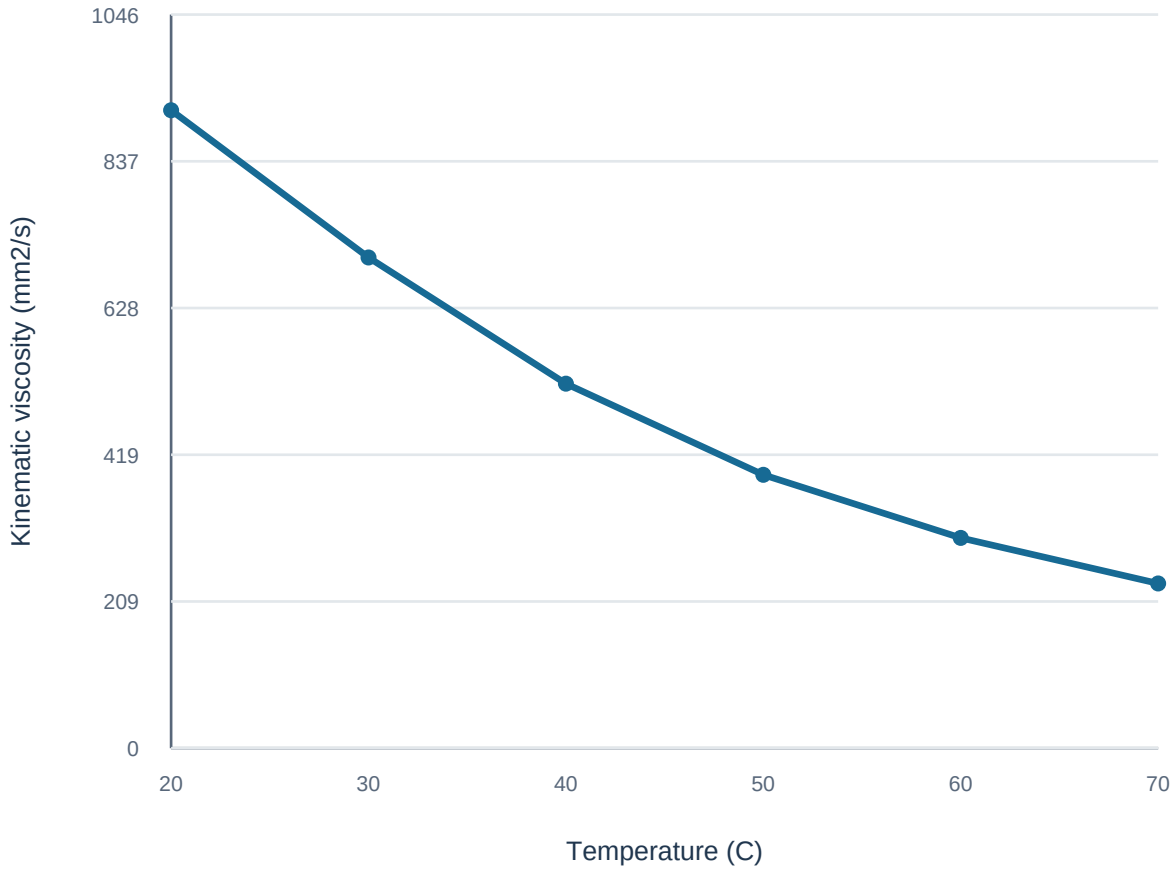

The curve is plotted as a picture; exact point values are not listed in a table.

Any numerical values read from the plot are visual estimates.

Interpretation and data governance

Do not compare measurements unless the physical quantity is the same.

Test method, material condition and substrate affect comparability.

Unit conversions should only be done for physically equivalent properties.

Unclear synonyms should be reviewed and approved by a domain expert.

Use and handling (illustrative only)

Store in a dry environment, away from direct sunlight.

Refer to actual supplier documentation for any real-world application.

All numbers and products in this sheet are fabricated for demonstration.