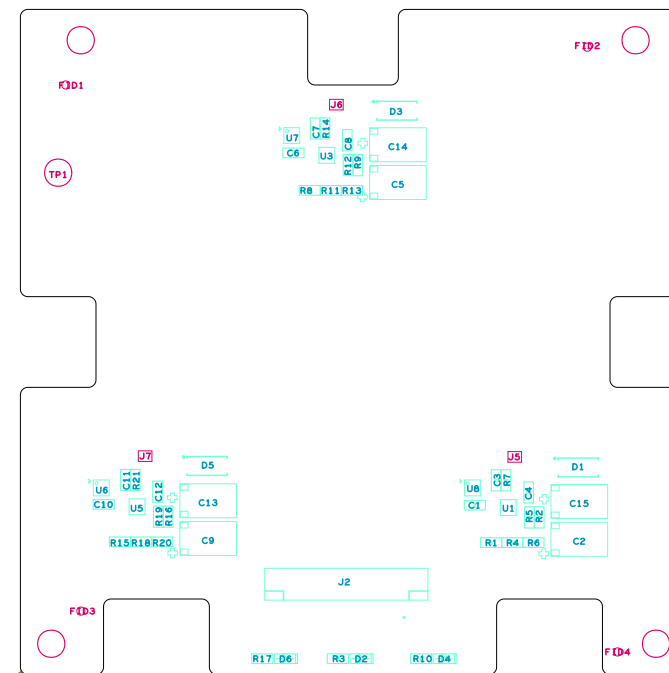



RED color: Do not place (DNP)

ART FILM - ASSY_TOP



ART FILM - ASSY_TOP

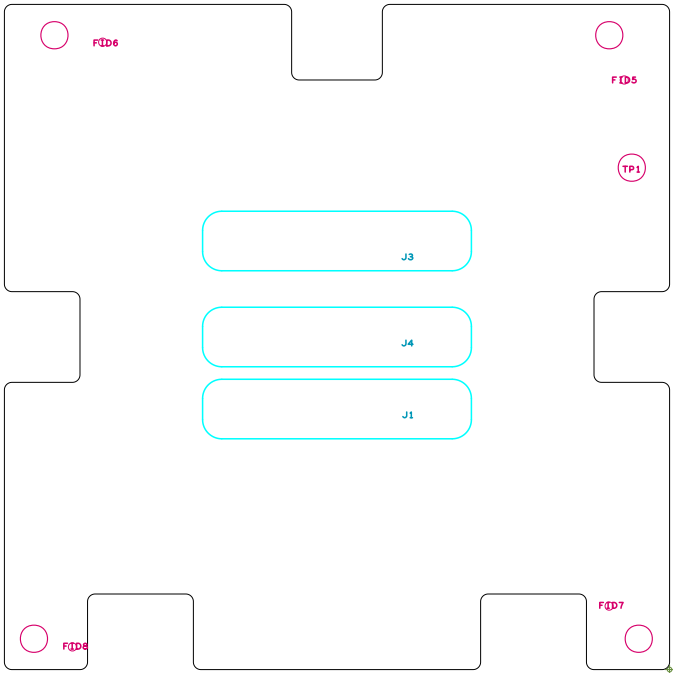ART FILM - ASSY_BOTTOM



ART FILM - ASSY_BOTTOM












Adaptor BOM list


Comment	Description	Designator	Footprint	Manufacturer Part Number	Quantity
1uF	CAP CER 1UF 25V X7R 0603	C1,C6,C10	C0603	CL10B105KA8NNNC	3
220uF	CAP TANT 220UF 10% 16V 2917	C2,C5,C9,C13,C14,C15	TAJD_AVX	T491D227K016AT	6
2.2nF	CAP CER 2.2NF 50V X7R 0603	C3,C4,C7,C8,C11,C12	C0603	CL10B222KB8WPJC	6
SS54	DIODE SCHOTTKY 40V 5A SMA	D1,D3,D5	do214ac_sma	SS54	3
LED R	LED RED CLEAR 0603 SMD	D2,D4,D6	LED0603	150060RS75000	3
858-22-005-10-011101	CONN SPRING PISTON 5POS PCB	J1,J3,J4	858-22-00	858-22-005-10-011101	3
M55-7012642R	CONN HEADER SMD 26POS 1.27MM	J2	HARWIN_M55-7002642R	M55-7012642R	1
470K	RES SMD 470K OHM 1% 1/10W 0603	R1,R8,R15	R0603	ERJ-3EKF4703V	3
47K	RES SMD 47K OHM 1% 1/10W 0603	R2,R5,R6,R9,R12,R13,R16,R19,R20	R0603	ERJ-3EKF4702V	9
1K	RES SMD 1K OHM 1% 1/10W 0603	R3,R10,R17	R0603	ERJ-3EKF1001V	3
11K	RES SMD 11K OHM 1% 1/10W 0603	R4,R11,R18	R0603	ERJ-3EKF1102V	3
2200R	RES SMD 2.2K OHM 1% 1/10W 0603	R7	R0603	ERJ-3EKF2201V	1
740R	RES SMD 750 OHM 1% 1/10W 0603	R14	R0603	ERJ-3EKF7500V	1
1600R	RES SMD 1.6K OHM 1% 1/10W 0603	R21	R0603	ERJ-3EKF1601V	1
TPS259470ARPWR	IC ELECTRONIC FUSE 10VQFN	U1,U3,U5	RPW0010A-MFG	TPS259470ARPWR	3
TVS2200DRVR	UNIDIR PRECISION SURGE DIODE	U2,U4,U6	DRV0006A	TVS2200DRVR	3

Do not place items (DNP)

DNP	DNP	J5,J6,J7	jumper_power	DNP	3
BONDING PAD	DNP	TP1	mh_3mm_1	DNP	1
MH	DNP	MH1,MH2,MH3,MH4	mh_3mm_1	DNP	4
FID	DNP	FID1,FID2,FID3,FID4,FID5,FID6,FID7,FID8	FID_1MM	DNP	8

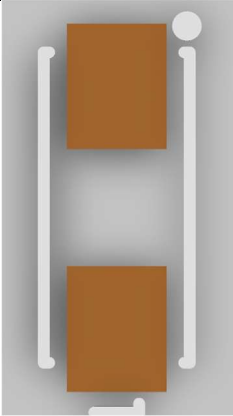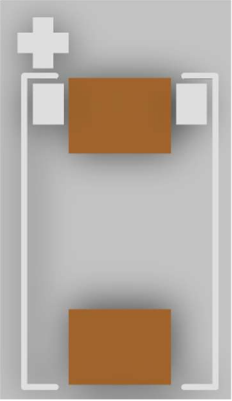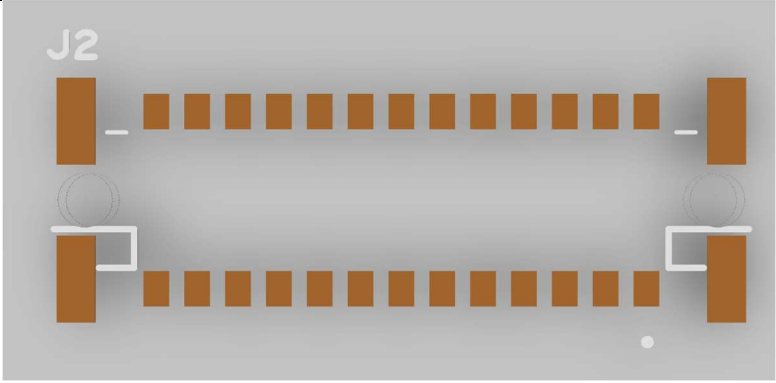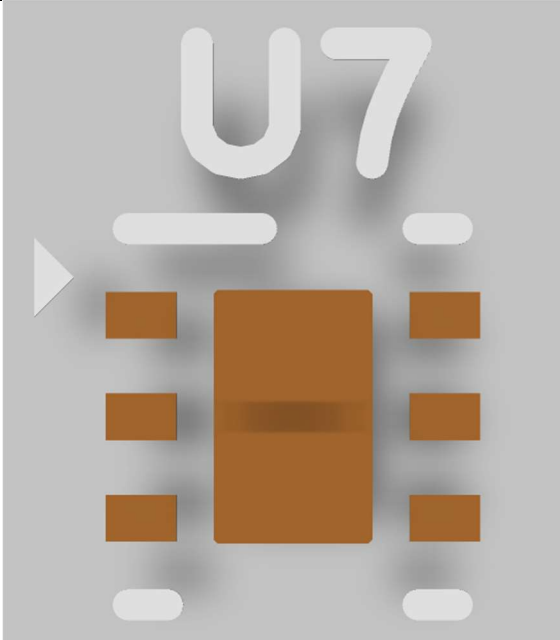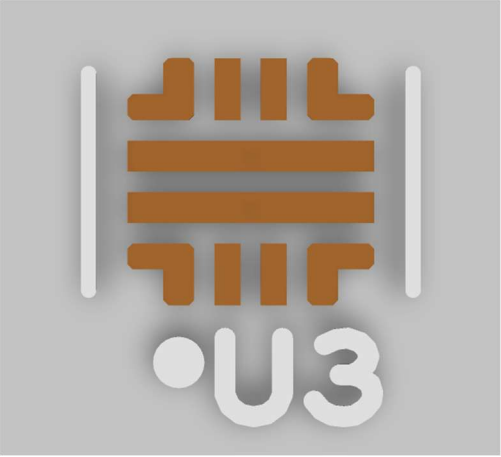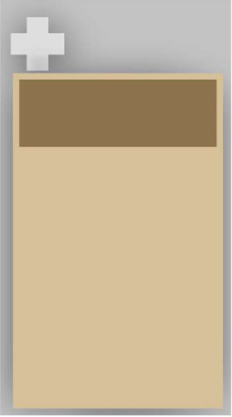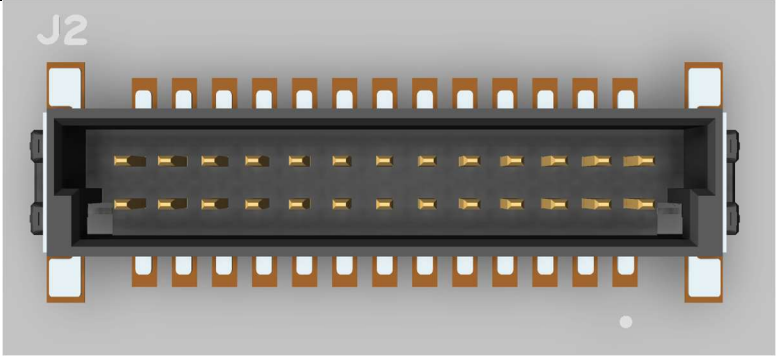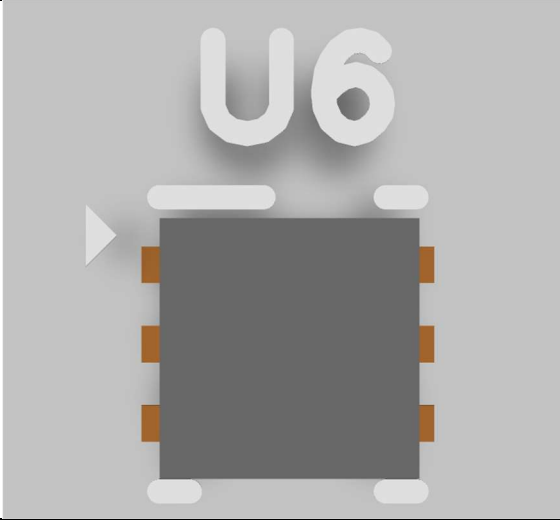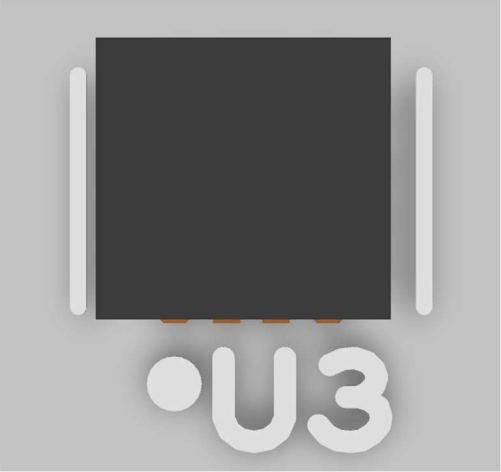Components that need attention

Footprint	DO214AC_SMA	TAJD_AVX	LED0603	HARWIN_M55-7002642R	DRV0006A	RPW0010A-MFG
Reference	D1, D3, D5	C2,C5, C9, C13, C14, C15	D2, D4, D6	J2	U6, U7, U8	U1, U3, U5
Silk screen draw						
3D			 Cathode (-) Anode (+)			
Note	Dot mark (.) is Cathode (-)	The plus mark (+) is positive of the capacitor.		The ridge of the connector is aligned with the direction of the dot mark (.)	The mark (>) is pin 1 st .	Dot mark (.) is pin 1 st .

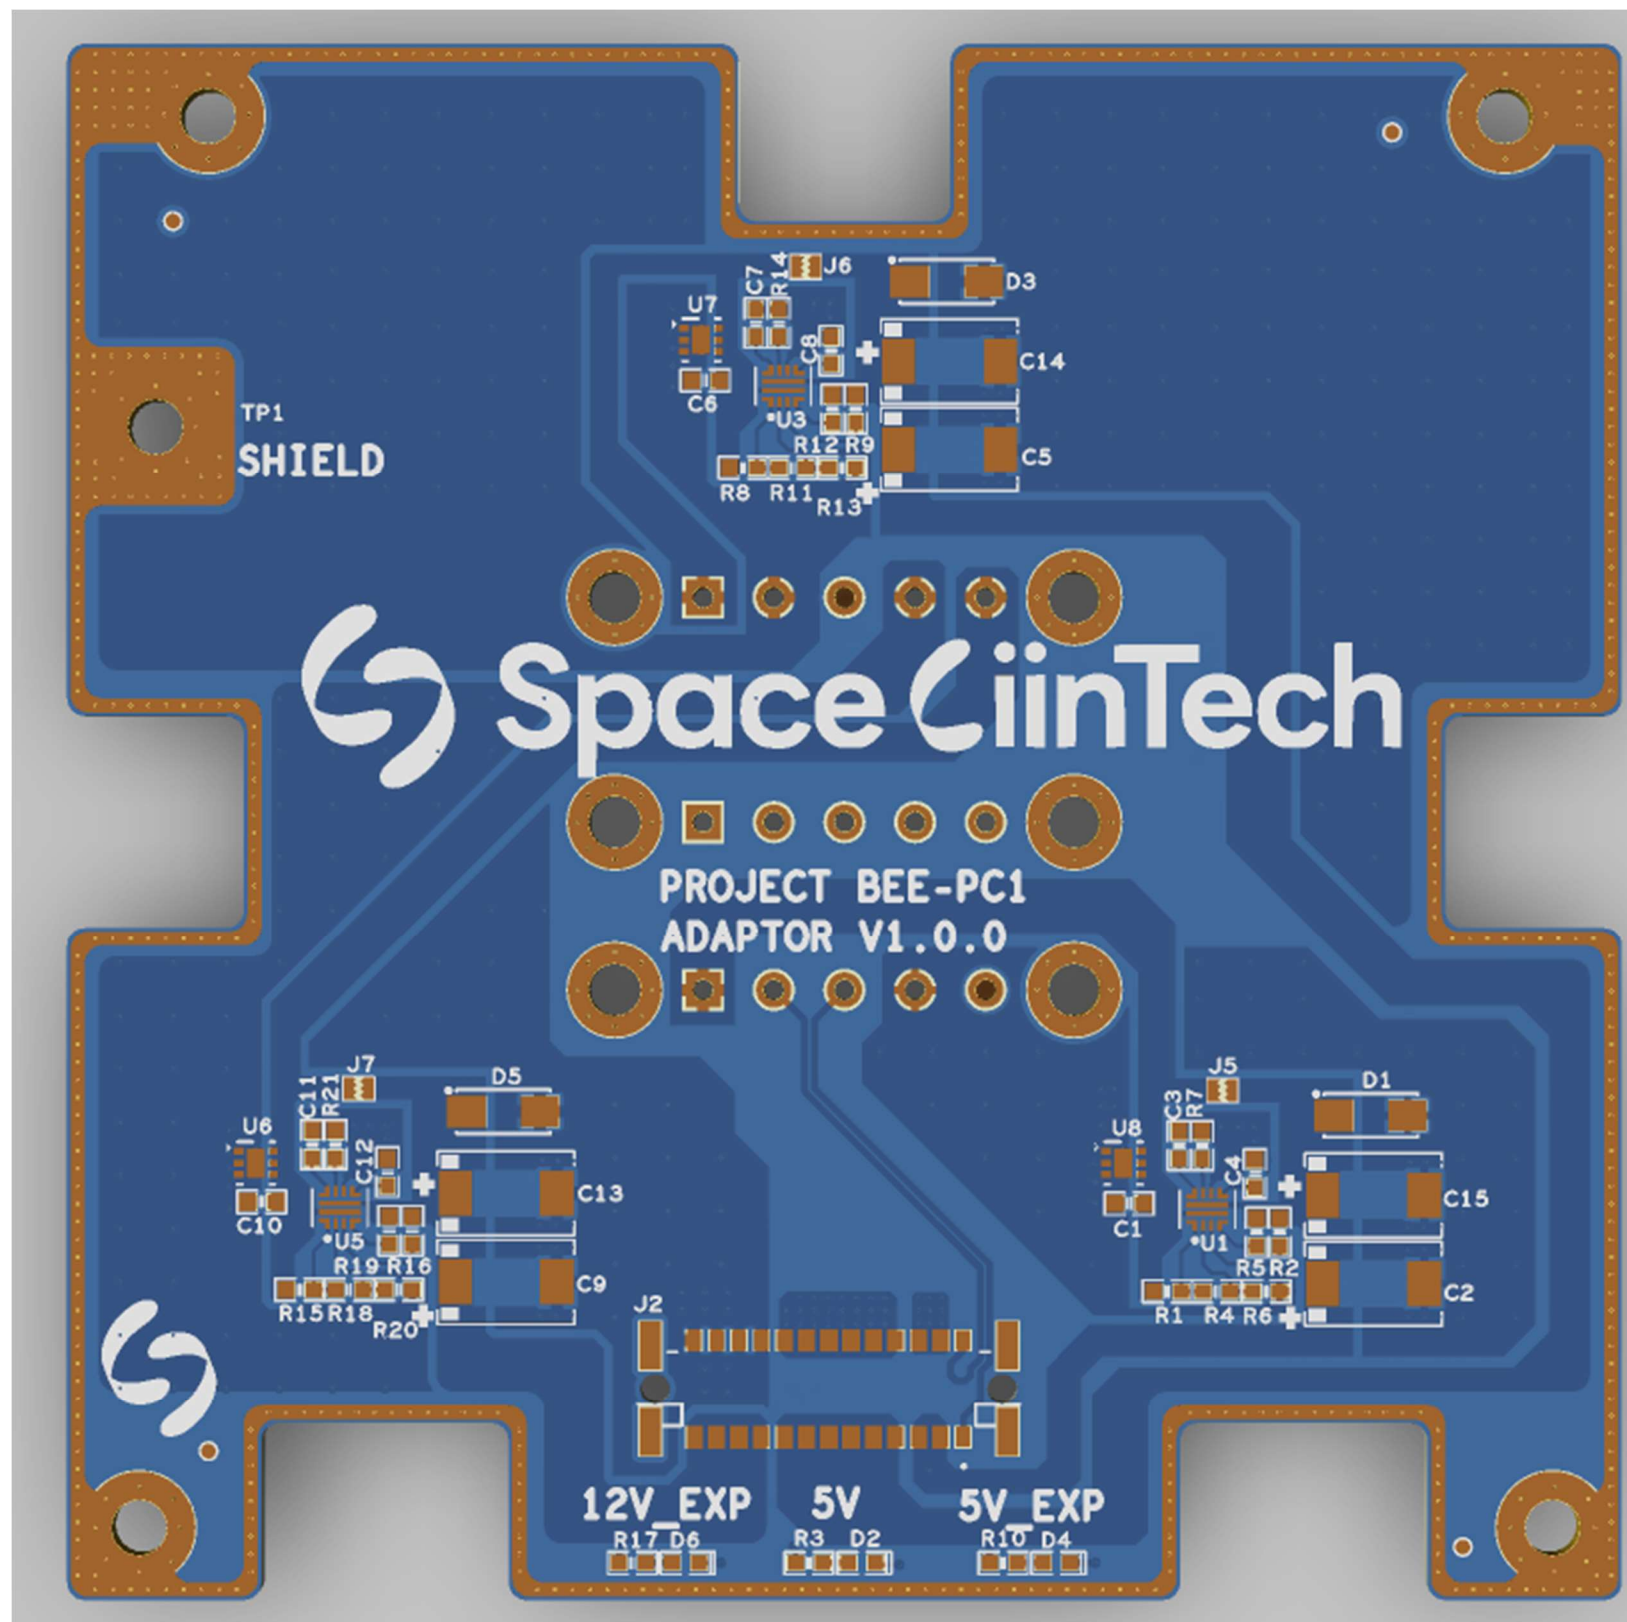





PROJECT BEE-PC1
ADAPTOR V1.0.0

J3



J4



J1





PROJECT BEE-PC1
ADAPTOR V1.0.0

J3

J4

J1

