
# WIRING DIAGRAM · SKYG SPEED 90B

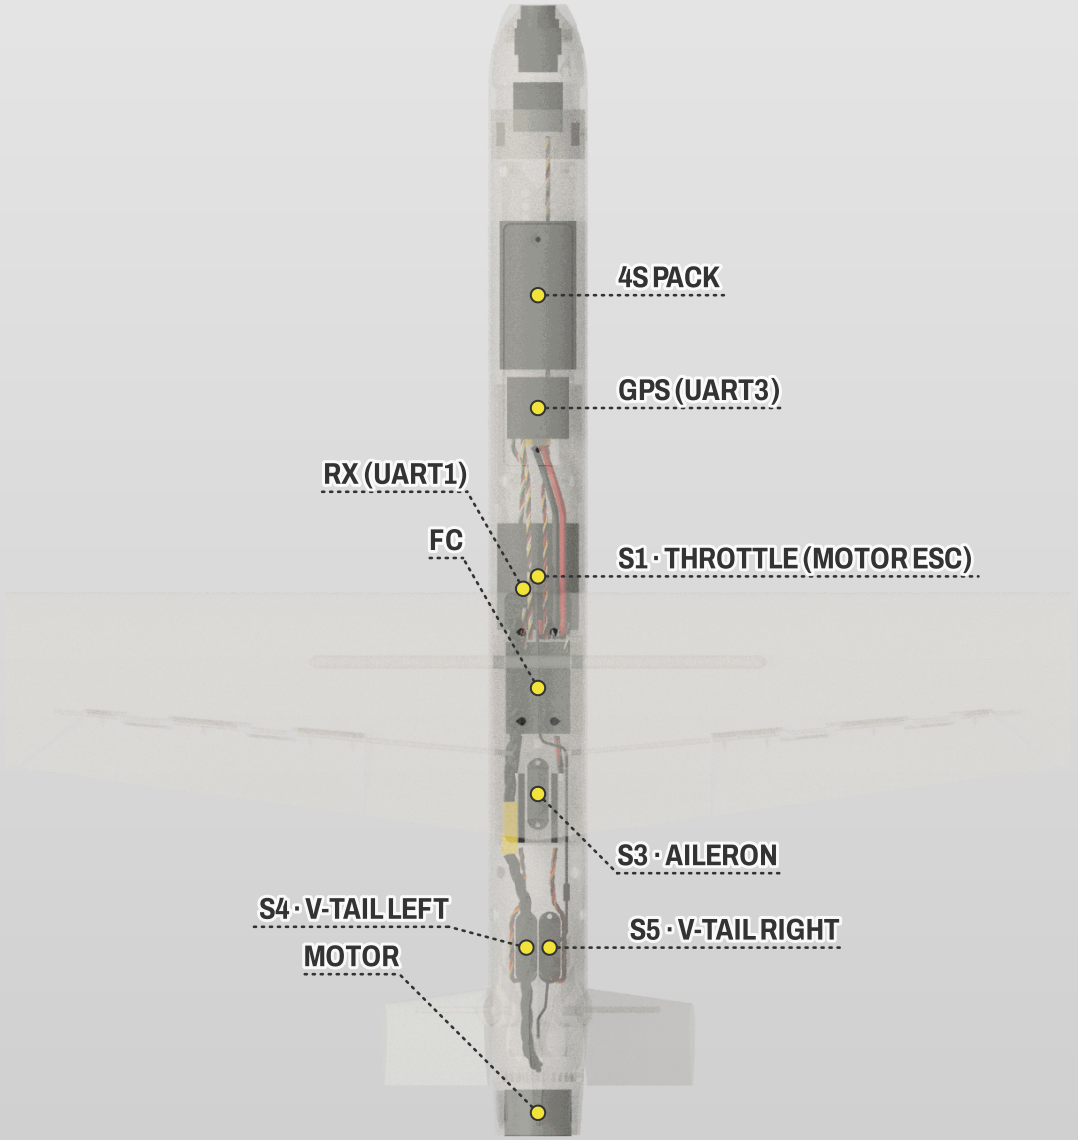


| PAD | FUNCTION | DEVICE |
|---|---|---|
| S1 | Throttle (motor ESC) | ESC (DShot300, bidirectional) |
| S2 | Unused | Leave empty (DShot group with S1) |
| S3 | Aileron | Aileron servo (ES9052MD, wing bay) |
| S4 | V-tail left | Left tail-panel servo (ES9052MD, tail module) |
| S5 | V-tail right | Right tail-panel servo (ES9052MD, tail module) |

| PORT | DEVICE | SETTING |
|---|---|---|
| UART1 (TX1/RX1) / SERIAL1 | RadioMaster RP1 V2 ELRS receiver | SERIAL1_PROTOCOL = 23 |
| UART3 (TX3/RX3) / SERIAL3 | TBS M10Q GPS (compass on SDA/SCL) | SERIAL3_PROTOCOL = 5 |
| UART5 (TX5/RX5) / SERIAL5 | DJI O4 Air Unit (O4 noses only) | SERIAL5_PROTOCOL = 42 (O4 noses) |
| UART6 / SERIAL6 | Wireless USB extender (ground setup) | SERIAL6_PROTOCOL = 2 |