


# WIRING DIAGRAM · SKYG SPEED 90

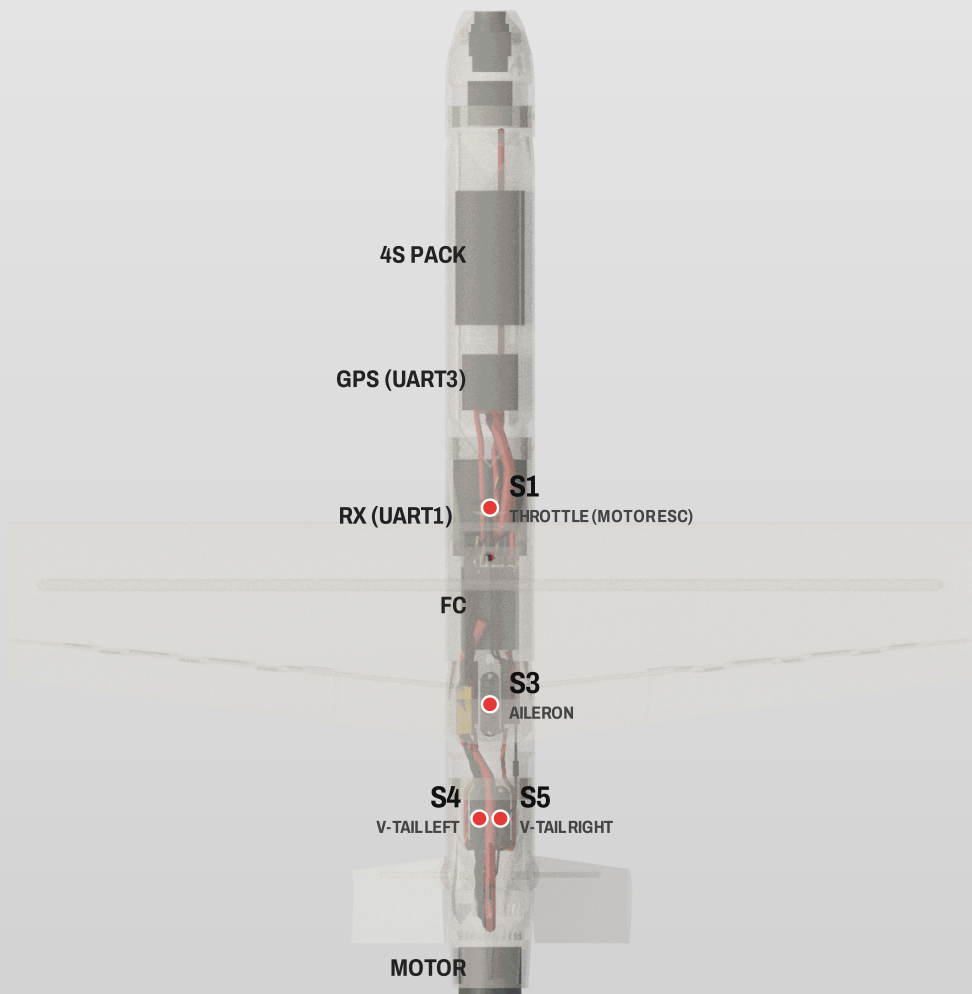

| PAD | FUNCTION             | DEVICE                                         |
|-----|----------------------|------------------------------------------------|
| S1  | Throttle (motor ESC) | ESC (DShot300, bidirectional)                  |
| S2  | Unused               | Leave empty (DShot group with S1)              |
| S3  | Aileron              | Aileron servo (ES9052MD, wing bay)             |
| S4  | V-tail left          | Left tail-panel servo (ES9052MD, tail module)  |
| S5  | V-tail right         | Right tail-panel servo (ES9052MD, tail module) |

| PORT                      | DEVICE                               | SETTING                          |
|---------------------------|--------------------------------------|----------------------------------|
| UART1 (TX1/RX1) / SERIAL1 | RadioMaster RP1 V2 ELRS receiver     | SERIAL1_PROTOCOL = 23            |
| UART3 (TX3/RX3) / SERIAL3 | TBS M10Q GPS (compass on SDA/SCL)    | SERIAL3_PROTOCOL = 5             |
| UART5 (TX5/RX5) / SERIAL5 | DJI O4 Air Unit (O4 noses only)      | SERIAL5_PROTOCOL = 42 (O4 noses) |
| UART6 / SERIAL6           | Wireless USB extender (ground setup) | SERIAL6_PROTOCOL = 2             |