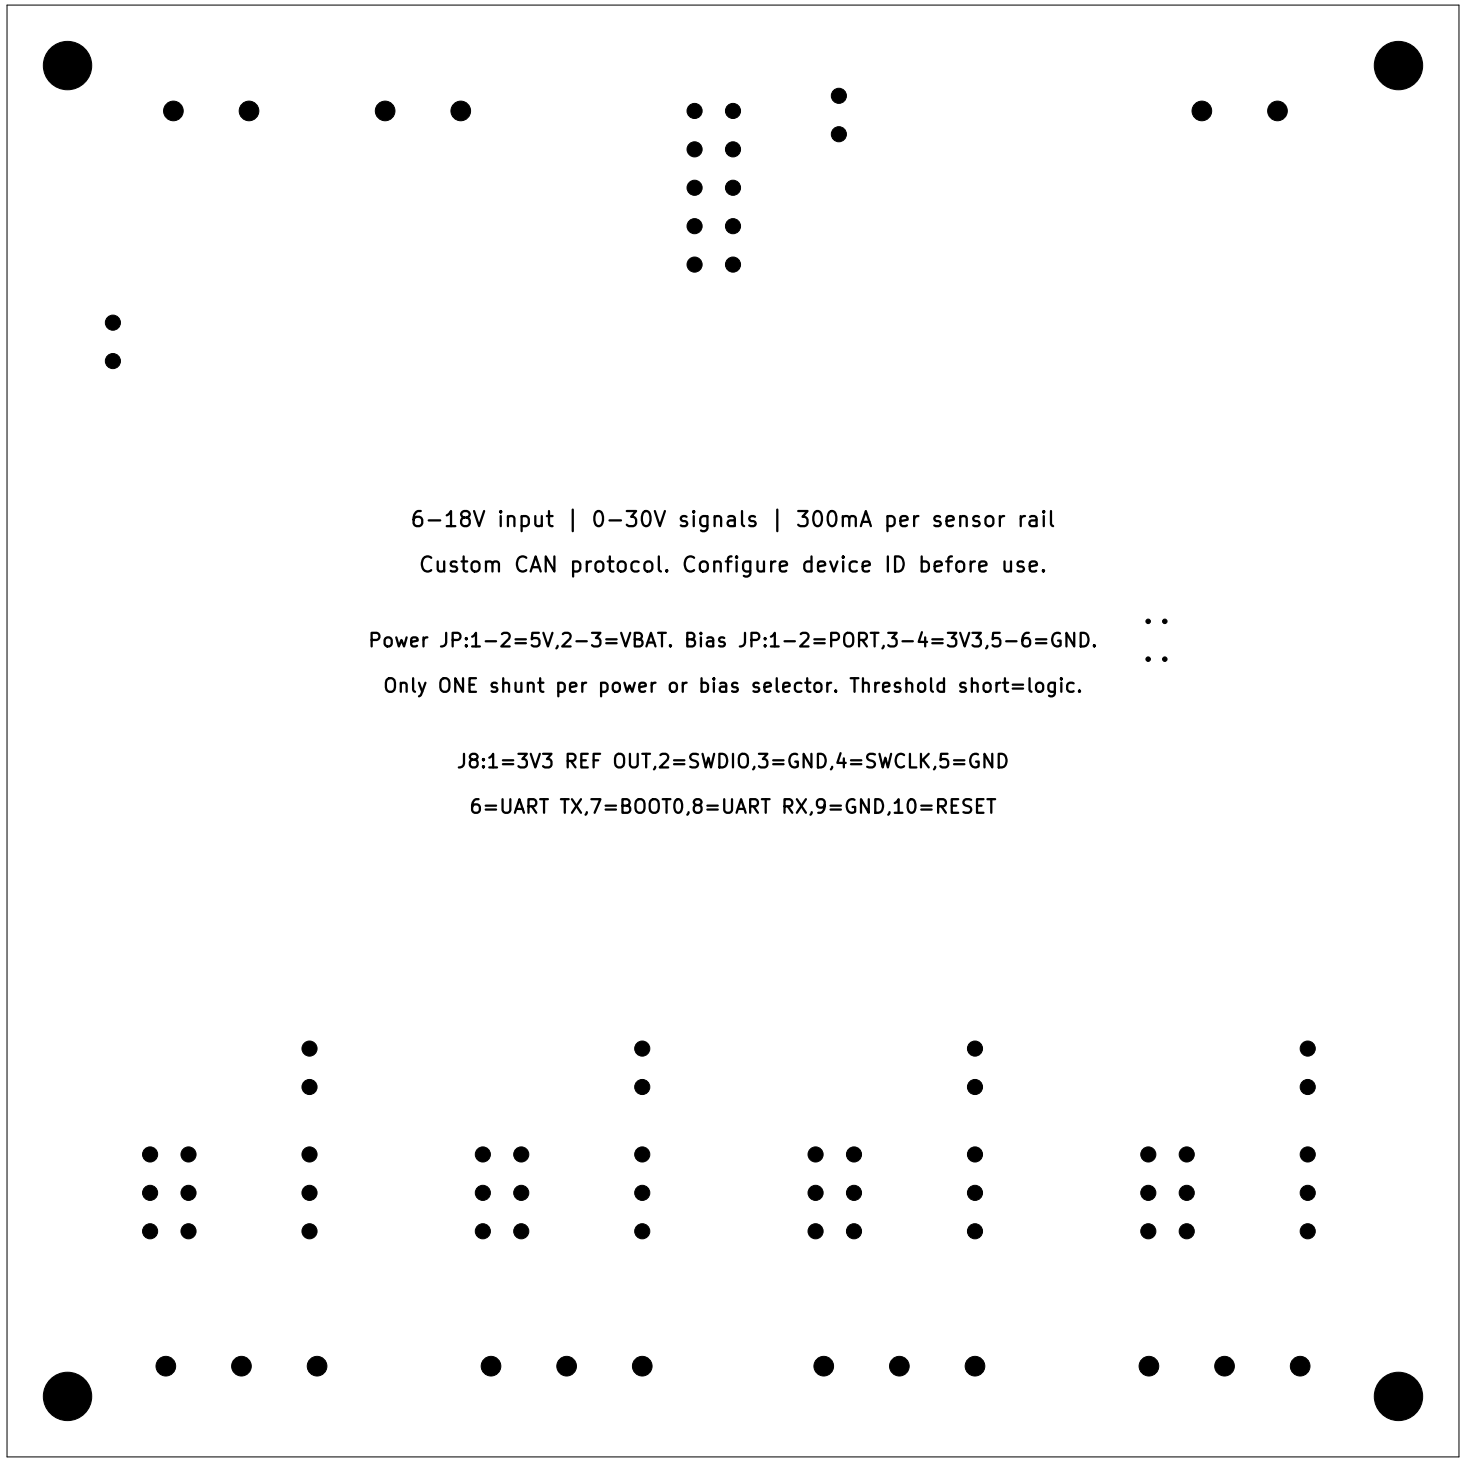

6–18V input | 0–30V signals | 300mA per sensor rail
Custom CAN protocol. Configure device ID before use.
Power JP:1–2=5V,2–3=VBAT. Bias JP:1–2=PORT,3–4=3V3,5–6=GND.
Only ONE shunt per power or bias selector. Threshold short=logic.
J8:1=3V3 REF OUT,2=SWDIO,3=GND,4=SWCLK,5=GND
6=UART TX,7=BOOT0,8=UART RX,9=GND,10=RESET