FRC SENSOR CAN — REVISION A PROTOTYPE

Four industrial / logic inputs. Protected battery and regulated 5 V sensor power.
STM32F042 + TCAN3413. Digital status and edge counts over a custom team CAN protocol.
Not a CTRE Phoenix–compatible device. Inspect and bench–test prototypes before robot use.

Battery entry and internal supplies

File: power.kicad_sch

Protected sensor power rails

File: sensor_power.kicad_sch

Controller, clock, debug and status

File: controller.kicad_sch

CAN physical interface and termination

File: can.kicad_sch

Input 1: industrial / logic selection

File: input1.kicad_sch

Input 2: industrial / logic selection

File: input2.kicad_sch

Input 3: industrial / logic selection

File: input3.kicad_sch

Input 4: industrial / logic selection

File: input4.kicad_sch

Original design — custom WPILib CAN protocol


Sheet: /
File: FRC_Sensor_CAN.kicad_sch


Title: FRC Sensor CAN

Size: A3	Date: 2026–09–07	**Rev: A PROTOTYPE**
KiCad E.D.A. 10.0.6		Id: 1/9


Battery entry and internal supplies

PROTECTED BATTERY ENTRY

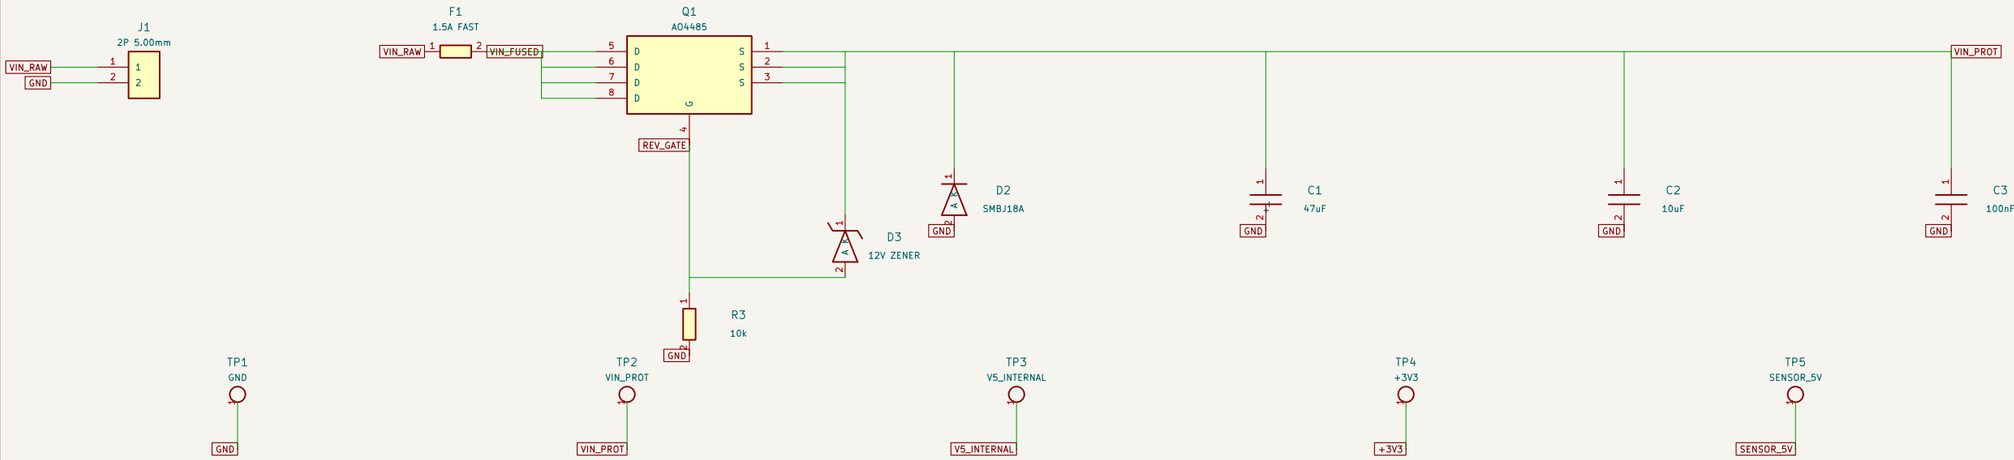




500 kHz BUCK / 5 V INTERNAL

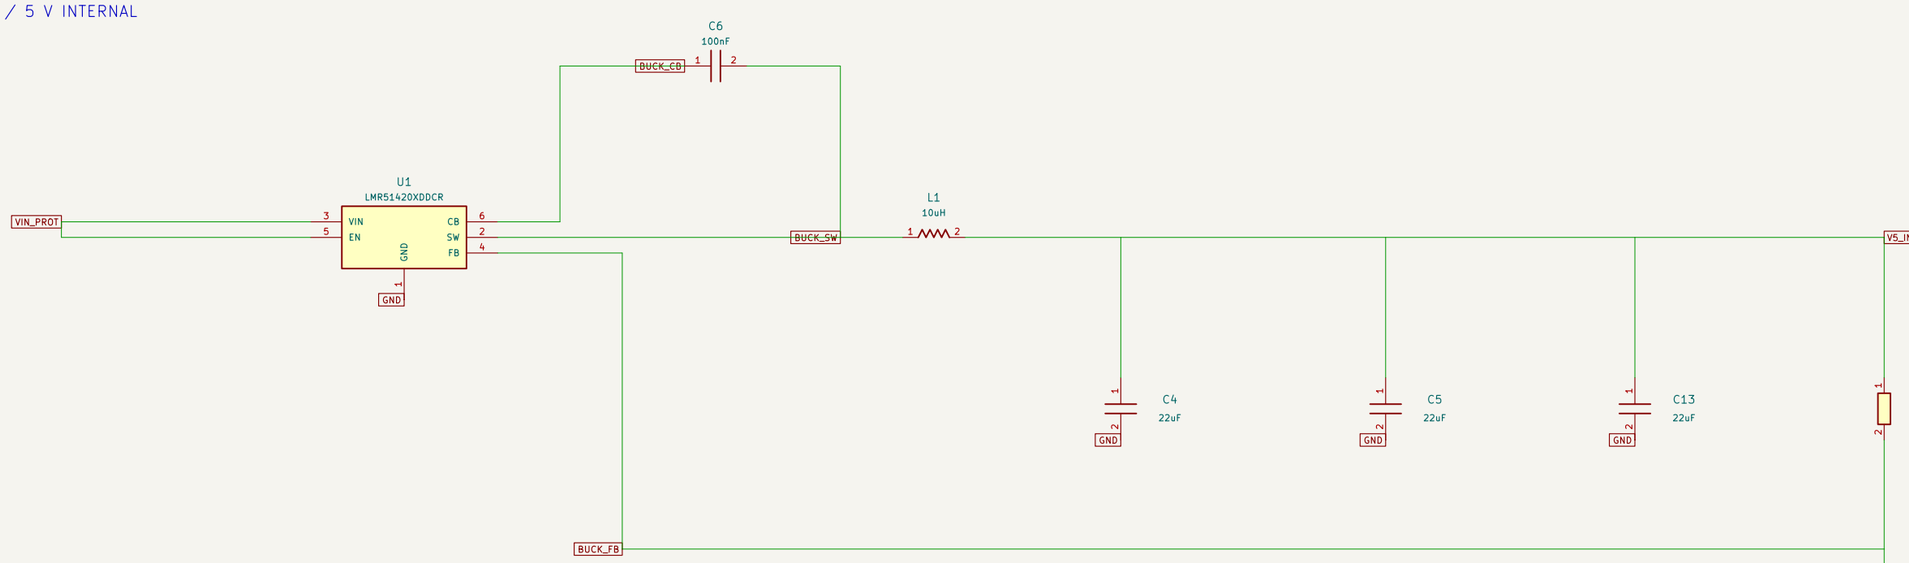

3.3 V LOGIC SUPPLY

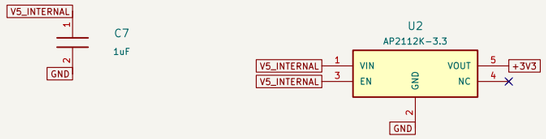

6–18 V input target; protected distribution feed.
VBAT output follows the protected entry voltage.
5 V sensor output has a separate limit switch.
R1/R2: 0.1%, 25 ppm/C.
TP1:GND, 2:VIN, 3:5V, 4:3V3, 5:S5V, 6:SBAT.

Prototype: bench validation required before robot use

Original open hardware design


Sheet: /Battery entry and internal supplies/
File: power.kicad_sch

Title: FRC Sensor CAN — Battery entry and internal supplies


Size: A3	Date: 2026-09-07	**Rev: A PROTOTYPE**
KiCad E.D.A. 10.0.6		Id: 2/9

Protected sensor power rails

PROTECTED BATTERY PASSTHROUGH

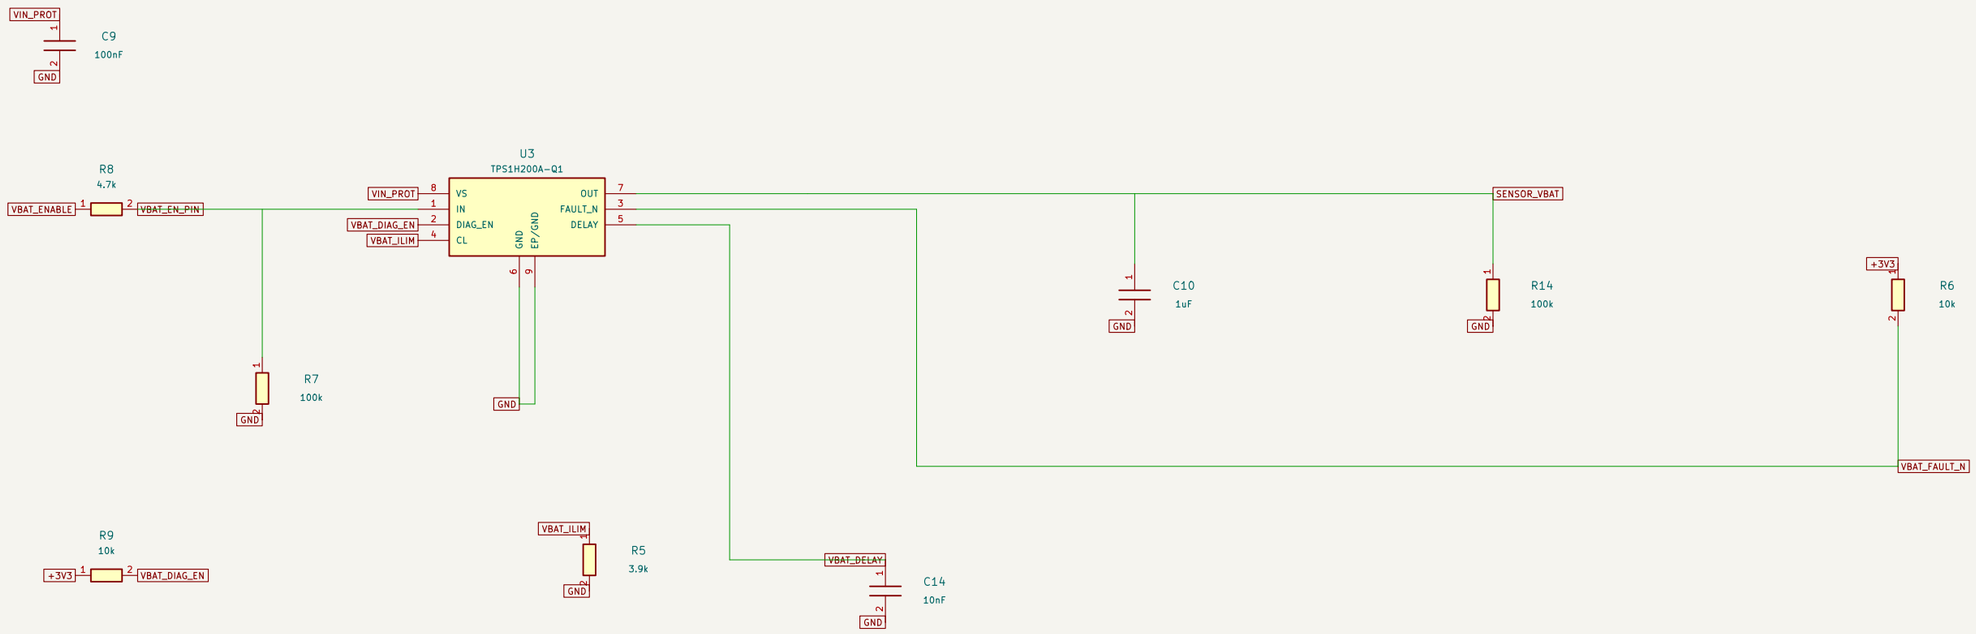

REGULATED 5 V SENSOR OUTPUT

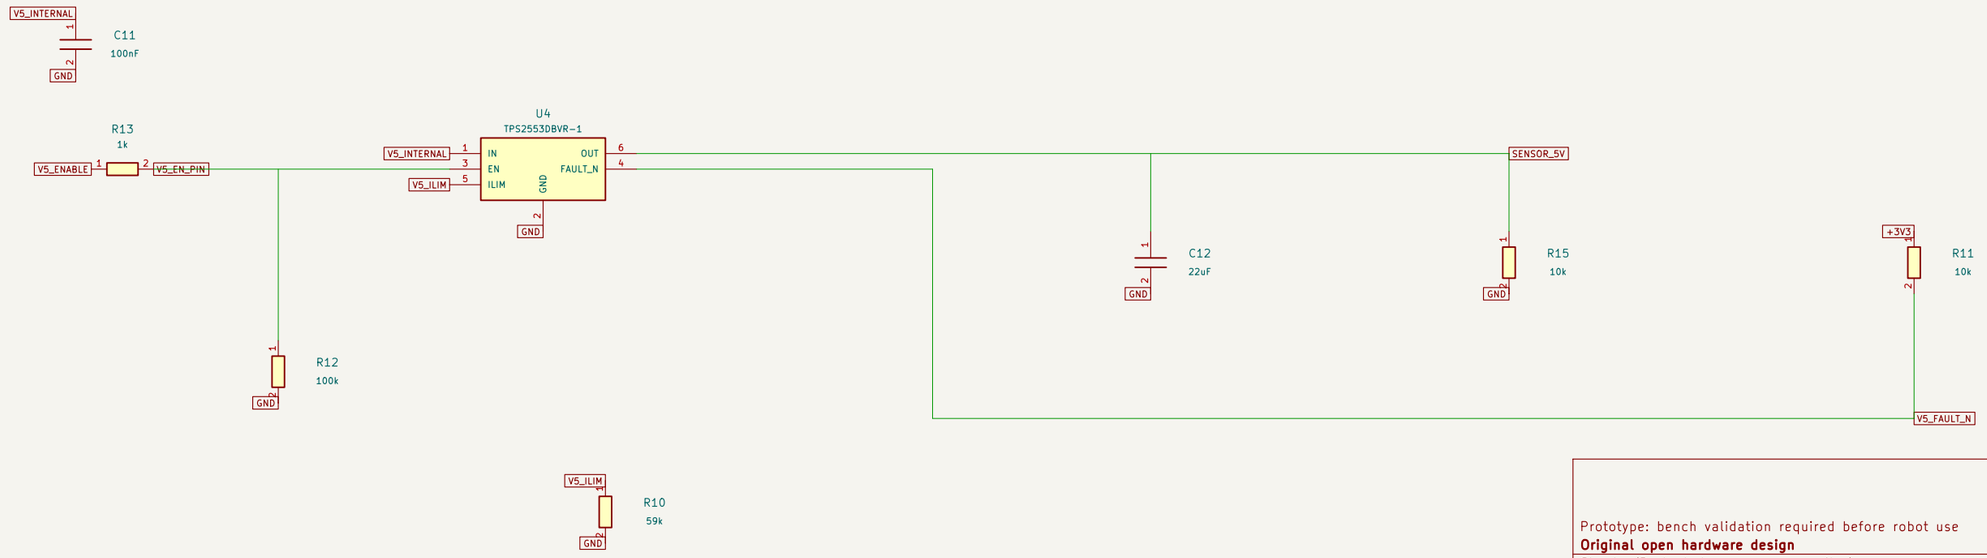

Usable targets: 300 mA total on each rail, shared across all ports.
Both enable pins have hardware pulldowns. Firmware latches overload faults.
TPS2553 -1 is the latching version. Clear only after inspecting sensor wiring.

Prototype: bench validation required before robot use

Original open hardware design


Sheet: /Protected sensor power rails/
File: sensor_power.kicad_sch

Title: FRC Sensor CAN — Protected sensor power rails


Size: A3	Date: 2026-09-07	**Rev: A PROTOTYPE**
KiCad E.D.A. 10.0.6		Id: 3/9

Controller, clock, debug and status


8 MHz CRYSTAL / PLL x6

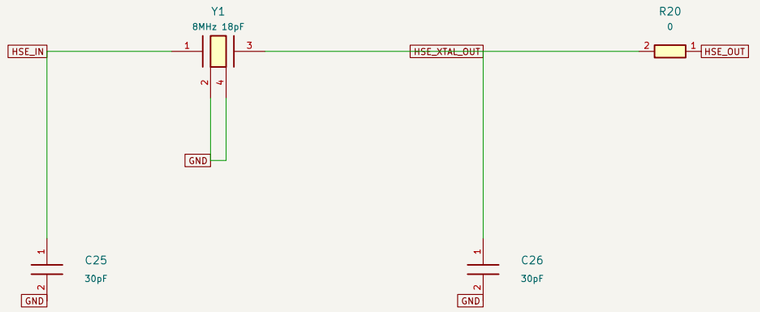


RESET / BOOT / SERVICE

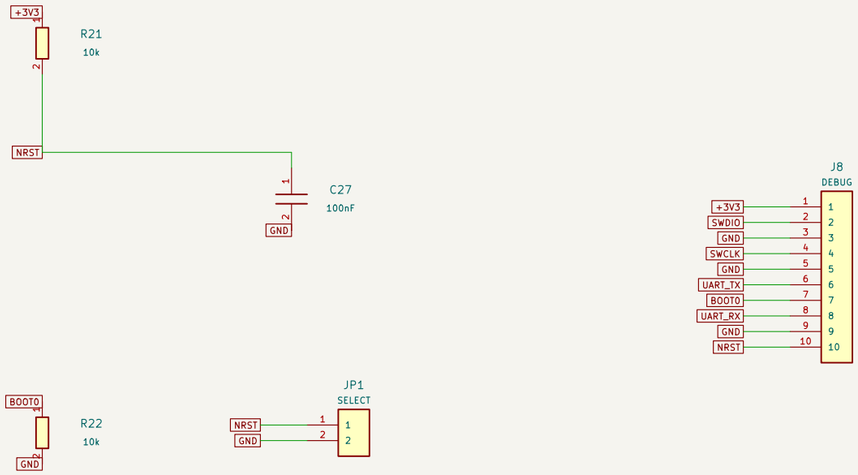


LOCAL DECOUPLING

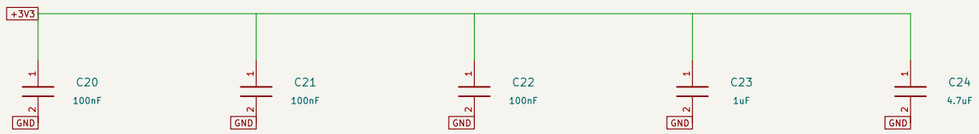

RAIL MONITORING

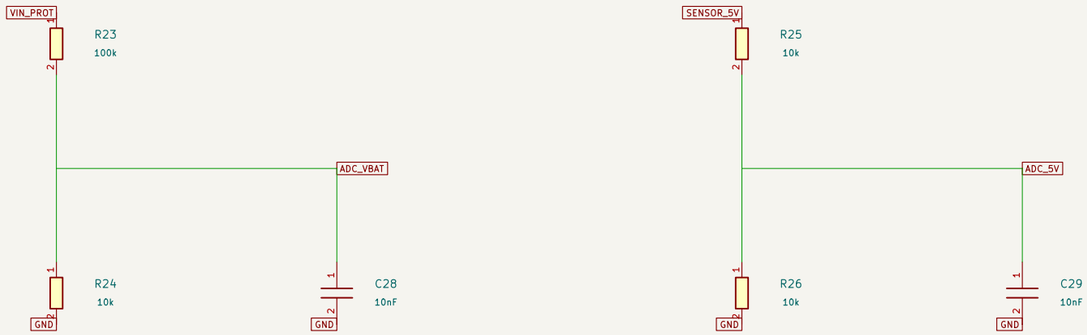



Prototype: bench validation required before robot use

Original open hardware design


Sheet: /Controller, clock, debug and status/


File: controller.kicad_sch


Title: FRC Sensor CAN — Controller, clock, debug and status


Size: A3	Date: 2026-09-07	**Rev: A PROTOTYPE**
KiCad E.D.A. 10.0.6		Id: 4/9


CAN physical interface and termination

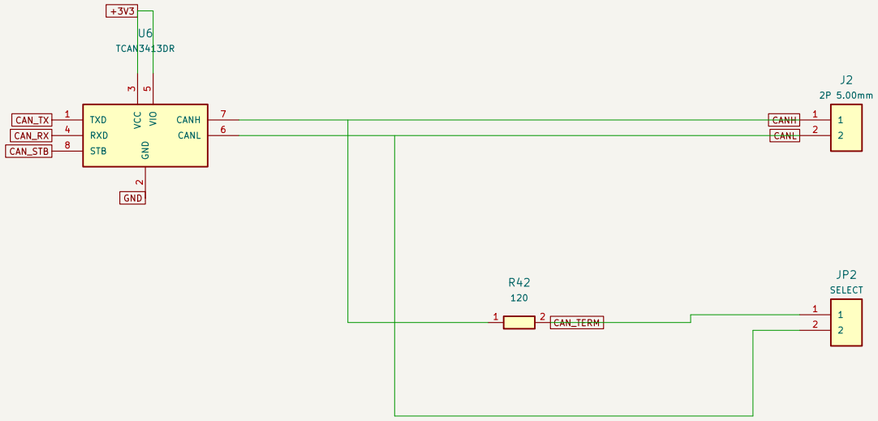

















1 Mbit/s. Fit JP2 only at a physical CAN trunk end.
TCAN3413 uses 3.3 V for both VCC and VIO.
STB pull-up keeps the bus silent during MCU reset.
CAN ground is shared through the power connection.

STATUS AND FOUR INPUT INDICATORS













Prototype: bench validation required before robot use

Original open hardware design


Sheet: /CAN physical interface and termination/
File: can.kicad_sch

Title: FRC Sensor CAN — CAN physical interface and termination

Size: A3	Date: 2026-09-07	**Rev: A PROTOTYPE**
KiCad E.D.A. 10.0.6		Id: 5/9

Input 1: industrial / logic selection

PORT POWER AND BIAS

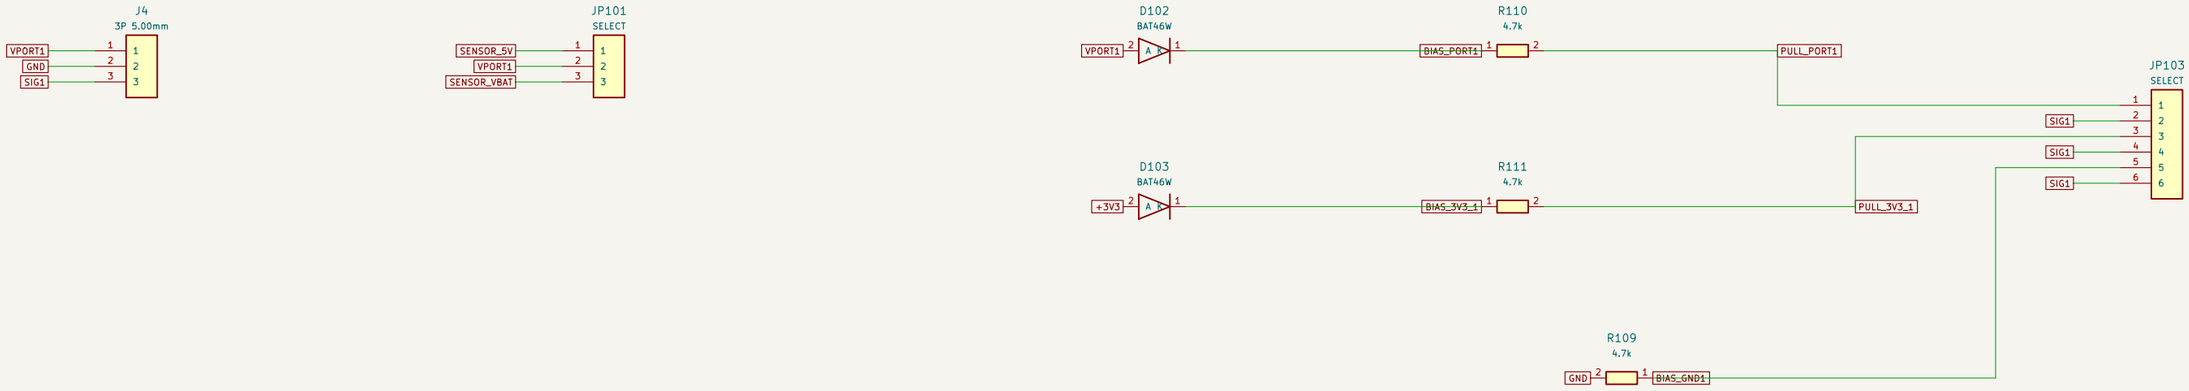

One shunt per selector. Bias diodes block signal backfeed into the supply rails.
NPN: port pullup. PNP: pulldown. Push–pull: bias open. Each bias branch is current limited.

PROTECTED SIGNAL AND HYSTERESIS


Threshold jumper open: LOW <=4V, HIGH >=7V.
Jumper fitted: LOW <=0.8V, HIGH >=2.4V.
0–30V signal target. 1nF input filter; digital debounce in firmware.
Do not apply external power to VPORT.

Prototype: bench validation required before robot use
Original open hardware design

Sheet: /Input 1: industrial / logic selection/		
File: input1.kicad_sch		
Title: FRC Sensor CAN – Input 1: industrial / logic selection		
Size: A3	Date: 2026-09-07	**Rev: A PROTOTYPE**
KiCad E.D.A. 10.0.6		Id: 6/9

Input 2: industrial / logic selection

PORT POWER AND BIAS

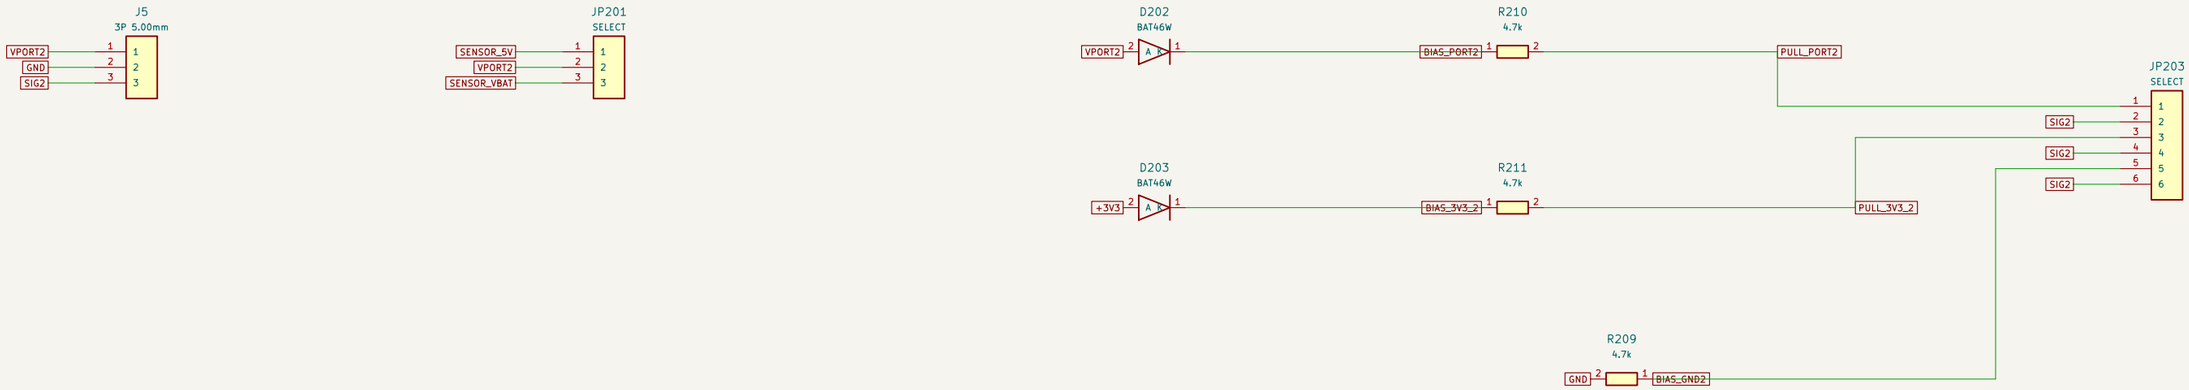

One shunt per selector. Bias diodes block signal backfeed into the supply rails.
NPN: port pullup. PNP: pulldown. Push–pull: bias open. Each bias branch is current limited.

PROTECTED SIGNAL AND HYSTERESIS


Threshold jumper open: LOW <=4V, HIGH >=7V.
Jumper fitted: LOW <=0.8V, HIGH >=2.4V.
0–30V signal target. 1nF input filter; digital debounce in firmware.
Do not apply external power to VPORT.

Prototype: bench validation required before robot use
Original open hardware design

Sheet: /Input 2: industrial / logic selection/		
File: input2.kicad_sch		
Title: FRC Sensor CAN – Input 2: industrial / logic selection		
Size: A3	Date: 2026-09-07	**Rev: A PROTOTYPE**
KiCad E.D.A. 10.0.6		Id: 7/9


Input 3: industrial / logic selection

PORT POWER AND BIAS

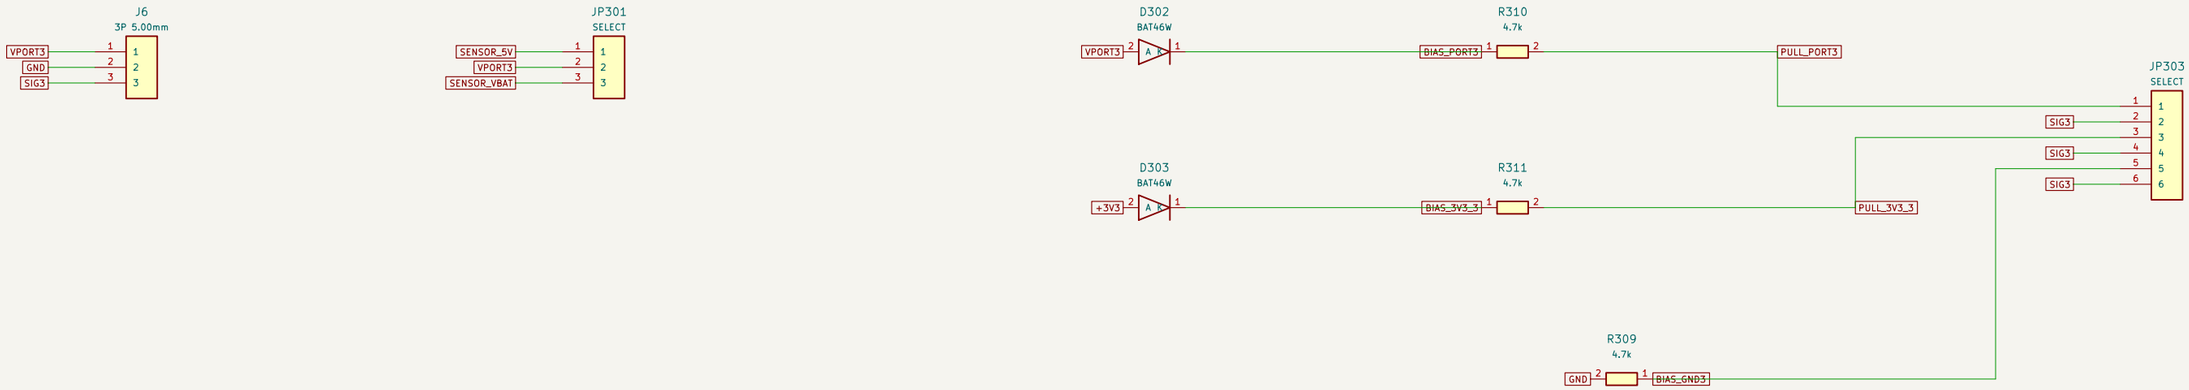

One shunt per selector. Bias diodes block signal backfeed into the supply rails.
NPN: port pullup. PNP: pulldown. Push–pull: bias open. Each bias branch is current limited.

PROTECTED SIGNAL AND HYSTERESIS

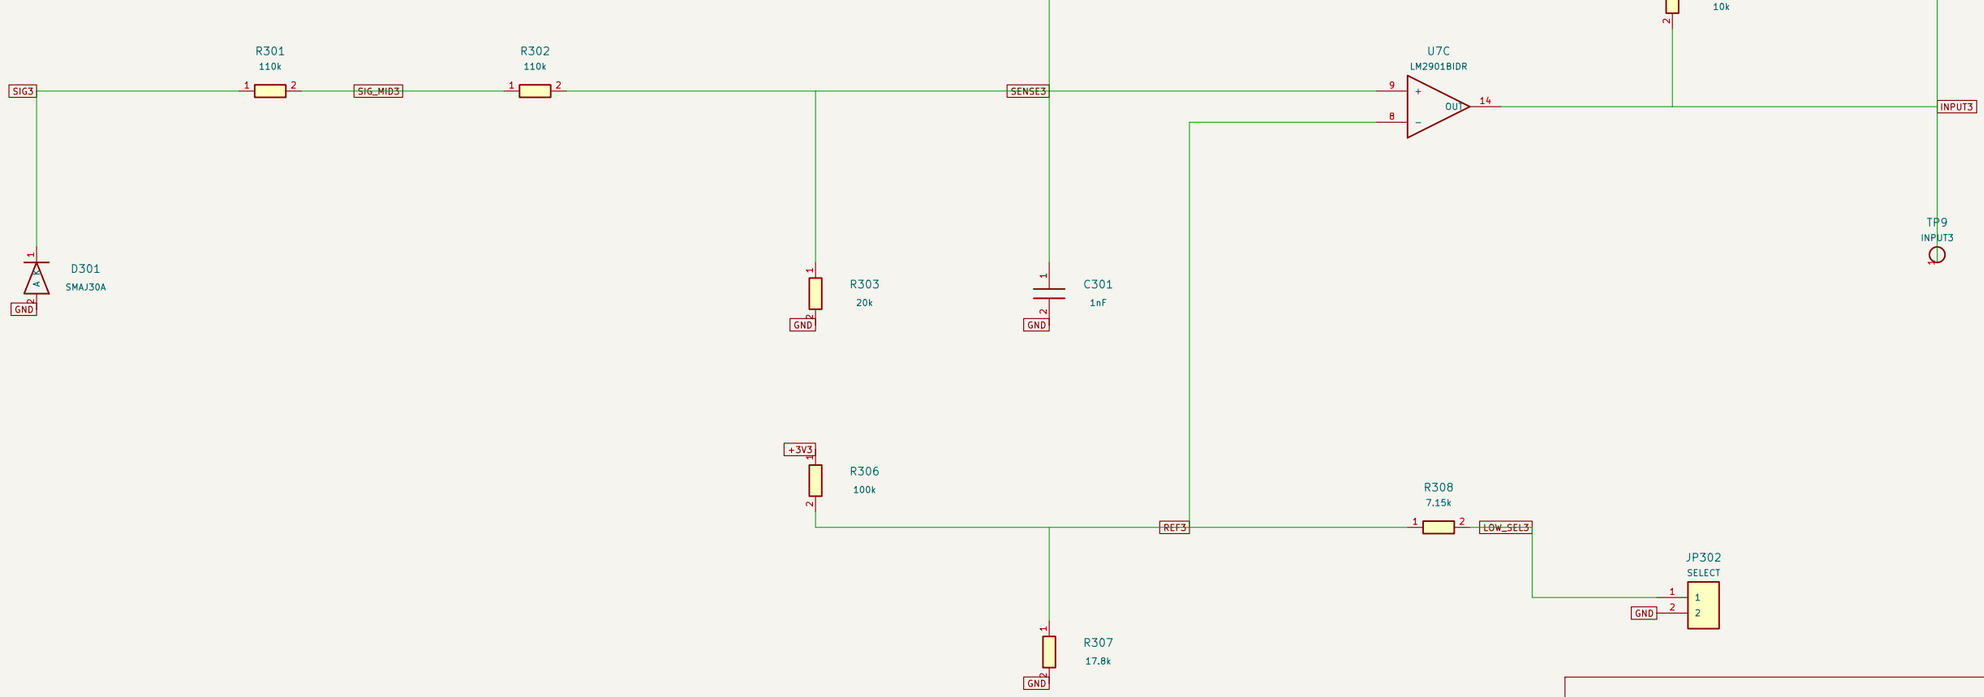


Threshold jumper open: LOW <=4V, HIGH >=7V.
Jumper fitted: LOW <=0.8V, HIGH >=2.4V.
0–30V signal target. 1nF input filter; digital debounce in firmware.
Do not apply external power to VPORT.


Prototype: bench validation required before robot use
Original open hardware design

Sheet: /Input 3: industrial / logic selection/		
File: input3.kicad_sch		
Title: FRC Sensor CAN – Input 3: industrial / logic selection		
Size: A3	Date: 2026-09-07	**Rev: A PROTOTYPE**
KiCad E.D.A. 10.0.6		Id: 8/9


Input 4: industrial / logic selection

PORT POWER AND BIAS














One shunt per selector. Bias diodes block signal backfeed into the supply rails.
NPN: port pullup. PNP: pulldown. Push–pull: bias open. Each bias branch is current limited.

PROTECTED SIGNAL AND HYSTERESIS

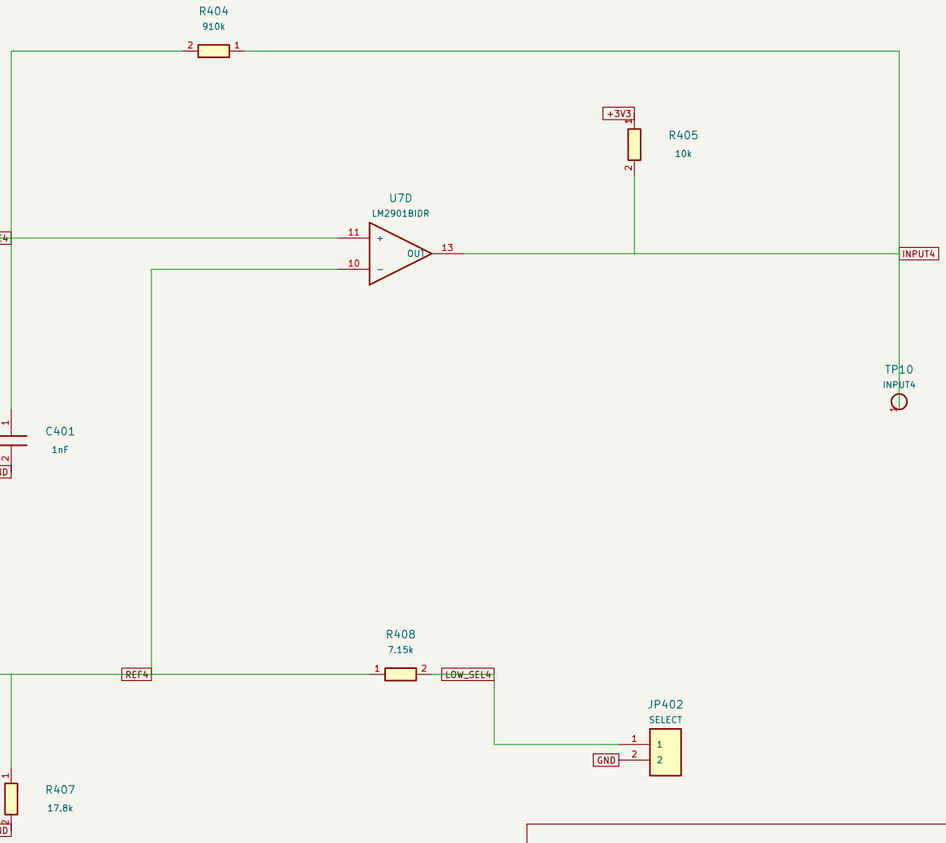

Threshold jumper open: LOW <=4V, HIGH >=7V.
Jumper fitted: LOW <=0.8V, HIGH >=2.4V.
0–30V signal target. 1nF input filter; digital debounce in firmware.
Do not apply external power to VPORT.

Prototype: bench validation required before robot use
Original open hardware design

Sheet: /Input 4: industrial / logic selection/		
File: input4.kicad_sch		
Title: FRC Sensor CAN – Input 4: industrial / logic selection		
Size: A3	Date: 2026-09-07	**Rev: A PROTOTYPE**
KiCad E.D.A. 10.0.6		Id: 9/9