
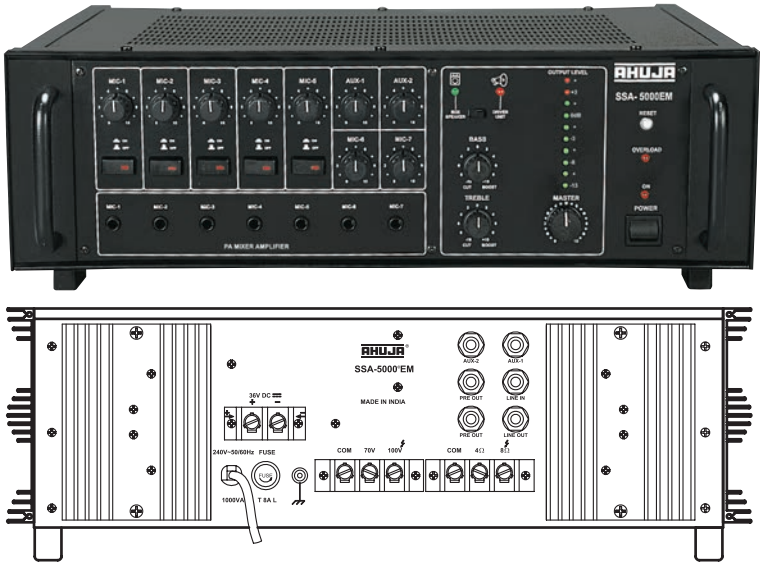



## SSA-5000®EM

### 500 WATTS ■ AC & 36V DC Operation

- 7 Mic & 2 Aux Inputs.
- Preamplifier and Line Output for connecting to a Booster Amplifier and for recording the programme.
- Line Input for connecting the output from any external PA mixer or permitting SSA-5000EM to be used as a Booster Power Amplifier.
- Resettable circuit breaker for protection against overload and short circuit.
- Instant transfer to DC power (Car Battery) if AC power fails.
- Box Speaker/Driver Unit selector switch. Bass boost defeated at Driver Unit position for safer operation of driver units.

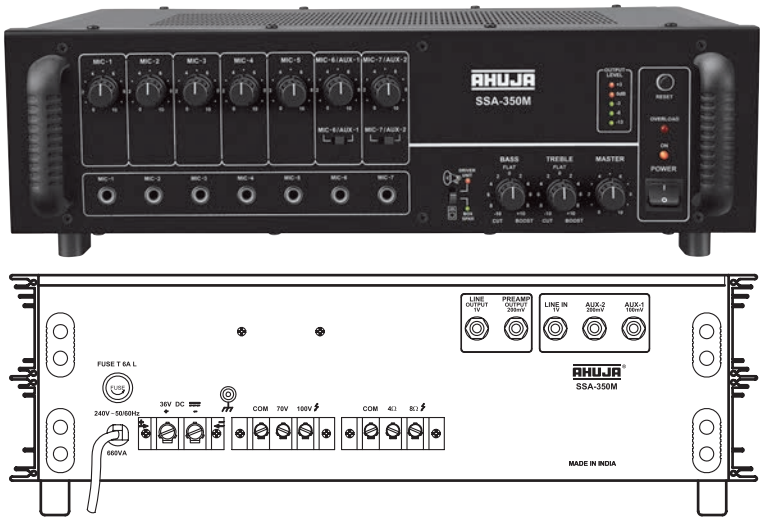


## SSA-350M

### 350 WATTS ■ AC & 36V DC Operation

- 7 Mic & 2 Aux Inputs.
- Preamplifier and Line Output for connecting to a Booster Amplifier and for recording the programme.
- Line Input for connecting the output from any external PA mixer or permitting SSA-350M to be used as a Booster Power Amplifier.
- Resettable circuit breaker for protection against overload and short circuit. Instant transfer to DC power (Car Battery) if AC power fails.
- Box Speaker/Driver Unit selector switch. Bass boost defeated at Driver Unit position for safer operation of driver units.
- Instant transfer to DC power (Car Battery) if AC power fails.

Ahuja models SSA-5000®EM and SSA-350M are highly reliable PA Mixer Amplifiers. These are designed to give high power clean sound and trouble free operation under extreme climatic conditions.

| SPECIFICATIONS | SSA-5000®EM | SSA-350M |
|---|---|---|
| POWER OUTPUT | 750W Max., 500W RMS at 10% THD | 450W Max., 350W RMS at 10% THD |
| | 450W RMS at 5% THD, 415W RMS at 2% THD | 320W RMS at 5% THD, 300W RMS at 2% THD |
| OUTPUT REGULATION | ≤ 2 dB, no load to full load at 1kHz | ≤ 2 dB, no load to full load at 1kHz |
| INPUT CHANNELS | 7 × Mic 0.8mV/4.7kΩ, 2 × Aux 100mV/470 kΩ | 7 × Mic 0.8mV/4.7kΩ, 1 × Aux 100mV/470kΩ |
| | 1 × Line 1V/50kΩ | 1 × Aux 200mV/470kΩ, 1 × Line 1V/50kΩ |
| FREQUENCY RESPONSE | 50-15,000Hz ±3dB | 50-15,000Hz ±3dB |
| SIGNAL TO NOISE RATIO | 60dB | 60dB |
| TONE CONTROLS | Bass: ±10dB at 100Hz, Treble: ±10dB at 10kHz | Bass: ±10dB at 100Hz, Treble: ±10dB at 10kHz |
| OUTPUTS | Preamp 200mV/600Ω, Line 1V/1kΩ | Preamp 200mV/600Ω, Line 1V/1kΩ |
| SPEAKER OUTPUTS | 4Ω, 8Ω, 70V & 100V | 4Ω, 8Ω, 70V & 100V |
| POWER SUPPLY | AC: 220-240V 50/60Hz DC: 36V (3×12V Car Battery) | AC: 220-240V 50/60Hz DC: 36V (3 ×12V Car Battery) |
| POWER CONSUMPTION | AC: 1000VA DC: 8A | AC: 660VA DC: 6A |
| DIMENSIONS | W510 × H172 × D385 mm | W480 × H155 × D360 mm |
| WEIGHT | 26.70kg | 18.90kg |



