
# Dual Channel Power Amplifier with Digital Player

## ZXA-500DP

### 250+250 WATTS ■ AC Operation

MP3 RECORDER | MP3 PLAYER | USB READER | CARD READER | MMC CARD READER | FM RADIO | BT | REMOTE CONTROL

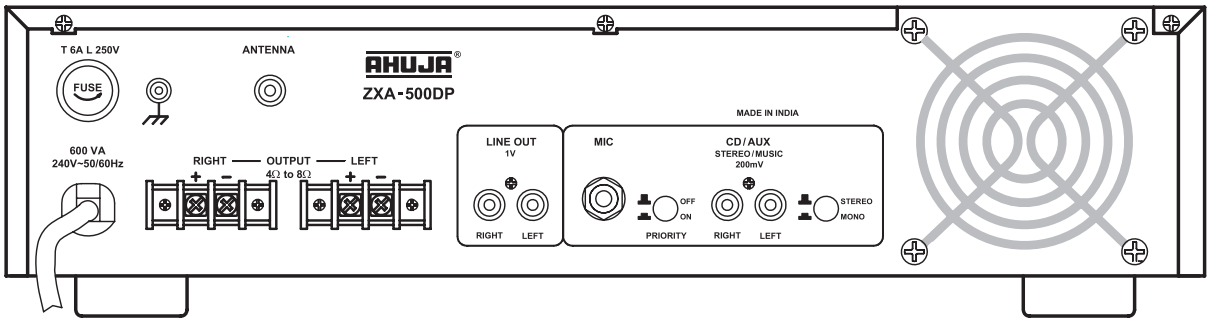


- Designed for use in wide variety of applications specially requiring high quality music.
- Professional dual channel power amplifier.
- 500 Watts rated output.
- Built-in MP3 play back facility with remote control. Backlit LCD display.
- Bluetooth and FM facility.
- Digital recorder facility.
- Cut-Boost type treble and bass control for tonal adjustment.
- Extensive built-in protection circuit for smooth and safe operation.

| SPECIFICATIONS | ZXA-500DP |
|---|---|
| CONTINUOUS RATED POWER | |
| STEREO/MONO | 8Ω : 100W + 100W RMS, 4Ω : 180W + 180W RMS |
| | 2Ω : 250W + 250W RMS |
| THD + N | < 1.0% |
| FREQUENCY RESPONSE (-1dB) | 20-20,000Hz |
| POWER BANDWIDTH (0.5% THD) | 20-20,000Hz |
| INPUTS | Mic: Mono Phone Jack 6.3mm, CD/Aux: RCA Jack (L&R) |
| INPUT SENSITIVITY | Mic: 5mV/4.7kΩ (unbal.), CD/Aux: 250mV/10kΩ (L&R) Stereo Mode |
| SIGNAL TO NOISE RATIO | > 65dB |
| TONE CONTROLS | Bass: ±10dB at 100Hz, Treble: ±10dB at 10kHz |
| CHANNEL SEPARATION | > 60dB AT 1kHz |
| OUTPUT | Line: 1V/1kΩ (L&R) through RCA Jack |
| DIGITAL PLAYER | MP3 Recorder Player with USB, SD, MMC Card, Bluetooth & FM |
| PROTECTIONS | Temperature, DC, RFI, Short Circuit, Built-in Limiter AC: Fuse 6A (T 6A L); ± DC: Fuse 2 × 8A (T 8A L) for each channel |
| OUTPUT CONNECTORS | 2 × Heavy duty 2-Way terminal strip |
| COOLING | DC Fan with Temperature Sensing |
| INDICATORS | Power ON, Signal, Clip, Protect (Ch. L&R) |
| POWER CONSUMPTION (RATED) | 600VA @ 220-240V ~ 50/60Hz |
| DIMENSIONS | W393 × H108 × D375mm |
| WEIGHT | 10.50kg |