
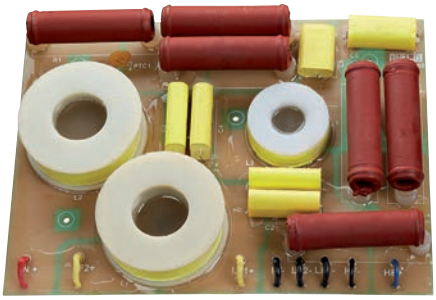



C-1300/750 1300W RMS

- Professional 2-Way Passive Crossover Network.
- Designed for use with 2 nos. LF woofer AHUJA Model L15-MB550 or L15-MB700.
- HF driver HD74-120.
- PTC for HF protection.
- High power and Low resistance Air core coils.
- High quality metallised polyester capacitors.

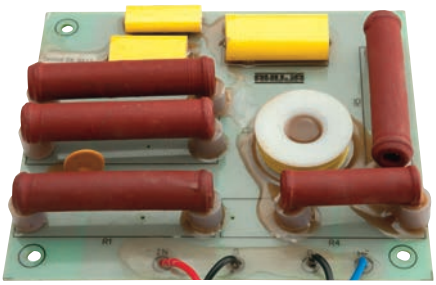

C-80HF 500W RMS

- Professional 1-Way Passive HF Crossover Network for HF Driver.
- Designed for use with 2-Way Speaker System using 1 no. compression driver AHUJA model HD51-80T.
- High power and Low resistance coils.
- High quality metallised polyester capacitors.

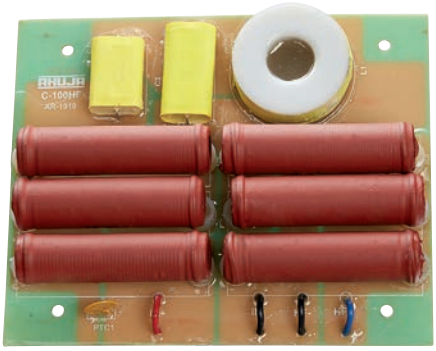

C-100HF 1300W RMS

- Professional 1-Way Passive HF Crossover Network for HF Driver.
- Designed for use with 2-Way Speaker System using 1 no. compression driver AHUJA model HD74-120.
- High power and Low resistance coils.
- High quality metallised polyester capacitors.

SPECIFICATIONS	C-1300/750	C-80HF	C-100HF
TYPE	Two-Way Crossover	HF Crossover	HF Crossover
POWER CAPACITY	1300W	500W	1300W
CROSSOVER FREQUENCY	1.2kHz	2.5kHz	1.2kHz
NOMINAL IMPEDANCE	4Ω	8Ω	8Ω
LOW PASS FILTER SLOPE	12dB/Octave	—	
HIGH PASS FILTER SLOPE	18dB/Octave with protection	18dB/Octave with protection	18dB/Octave with protection
DIMENSIONS	W260 x H43 x D192 mm	W161 × H32 × D140 mm	W183 × H43 × D150 mm
WEIGHT	1.72kg	355g	622g