


ANSWER true to the correct statement and False to the incorrect statement and correct it .



1. () PID controller is more stable than PI, PD controller .
2. () calibration diagram of the pump is the graph between the flow and voltage and it can be nonlinear of proportionality .
3. () the time constant of the first order control system is equal to 0.63 of the value of the level
4. () time response is the interval between input step and output signal first reaching of its final value of the level .
5. () The derivative controller reduces the amount of over shoot but increase delay time .

QUESTION 3: A- The following graph is obtained from ON-OFF control of the level experiment. Answer the following questions:

1. The Set point is =
2. On time is =
3. Off time is =
4. Experimental value of hysteresis is =
5. Draw the On-Off time in the graph
6. Draw the closed loop control of the process for ON-OFF controller. Define each block its gain.

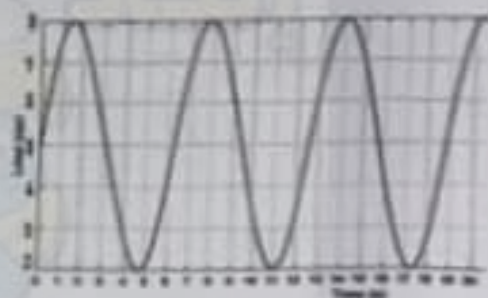

B. Given the following seven controllers (PD1010, I 20, PID 10105, D10, PO3010, PID20202, ID1010,). Assign each controller with the appropriate graph explaining why.

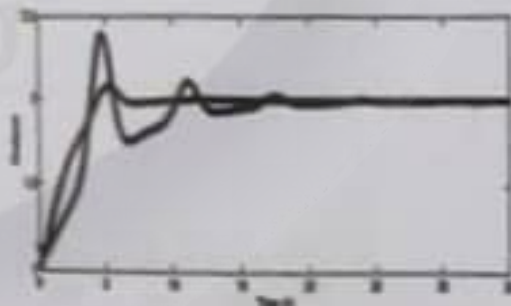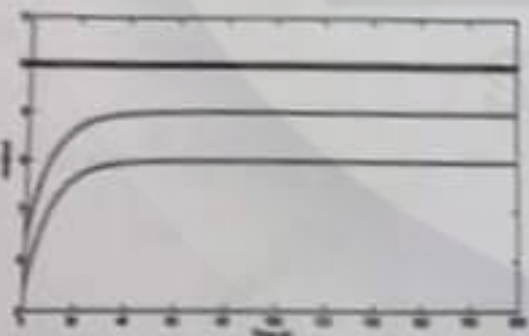

a) P 10 b) PI 10, 10 c) PID 10,10, 10 e) _____

10) Approximately the overshoot percentage for system 1, system 2 =

a) 0, 7% b) undefined, 70% c) undefined, 78.5% e) _____

11) Which of the following controller is suitable for the system 2

a) PD 10, 10 b) PD10, 20 c) P 10 e) _____

12) The theoretical error for system 1, system 2

a) 0, 0 b) $A/(1+KPGPR)$, 0 c) 1.2, 0 e) _____

13) Which of the following controller gain is suitable for the system 1

a) k_p+k_d b) $k_p+k_d+k_i/s$ c) k_p+k_i e) _____


14) Approximately the overshoot for system 1, system 2 =

a) 0, 7 b) undefined, 7 c) undefined, 17 e) _____

QUESTION 2:

A) - If we decrease the value of the integral term for PI (4, 2) what changes will occur for the following variables, use the words (increase, decrease, the same)

- 1) T_{ss}
- 2) Over shoot
- 3) Number of cycles in settling time
- 4) steady state error
- 5) stability of the system

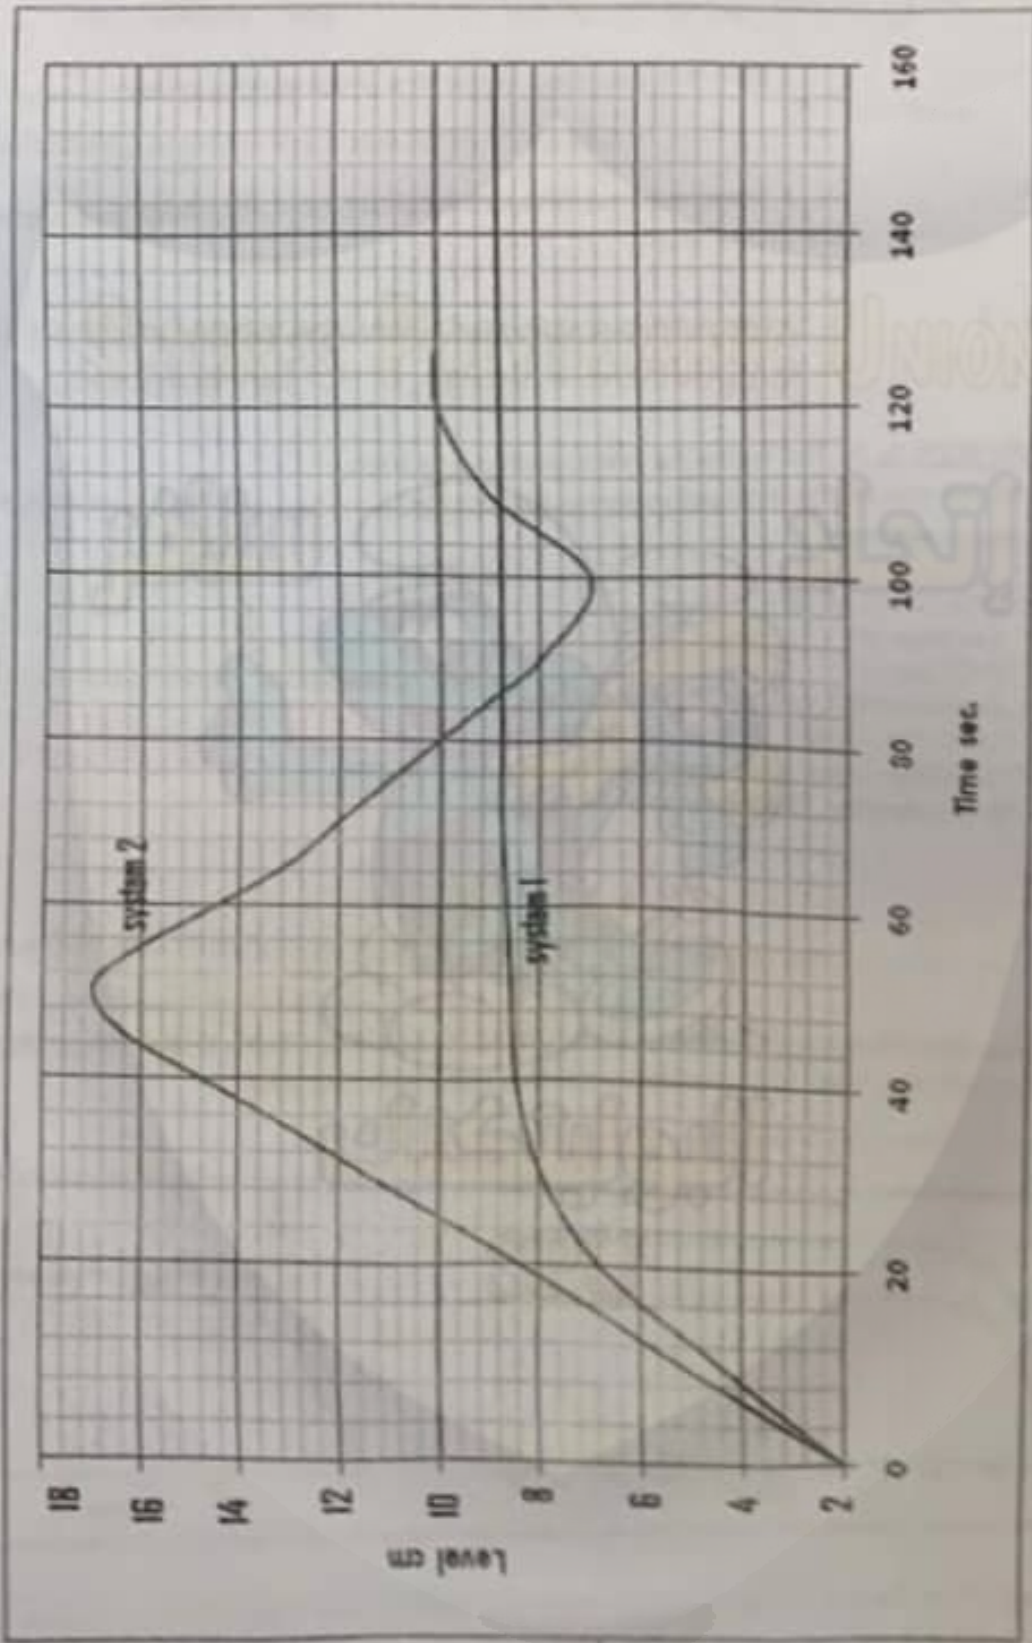

Mechanical control lab

students name :
Day & time of the lab:

QUESTION 1: Circle the right answer :

1) The steady state level [hss] for system 1 , system 2 =

- a) 6.8 , 8 b) 8.8 , 10 c) 6.8 , 14 e)

2) Approximately Time constant for system 1 , system 2 =

- a) 12 , 15 b) 25 , 30 c) 16 , 17 e)

3) the experimental error ess for system 1 , system 2 =

- a) 3.6 , 0 b) 1.2 , 0 c) 1.6 , 0 e)

4) Approximately the settling time for system 1 , system 2 =

- a) 0 , 128 b) undefined , 128 c) 64 , 128 e)

5) Approximately the rise time for system 1 =

- a) 30 b) 20 c) 60 e)

6) Approximately the rise time for system 2 =

- a) 30 b) 20 c) 25 e)

7) Approximately the delay time for system 1 =

- a) 5.4 b) 20 c) 15 e)

8) Approximately the delay time for system 2 =

- a) 5.4 b) 12 c) 8 e)

9) Which of the following controller is suitable for the system 1

QUESTION 1: (10 Marks)

1. What is the function Of LVDT?

measure the displacement and convert it into voltage.

2. What are the disadvantages of the ON - OFF controller?

1 - ~~High~~ Power consumption / electricity consumption

2 - Physical damage on pumps, due rapidly swithing

3. Explain how you can calculate the Resistance of the drain valve experimentally?

we must know if the flow is laminar or turbilant.

$$R = 2H/Q$$

$$\frac{\text{flow velocity} \times D_{\text{Pipe}}}{1 \times 10^{-6} \text{ m}^2/\text{s}}$$

4. Define

a. Time constant time @ $0.63 h_{ss} + h_i$

main characterstic unit of the First order.

b. Rising time time @ $0.9 h_{ss} + h_i$ - time @ $0.1 h_{ss} + h_i$

the time needed to reach the ~~level~~ response. to maximum value. $\rightarrow$ reach

c. Delay time time @ $0.5 h_{ss} + h_i$

time needed for the responce to reach half of its final Value

d. Settling time the time when the level start to be constant

(no ~~change~~ in level)
Change

Q3] a- This graph was obtained for on-off control of the level Exp#5, answer the following:



1- The upper limit =

2- The lower limit =

3- The set point =



4- time ON =

5- time OFF =

6- hysteresis =


Q4) Given the following seven controllers (P10, I10, PI 105, D5, P20, PID 1010, ID 1010)

Assign each controller with the appropriate case graph and explain why? (8 marks)

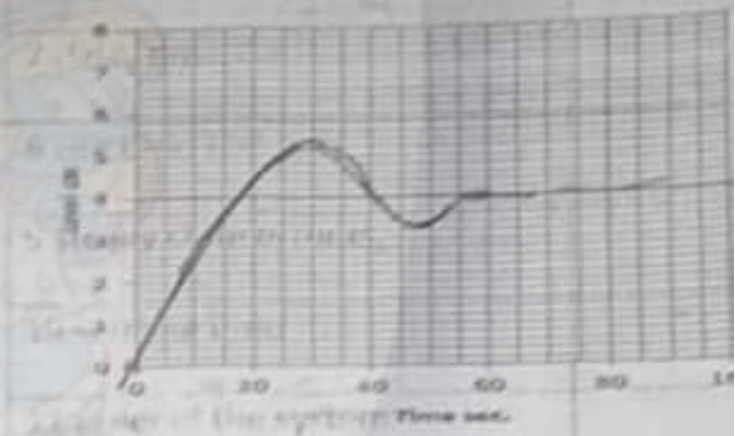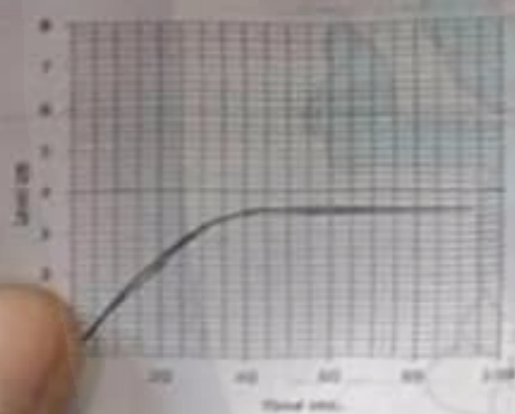


Case 2:

2- Analyze the function of the controller.

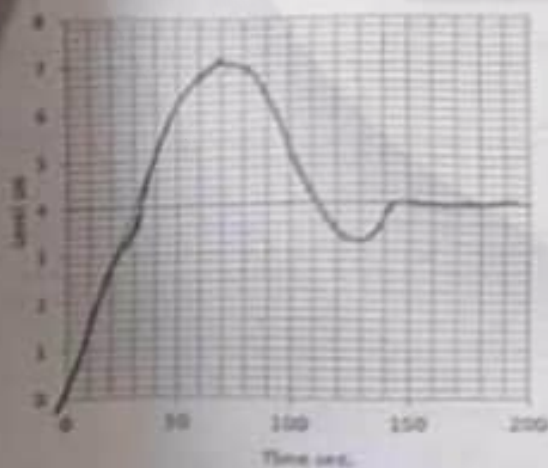

Case 3:

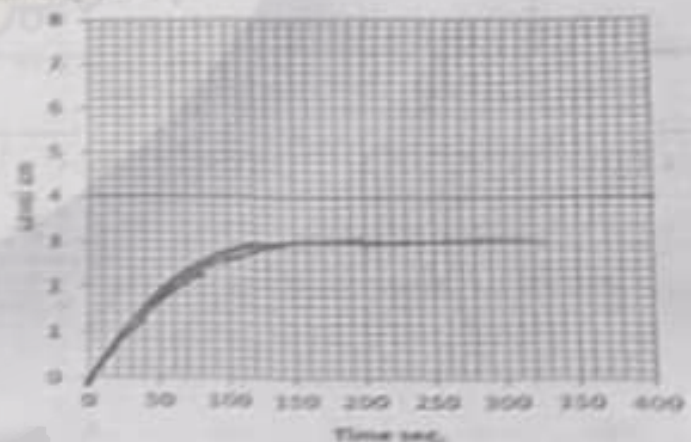

Case 4:

Al Balqa Applied University,
Faculty of Engineering Technology
Mechanical Engineering Department

Mechanical control lab

Date :

Name :

Day & time of the lab :

Q1) Answer **True** or **False** for the following statements and **correct the false** : (10 marks)

1- Calibration the LVDT below 14 cm because above this level the relation is non linear. ()

2- In exp. 6 on-off control of the level with sol valve, the sol valve give signal to the pump to on or off according to the tank level. ()


3- In exp. 5 on-off control of the level if the upper limit in the tank = 10 cm and the lower limit = 4cm then the value of the hysteresis = 40%. ()

4- A-In exp. 4 if the tank diameter = 17.5 cm and the static gain = 1.25 s/cm^2 then the time constant of the process = 904 sec. ()

b- If the level in the tank $H = 15 \text{ cm}$, then the flow velocity of the water exit from the drain = 1.54 m/s ()

Peak Time T_p	4.9	50
Delay Time T_d	time @ $0.5(h_{max} - h_i) + h_i$ $= 3 \text{ sec}$	8 sec 5 sec
Steady State Error e_{ss}	setpoint - $h_o = 3 - 2.5$ $= 0$	$11 - 2.5 = 8.5$
Settling Time	25	50
System Order	Second order	First order
Controller Transfer Function	$\frac{K_p s + K_d s^2 + K_i}{s(Rs+1)} \times G_p \times R$	$\frac{(K_p + K_d s) \times G_p \times (R)}{Ts + 1}$
Theoretical error	0	$\frac{\text{step input (A)}}{1 + K_p G_p R}$
Time Constant	time @ $0.63(h_{max} - h_i) + h_i$ $= 3.75 \text{ sec}$	10 sec 16 sec
Experimental Value of R	$R = \frac{A}{S}$	$R = \frac{A}{S}$
Rise Time	3.8 sec	50 sec

B. Draw the closed loop control of the process for the **PID** controller. Define each block its gain. Write the transfer function.

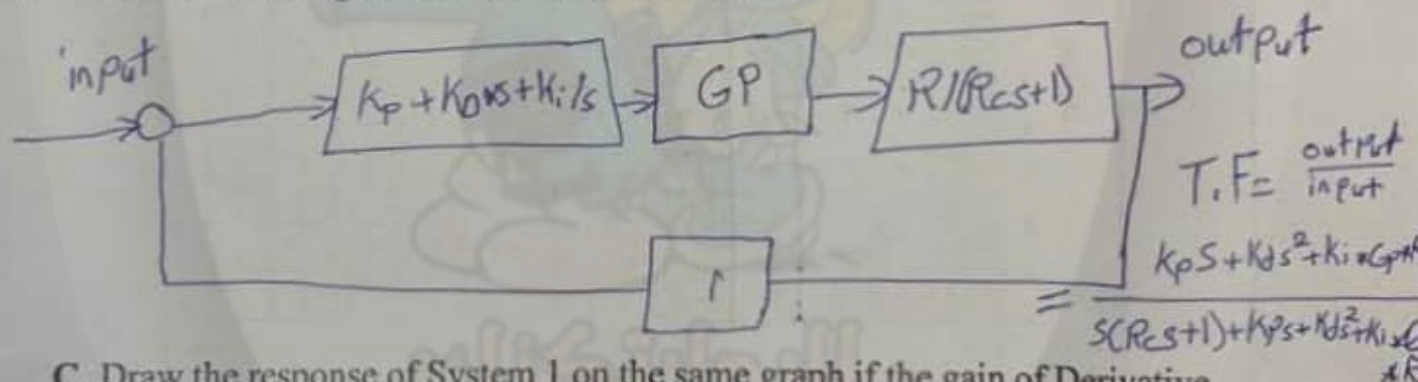

C. Draw the response of System 1 on the same graph if the gain of Derivative controller is 2 explaining why??

D. What are the objective of these experiments?

to verify the effects of the gain of the loop (K_p) (K_d) (K_i) on the dynamic response of the system.



QUESTION 3: (8 Marks)

a. For a closed loop system using on off controller, the desired set point = 4 cm and the hysteresis = 30%. What are the values of the upper and lower limits?

$$\begin{aligned} \text{upper limit} &= \text{setpoint} + \frac{1}{2} \text{hysteresis} \times 10 \\ &= 4 + (15 \times 10) = 34 \end{aligned}$$


$$\begin{aligned} \text{lower limit} &= \text{setpoint} - \frac{1}{2} \text{hysteresis} \times 10 \\ &= 4 - (15 \times 10) = -26 \end{aligned}$$

- b. Given the following seven controllers (PD1010, I 20, PID 10105, D10, PD3010, PI2020, ID1010,). Assign each controller with the appropriate graph explaining why.

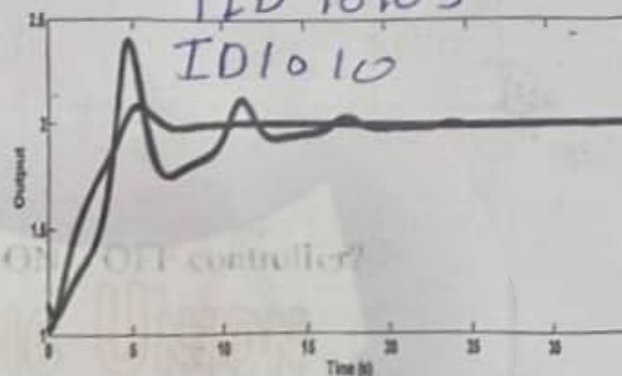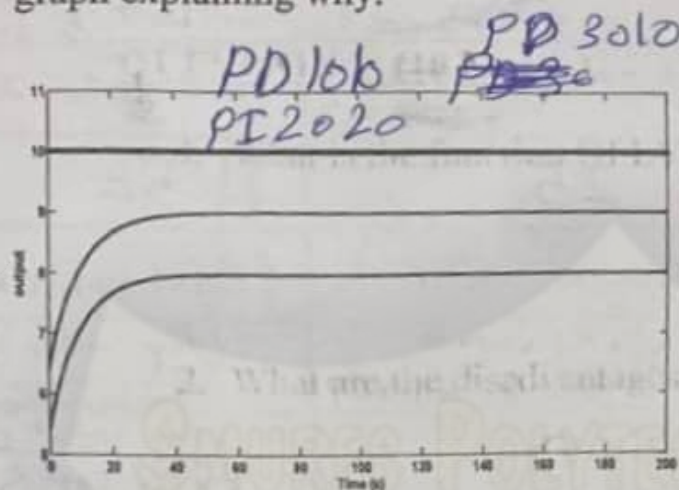



QUESTION 4: (8 Marks)

The given graph represents the transient response of the closed loop proportional control level $K_p = 5$. Use the graph to fill the table (10 marks)

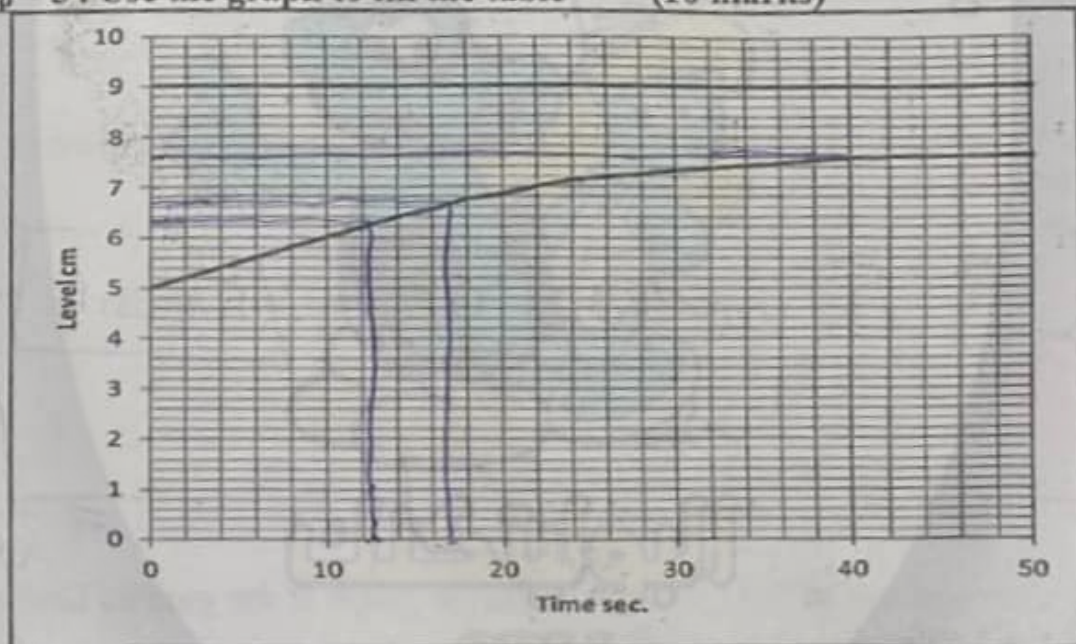

1-The initial condition= 5	5- Steady state level $h_{ss} = 7.6 - 5 = 2.6$
2- delay time T_d $0.5 \times (h_{max} - h_i) + h_i = 12.5 \text{ sec}$	6-Time constant of the process τ $0.65 \times (h_{max} - h_i) + h_i = 17 \text{ sec}$
3- the step input value 2	7-steady state error $e_{ss} = 9 - 7.6 = 1.4$
4-The desired value = 7.6	8-settling time $T_{ss} = 40 \text{ s}$

QUESTION 2: the following figure represents the transient response of the closed loop PID 10105 and PD 2010 control of the level. Use the graph to fill the table, show all the projections.
The Diameter of the cylinder is 17.5 cm. (22 Marks)

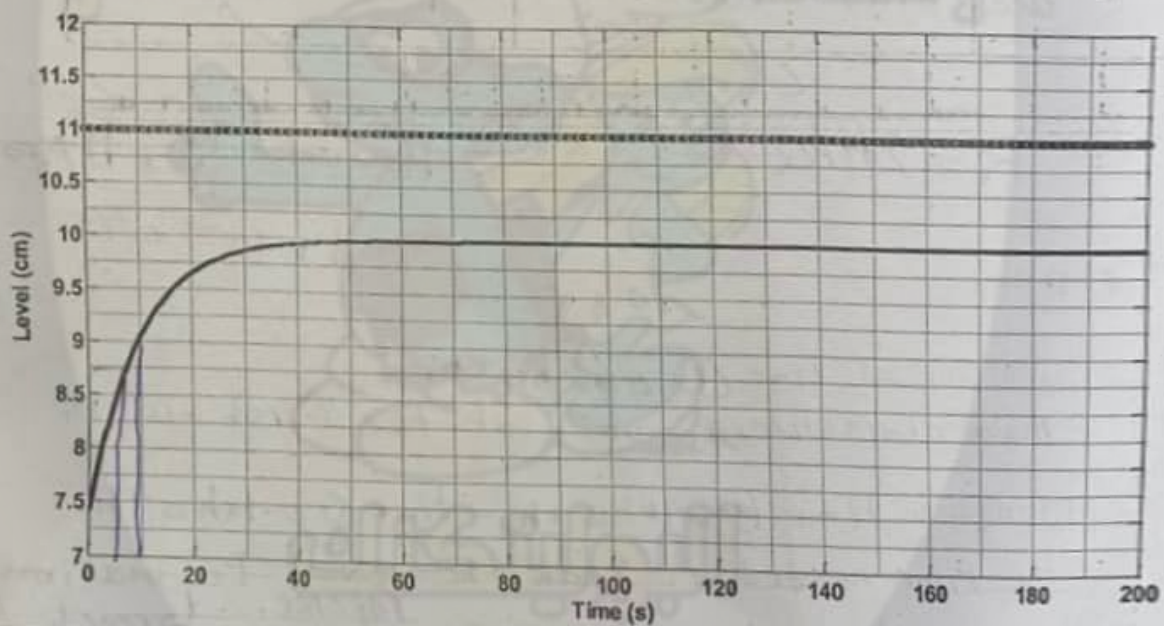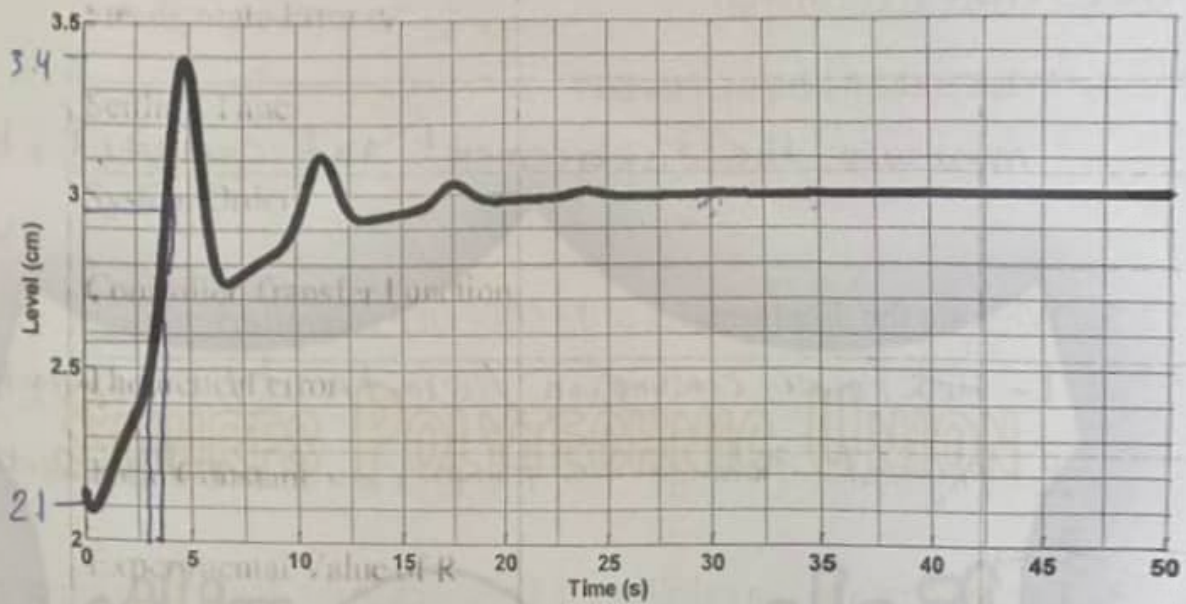

	SYSTEM 1	SYSTEM 2
Steady State Level h_{ss}	$3.4 - 2.1 = \underline{1.3}$	$10 - 7.5 = \underline{2.5}$
Step input	2.5 2.5	10 10
Maximum Over shoot	0.4	undifined
Minimum Overshoot	$s.p - h_{min}$ $3 - 2.75 = 0.25$ undifined	undifined
Maximum Over shoot Percentage	$\frac{0.5}{s.p} \times 100\% = \frac{0.4 \times 100}{3} = 13.3\%$	0
Minimum Over shoot Percentage	$\frac{0.5}{s.p} \times 100\% = \frac{0.25 \times 100}{3} = 8.33\%$	0

$$= 8.33\%$$

Al Balqa Applied University,
Faculty of Engineering Technology
Mechanical Engineering Department

Mechanical control lab

Date :

Name :

Day & time of the lab :

Q1) Answer True or False for the following statements and correct the false : (10 marks)

1- Calibration the LVDT below 14 cm because above this level the relation is non linear. ()


2- In exp. 6 on-off control of the level with sol valve, the sol valve give signal to the pump to on or off according to the tank level. ()

3- In exp. 5 on-off control of the level if the upper limit in the tank = 10 cm and the lower limit = 4cm then the value of the hysteresis = 40%. ()

4- A- In exp. 4 if the tank diameter = 17.5 cm and the static gain = 1.25 s/cm^2 then the time constant of the process = 904 sec. ()

b- If the level in the tank $H = 15 \text{ cm}$, then the flow velocity of the water exit from the drain = 1.54 m/s ()

13] a- This graph was obtained for on-off control of the level Exp#5, answer the following:

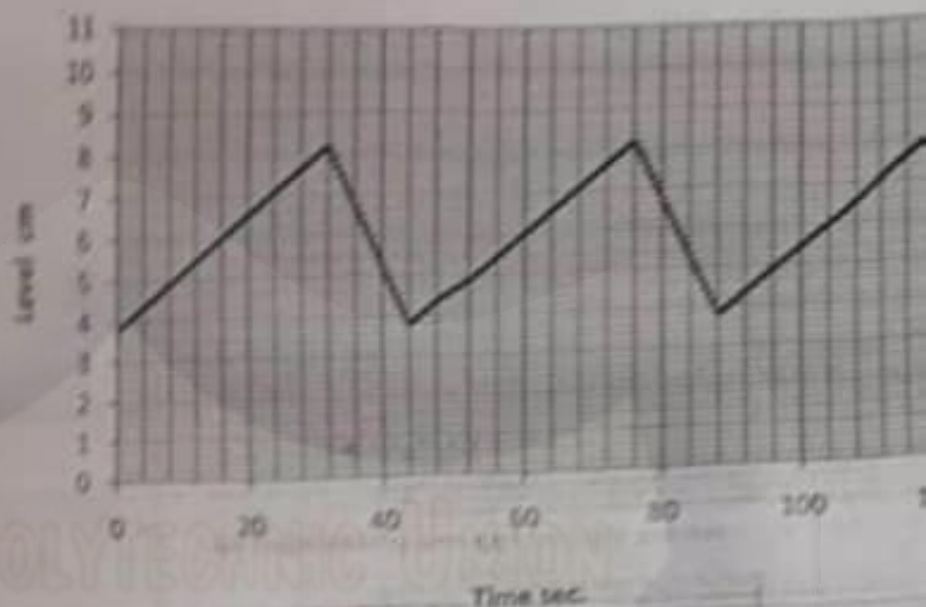

1- The upper limit =

2- The lower limit =

3- The set point =


4- time ON =

5- time OFF =


6- hysteresis =

Q4] Given the following seven controllers (P10, I10, PI 105, D5, P20, PI 1010, ID 1010)

Assign each controller with the appropriate case graph and explain why? (8 marks)

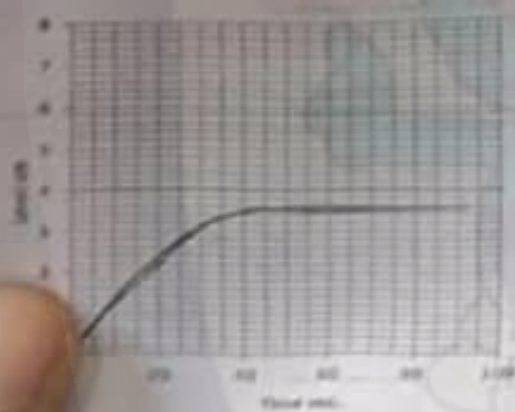


Case 1:

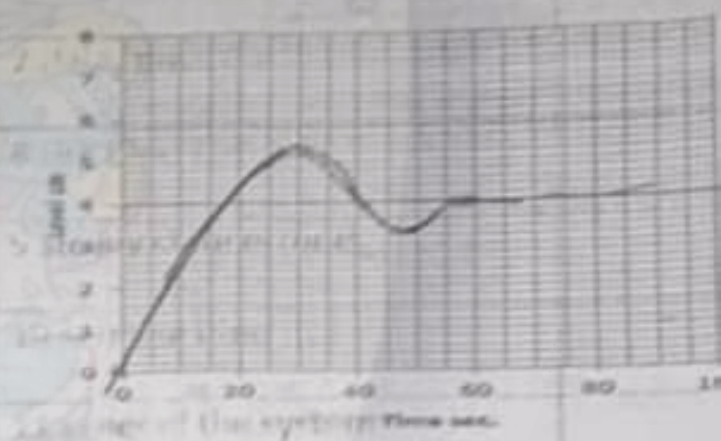


Case 2:

2- time ON = 10 sec and time OFF = 10 sec

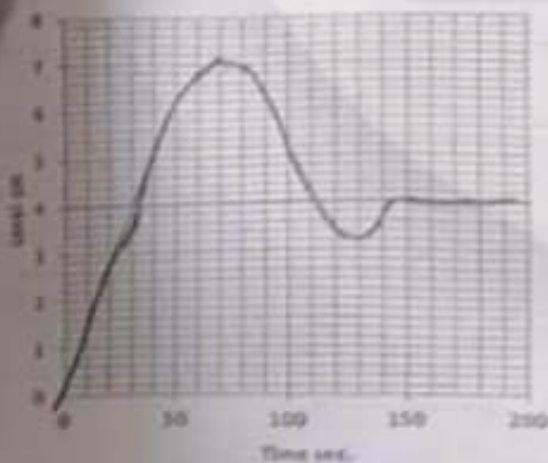


Case 3:

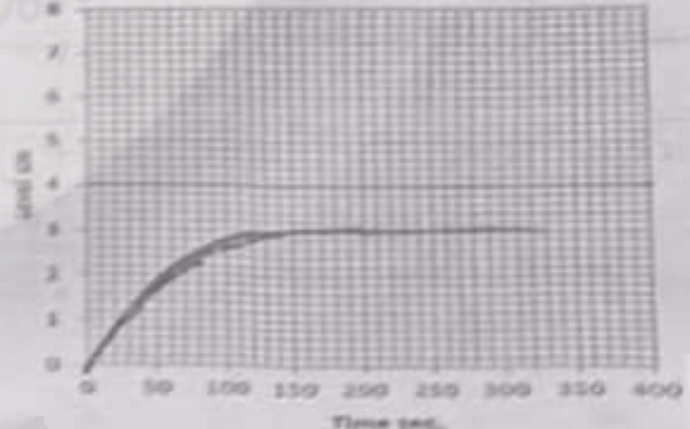

Case 4:

Peak Time T_p	4.9	50
Delay Time T_d	time @ 0.5(hmax - hi) + hi = 2.5 3 sec	8 5 sec
Steady State Error e_{ss}	setpoint - ho = 3 - 3 setpoint = 0	11 - 2.5 = 8.5
Settling Time	25	50
System Order	second order	first order
Controller Transfer Function	$\frac{K_p s + K_d s^2 + K_i}{s(Rs + 1)} \times G_p \times R$	$\frac{(K_p + K_d s) \times G_p \times \left(\frac{R}{Rs + 1}\right)}{1 + (K_p + K_d s) \times G_p \times \left(\frac{R}{Rs + 1}\right)}$
Theoretical error	0	$\frac{\text{step input} \times (A)}{1 + K_p G_p R}$
Time Constant	time @ 0.63(hmax - hi) + hi = 2.1 3.75 sec	10 16 sec
Experimental Value of R	$R = \frac{A}{S}$	$R = \frac{A}{S}$
Rise Time	3.8 sec	50 sec

B. Draw the closed loop control of the process for the **PID** controller. Define each block its gain. Write the transfer function.

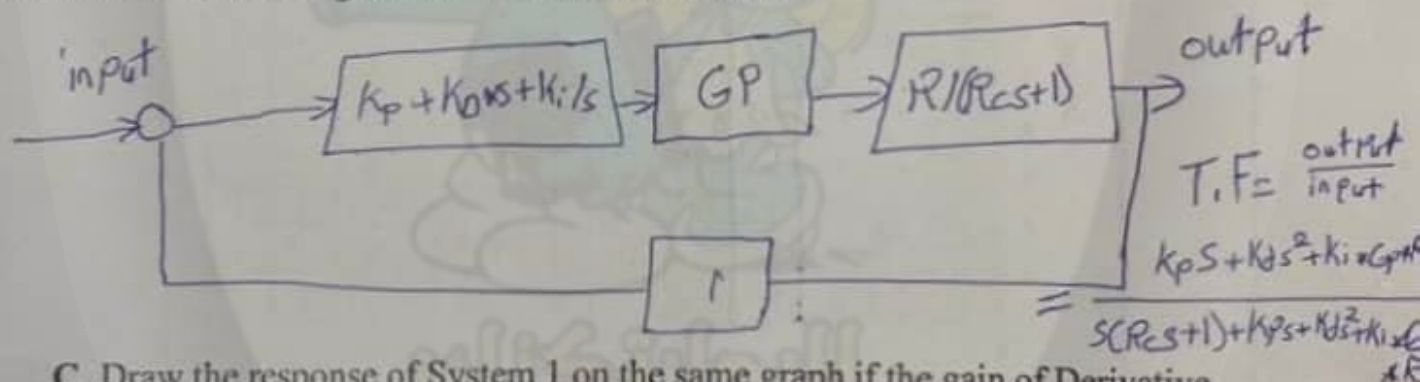

C. Draw the response of System 1 on the same graph if the gain of Derivative controller is 2 explaining why??

D. What are the objective of these experiments?

to verify the effects of the gain of the loop (K_p) (K_d) (K_i) on the dynamic response of the system.


QUESTION 3: (8 Marks)

a. For a closed loop system using on off controller, the desired set point = 4 cm and the hysteresis = 30%. What are the values of the upper and lower limits?

$$\begin{aligned} \text{upper limit} &= \text{setpoint} + \frac{1}{2} \text{hysteresis} \times 10 \\ &= 4 + (15 \times 10) = 34 \end{aligned}$$

$$\begin{aligned} \text{lower limit} &= \text{setpoint} - \frac{1}{2} \text{hysteresis} \times 10 \\ &= 4 - (15 \times 10) = -26 \end{aligned}$$



QUESTION 2: the following figure represents the transient response of the closed loop PID 10103 and PD 2010 control of the level. Use the graph to fill the table, show all the projections.
The Diameter of the cylinder is 17.5 cm. (22 Marks)

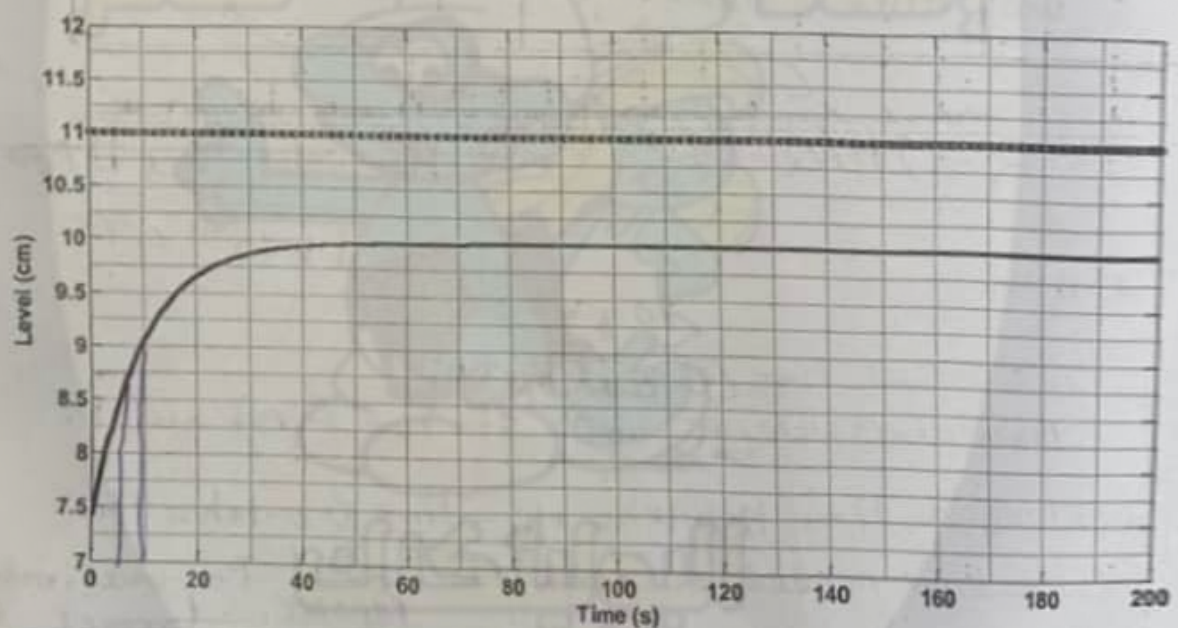

	SYSTEM 1	SYSTEM 2
Steady State Level h_{ss}	$3.4 - 2.1 = \underline{1.3}$	$10 - 7.5 = \underline{2.5}$
Step input	$\underline{2.5}$	$\underline{10}$
Maximum Over shoot	0.4	undifined
Minimum Overshoot	$s.p - h_{min} = 3 - 2.25 = 0.75$ $\frac{0.75}{3} = 0.25$	undifined
Maximum Over shoot Percentage	$\frac{0.5}{s.p} \times 100\% = \frac{0.4}{3} \times 100\% = 13.3\%$	0
Minimum Over shoot Percentage	$\frac{0.5}{s.p} \times 100\% = \frac{0.25}{3} \times 100\% = 8.33\%$	0


$$= 8.33\%$$

- b. Given the following seven controllers (PD1010, I 20, PID 10105, D10, PD3010, PI2020, ID1010,). Assign each controller with the appropriate graph explaining why.

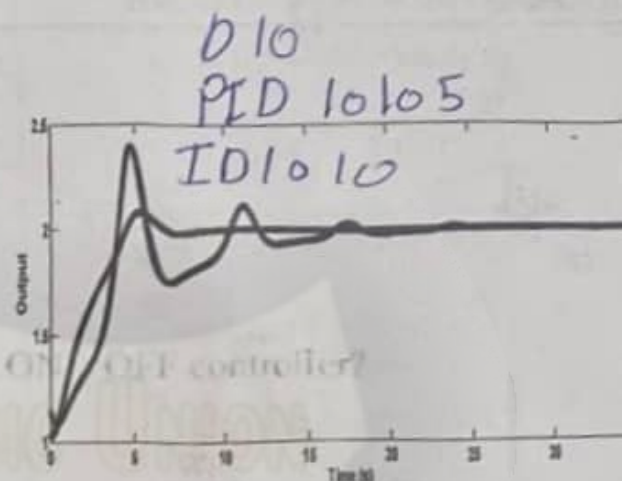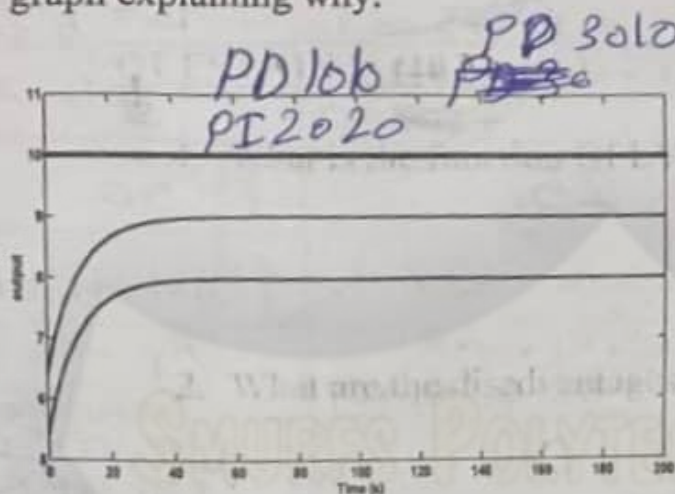

QUESTION 4: (8 Marks)

The given graph represents the transient response of the closed loop proportional control level $K_p = 5$. Use the graph to fill the table (10 marks)

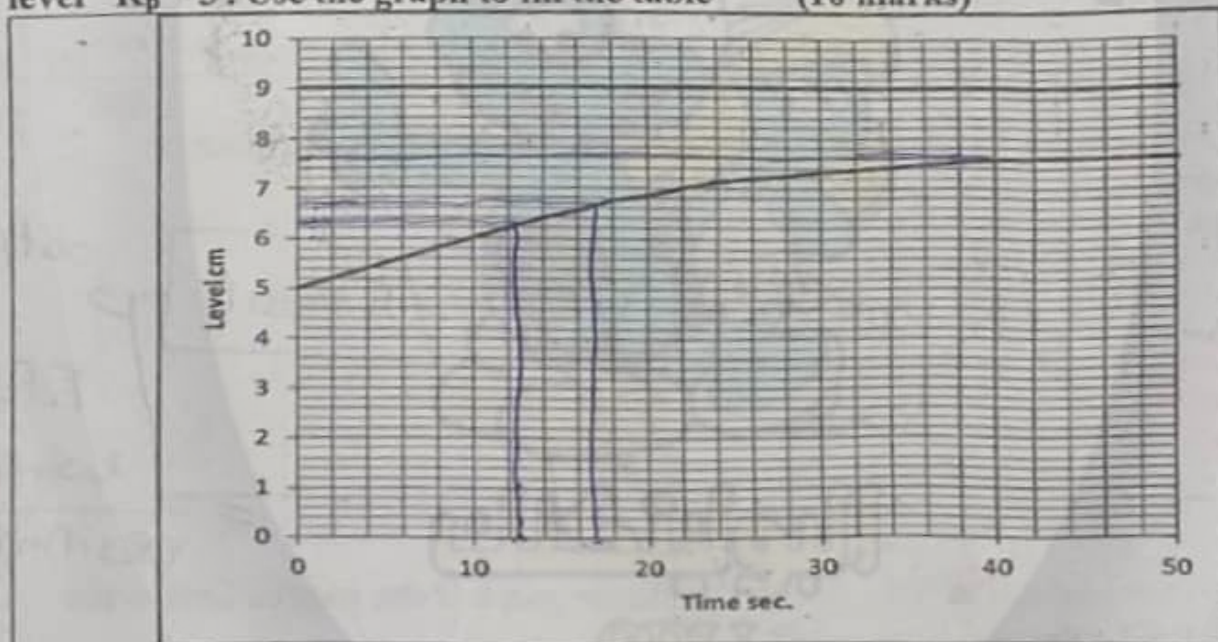

1-The initial condition= 5	5- Steady state level $h_{ss} = 7.6 - 5 = 2.6$
2- delay time T_d $0.5 \times (h_{max} - h_i) + h_i = 12.5 \text{ sec}$	6-Time constant of the process τ $0.65 \times (h_{max} - h_i) + h_i = 17 \text{ sec}$
3- the step input value 2	7-steady state error $e_{ss} = 9 - 7.6 = 1.4$
4-The desired value = 7.6	8-settling time $T_{ss} = 40 \text{ s}$