

AFT-SP Concept and detail for MIR-SB03 explain software PLC

- *MIR-SB03 Layout of Machine*

- *MIR-SB03 Sequent of Machine*

- *MIR-SB03 Softwere PLC*

AGC Technology Solutions (Thailand) Co., Ltd.

Concept and detail MIR-SB03 software PLC



Software PLC sheet

for step sequent SB03 working of Machine

Project Name

AFT-SP Concept and detail for MIR-SB03 explain software PLC

PO : 4501912830


Person in charge
Taweechart P.

28/8/2025


Director	Manager/AD	Confirmed	Checked
Mr.Norio Saotome	Mr.Premrat Ranog	Mr.Taweechart Prachoom	Mr.Manasak Chooglin

AGC Technology Solutions (Thailand) Co.,Ltd.


- MIR-SB03 Layout of Machine

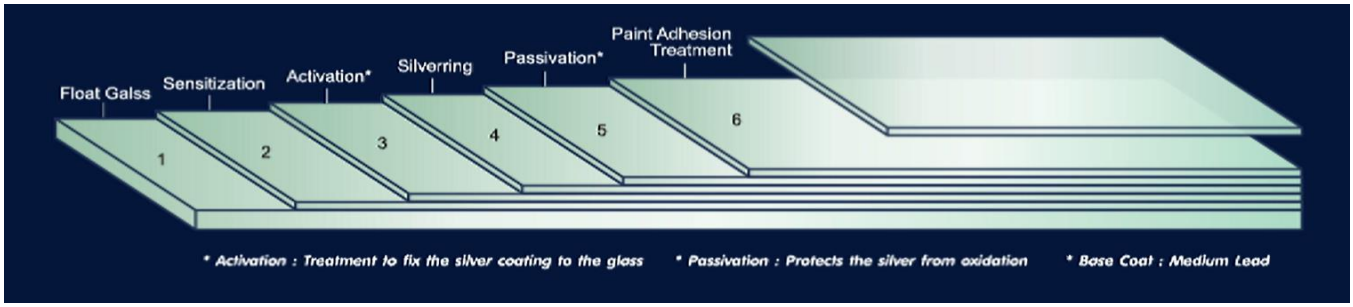

- MIR-SB03 Sequent of Machine

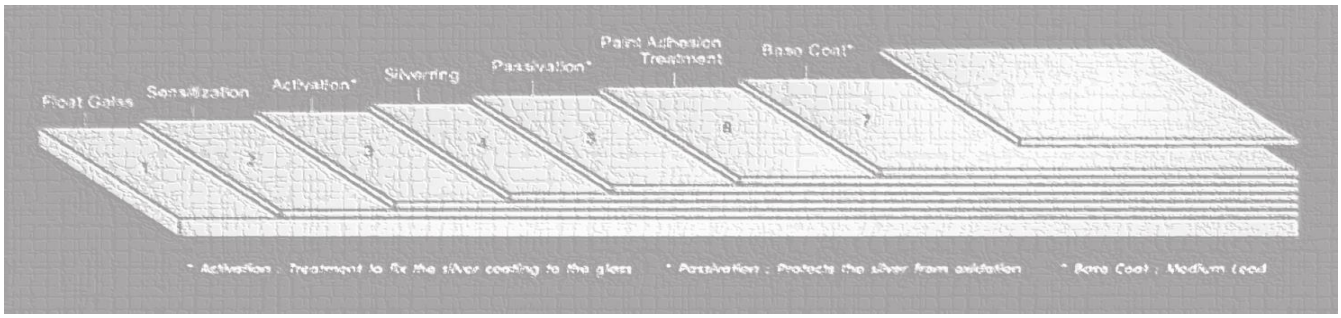


- MIR-SB03 Softwere PLC

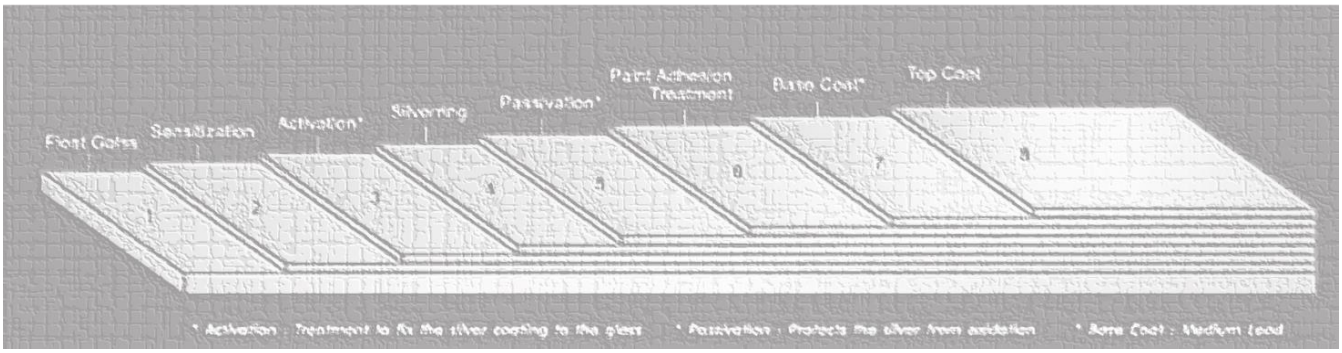

AGC

AGC Technology Solutions (Thailand) Co., Ltd.

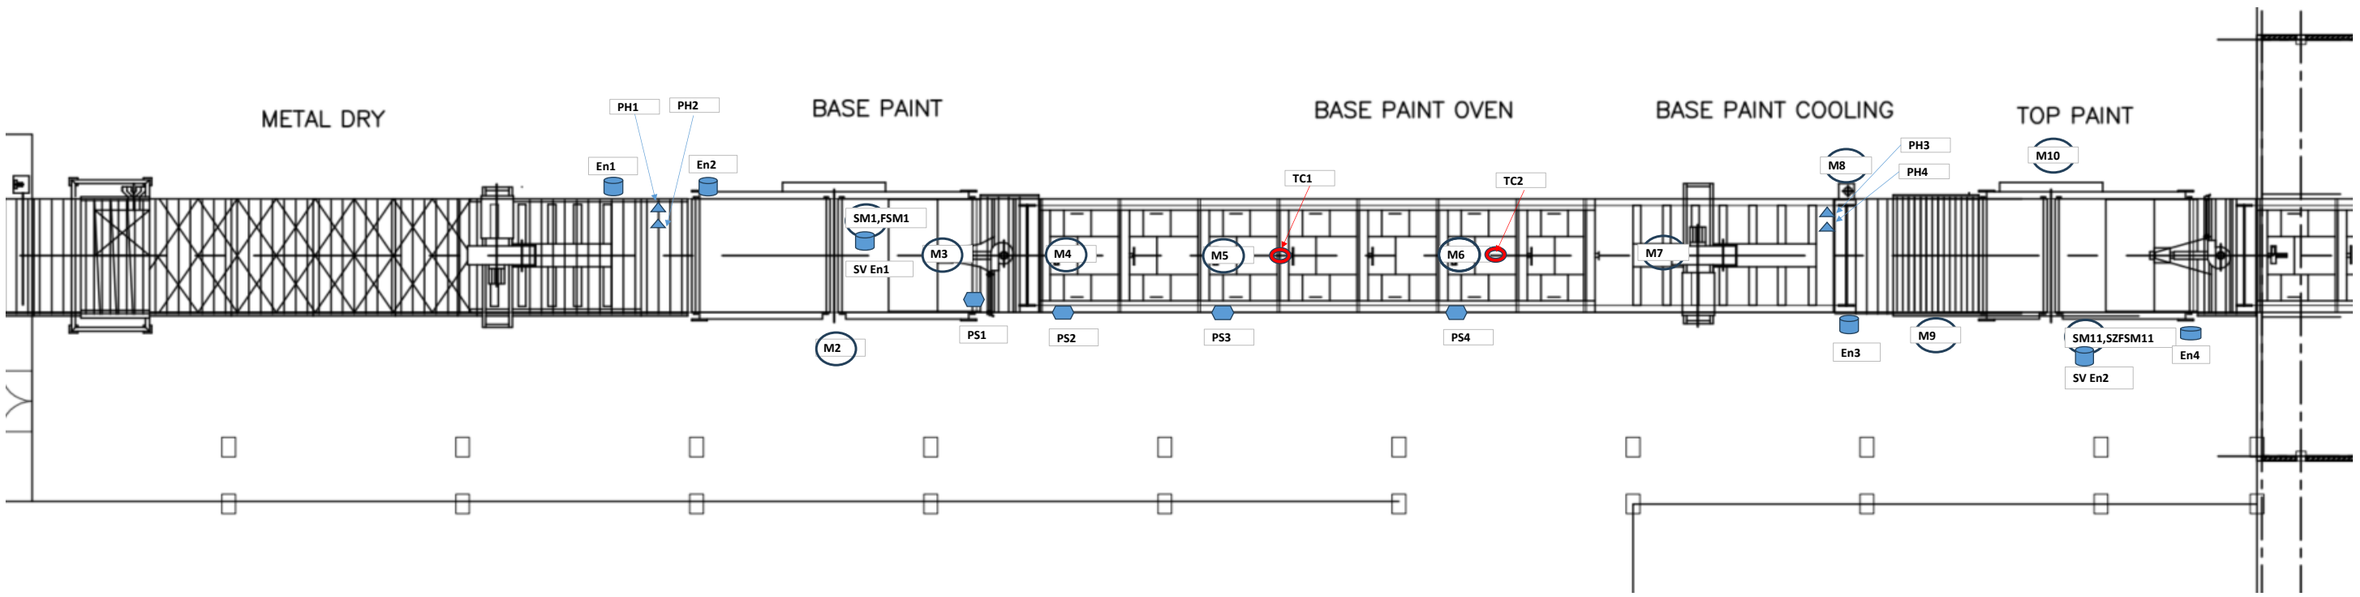

Mark	DWG.		
SM1	- 10M1	Curtain Coater Belt conv. (Servo)	Servo LENZE drive C/V
FSM1	- 10M6	Cooling of Servo Motor	DOL drive
M2	-13M1	Curtain Coater base Paint pump	Inverter SEW drive color stirrer
M3	- 15M1	Blower Outlet Belt Absorption	DOL drive
M4	- 15M2	Blower Preavaporation Absorption	DOL drive
M5	- 15M3	Blower Base Paint Oven 1 Absorption	DOL drive
M6	- 15M4	Blower Base Paint Oven 2 Absorption	DOL drive
M7	- 30M1	Blower Base paint cooling	DOL drive
M8	- 31M1	Base Paint Oven Transpot (Main Drive Furnace)	DOL drive C/V
M9	- 33M1	Cross Over Table Inlet Transport (Drive Conveyer)	Inverter Mits. drive C/V
M10	- 41M1	Curtain Coater top paint pump	Inverter SEW drive color stirrer
SM11	- 38M1	Curtain Coater Belt conv. (Servo)	Servo LENZE drive C/V
FSM11	- 38M6	Cooling of Servo Motor	DOL drive


Mark	DWG.		
En1	- 48B1	Impulsegeber -fure Laengenmessung LGM (Rotary 32pulse)	
En2	- 45B7	Curtain coater base paint (Rotary 68pulse)	
SV En1	- 10M1-12B5	Curtain Coater Base Belt conv. (Servo)	(Direct to LENZE servo amplifier Drive.)
En3	- 50B1	Pulse sensor for curtain coater no.2 (Rotary 32pulse)	
SV En2	- 38M1-40B5	Curtain Coater top Belt conv. (Servo)	(Direct to LENZE servo amplifier Drive.)
En4	- 46B7	Curtain coater top paint (Rotary 68pulse)	
PS1	- 16B1	Pressure control curtain coater outlet belt	(Non connect to PLC)
PS2	- 16B3	Pressure control preavaporation	(Non connect to PLC)
PS3	- 16B5	Pressure control base paint oven I	(Non connect to PLC)
PS4	- 16B7	Pressure control base paint oven II	(Non connect to PLC)

Mark	DWG.	
PH1	-48B2	I3.1(I2.6Of - BERO 1 Scheibenerkennung fure Leang
PH2		
PH3	- 50B2	I5.1(I5.2Of - Sensor 2-measuring for curtain coater No.2
PH4		

AGC

AGC Technology Solutions (Thailand) Co., Ltd.

SB03 C/V drive

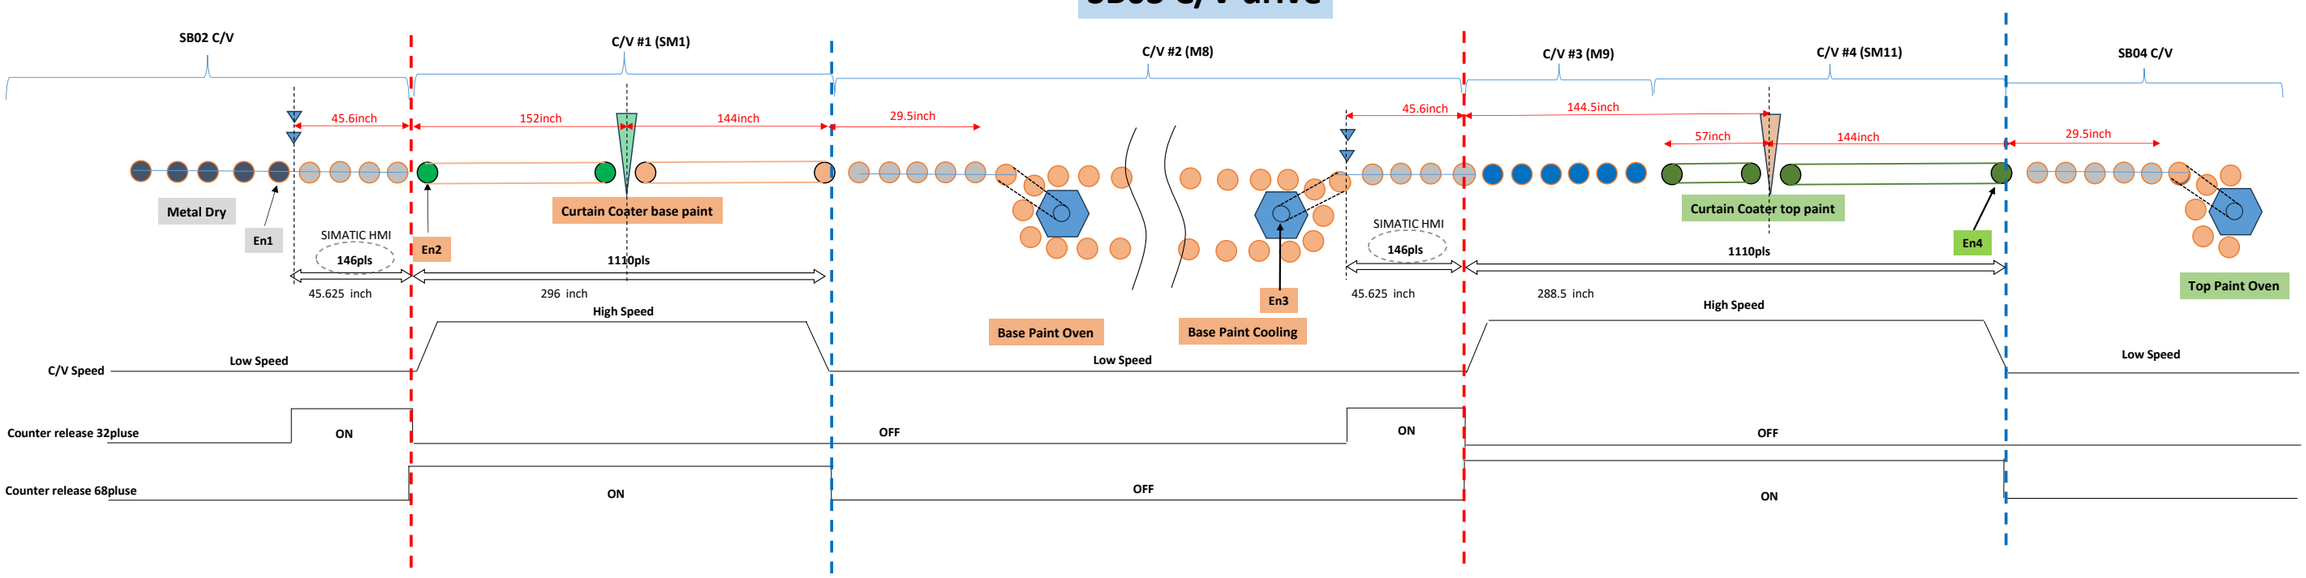


Mark	DWG.		
En1	- 48B1	Impulsegeber -fure Laengenmessung LGM (Rotary 32pulse)	
En2	- 45B7	Curtain coater base paint (Rotary 68pulse)	
En3	- 50B1	Pulse sensor for curtain coater no.2 (Rotary 32pulse)	
En4	- 46B7	Curtain coater top paint (Rotary 68pulse)	
SM1	- 10M1	Curtain Coater Belt conv. (Servo)	Servo LENZE drive C/V
M8	- 31M1	Base Paint Oven Transport (Main Drive Furnace)	DOL drive C/V
M9	- 33M1	Cross Over Table Inlet Transport (Drive Conveyer)	Inverter Mits. drive C/V
SM11	- 38M1	Curtain Coater Belt conv. (Servo)	Servo LENZE drive C/V


: Photo sensor

: Free roller conveyer for up speed


- MIR-SB03 Layout of Machine

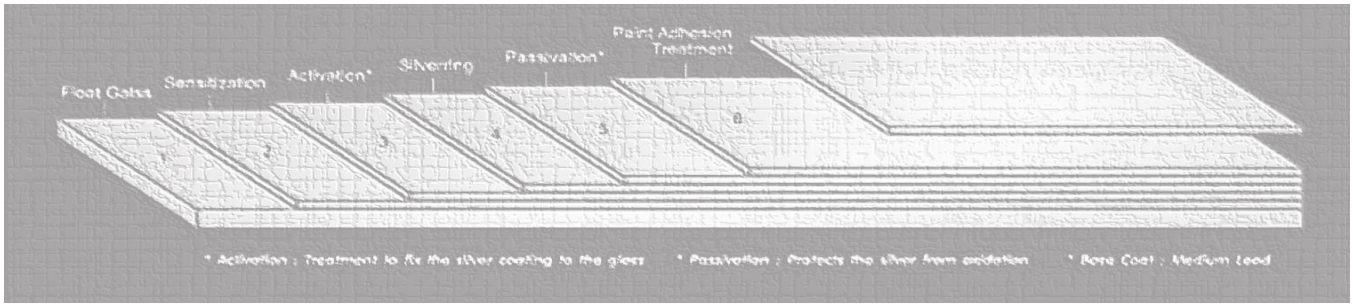

- MIR-SB03 Sequent of Machine

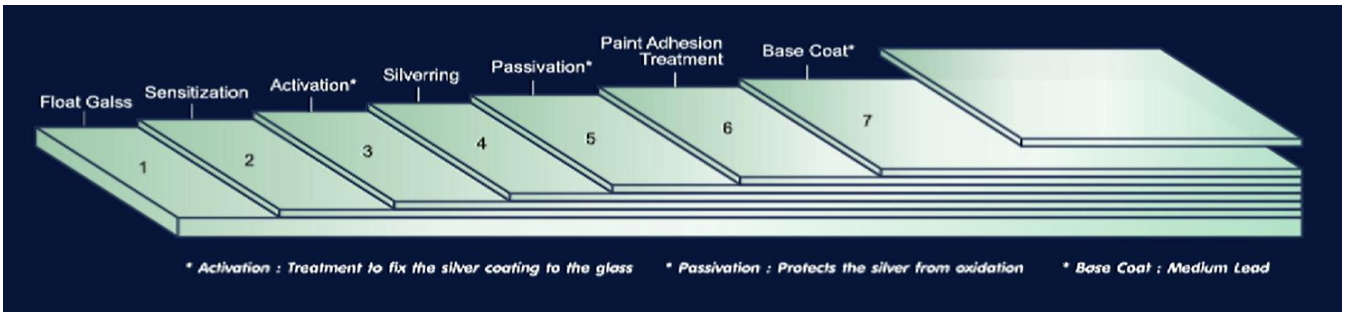

- MIR-SB03 Softwere PLC

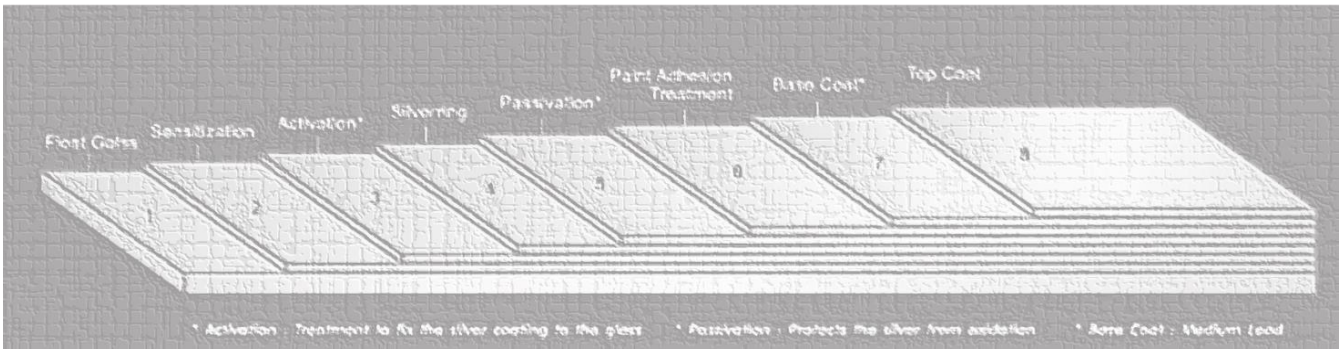

AGC


AGC Technology Solutions (Thailand) Co., Ltd.

AFT SP Mirror

SB03-LINE GLASS TRACKING-type Single

2025.08.26
Taweechart_ATST

Confide

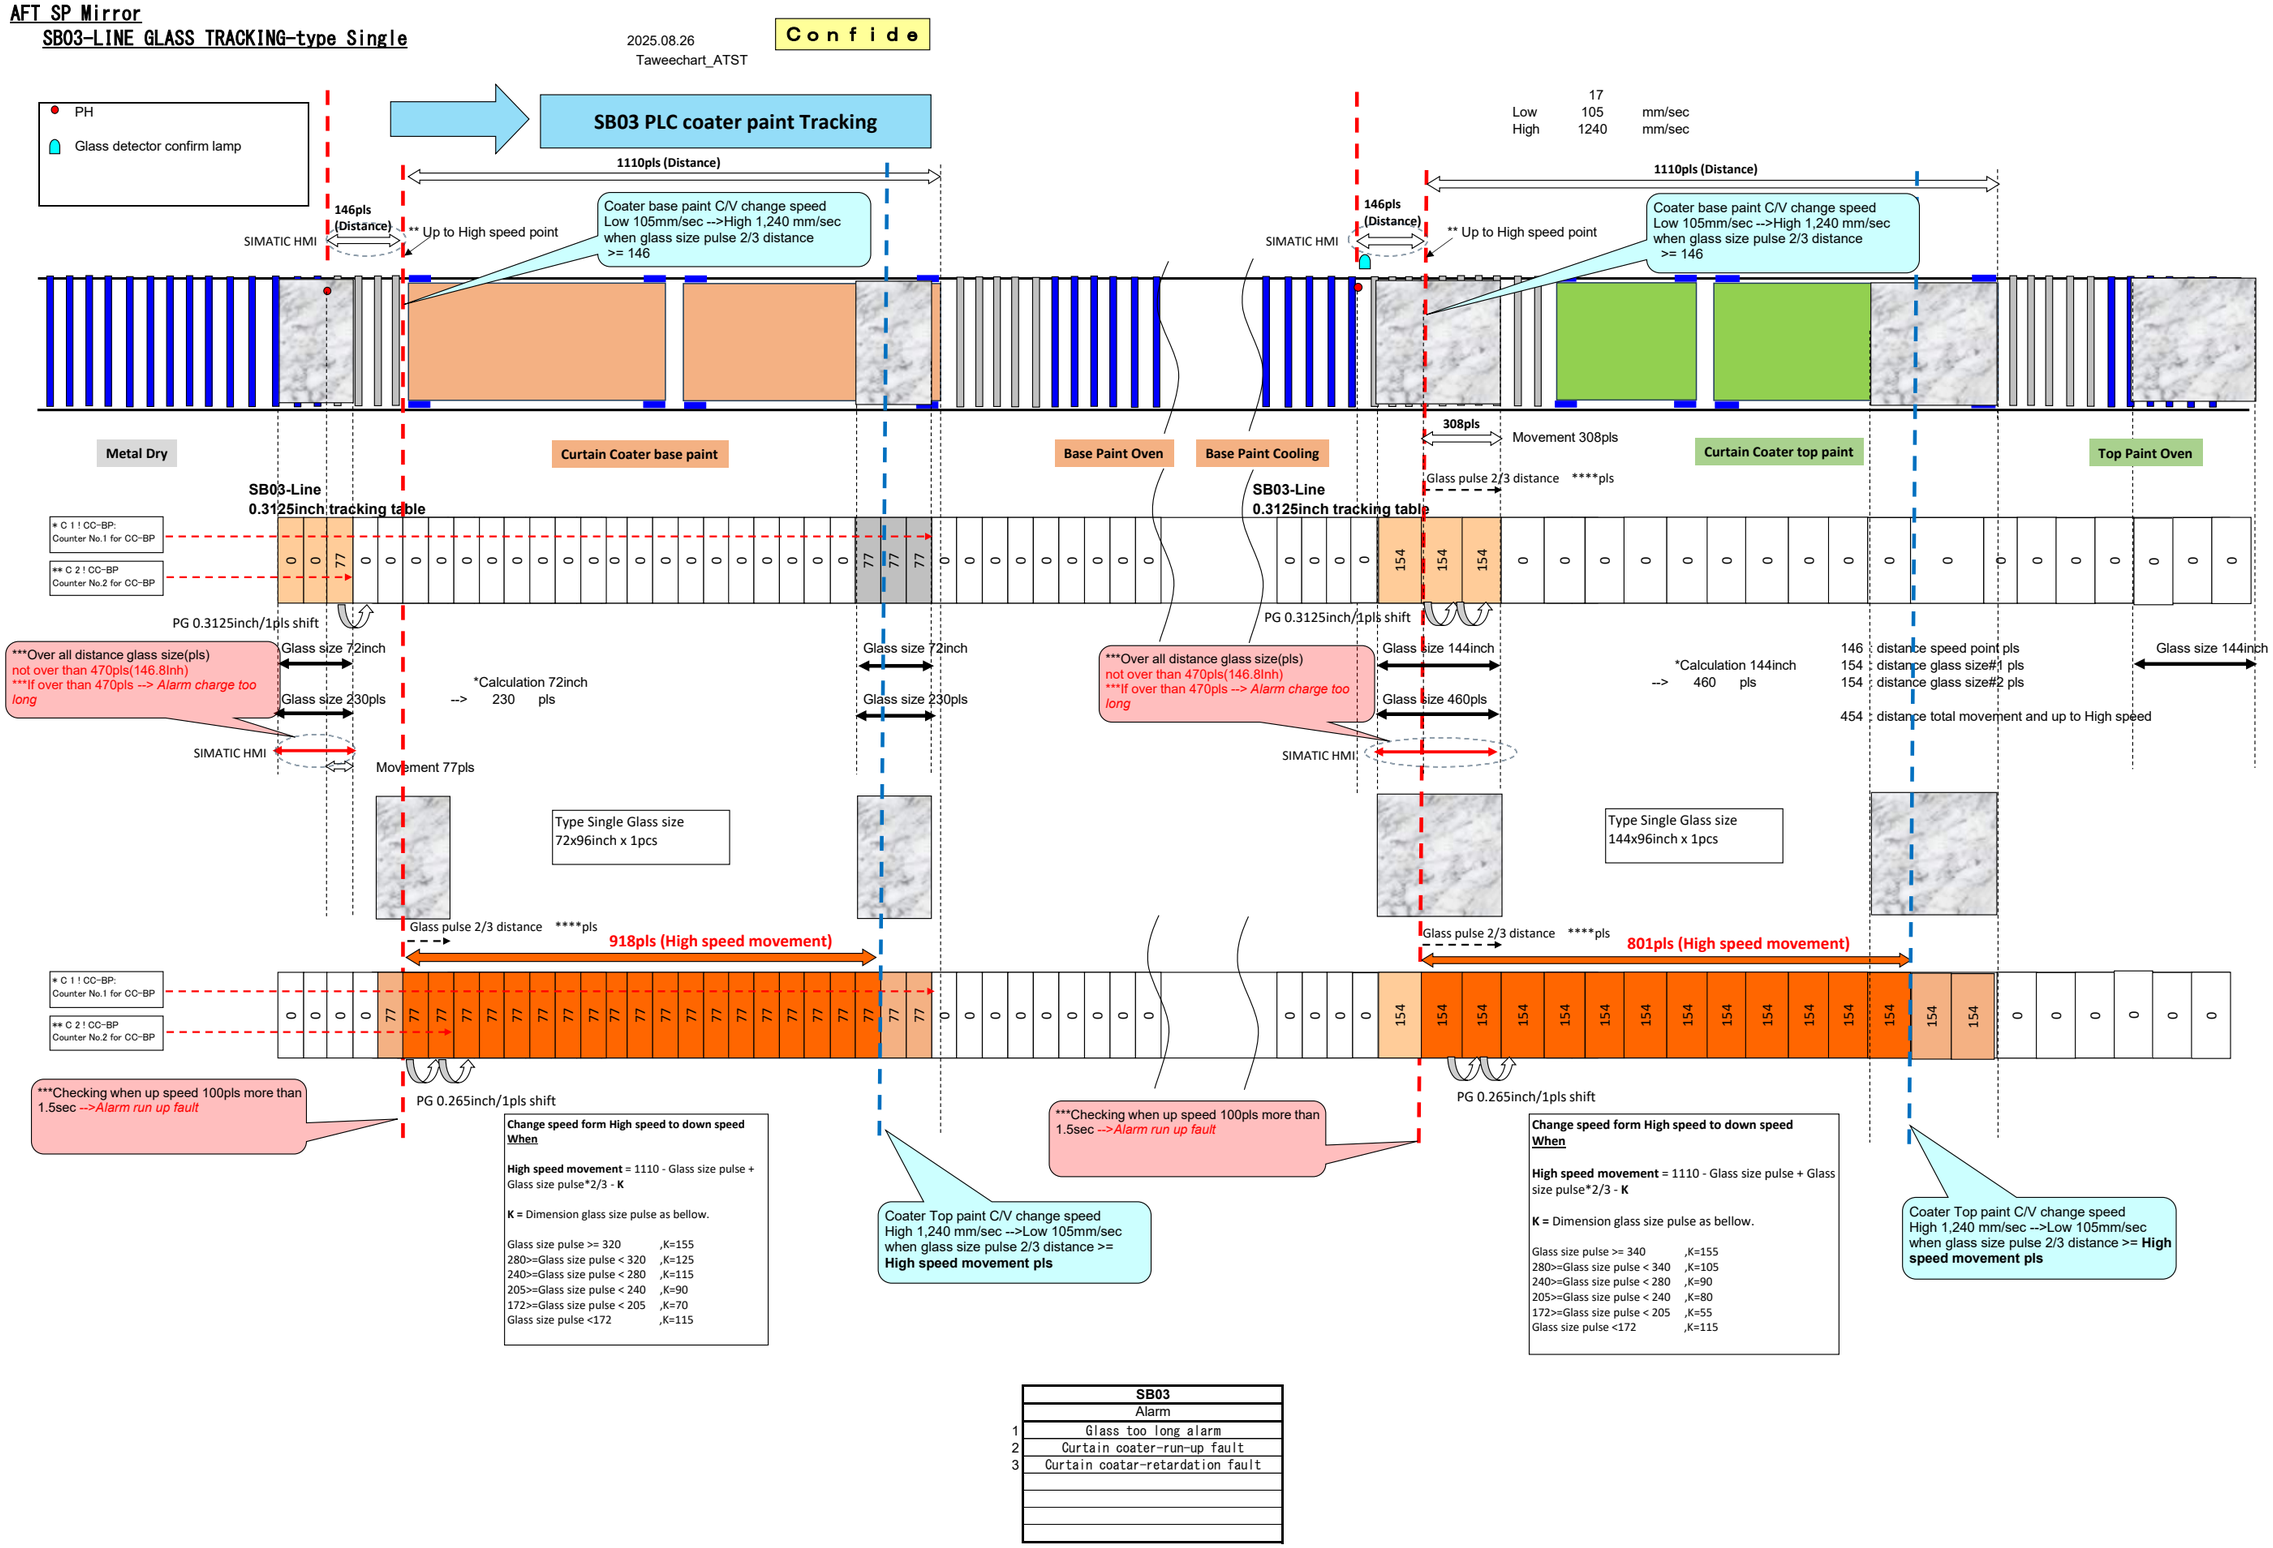

	SB03
	Alarm
1	Glass too long alarm
2	Curtain coater-run-up fault
3	Curtain coatar-retardation fault

AGC


AGC Technology Solutions (Thailand) Co., Ltd.

AFT SP Mirror

SB03-LINE GLASS TRACKING-type Batch


2025.08.26
Taweechart_ATST

Confide

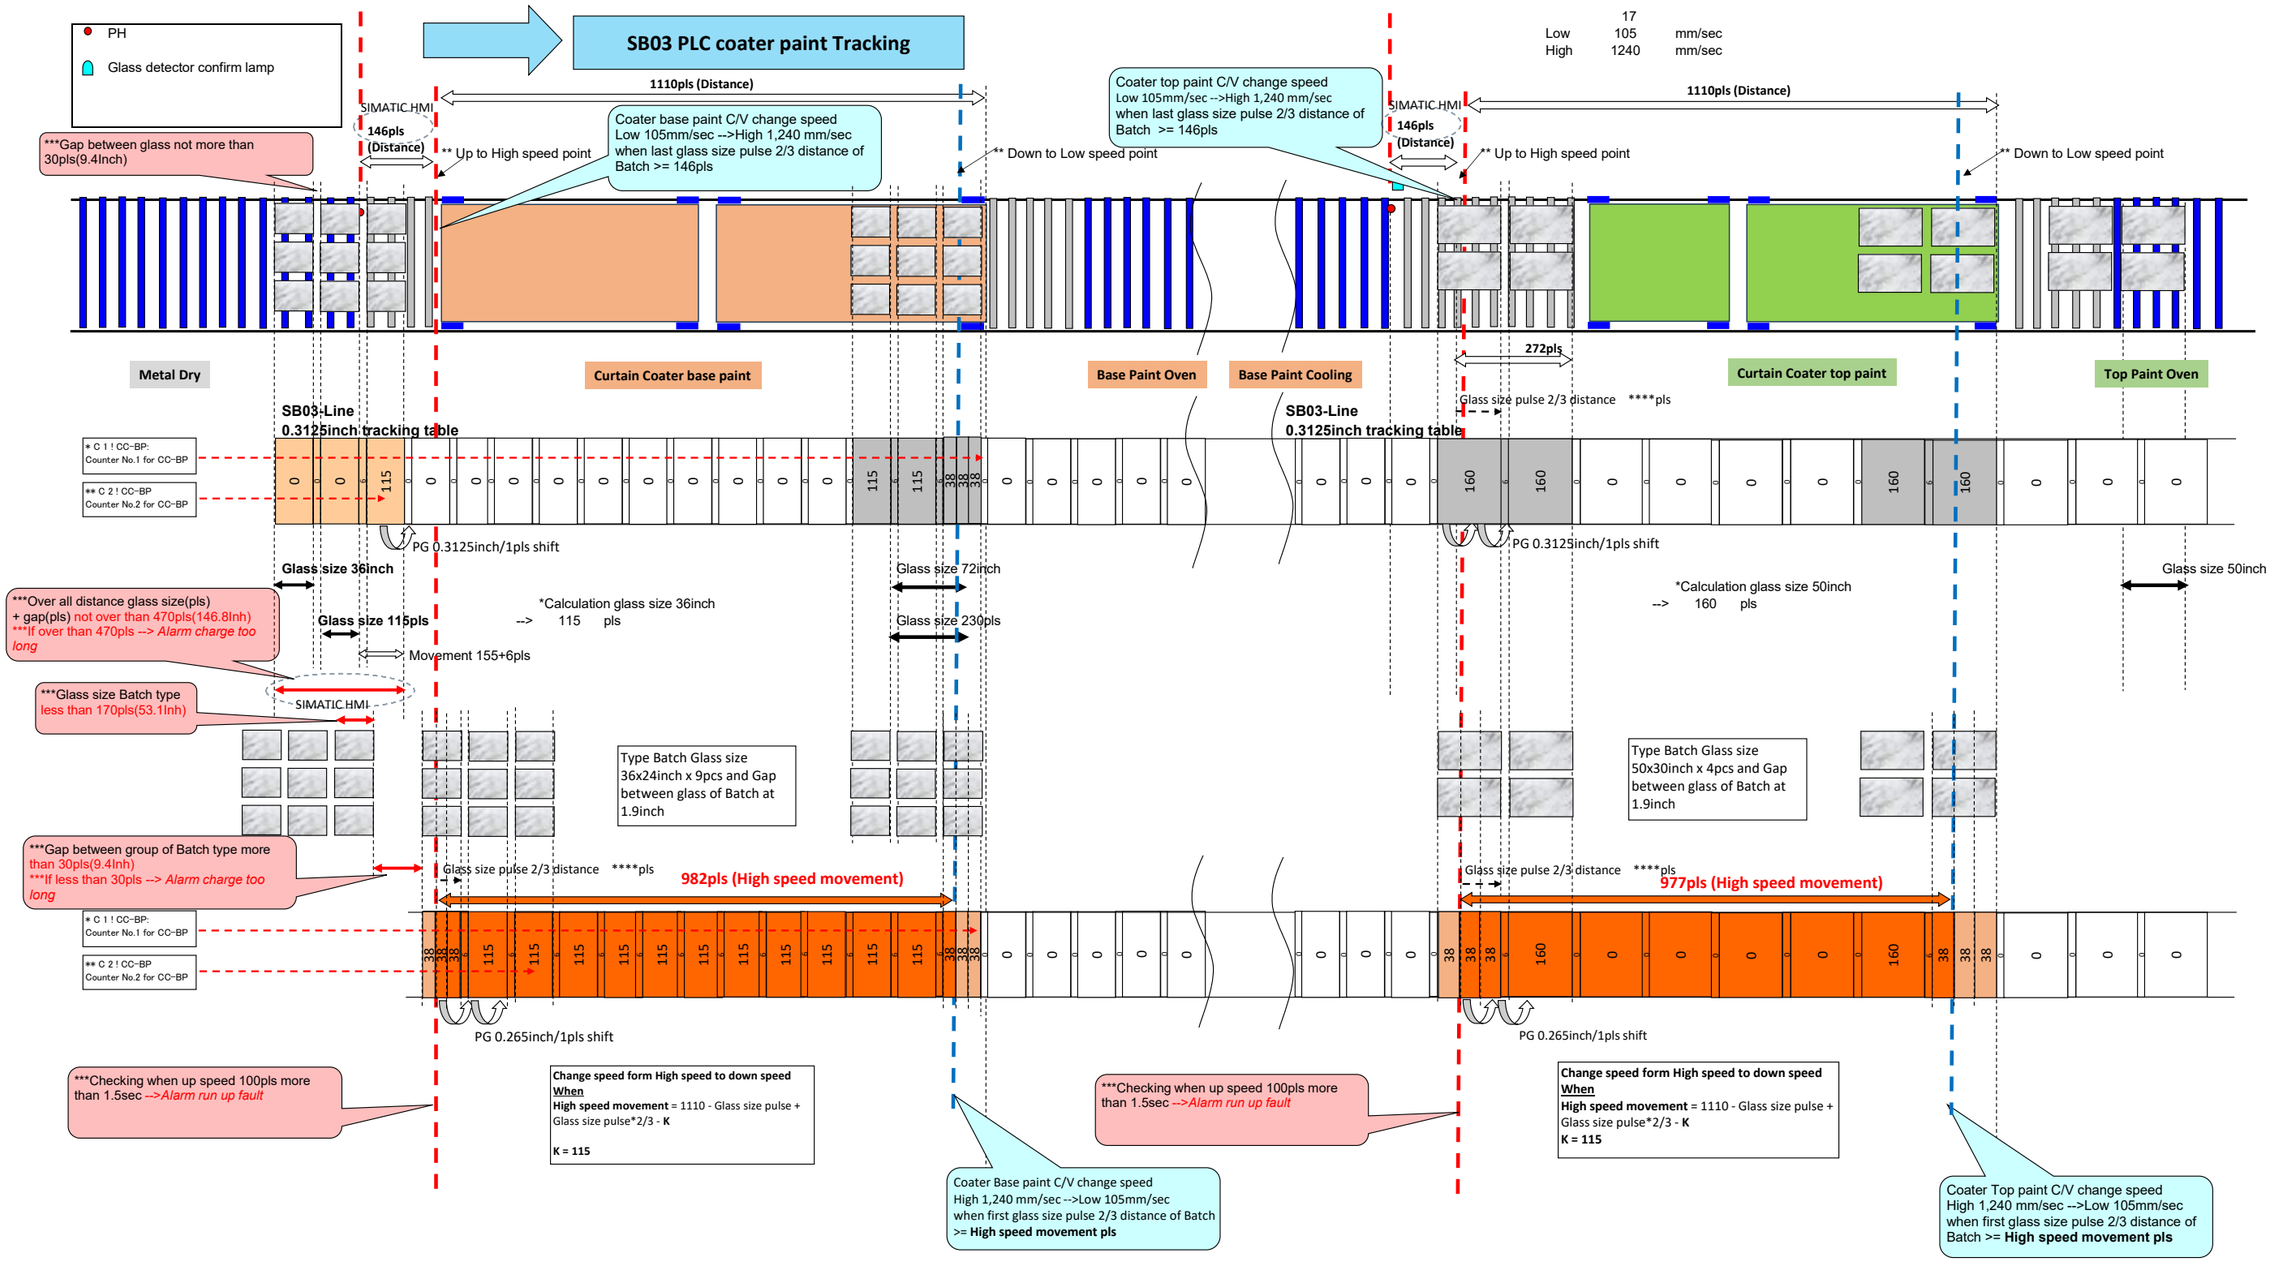


	SB03
	Alarm
1	Glass too long alarm
2	Curtain coater-run-up fault
3	Curtain coatar-retardation fault


- *MIR-SB03 Layout of Machine*

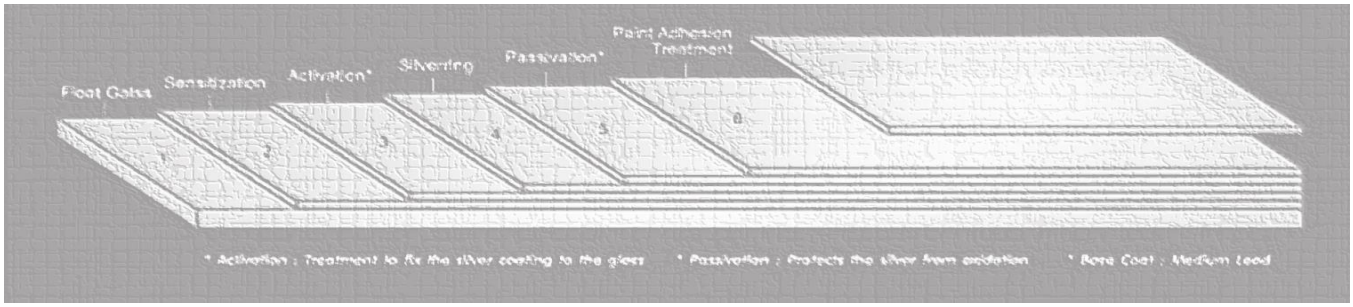


- *MIR-SB03 Sequent of Machine*

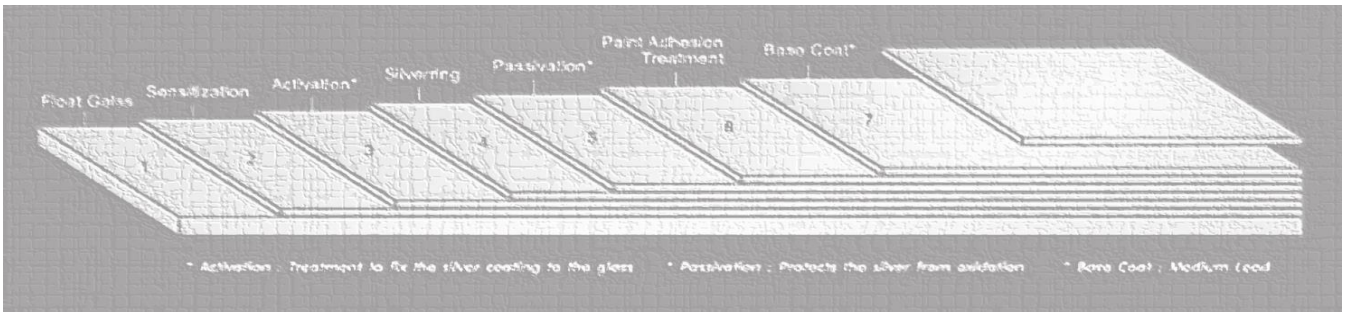


- ***MIR-SB03 Softwere PLC***

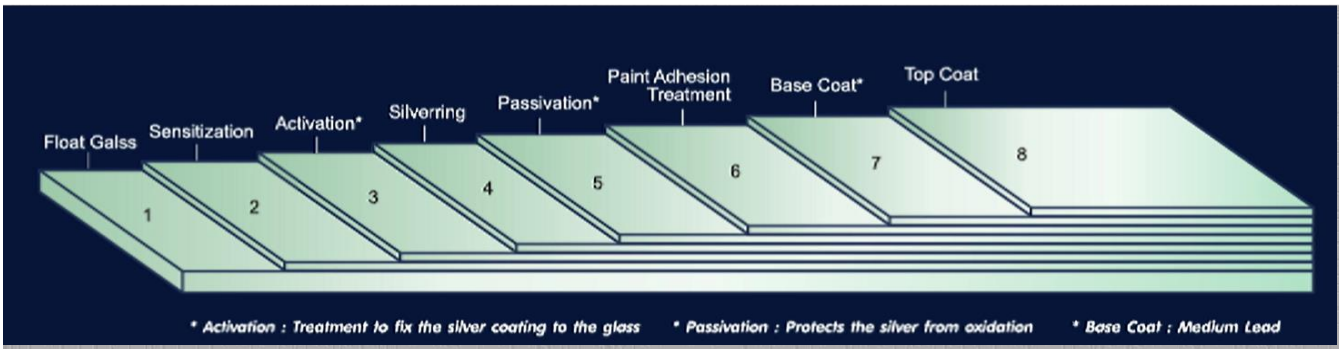


Tracking Process

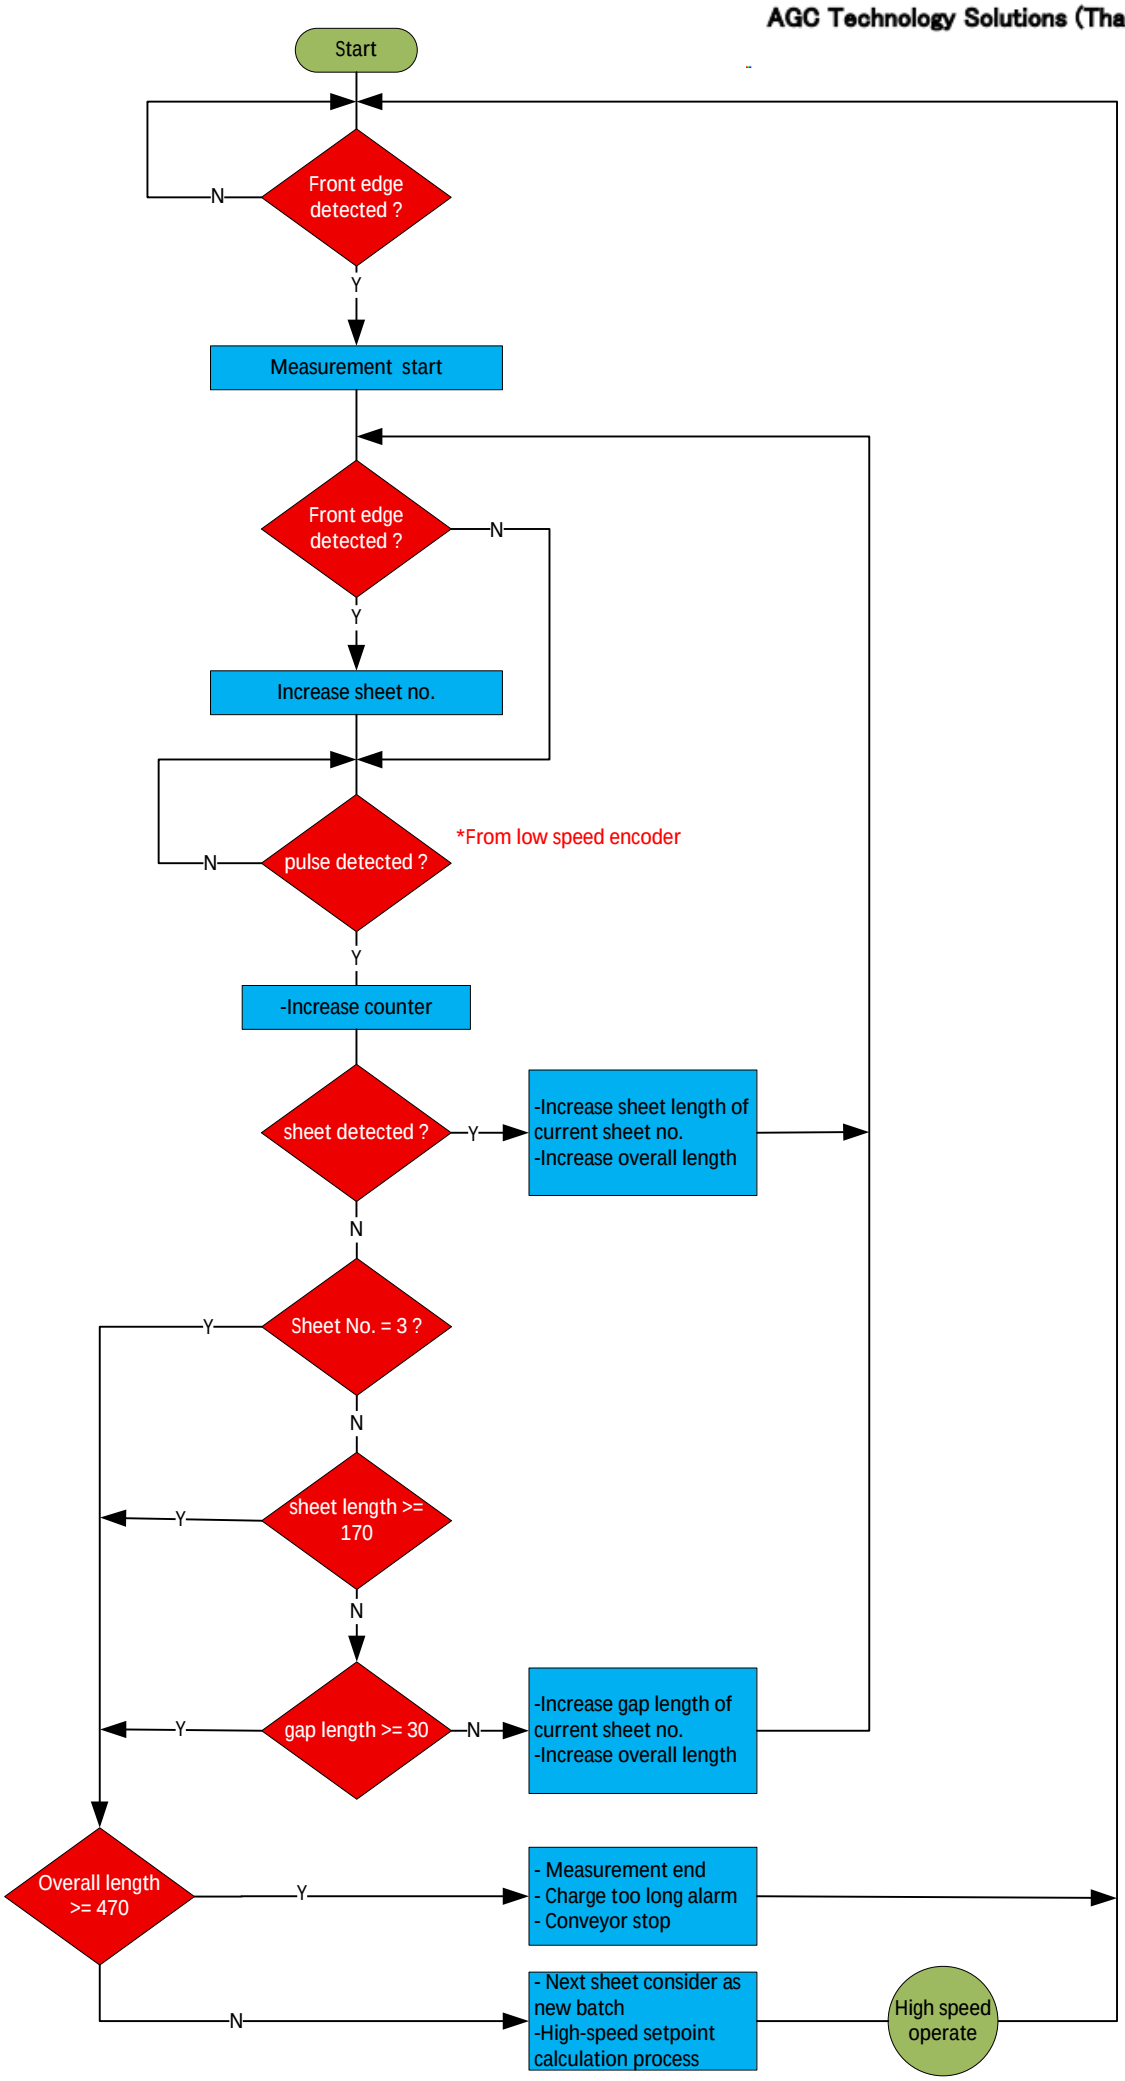

High-speed operate

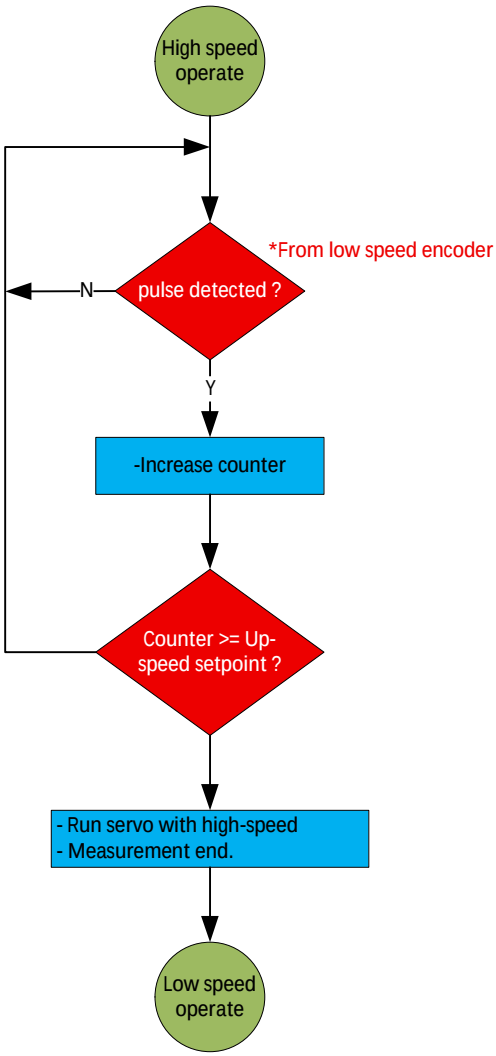

Low-speed operate

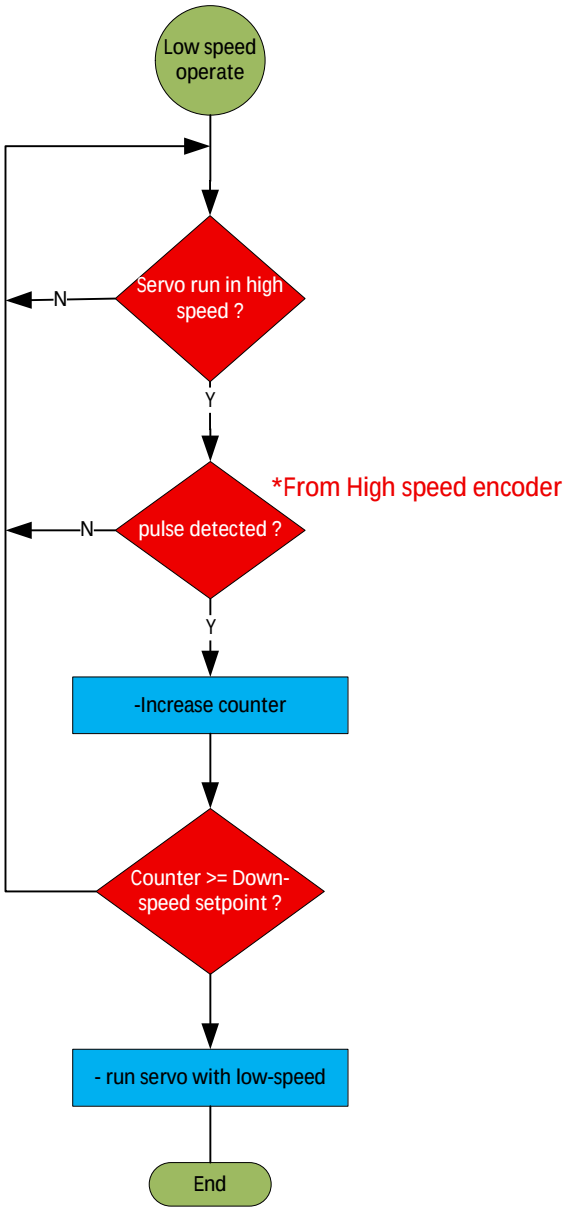

1. Brief overview of program structure

The program consists of many objects (OB, FC, DB, etc.). Each object has a specific purpose. Here is a brief discussion about program structure.

- OB82: Diagnostic OB executed when module sends diagnostic message to CPU. Used for diagnostic module error.
- OB100: Restart OB executed after restarting the CPU. Normally used for initial memory or conditions.
- OB1: Main cycling OB is executed every cyclic time, and it is the main entry of all user programs. All functions and function blocks must run from here.
    - FC140: FM350-2 configuration function: Used for configurate FM350-2 module for hi-speed counter.
    - FC10: Base paint handle function:
        - Emergency handle (Don't stop servo if running in high speed even when emergency stop pressed. Prevent over coat when curtain-coater stop.)
        - front-edge/end-edge of sheet detection
        - encoder pulse edge detection
        - Up speed output command
        - Down speed output command
        - Run-up fault detection
        - Retardation fault detection
        - Summary fault output
        - Fault lamp output
    - FC0: Base paint handle function:
        - Select which counter should be run
        - Increase counter
        - Calculate up speed setpoint
        - Calculate down speed setpoint
    - FC2: Base paint counter 1 handle function:
        - Identify single or batch operation
        - Charge to long detection
    - FC3: Base paint counter 2 handle function:
        - Identify single or batch operation
        - Charge to long detection
    - FC12: Top paint handle function:
        - Emergency handle (Don't stop servo if running in high speed even when emergency stop pressed. Prevent over coat when curtain-coater stop.)
        - front-edge/end-edge of sheet detection
        - encoder pulse edge detection
        - Up speed output command
        - Down speed output command
        - Run-up fault detection
        - Retardation fault detection
        - Summary fault output
        - Fault lamp output
    - FC1: Top paint handle function:
        - Select which counter should be run
        - Increase counter
        - Calculate up speed setpoint

        - Calculate down speed setpoint
    - FC4: Top paint counter 1 handle function:
        - Identify single or batch operation
        - Charge to long detection
    - FC5: Top paint counter 2 handle function:
        - Identify single or batch operation
        - Charge to long detection
    - FC11: Cross over table inlet transfer handle function:
        - Control low and high speed of cross over table according to top paint servo speed
    - FC6, FC7: Cross over table inlet transfer fault handle function:
        - Over current fault detection
        - Fail to run and fail to stop detection

2. Setpoint (low to high speed) = 146 + overall length - 1/3 of last sheet length
   When low speed encoder (32pulse/turn) >= Setpoint (low to high speed) servo will run in high speed

3. Setpoint (high to low speed) = 1110 - overall length + 2/3(1st sheet length) - K

Where (Base Paint): K =	155	if			1st sheet length >=	320
	125	if	280	<=	1st sheet length <	320
	115	if	240	<=	1st sheet length <	280
	90	if	205	<=	1st sheet length <	240
	70	if	172	<=	1st sheet length <	205
	115	if			1st sheet length <	172
(Top Paint): K =	155	if			1st sheet length >=	340
	105	if	280	<=	1st sheet length <	340
	90	if	240	<=	1st sheet length <	280
	80	if	205	<=	1st sheet length <	240
	55	if	172	<=	1st sheet length <	205
	115	if			1st sheet length <	172

   When high speed encoder (68pulse/turn) >= Setpoint (high to low speed) servo will run in low speed

4. Fault
   4.1. Charge too long alarm occurred when Overall length >= 470
   4.2. Run-up fault: PLC sends run high-speed command to the servo drive, but receives pulse from the high-speed encoder(68pulse/rev) <= 100 within 1.5S
   4.3. Retardation fault: PLC doesn't send run high-speed command but detects run at high-speed feedback from servo drive within 1.5S.

5. Interlocking
   5.1. Charge too long: stop servo drive (hardwiring)
   5.2. Run-up fault: stop servo drive (hardwiring)
   5.3. Retardation fault: stop servo drive (hardwiring)

OB1 - <offline>


""

Name: **Family:**
Author: **Version:** 0.0
Block version: 2
Time stamp Code: 02/02/2018 11:45:15 AM
Interface: 02/15/1996 04:51:12 PM
Lengths (block/logic/data): 00642 00482 00028


Name	Data Type	Address	Comment
TEMP		0.0	
TEMP0	Byte	0.0	
TEMP1	Byte	1.0	
TEMP2	Byte	2.0	
TEMP3	Byte	3.0	
TEMP4	Byte	4.0	
TEMP5	Byte	5.0	
TEMP6	Int	6.0	
TEMP7	Int	8.0	
TEMP8	Int	10.0	
TEMP9	Date_And_Time	12.0	

Block: OB1

Network: 1

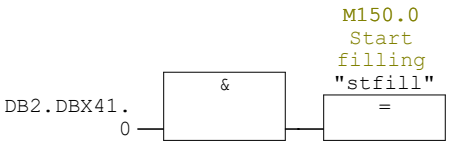


Network: 2

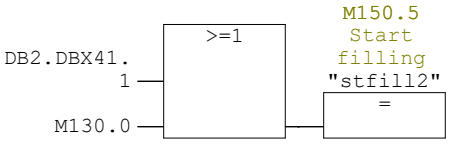


Network: 3

```
CALL  FC   140
 IN0  :=W#16#2
 IN1  :="quant"            MW154          -- New quantity
 IN2  :="in_load"          M150.2         -- Trigger load new quantity
 IN3  :="stfill"           M150.0         -- Start filling
 IN4  :="stfrequ"          M150.1         -- Start frequency measurement
 IN5  :="M 0.1 ! General"  M0.1           -- Alway 1-status
 IN6  :="ch_act_val"       M150.4         -- Select actual values count channels 0 to 3 or 4 to 7
 IN7  :="stfill2"          M150.5         -- Start filling
 OUT8 :="err_rd"           M152.2         -- Error reading the actual values
 OUT9 :="err_wr"           M152.1         -- Error loading quantity
 OUT10:="state_load"       M152.0         -- Loading executed
 OUT11:="oflw"             M152.3         -- Upper frequency limit exceeded
 OUT12:="uflw"             M152.4         -- Lower frequency limit exceeded
```


Network: 4




Network: 5



Network: 6




Network: 7




Network: 8


Network: 9



Network: 10

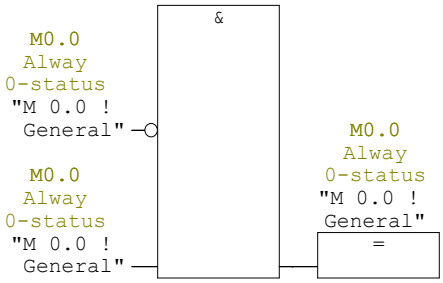


Network: 11

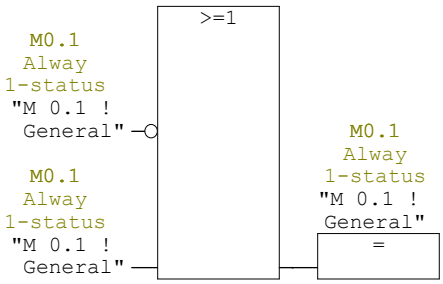

Network: 12

```
CALL  FC     9
 IN0 :="M 0.1 ! General"  M0.1              -- Alway 1-status
 IN1 :="T 1"              T1                -- Timer for flash frequency
 IN2 :=DBW2
 OUT3:=MB1
```

Network: 13

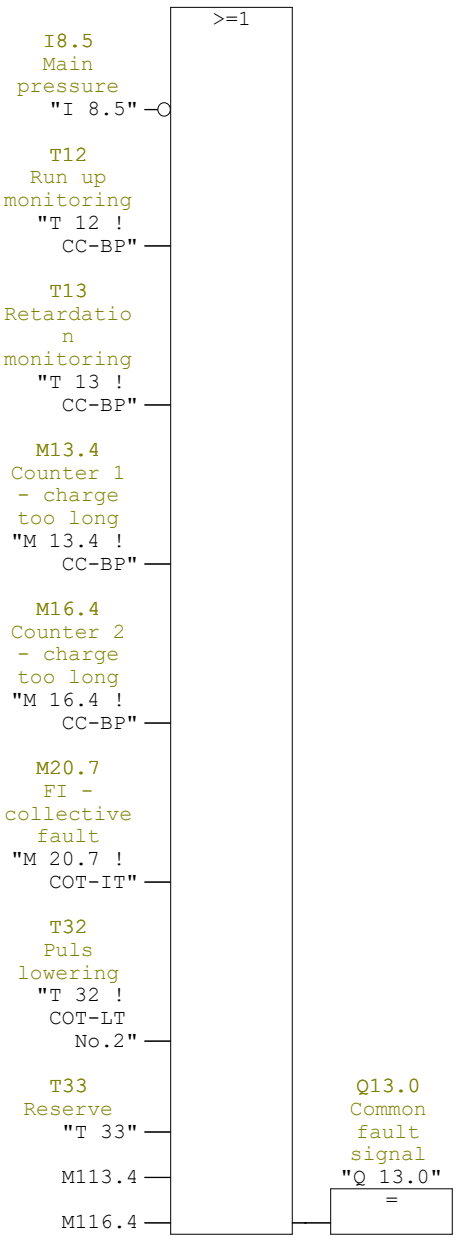


Network: 14

```
CALL  FC    10
CALL  FC    11
CALL  FC    12
```


Network: 15

```
A     "M 13.4 ! CC-BP"  M13.4            -- Counter 1 - charge too long
=     M     90.0
A     "M 16.4 ! CC-BP"  M16.4            -- Counter 2 - charge too long
=     M     90.1
A     M    113.4
=     M     90.2
A     M    116.4
=     M     90.3
```


Network: 16

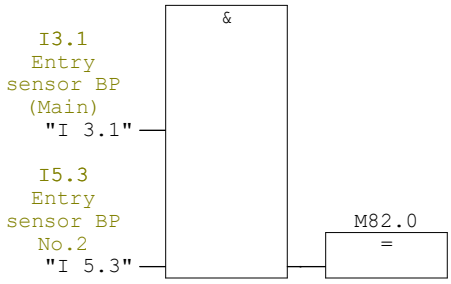


Network: 17

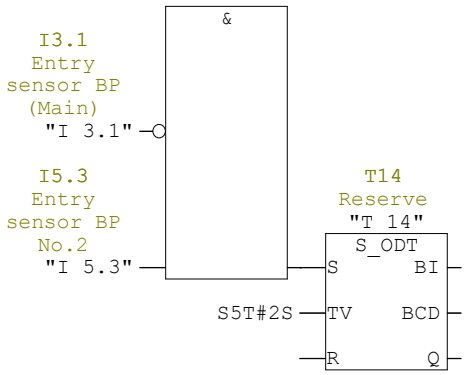


Network: 18

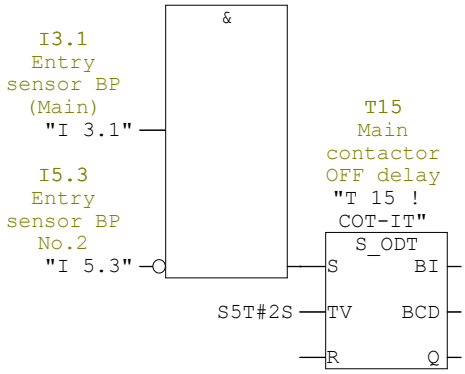


Network: 19

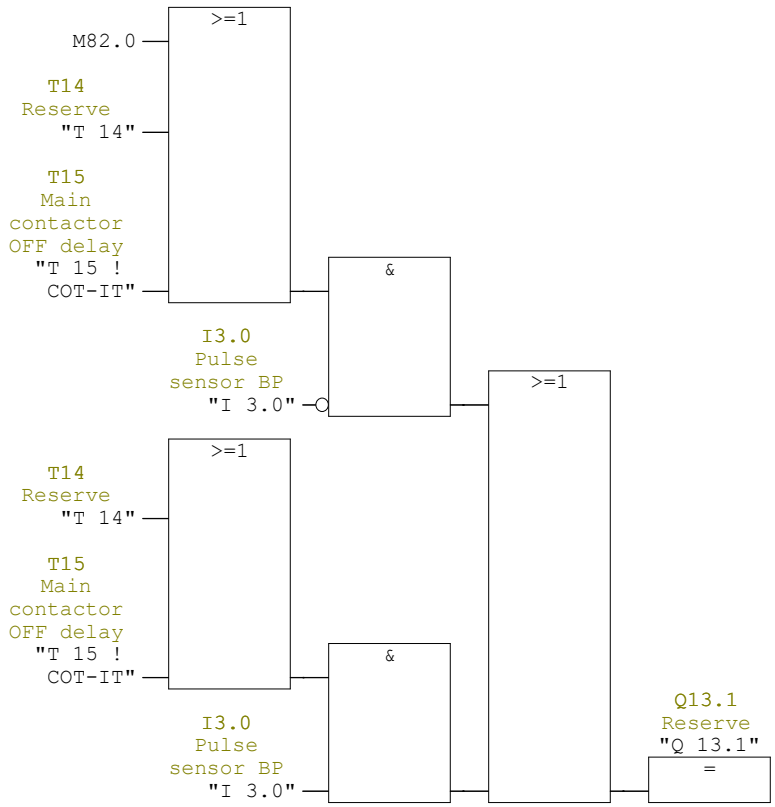


Network: 20

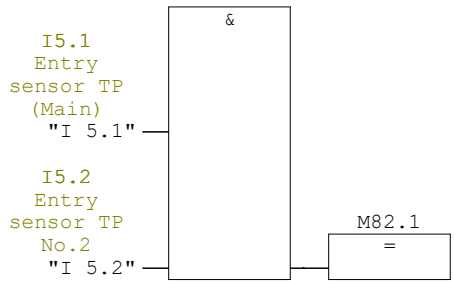


Network: 21

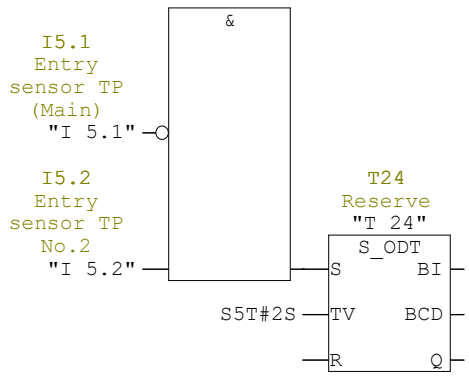

Network: 22

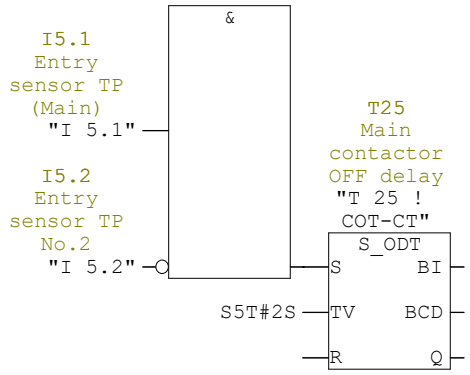

Network: 23

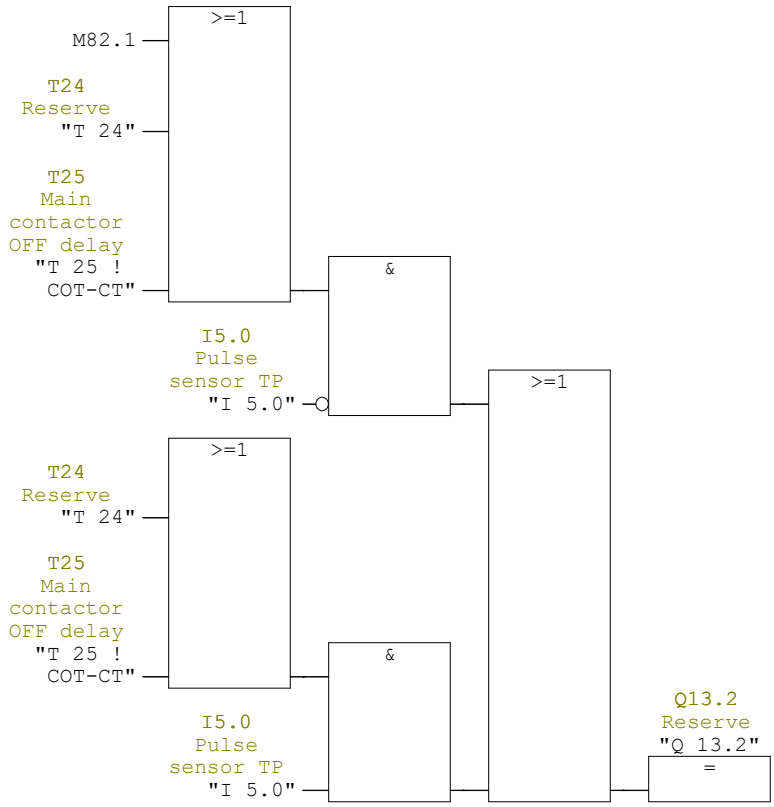

Network: 24

```
CALL  "DT_DATE"   FC13              -- DT to DATE
 IN0    :=#TEMP9  #TEMP9
 RET_VAL:=MW40
```

Network: 25

```
CALL  "DT_TOD"    FC14              -- DT to TOD
 IN0    :=#TEMP9  #TEMP9
 RET_VAL:=MD44
```

OB82 - <offline>

""

Name: **Family:**
Author: **Version:** 1.1
Block version: 2
Time stamp Code: 03/30/2009 03:46:59 PM
Interface: 02/15/1996 04:51:13 PM
Lengths (block/logic/data): 00230 00066 00026

Name	Data Type	Address	Comment
TEMP		0.0	
TEMP0	Byte	0.0	
TEMP1	Byte	1.0	
TEMP2	Byte	2.0	
TEMP3	Byte	3.0	
TEMP4	Byte	4.0	
TEMP5	Byte	5.0	
TEMP6	Int	6.0	
TEMP7	Bool	8.0	
TEMP8	Bool	8.1	
TEMP9	Bool	8.2	
TEMP10	Bool	8.3	
TEMP11	Bool	8.4	
TEMP12	Bool	8.5	
TEMP13	Bool	8.6	
TEMP14	Bool	8.7	
TEMP15	Byte	9.0	
TEMP16	Bool	10.0	
TEMP17	Bool	10.1	
TEMP18	Bool	10.2	
TEMP19	Bool	10.3	
TEMP20	Bool	10.4	
TEMP21	Bool	10.5	
TEMP22	Bool	10.6	
TEMP23	Bool	10.7	
TEMP24	Bool	11.0	
TEMP25	Bool	11.1	
TEMP26	Bool	11.2	
TEMP27	Bool	11.3	
TEMP28	Bool	11.4	
TEMP29	Bool	11.5	
TEMP30	Bool	11.6	
TEMP31	Bool	11.7	
TEMP32	Date_And_Time	12.0	
TEMP33	Word	20.0	
TEMP34	Int	22.0	

Block: OB82

Network: 1

```
      BEU
      L     #TEMP6         #TEMP6
      L     DB2.DBW   12
      ==I
      JC    M001
      CALL  "STP"          SFC46               -- Change the CPU to STOP
M001: OPN   "fill_unit1"   DB2                 -- Counter data block for application
      L     DBNO
      T     #TEMP33        #TEMP33
      CALL  FC   135
       IN0    :=#TEMP33    #TEMP33
       RET_VAL:=#TEMP34    #TEMP34
```

OB100 - <offline>

""

Name: **Family:**
Author: **Version:** 0.0
Block version: 2
Time stamp Code: 11/02/2011 06:47:54 AM
Interface: 02/15/1996 04:51:09 PM
Lengths (block/logic/data): 00150 00040 00026

Name	Data Type	Address	Comment
TEMP		0.0	
TEMP0	Byte	0.0	
TEMP1	Byte	1.0	
TEMP2	Byte	2.0	
TEMP3	Byte	3.0	
TEMP4	Byte	4.0	
TEMP5	Byte	5.0	
TEMP6	Word	6.0	
TEMP7	DWord	8.0	
TEMP8	Date_And_Time	12.0	

Block: OB100

Network: 1

```
CALL  FC     8
 IN0:=0
 IN1:=198
```

FC0 - <offline>

""

Name: POSITION **Family:**
Author: **Version:** 0.0
Block version: 2
Time stamp Code: 12/03/2012 09:52:19 AM
Interface: 11/02/2011 06:47:54 AM
Lengths (block/logic/data): 01044 00876 00002

Name	Data Type	Address	Comment
IN		0.0	
IN0	Block_DB	0.0	
IN1	Bool	2.0	
IN2	Bool	2.1	
IN3	Bool	2.2	
OUT		0.0	
OUT4	Bool	4.0	
IN_OUT		0.0	
TEMP		0.0	
RETURN		0.0	
RET_VAL		0.0	

Block: FC0

Network: 1

Network: 2

```
      OPN   #IN0              #IN0
      A     #IN1              #IN1
      A     "M 11.0 ! CC-BP"  M11.0            -- Help flag counter No.1
      AN    "M 13.0 ! CC-BP"  M13.0            -- Counter 1 - measurement is running
      S     "M 14.0 ! CC-BP"  M14.0            -- Help flag counter No.2
      A     #IN1              #IN1
      AN    "M 16.0 ! CC-BP"  M16.0            -- Counter 2 - measurement is running
      S     "M 11.0 ! CC-BP"  M11.0            -- Help flag counter No.1
      A     #IN3              #IN3
      A     "M 11.0 ! CC-BP"  M11.0            -- Help flag counter No.1
      AN    "M 11.2 ! CC-BP"  M11.2            -- Help flag counter No.1
      CU    "C 1 ! CC-BP"     C1               -- Counter No.1 for CC-BP
      A     #IN3              #IN3
      A     "M 14.0 ! CC-BP"  M14.0            -- Help flag counter No.2
      AN    "M 14.2 ! CC-BP"  M14.2            -- Help flag counter No.2
      CU    "C 2 ! CC-BP"     C2               -- Counter No.2 for CC-BP
```

Network: 3

```
      CALL  FC     2
      A     "M 13.1 ! CC-BP"   M13.1             -- Counter 1 - end of measurement
      AN    "M 13.3 ! CC-BP"   M13.3             -- Counter 1 - edge flag end of measurem.
      =     "M 13.2 ! CC-BP"   M13.2             -- Counter 1 - puls flag end of measurem.
      A     "M 13.2 ! CC-BP"   M13.2             -- Counter 1 - puls flag end of measurem.
      S     "M 13.3 ! CC-BP"   M13.3             -- Counter 1 - edge flag end of measurem.
      AN    "M 13.1 ! CC-BP"   M13.1             -- Counter 1 - end of measurement
      R     "M 13.3 ! CC-BP"   M13.3             -- Counter 1 - edge flag end of measurem.
      A     "M 11.0 ! CC-BP"   M11.0             -- Help flag counter No.1
      AN    "M 11.1 ! CC-BP"   M11.1             -- Help flag counter No.1
      L     C#0
      S     "C 1 ! CC-BP"      C1                -- Counter No.1 for CC-BP
```

```
      S     "M 11.1 ! CC-BP"   M11.1             -- Help flag counter No.1
      A     "M 11.1 ! CC-BP"   M11.1             -- Help flag counter No.1
      A     "M 13.2 ! CC-BP"   M13.2             -- Counter 1 - puls flag end of measurem.
      JC    M001
      JU    M002
M001: S     "M 11.3 ! CC-BP"   M11.3             -- Counter No.1-release pouring speed
      L     DBW   20
      T     DBW   22
      CALL  "5"                FC84              -- 16 bit binary division
       IN0 :=DBW22
       IN1 :=DBW24
       OUT2:="M 12.0 ! CC-BP"  M12.0             -- Counter 1 - overrun
       OUT3:="M 12.1 ! CC-BP"  M12.1             -- Counter 1 - error by division through 0
       OUT4:="M 12.2 ! CC-BP"  M12.2             -- Counter 1 - quotient = 0
       OUT5:="M 12.3 ! CC-BP"  M12.3             -- Counter 1 - reset
       OUT6:=DBW26
       OUT7:=DBW28
      L     DBW  140
      L     DBW   50
      +I
      L     DBW   26
      -I
      T     DBW   30
M002: A(
      L     "C 1 ! CC-BP"      C1                -- Counter No.1 for CC-BP
      L     DBW   30
      >=I
      )
      A     "M 11.3 ! CC-BP"   M11.3             -- Counter No.1-release pouring speed
      S     "M 11.2 ! CC-BP"   M11.2             -- Help flag counter No.1
      A(
      L     "C 1 ! CC-BP"      C1                -- Counter No.1 for CC-BP
      L     DBW   30
      >I
      )
      A     "M 11.3 ! CC-BP"   M11.3             -- Counter No.1-release pouring speed
      O
      A     "M 13.4 ! CC-BP"   M13.4             -- Counter 1 - charge too long
      R     "M 11.0 ! CC-BP"   M11.0             -- Help flag counter No.1
      R     "M 11.1 ! CC-BP"   M11.1             -- Help flag counter No.1
      R     "M 11.3 ! CC-BP"   M11.3             -- Counter No.1-release pouring speed
      R     "M 13.1 ! CC-BP"   M13.1             -- Counter 1 - end of measurement
      R     "C 1 ! CC-BP"      C1                -- Counter No.1 for CC-BP
```

Network: 4

```
      CALL  FC     3
      A     "M 16.1 ! CC-BP"   M16.1             -- Counter 2 - end of measurement
      AN    "M 16.3 ! CC-BP"   M16.3             -- Counter 2 - edge flag end of measurem.
      =     "M 16.2 ! CC-BP"   M16.2             -- Counter 2 - puls flag end of measurem.
      A     "M 16.2 ! CC-BP"   M16.2             -- Counter 2 - puls flag end of measurem.
      S     "M 16.3 ! CC-BP"   M16.3             -- Counter 2 - edge flag end of measurem.
      AN    "M 16.1 ! CC-BP"   M16.1             -- Counter 2 - end of measurement
      R     "M 16.3 ! CC-BP"   M16.3             -- Counter 2 - edge flag end of measurem.
      A     "M 14.0 ! CC-BP"   M14.0             -- Help flag counter No.2
      AN    "M 14.1 ! CC-BP"   M14.1             -- Help flag counter No.2
      L     C#0
      S     "C 2 ! CC-BP"      C2                -- Counter No.2 for CC-BP
      S     "M 14.1 ! CC-BP"   M14.1             -- Help flag counter No.2
      A     "M 14.1 ! CC-BP"   M14.1             -- Help flag counter No.2
      A     "M 16.2 ! CC-BP"   M16.2             -- Counter 2 - puls flag end of measurem.
      JC    M003
      JU    M004
M003: S     "M 14.3 ! CC-BP"   M14.3             -- Counter No.2-release pouring speed
      L     DBW   60
      T     DBW   62
      CALL  "5"                FC84              -- 16 bit binary division
       IN0 :=DBW62
       IN1 :=DBW64
       OUT2:="M 15.0 ! CC-BP"  M15.0             -- Counter 2 - overrun
       OUT3:="M 15.1 ! CC-BP"  M15.1             -- Counter 2 - error by division through 0
       OUT4:="M 15.2 ! CC-BP"  M15.2             -- Counter 2 - quotient = 0
       OUT5:="M 15.3 ! CC-BP"  M15.3             -- Counter 2 - reset
       OUT6:=DBW66
       OUT7:=DBW68
      L     DBW  142
      L     DBW   90
      +I
      L     DBW   66
      -I
      T     DBW   70
M004: A(
      L     "C 2 ! CC-BP"      C2                -- Counter No.2 for CC-BP
```

```
      L     DBW   70
      >=I
      )
      A     "M 14.3 ! CC-BP"   M14.3             -- Counter No.2-release pouring speed
      S     "M 14.2 ! CC-BP"   M14.2             -- Help flag counter No.2
      A(
      L     "C 2 ! CC-BP"      C2                -- Counter No.2 for CC-BP
      L     DBW   70
      >I
      )
      A     "M 14.3 ! CC-BP"   M14.3             -- Counter No.2-release pouring speed
      O
      A     "M 16.4 ! CC-BP"   M16.4             -- Counter 2 - charge too long
      R     "M 14.0 ! CC-BP"   M14.0             -- Help flag counter No.2
      R     "M 14.1 ! CC-BP"   M14.1             -- Help flag counter No.2
      R     "M 14.3 ! CC-BP"   M14.3             -- Counter No.2-release pouring speed
      R     "M 16.1 ! CC-BP"   M16.1             -- Counter 2 - end of measurement
      R     "C 2 ! CC-BP"      C2                -- Counter No.2 for CC-BP
```

Network: 5

```
      A     "M 11.0 ! CC-BP"  M11.0              -- Help flag counter No.1
      A     "M 11.2 ! CC-BP"  M11.2              -- Help flag counter No.1
      JC    M005
      JU    M006
M005: L     DBW   50
      T     DBW  100
      L     DBW   52
      T     DBW  102
M006: NOP   0
      A     "M 14.0 ! CC-BP"  M14.0              -- Help flag counter No.2
      A     "M 14.2 ! CC-BP"  M14.2              -- Help flag counter No.2
      JC    M007
      JU    M008
M007: L     DBW   90
      T     DBW  100
      L     DBW   92
      T     DBW  102
M008: NOP   0
```

Network: 6

```
      L     DBW  102
      T     DBW  122
      CALL  "5"                   FC84              -- 16 bit binary division
       IN0 :=DBW122
       IN1 :=DBW124
       OUT2:="M 17.0 ! CC-BP"     M17.0             -- General - overrun
       OUT3:="M 17.1 ! CC-BP"     M17.1             -- General - error by division through 0
       OUT4:="M 17.2 ! CC-BP"     M17.2             -- General - quotient = 0
       OUT5:="M 17.3 ! CC-BP"     M17.3             -- General - reset
       OUT6:=DBW126
       OUT7:=DBW128
      L     DBW  122
      L     320
      >=I
      JC    M009
      JU    M00a
M009: L     155
      T     DBW  132
      JU    M00b
M00a: L     DBW  122
      L     280
      >=I
      JC    M00c
      JU    M00d
M00c: L     125
      T     DBW  132
      JU    M00b
M00d: L     DBW  122
      L     240
      >=I
      JC    M00e
      JU    M00f
M00e: L     115
      T     DBW  132
      JU    M00b
M00f: L     DBW  122
      L     205
      >=I
      JC    M010
```

```
      JU    M011
M010: L     90
      T     DBW  132
      JU    M00b
M011: L     DBW  122
      L     172
      >=I
      JC    M012
      JU    M013
M012: L     70
      T     DBW  132
      JU    M00b
M013: L     115
      T     DBW  132
M00b: NOP   0
      L     1110
      L     DBW  100
      -I
      L     DBW  126
      +I
      L     DBW  126
      +I
      L     DBW  132
      -I
      T     MW    64
      AN    M    165.1
      S     "M 10.7 ! CC-BP"      M10.7             -- Reset counter
      A     M    165.1
      A     "M 10.7 ! CC-BP"      M10.7             -- Reset counter
      R     "M 10.7 ! CC-BP"      M10.7             -- Reset counter
      R     "M 11.2 ! CC-BP"      M11.2             -- Help flag counter No.1
      R     "M 14.2 ! CC-BP"      M14.2             -- Help flag counter No.2
      O     "M 13.4 ! CC-BP"      M13.4             -- Counter 1 - charge too long
      R     "M 11.2 ! CC-BP"      M11.2             -- Help flag counter No.1
      O     "M 16.4 ! CC-BP"      M16.4             -- Counter 2 - charge too long
      R     "M 14.2 ! CC-BP"      M14.2             -- Help flag counter No.2
      O     "M 11.2 ! CC-BP"      M11.2             -- Help flag counter No.1
      O     "M 14.2 ! CC-BP"      M14.2             -- Help flag counter No.2
      L     S5T#150MS
      SS    "T 20 ! COT-LT No.1"  T20               -- Main contactor - checkback monitoring
      A     "T 20 ! COT-LT No.1"  T20               -- Main contactor - checkback monitoring
      S     #OUT4                 #OUT4
      A     #OUT4                 #OUT4
      R     "T 20 ! COT-LT No.1"  T20               -- Main contactor - checkback monitoring
      R     "M 11.2 ! CC-BP"      M11.2             -- Help flag counter No.1
      R     "M 14.2 ! CC-BP"      M14.2             -- Help flag counter No.2
      O     "M 15.5 ! CC-BP"      M15.5             -- Puls flags-Set point 1 reached (E 65.1)
      ON    "Q 14.2 ! CC-BP"      Q14.2             -- Curtain coatar-run-up fault
      ON    "Q 14.3 ! CC-BP"      Q14.3             -- Curtain coatar-retardation fault
      R     #OUT4                 #OUT4
```

Network: 7

```
      L     100
      T     MW    66
```

Network: 8

```
      O     "I 2.0"            I2.0              -- Emergency-off
      ON    "M 8.0 ! General"  M8.0              -- Reserve
      JC    M014
      JU    M015
M014: NOP   0
      R     "M 10.7 ! CC-BP"   M10.7             -- Reset counter
      L     0
      T     MW    11
      T     MW    13
      T     MW    15
      T     DBW   20
      T     DBW   22
      T     DBW   36
      T     DBW   38
      T     DBW   42
      T     DBW   44
      T     DBW   46
      T     DBW   48
      T     DBW   50
      T     DBW   52
      T     DBW   60
      T     DBW   62
      T     DBW   76
```

```
      T     DBW   78
      T     DBW   80
      T     DBW   82
      T     DBW   84
      T     DBW   86
      T     DBW   88
      T     DBW   90
      T     DBW   92
      T     DBW  100
      T     DBW  102
M015: NOP   0
```

Network: 9

FC1 - <offline>

""

Name: POSITION **Family:**
Author: **Version:** 0.0
Block version: 2
Time stamp Code: 09/20/2013 02:06:35 PM
Interface: 11/02/2011 06:47:54 AM
Lengths (block/logic/data): 01044 00876 00002

Name	Data Type	Address	Comment
IN		0.0	
IN0	Block_DB	0.0	
IN1	Bool	2.0	
IN2	Bool	2.1	
IN3	Bool	2.2	
OUT		0.0	
OUT4	Bool	4.0	
IN_OUT		0.0	
TEMP		0.0	
RETURN		0.0	
RET_VAL		0.0	

Block: FC1

Network: 1

Network: 2

```
      OPN   #IN0           #IN0
      A     #IN1           #IN1
      A     M    111.0
      AN    M    113.0
      S     M    114.0
      A     #IN1           #IN1
      AN    M    116.0
      S     M    111.0
      A     #IN3           #IN3
      A     M    111.0
      AN    M    111.2
      CU    "C 3 ! CC-TP"  C3              -- Counter No.1 for CC-TP
      A     #IN3           #IN3
      A     M    114.0
      AN    M    114.2
      CU    "C 4 ! CC-TP"  C4              -- Counter No.2 for CC-TP
```

Network: 3

```
      CALL  FC     4
      A     M    113.1
      AN    M    113.3
      =     M    113.2
      A     M    113.2
      S     M    113.3
      AN    M    113.1
      R     M    113.3
      A     M    111.0
      AN    M    111.1
      L     C#0
      S     "C 3 ! CC-TP"  C3              -- Counter No.1 for CC-TP
```

```
      S     M    111.1
      A     M    111.1
      A     M    113.2
      JC    M001
      JU    M002
M001: S     M    111.3
      L     DBW   20
      T     DBW   22
      CALL  "5"            FC84              -- 16 bit binary division
       IN0 :=DBW22
       IN1 :=DBW24
       OUT2:=M112.0
       OUT3:=M112.1
       OUT4:=M112.2
       OUT5:=M112.3
       OUT6:=DBW26
       OUT7:=DBW28
      L     DBW  140
      L     DBW   50
      +I
      L     DBW   26
      -I
      T     DBW   30
M002: A(
      L     "C 3 ! CC-TP"  C3                -- Counter No.1 for CC-TP
      L     DBW   30
      >=I
      )
      A     M    111.3
      S     M    111.2
      A(
      L     "C 3 ! CC-TP"  C3                -- Counter No.1 for CC-TP
      L     DBW   30
      >I
      )
      A     M    111.3
      O
      A     M    113.4
      R     M    111.0
      R     M    111.1
      R     M    111.3
      R     M    113.1
      R     "C 3 ! CC-TP"  C3                -- Counter No.1 for CC-TP
```

Network: 4

```
      CALL  FC     5
      A     M    116.1
      AN    M    116.3
      =     M    116.2
      A     M    116.2
      S     M    116.3
      AN    M    116.1
      R     M    116.3
      A     M    114.0
      AN    M    114.1
      L     C#0
      S     "C 4 ! CC-TP"  C4                -- Counter No.2 for CC-TP
      S     M    114.1
      A     M    114.1
      A     M    116.2
      JC    M003
      JU    M004
M003: S     M    114.3
      L     DBW   60
      T     DBW   62
      CALL  "5"            FC84              -- 16 bit binary division
       IN0 :=DBW62
       IN1 :=DBW64
       OUT2:=M115.0
       OUT3:=M115.1
       OUT4:=M115.2
       OUT5:=M115.3
       OUT6:=DBW66
       OUT7:=DBW68
      L     150
      L     DBW   90
      +I
      L     DBW   66
      -I
      T     DBW   70
M004: A(
      L     "C 4 ! CC-TP"  C4                -- Counter No.2 for CC-TP
```

```
      L     DBW   70
      >=I
      )
      A     M    114.3
      S     M    114.2
      A(
      L     "C 4 ! CC-TP"  C4                -- Counter No.2 for CC-TP
      L     DBW   70
      >I
      )
      A     M    114.3
      O
      A     M    116.4
      R     M    114.0
      R     M    114.1
      R     M    114.3
      R     M    116.1
      R     "C 4 ! CC-TP"  C4                -- Counter No.2 for CC-TP
```

Network: 5

```
      A     M    111.0
      A     M    111.2
      JC    M005
      JU    M006
M005: L     DBW   50
      T     DBW  100
      L     DBW   52
      T     DBW  102
M006: NOP   0
      A     M    114.0
      A     M    114.2
      JC    M007
      JU    M008
M007: L     DBW   90
      T     DBW  100
      L     DBW   92
      T     DBW  102
M008: NOP   0
```

Network: 6

```
      L     DBW  102
      T     DBW  122
      CALL  "5"               FC84               -- 16 bit binary division
       IN0 :=DBW122
       IN1 :=DBW124
       OUT2:=M117.0
       OUT3:=M117.1
       OUT4:=M117.2
       OUT5:=M117.3
       OUT6:=DBW126
       OUT7:=DBW128
      L     DBW  122
      L     340
      >=I
      JC    M009
      JU    M00a
M009: L     155
      T     DBW  132
      JU    M00b
M00a: L     DBW  122
      L     280
      >=I
      JC    M00c
      JU    M00d
M00c: L     105
      T     DBW  132
      JU    M00b
M00d: L     DBW  122
      L     240
      >=I
      JC    M00e
      JU    M00f
M00e: L     90
      T     DBW  132
      JU    M00b
M00f: L     DBW  122
      L     205
      >=I
      JC    M010
```

```
      JU    M011
M010: L     80
      T     DBW  132
      JU    M00b
M011: L     DBW  122
      L     172
      >=I
      JC    M012
      JU    M013
M012: L     55
      T     DBW  132
      JU    M00b
M013: L     115
      T     DBW  132
M00b: NOP   0
      L     1110
      L     DBW  100
      -I
      L     DBW  126
      +I
      L     DBW  126
      +I
      L     DBW  132
      -I
      T     MW    72
      AN    M    173.1
      S     M    110.7
      A     M    173.1
      A     M    110.7
      R     M    110.7
      R     M    111.2
      R     M    114.2
      O     M    113.4
      R     M    111.2
      O     M    116.4
      R     M    114.2
      O     M    111.2
      O     M    114.2
      L     S5T#150MS
      SS    "T 40 ! CC-TP"    T40               -- Base speed
      A     "T 40 ! CC-TP"    T40               -- Base speed
      S     #OUT4             #OUT4
      A     #OUT4             #OUT4
      R     "T 40 ! CC-TP"    T40               -- Base speed
      R     M    111.2
      R     M    114.2
      O     M    115.5
      ON    "Q 20.2 ! CC-TP"  Q20.2             -- Curtain coater-run-up fault
      ON    "Q 20.3 ! CC-TP"  Q20.3             -- Curtain coater-retardation fault
      R     #OUT4             #OUT4
```

Network: 7

```
      L     100
      T     MW    74
```

Network: 8

```
      O     "I 2.0"     I2.0              -- Emergency-off
      ON    M    108.0
      JC    M014
      JU    M015
M014: NOP   0
      R     M    110.7
      L     0
      T     MW   111
      T     MW   113
      T     MW   115
      T     DBW   20
      T     DBW   22
      T     DBW   36
      T     DBW   38
      T     DBW   42
      T     DBW   44
      T     DBW   46
      T     DBW   48
      T     DBW   50
      T     DBW   52
      T     DBW   60
      T     DBW   62
      T     DBW   76
```

```
      T     DBW   78
      T     DBW   80
      T     DBW   82
      T     DBW   84
      T     DBW   86
      T     DBW   88
      T     DBW   90
      T     DBW   92
      T     DBW  100
      T     DBW  102
M015: NOP   0
```

Network: 9

FC2 - <offline>

""

Name: MESSUNG **Family:**
Author: **Version:** 0.0
Block version: 2
Time stamp Code: 11/02/2011 06:47:52 AM
Interface: 11/02/2011 06:47:52 AM
Lengths (block/logic/data): 00704 00560 00000

Name	Data Type	Address	Comment
IN		0.0	
OUT		0.0	
IN_OUT		0.0	
TEMP		0.0	
RETURN		0.0	
RET_VAL		0.0	

Block: FC2

Network: 1

Network: 2

```
      A     "I 2.1"           I2.1             -- Alarm acknowledge
      A     "M 13.4 ! CC-BP"  M13.4            -- Counter 1 - charge too long
      R     "M 13.4 ! CC-BP"  M13.4            -- Counter 1 - charge too long
      A     "M 13.4 ! CC-BP"  M13.4            -- Counter 1 - charge too long
      R     "M 13.0 ! CC-BP"  M13.0            -- Counter 1 - measurement is running
      A     "M 11.0 ! CC-BP"  M11.0            -- Help flag counter No.1
      AN    "M 13.4 ! CC-BP"  M13.4            -- Counter 1 - charge too long
      JC    M001
      JU    M002
M001: A     "M 10.0 ! CC-BP"  M10.0            -- Puls flag-front edge of sheet discernd
      AN    "M 13.1 ! CC-BP"  M13.1            -- Counter 1 - end of measurement
      S     "M 13.0 ! CC-BP"  M13.0            -- Counter 1 - measurement is running
      JC    M003
      JU    M004
M003: L     DBW   36
      L     1
      +I
      T     DBW   36
M004: A(
      L     DBW   36
      L     1
      ==I
      )
      A     "I 3.1"           I3.1             -- Entry sensor BP (Main)
      AN    "M 13.1 ! CC-BP"  M13.1            -- Counter 1 - end of measurement
      A     "M 10.4 ! CC-BP"  M10.4            -- Puls flags for sheet measurement
      AN    "M 11.2 ! CC-BP"  M11.2            -- Help flag counter No.1
      JC    M005
      A(
      L     DBW   36
      L     2
      ==I
      )
      A     "I 3.1"           I3.1             -- Entry sensor BP (Main)
      AN    "M 13.1 ! CC-BP"  M13.1            -- Counter 1 - end of measurement
      A     "M 10.4 ! CC-BP"  M10.4            -- Puls flags for sheet measurement
      AN    "M 11.2 ! CC-BP"  M11.2            -- Help flag counter No.1
      JC    M006
      A(
      L     DBW   36
      L     3
```

```
      ==I
      )
      A     "I 3.1"           I3.1              -- Entry sensor BP (Main)
      AN    "M 13.1 ! CC-BP"  M13.1             -- Counter 1 - end of measurement
      A     "M 10.4 ! CC-BP"  M10.4             -- Puls flags for sheet measurement
      AN    "M 11.2 ! CC-BP"  M11.2             -- Help flag counter No.1
      JC    M007
      JU    M008
M005: L     DBW   38
      L     1
      +I
      T     DBW   38
      JU    M008
M006: L     DBW   40
      L     1
      +I
      T     DBW   40
      JU    M008
M007: L     DBW   42
      L     1
      +I
      T     DBW   42
M008: A(
      L     DBW   36
      L     1
      ==I
      )
      AN    "I 3.1"           I3.1              -- Entry sensor BP (Main)
      AN    "M 13.1 ! CC-BP"  M13.1             -- Counter 1 - end of measurement
      A     "M 10.4 ! CC-BP"  M10.4             -- Puls flags for sheet measurement
      JC    M009
      A(
      L     DBW   36
      L     2
      ==I
      )
      AN    "I 3.1"           I3.1              -- Entry sensor BP (Main)
      AN    "M 13.1 ! CC-BP"  M13.1             -- Counter 1 - end of measurement
      A     "M 10.4 ! CC-BP"  M10.4             -- Puls flags for sheet measurement
      JC    M00a
      A(
      L     DBW   36
      L     3
      ==I
      )
      AN    "I 3.1"           I3.1              -- Entry sensor BP (Main)
      S     "M 13.1 ! CC-BP"  M13.1             -- Counter 1 - end of measurement
      JU    M00b
M002: JU    M00c
M009: L     DBW   44
      L     1
      +I
      T     DBW   44
      A(
      L     DBW   38
      L     DBW   54
      >I
      )
      AN    "I 3.1"           I3.1              -- Entry sensor BP (Main)
      O(
      L     DBW   44
      L     DBW   32
      >I
      )
      S     "M 13.1 ! CC-BP"  M13.1             -- Counter 1 - end of measurement
      JU    M00b
M00a: L     DBW   46
      L     1
      +I
      T     DBW   46
      L     DBW   32
      >I
      S     "M 13.1 ! CC-BP"  M13.1             -- Counter 1 - end of measurement
M00b: AN    "M 13.1 ! CC-BP"  M13.1             -- Counter 1 - end of measurement
      JC    M00d
      L     DBW   36
      L     1
      ==I
      JC    M00e
      L     DBW   36
      L     2
      ==I
      JC    M00f
      L     DBW   36
      L     3
```

```
      ==I
      JC    M010
      JU    M00d
M00e: L     DBW   38
      T     DBW   20
      T     DBW   50
      T     DBW   52
      JU    M00c
M00f: L     DBW   40
      T     DBW   20
      L     DBW   38
      +I
      L     DBW   44
      +I
      T     DBW   50
      L     DBW   38
      T     DBW   52
      JU    M00c
M010: L     DBW   42
      T     DBW   20
      L     DBW   38
      +I
      L     DBW   42
      +I
      L     DBW   44
      +I
      L     DBW   46
      +I
      T     DBW   50
      L     DBW   38
      T     DBW   52
M00c: L     0
      T     DBW   36
      T     DBW   38
      T     DBW   40
      T     DBW   42
      T     DBW   44
      T     DBW   46
      T     DBW   48
      A     "M 13.1 ! CC-BP"  M13.1             -- Counter 1 - end of measurement
      R     "M 13.0 ! CC-BP"  M13.0             -- Counter 1 - measurement is running
M00d: NOP   0
      A     "M 13.0 ! CC-BP"  M13.0             -- Counter 1 - measurement is running
      A     "M 10.4 ! CC-BP"  M10.4             -- Puls flags for sheet measurement
      AN    "M 13.1 ! CC-BP"  M13.1             -- Counter 1 - end of measurement
      AN    "M 11.2 ! CC-BP"  M11.2             -- Help flag counter No.1
      JC    M011
      JU    M012
M011: L     DBW   48
      L     1
      +I
      T     DBW   48
      L     DBW   34
      >I
      S     "M 13.4 ! CC-BP"  M13.4             -- Counter 1 - charge too long
M012: NOP   0
```

Network: 3

FC3 - <offline>

""

Name: MESSUNG **Family:**
Author: **Version:** 0.0
Block version: 2
Time stamp Code: 11/02/2011 06:47:54 AM
Interface: 11/02/2011 06:47:54 AM
Lengths (block/logic/data): 00704 00560 00000

Name	Data Type	Address	Comment
IN		0.0	
OUT		0.0	
IN_OUT		0.0	
TEMP		0.0	
RETURN		0.0	
RET_VAL		0.0	

Block: FC3

Network: 1

Network: 2

```
      A     "I 2.1"           I2.1             -- Alarm acknowledge
      A     "M 16.4 ! CC-BP"  M16.4            -- Counter 2 - charge too long
      R     "M 16.4 ! CC-BP"  M16.4            -- Counter 2 - charge too long
      A     "M 16.4 ! CC-BP"  M16.4            -- Counter 2 - charge too long
      R     "M 16.0 ! CC-BP"  M16.0            -- Counter 2 - measurement is running
      A     "M 14.0 ! CC-BP"  M14.0            -- Help flag counter No.2
      AN    "M 16.4 ! CC-BP"  M16.4            -- Counter 2 - charge too long
      JC    M001
      JU    M002
M001: A     "M 10.0 ! CC-BP"  M10.0            -- Puls flag-front edge of sheet discernd
      AN    "M 16.1 ! CC-BP"  M16.1            -- Counter 2 - end of measurement
      S     "M 16.0 ! CC-BP"  M16.0            -- Counter 2 - measurement is running
      JC    M003
      JU    M004
M003: L     DBW   76
      L     1
      +I
      T     DBW   76
M004: A(
      L     DBW   76
      L     1
      ==I
      )
      A     "I 3.1"           I3.1             -- Entry sensor BP (Main)
      AN    "M 16.1 ! CC-BP"  M16.1            -- Counter 2 - end of measurement
      A     "M 10.4 ! CC-BP"  M10.4            -- Puls flags for sheet measurement
      AN    "M 14.2 ! CC-BP"  M14.2            -- Help flag counter No.2
      JC    M005
      A(
      L     DBW   76
      L     2
      ==I
      )
      A     "I 3.1"           I3.1             -- Entry sensor BP (Main)
      AN    "M 16.1 ! CC-BP"  M16.1            -- Counter 2 - end of measurement
      A     "M 10.4 ! CC-BP"  M10.4            -- Puls flags for sheet measurement
      AN    "M 14.2 ! CC-BP"  M14.2            -- Help flag counter No.2
      JC    M006
      A(
      L     DBW   76
      L     3
```

```
      ==I
      )
      A     "I 3.1"           I3.1              -- Entry sensor BP (Main)
      AN    "M 16.1 ! CC-BP"  M16.1             -- Counter 2 - end of measurement
      A     "M 10.4 ! CC-BP"  M10.4             -- Puls flags for sheet measurement
      AN    "M 14.2 ! CC-BP"  M14.2             -- Help flag counter No.2
      JC    M007
      JU    M008
M005: L     DBW   78
      L     1
      +I
      T     DBW   78
      JU    M008
M006: L     DBW   80
      L     1
      +I
      T     DBW   80
      JU    M008
M007: L     DBW   82
      L     1
      +I
      T     DBW   82
M008: A(
      L     DBW   76
      L     1
      ==I
      )
      AN    "I 3.1"           I3.1              -- Entry sensor BP (Main)
      AN    "M 16.1 ! CC-BP"  M16.1             -- Counter 2 - end of measurement
      A     "M 10.4 ! CC-BP"  M10.4             -- Puls flags for sheet measurement
      JC    M009
      A(
      L     DBW   76
      L     2
      ==I
      )
      AN    "I 3.1"           I3.1              -- Entry sensor BP (Main)
      AN    "M 16.1 ! CC-BP"  M16.1             -- Counter 2 - end of measurement
      A     "M 10.4 ! CC-BP"  M10.4             -- Puls flags for sheet measurement
      JC    M00a
      A(
      L     DBW   76
      L     3
      ==I
      )
      AN    "I 3.1"           I3.1              -- Entry sensor BP (Main)
      S     "M 16.1 ! CC-BP"  M16.1             -- Counter 2 - end of measurement
      JU    M00b
M002: JU    M00c
M009: L     DBW   84
      L     1
      +I
      T     DBW   84
      A(
      L     DBW   78
      L     DBW   94
      >I
      )
      AN    "I 3.1"           I3.1              -- Entry sensor BP (Main)
      O(
      L     DBW   84
      L     DBW   72
      >I
      )
      S     "M 16.1 ! CC-BP"  M16.1             -- Counter 2 - end of measurement
      JU    M00b
M00a: L     DBW   86
      L     1
      +I
      T     DBW   86
      L     DBW   72
      >I
      S     "M 16.1 ! CC-BP"  M16.1             -- Counter 2 - end of measurement
M00b: AN    "M 16.1 ! CC-BP"  M16.1             -- Counter 2 - end of measurement
      JC    M00d
      L     DBW   76
      L     1
      ==I
      JC    M00e
      L     DBW   76
      L     2
      ==I
      JC    M00f
      L     DBW   76
      L     3
```

```
      ==I
      JC    M010
      JU    M00d
M00e: L     DBW   78
      T     DBW   60
      T     DBW   90
      T     DBW   92
      JU    M00c
M00f: L     DBW   80
      T     DBW   60
      L     DBW   78
      +I
      L     DBW   84
      +I
      T     DBW   90
      L     DBW   78
      T     DBW   92
      JU    M00c
M010: L     DBW   82
      T     DBW   60
      L     DBW   78
      +I
      L     DBW   82
      +I
      L     DBW   84
      +I
      L     DBW   86
      +I
      T     DBW   90
      L     DBW   78
      T     DBW   92
M00c: L     0
      T     DBW   76
      T     DBW   78
      T     DBW   80
      T     DBW   82
      T     DBW   84
      T     DBW   86
      T     DBW   88
      A     "M 16.1 ! CC-BP"  M16.1             -- Counter 2 - end of measurement
      R     "M 16.0 ! CC-BP"  M16.0             -- Counter 2 - measurement is running
M00d: NOP   0
      A     "M 16.0 ! CC-BP"  M16.0             -- Counter 2 - measurement is running
      A     "M 10.4 ! CC-BP"  M10.4             -- Puls flags for sheet measurement
      AN    "M 16.1 ! CC-BP"  M16.1             -- Counter 2 - end of measurement
      AN    "M 14.2 ! CC-BP"  M14.2             -- Help flag counter No.2
      JC    M011
      JU    M012
M011: L     DBW   88
      L     1
      +I
      T     DBW   88
      L     DBW   74
      >I
      S     "M 16.4 ! CC-BP"  M16.4             -- Counter 2 - charge too long
M012: NOP   0
```

Network: 3

FC4 - <offline>

""

Name: MESSUNG **Family:**
Author: **Version:** 0.0
Block version: 2
Time stamp Code: 11/02/2011 06:47:54 AM
Interface: 11/02/2011 06:47:54 AM
Lengths (block/logic/data): 00704 00560 00000

Name	Data Type	Address	Comment
IN		0.0	
OUT		0.0	
IN_OUT		0.0	
TEMP		0.0	
RETURN		0.0	
RET_VAL		0.0	

Block: FC4

Network: 1

Network: 2

```
      A     "I 2.1"     I2.1              -- Alarm acknowledge
      A     M    113.4
      R     M    113.4
      A     M    113.4
      R     M    113.0
      A     M    111.0
      AN    M    113.4
      JC    M001
      JU    M002
M001: A     M    110.0
      AN    M    113.1
      S     M    113.0
      JC    M003
      JU    M004
M003: L     DBW   36
      L     1
      +I
      T     DBW   36
M004: A(
      L     DBW   36
      L     1
      ==I
      )
      A     "I 5.1"     I5.1              -- Entry sensor TP (Main)
      AN    M    113.1
      A     M    110.4
      AN    M    111.2
      JC    M005
      A(
      L     DBW   36
      L     2
      ==I
      )
      A     "I 5.1"     I5.1              -- Entry sensor TP (Main)
      AN    M    113.1
      A     M    110.4
      AN    M    111.2
      JC    M006
      A(
      L     DBW   36
      L     3
```

```
      ==I
      )
      A     "I 5.1"     I5.1              -- Entry sensor TP (Main)
      AN    M    113.1
      A     M    110.4
      AN    M    111.2
      JC    M007
      JU    M008
M005: L     DBW   38
      L     1
      +I
      T     DBW   38
      JU    M008
M006: L     DBW   40
      L     1
      +I
      T     DBW   40
      JU    M008
M007: L     DBW   42
      L     1
      +I
      T     DBW   42
M008: A(
      L     DBW   36
      L     1
      ==I
      )
      AN    "I 5.1"     I5.1              -- Entry sensor TP (Main)
      AN    M    113.1
      A     M    110.4
      JC    M009
      A(
      L     DBW   36
      L     2
      ==I
      )
      AN    "I 5.1"     I5.1              -- Entry sensor TP (Main)
      AN    M    113.1
      A     M    110.4
      JC    M00a
      A(
      L     DBW   36
      L     3
      ==I
      )
      AN    "I 5.1"     I5.1              -- Entry sensor TP (Main)
      S     M    113.1
      JU    M00b
M002: JU    M00c
M009: L     DBW   44
      L     1
      +I
      T     DBW   44
      A(
      L     DBW   38
      L     DBW   54
      >I
      )
      AN    "I 5.1"     I5.1              -- Entry sensor TP (Main)
      O(
      L     DBW   44
      L     DBW   32
      >I
      )
      S     M    113.1
      JU    M00b
M00a: L     DBW   46
      L     1
      +I
      T     DBW   46
      L     DBW   32
      >I
      S     M    113.1
M00b: AN    M    113.1
      JC    M00d
      L     DBW   36
      L     1
      ==I
      JC    M00e
      L     DBW   36
      L     2
      ==I
      JC    M00f
      L     DBW   36
      L     3
```

```
      ==I
      JC    M010
      JU    M00d
M00e: L     DBW   38
      T     DBW   20
      T     DBW   50
      T     DBW   52
      JU    M00c
M00f: L     DBW   40
      T     DBW   20
      L     DBW   38
      +I
      L     DBW   44
      +I
      T     DBW   50
      L     DBW   38
      T     DBW   52
      JU    M00c
M010: L     DBW   42
      T     DBW   20
      L     DBW   38
      +I
      L     DBW   42
      +I
      L     DBW   44
      +I
      L     DBW   46
      +I
      T     DBW   50
      L     DBW   38
      T     DBW   52
M00c: L     0
      T     DBW   36
      T     DBW   38
      T     DBW   40
      T     DBW   42
      T     DBW   44
      T     DBW   46
      T     DBW   48
      A     M    113.1
      R     M    113.0
M00d: NOP   0
      A     M    113.0
      A     M    110.4
      AN    M    113.1
      AN    M    111.2
      JC    M011
      JU    M012
M011: L     DBW   48
      L     1
      +I
      T     DBW   48
      L     DBW   34
      >I
      S     M    113.4
M012: NOP   0
```

Network: 3

FC5 - <offline>

""

Name: MESSUNG **Family:**
Author: **Version:** 0.0
Block version: 2
Time stamp Code: 11/02/2011 06:47:54 AM
Interface: 11/02/2011 06:47:54 AM
Lengths (block/logic/data): 00704 00560 00000

Name	Data Type	Address	Comment
IN		0.0	
OUT		0.0	
IN_OUT		0.0	
TEMP		0.0	
RETURN		0.0	
RET_VAL		0.0	

Block: FC5

Network: 1

Network: 2

```
      A     "I 2.1"     I2.1              -- Alarm acknowledge
      A     M    116.4
      R     M    116.4
      A     M    116.4
      R     M    116.0
      A     M    114.0
      AN    M    116.4
      JC    M001
      JU    M002
M001: A     M    110.0
      AN    M    116.1
      S     M    116.0
      JC    M003
      JU    M004
M003: L     DBW   76
      L     1
      +I
      T     DBW   76
M004: A(
      L     DBW   76
      L     1
      ==I
      )
      A     "I 5.1"     I5.1              -- Entry sensor TP (Main)
      AN    M    116.1
      A     M    110.4
      AN    M    114.2
      JC    M005
      A(
      L     DBW   76
      L     2
      ==I
      )
      A     "I 5.1"     I5.1              -- Entry sensor TP (Main)
      AN    M    116.1
      A     M    110.4
      AN    M    114.2
      JC    M006
      A(
      L     DBW   76
      L     3
```

```
      ==I
      )
      A     "I 5.1"     I5.1              -- Entry sensor TP (Main)
      AN    M    116.1
      A     M    110.4
      AN    M    114.2
      JC    M007
      JU    M008
M005: L     DBW   78
      L     1
      +I
      T     DBW   78
      JU    M008
M006: L     DBW   80
      L     1
      +I
      T     DBW   80
      JU    M008
M007: L     DBW   82
      L     1
      +I
      T     DBW   82
M008: A(
      L     DBW   76
      L     1
      ==I
      )
      AN    "I 5.1"     I5.1              -- Entry sensor TP (Main)
      AN    M    116.1
      A     M    110.4
      JC    M009
      A(
      L     DBW   76
      L     2
      ==I
      )
      AN    "I 5.1"     I5.1              -- Entry sensor TP (Main)
      AN    M    116.1
      A     M    110.4
      JC    M00a
      A(
      L     DBW   76
      L     3
      ==I
      )
      AN    "I 5.1"     I5.1              -- Entry sensor TP (Main)
      S     M    116.1
      JU    M00b
M002: JU    M00c
M009: L     DBW   84
      L     1
      +I
      T     DBW   84
      A(
      L     DBW   78
      L     DBW   94
      >I
      )
      AN    "I 5.1"     I5.1              -- Entry sensor TP (Main)
      O(
      L     DBW   84
      L     DBW   72
      >I
      )
      S     M    116.1
      JU    M00b
M00a: L     DBW   86
      L     1
      +I
      T     DBW   86
      L     DBW   72
      >I
      S     M    116.1
M00b: AN    M    116.1
      JC    M00d
      L     DBW   76
      L     1
      ==I
      JC    M00e
      L     DBW   76
      L     2
      ==I
      JC    M00f
      L     DBW   76
      L     3
```

```
      ==I
      JC    M010
      JU    M00d
M00e: L     DBW   78
      T     DBW   60
      T     DBW   90
      T     DBW   92
      JU    M00c
M00f: L     DBW   80
      T     DBW   60
      L     DBW   78
      +I
      L     DBW   84
      +I
      T     DBW   90
      L     DBW   78
      T     DBW   92
      JU    M00c
M010: L     DBW   82
      T     DBW   60
      L     DBW   78
      +I
      L     DBW   82
      +I
      L     DBW   84
      +I
      L     DBW   86
      +I
      T     DBW   90
      L     DBW   78
      T     DBW   92
M00c: L     0
      T     DBW   76
      T     DBW   78
      T     DBW   80
      T     DBW   82
      T     DBW   84
      T     DBW   86
      T     DBW   88
      A     M    116.1
      R     M    116.0
M00d: NOP   0
      A     M    116.0
      A     M    110.4
      AN    M    116.1
      AN    M    114.2
      JC    M011
      JU    M012
M011: L     DBW   88
      L     1
      +I
      T     DBW   88
      L     DBW   74
      >I
      S     M    116.4
M012: NOP   0
```

Network: 3

FC6 - <offline>

""

Name: FREQEINL **Family:**
Author: **Version:** 0.0
Block version: 2
Time stamp Code: 11/02/2011 06:47:54 AM
Interface: 11/02/2011 06:47:54 AM
Lengths (block/logic/data): 00152 00060 00000

Name	Data Type	Address	Comment
IN		0.0	
OUT		0.0	
IN_OUT		0.0	
TEMP		0.0	
RETURN		0.0	
RET_VAL		0.0	

Block: FC6

Network: 1

```
A     "I 2.1"             I2.1             -- Alarm acknowledge
R     "M 20.5 ! COT-IT"   M20.5            -- FI - fault checkback of main contactor
R     "M 20.6 ! COT-IT"   M20.6            -- FI - fault overcurrent
A     "I 6.1"             I6.1             -- Thermal release
S     "M 20.6 ! COT-IT"   M20.6            -- FI - fault overcurrent
A     "M 20.0 ! COT-IT"   M20.0            -- FI - ON/OFF
AN    "I 6.2"             I6.2             -- FI checkback signal of contactor
O
AN    "M 20.0 ! COT-IT"   M20.0            -- FI - ON/OFF
A     "I 6.2"             I6.2             -- FI checkback signal of contactor
L     DBW   32
SD    "T 16 ! COT-IT"     T16              -- Main contactor - checkback monitoring
A     "T 16 ! COT-IT"     T16              -- Main contactor - checkback monitoring
S     "M 20.5 ! COT-IT"   M20.5            -- FI - fault checkback of main contactor
O     "M 20.6 ! COT-IT"   M20.6            -- FI - fault overcurrent
O     "M 20.5 ! COT-IT"   M20.5            -- FI - fault checkback of main contactor
=     "M 20.7 ! COT-IT"   M20.7            -- FI - collective fault
A     "M 20.0 ! COT-IT"   M20.0            -- FI - ON/OFF
AN    "M 20.7 ! COT-IT"   M20.7            -- FI - collective fault
=     "M 20.3 ! COT-IT"   M20.3            -- FI - main contactor ON/OFF
A     "M 20.7 ! COT-IT"   M20.7            -- FI - collective fault
A     "M 1.2 ! General"   M1.2             -- Flash frequency 3
O
A     "I 6.2"             I6.2             -- FI checkback signal of contactor
AN    "M 20.7 ! COT-IT"   M20.7            -- FI - collective fault
O
O     "I 2.2"             I2.2             -- Lamp test
=     "M 20.4 ! COT-IT"   M20.4            -- FI - indication "is WORKING"
```

FC7 - <offline>

""

Name: ANTREINL **Family:**
Author: **Version:** 0.0
Block version: 2
Time stamp Code: 11/02/2011 06:47:54 AM
Interface: 11/02/2011 06:47:54 AM
Lengths (block/logic/data): 00204 00108 00000

Name	Data Type	Address	Comment
IN		0.0	
OUT		0.0	
IN_OUT		0.0	
TEMP		0.0	
RETURN		0.0	
RET_VAL		0.0	

Block: FC7

Network: 1

Network: 2

```
A     "I 2.1"            I2.1             -- Alarm acknowledge
R     "M 22.5 ! COT-IT"  M22.5            -- Fault - numbrer of revolution = 0
R     "M 22.6 ! COT-IT"  M22.6            -- Fault FI
A(
O     "Q 16.1 ! COT-IT"  Q16.1            -- FI forward
O     "Q 16.0 ! COT-IT"  Q16.0            -- FI input I1
)
AN    "Q 16.1 ! COT-IT"  Q16.1            -- FI forward
L     DBW   34
SD    "T 17 ! COT-IT"    T17              -- Number of revolution = 0 monitoring
A     "T 17 ! COT-IT"    T17              -- Number of revolution = 0 monitoring
S     "M 22.5 ! COT-IT"  M22.5            -- Fault - numbrer of revolution = 0
AN    "I 6.3"            I6.3             -- FI noise
A     "M 20.0 ! COT-IT"  M20.0            -- FI - ON/OFF
AN    "M 22.6 ! COT-IT"  M22.6            -- Fault FI
L     DBW   36
SD    "T 18 ! COT-IT"    T18              -- FI fault delay
AN    "T 18 ! COT-IT"    T18              -- FI fault delay
A     "M 21.1 ! COT-IT"  M21.1            -- FI - edge flag-FI fault
A     "M 20.0 ! COT-IT"  M20.0            -- FI - ON/OFF
=     "M 21.0 ! COT-IT"  M21.0            -- FI - puls flags-FI fault
O     "M 21.0 ! COT-IT"  M21.0            -- FI - puls flags-FI fault
ON    "M 20.0 ! COT-IT"  M20.0            -- FI - ON/OFF
R     "M 21.1 ! COT-IT"  M21.1            -- FI - edge flag-FI fault
A     "T 18 ! COT-IT"    T18              -- FI fault delay
S     "M 21.1 ! COT-IT"  M21.1            -- FI - edge flag-FI fault
A     "M 21.0 ! COT-IT"  M21.0            -- FI - puls flags-FI fault
S     "M 22.6 ! COT-IT"  M22.6            -- Fault FI
O     "M 22.5 ! COT-IT"  M22.5            -- Fault - numbrer of revolution = 0
O     "M 22.6 ! COT-IT"  M22.6            -- Fault FI
=     "M 22.7 ! COT-IT"  M22.7            -- Collective fault
A(
O     "M 22.2 ! COT-IT"  M22.2            -- Slow ON/OFF
O     "M 22.3 ! COT-IT"  M22.3            -- Speed ON/OFF
)
AN    "M 22.7 ! COT-IT"  M22.7            -- Collective fault
=     "Q 16.1 ! COT-IT"  Q16.1            -- FI forward
A     "M 22.3 ! COT-IT"  M22.3            -- Speed ON/OFF
AN    "M 22.7 ! COT-IT"  M22.7            -- Collective fault
=     "Q 16.0 ! COT-IT"  Q16.0            -- FI input I1
O     "Q 16.1 ! COT-IT"  Q16.1            -- FI forward
```

```
O     "Q 16.0 ! COT-IT"  Q16.0            -- FI input I1
O     "Q 16.1 ! COT-IT"  Q16.1            -- FI forward
=     "M 22.4 ! COT-IT"  M22.4            -- Breke (Reserve)
O(
A     "M 22.7 ! COT-IT"  M22.7            -- Collective fault
A     "M 1.2 ! General"  M1.2             -- Flash frequency 3
)
O     "Q 16.1 ! COT-IT"  Q16.1            -- FI forward
O     "I 2.2"            I2.2             -- Lamp test
=     "Q 16.6 ! COT-IT"  Q16.6            -- FI indication ON/NOISE
```

Network: 3

FC8 - <offline>

""

Name: LOESCHM **Family:**
Author: **Version:** 0.0
Block version: 2
Time stamp Code: 11/02/2011 06:47:54 AM
Interface: 11/02/2011 06:47:54 AM
Lengths (block/logic/data): 00172 00068 00010

Name	Data Type	Address	Comment
IN		0.0	
IN0	Int	0.0	
IN1	Int	2.0	
OUT		0.0	
IN_OUT		0.0	
TEMP		0.0	
TEMP2	DWord	0.0	
TEMP3	DWord	4.0	
TEMP4	Word	8.0	
RETURN		0.0	
RET_VAL		0.0	

Block: FC8

Network: 1

```
      L     0
      T     MW   200
M001: L     #IN0            #IN0
      T     #TEMP2          #TEMP2
      TAK
      T     #TEMP3          #TEMP3
      L     STW
      T     #TEMP4          #TEMP4
      L     MB   201
      SLW   3
      LAR1
      L     #TEMP4          #TEMP4
      T     STW
      L     #TEMP3          #TEMP3
      L     #TEMP2          #TEMP2
      T     MW [AR1,P#0.0]
      L     MW   200
      INC   2
      T     MW   200
      L     #IN1            #IN1
      <=I
      JC    M001
```

FC9 - <offline>

""

Name: BLINKER **Family:**
Author: **Version:** 0.0
Block version: 2
Time stamp Code: 11/02/2011 06:47:54 AM
Interface: 11/02/2011 06:47:54 AM
Lengths (block/logic/data): 00138 00036 00000

Name	Data Type	Address	Comment
IN		0.0	
IN0	Bool	0.0	
IN1	Timer	2.0	
IN2	Word	4.0	
OUT		0.0	
OUT3	Byte	6.0	
IN_OUT		0.0	
TEMP		0.0	
RETURN		0.0	
RET_VAL		0.0	

Block: FC9

Network: 1

```
      AN    #IN1   #IN1
      JC    M001
      L     #OUT3  #OUT3
      INC   1
      T     #OUT3  #OUT3
M001: A     #IN0   #IN0
      AN    #IN1   #IN1
      L     #IN2   #IN2
      SD    #IN1   #IN1
```

FC10 - <offline>


""

Name: **Family:**
Author: **Version:** 0.0
Block version: 2
Time stamp Code: 12/13/2013 10:11:10 AM
Interface: 11/02/2011 06:47:54 AM
Lengths (block/logic/data): 00486 00350 00002

Name	Data Type	Address	Comment
IN		0.0	
OUT		0.0	
IN_OUT		0.0	
TEMP		0.0	
RETURN		0.0	
RET_VAL		0.0	

Block: FC10


Network: 1

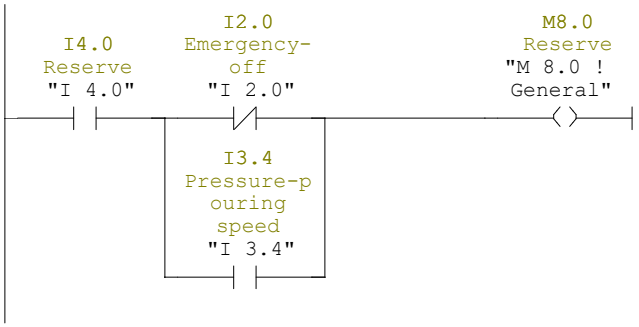


Network: 2




Network: 3

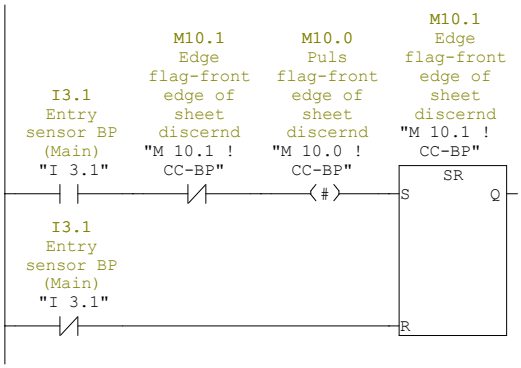


Network: 4

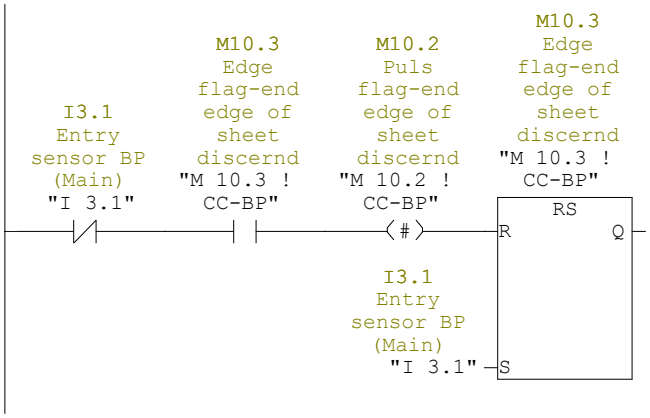


Network: 5

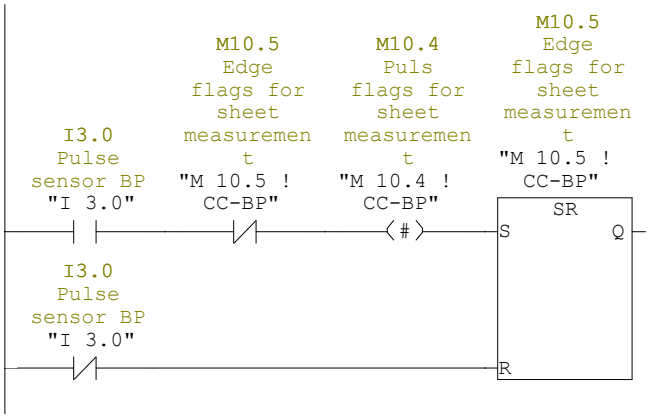


Network: 6

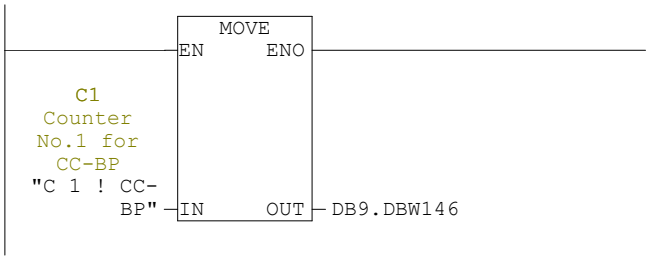

Network: 7

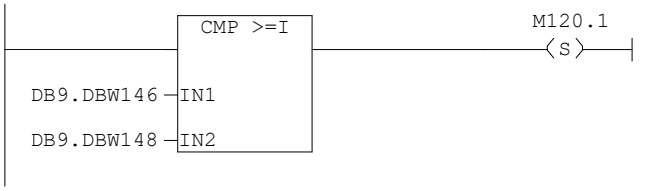


Network: 8

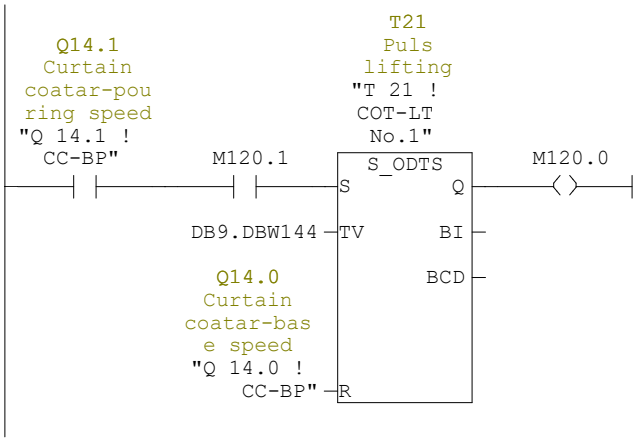

Network: 9



Network: 10

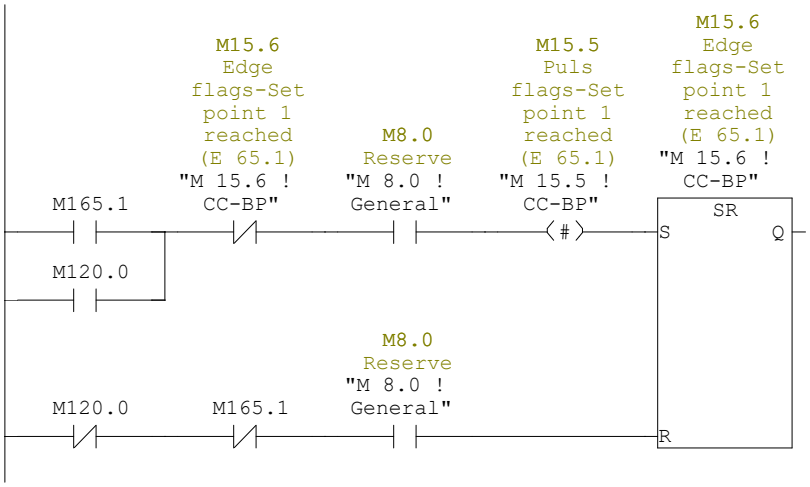


Network: 11

```
CALL  FC     0
 IN0 :=DB9
 IN1 :="M 10.0 ! CC-BP"  M10.0          -- Puls flag-front edge of sheet discernd
 IN2 :="M 10.2 ! CC-BP"  M10.2          -- Puls flag-end edge of sheet discernd
 IN3 :="I 3.0"           I3.0           -- Pulse sensor BP
 OUT4:="Q 14.7 ! CC-BP"  Q14.7          -- Curtain coatar-enabling the counter
```


Network: 12




Network: 13

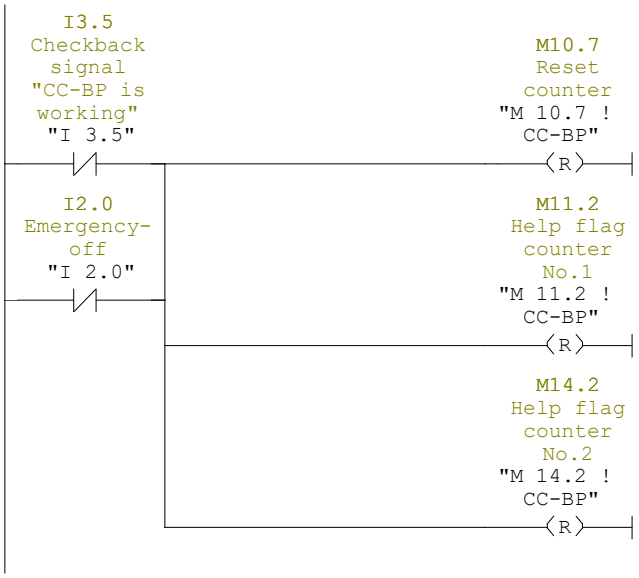


Network: 14

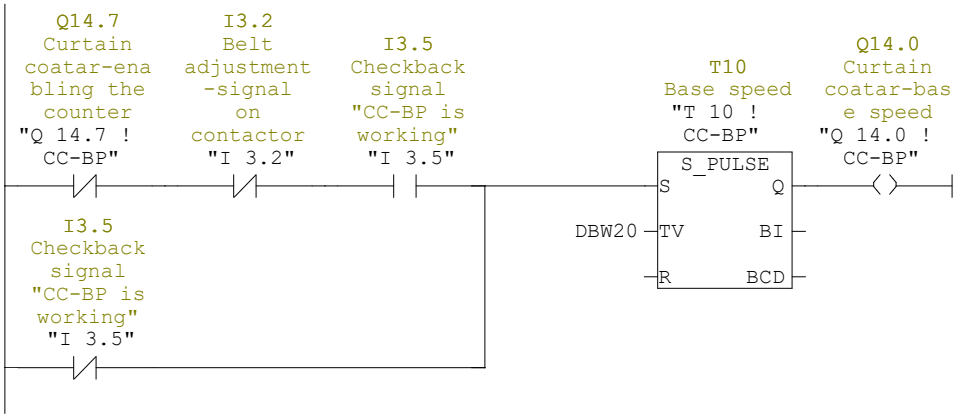


Network: 15

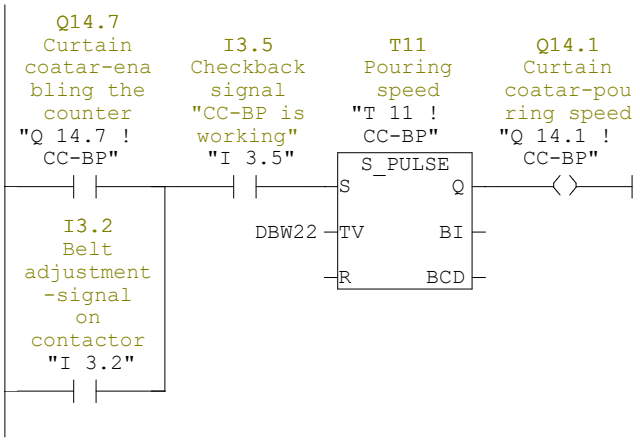


Network: 16

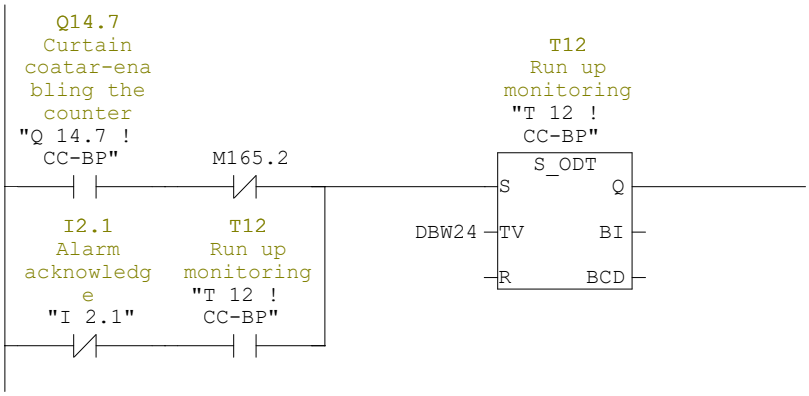

Network: 17

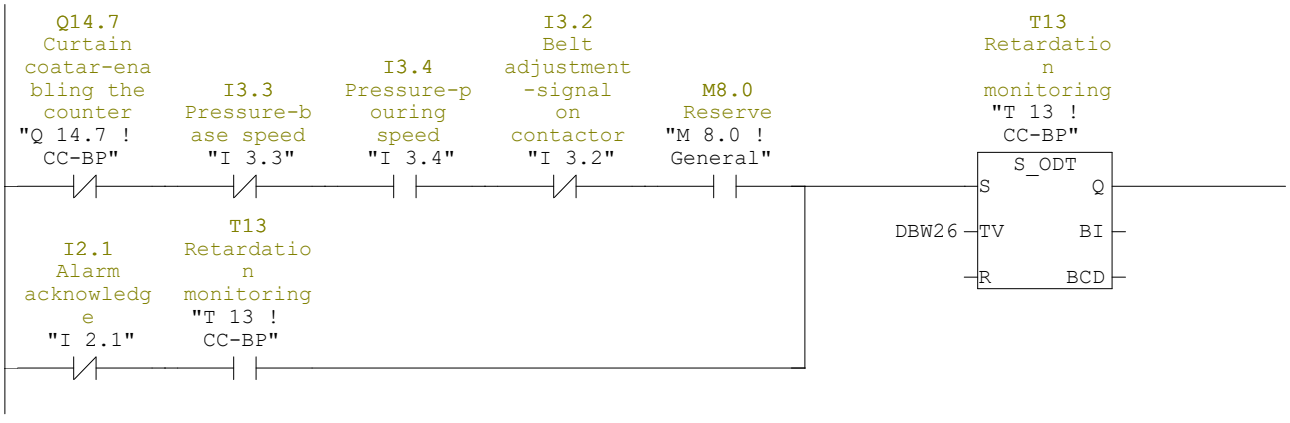


Network: 18

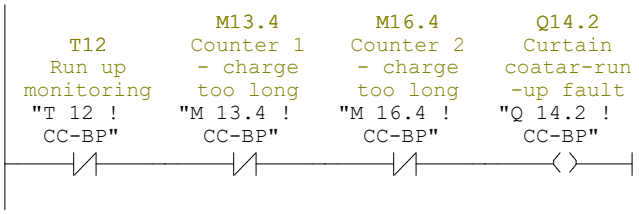


Network: 19




Network: 20

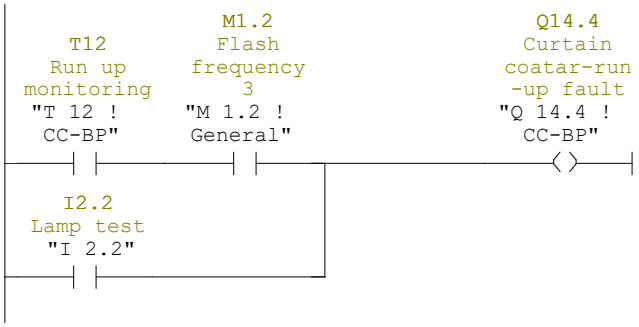

Network: 21

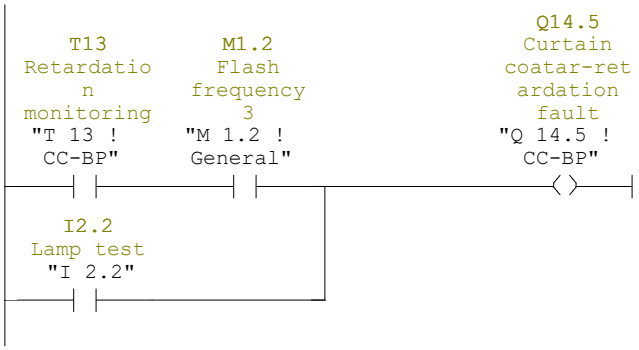

Network: 22

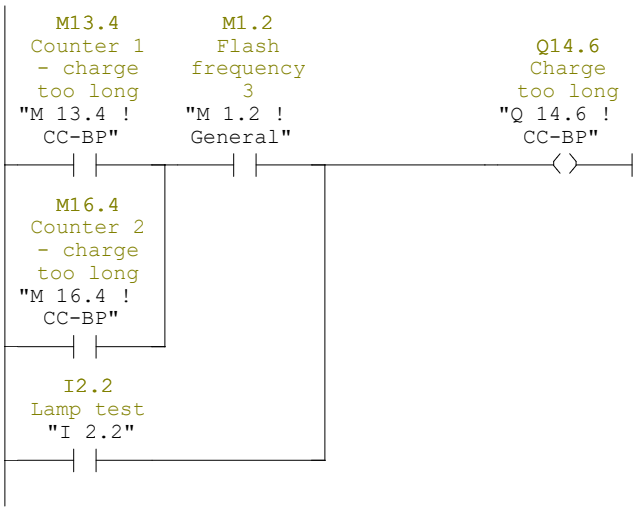

Network: 23



FC11 - <offline>

""

Name: **Family:**
Author: **Version:** 0.0
Block version: 2
Time stamp Code: 11/02/2011 06:47:54 AM
Interface: 11/02/2011 06:47:54 AM
Lengths (block/logic/data): 00218 00108 00002

Name	Data Type	Address	Comment
IN		0.0	
OUT		0.0	
IN_OUT		0.0	
TEMP		0.0	
RETURN		0.0	
RET_VAL		0.0	

Block: FC11

Network: 1

```
      O     "M 20.0 ! COT-IT"   M20.0             -- FI - ON/OFF
      O     "I 11.4"            I11.4             -- Pressure-pouring speed
      =     "Q 15.0 ! General"  Q15.0             -- Main contactor FI ON/OFF
```

Network: 2

```
      A     "I 6.5"             I6.5              -- FI speed=0
      A     "Q 16.1 ! COT-IT"   Q16.1             -- FI forward
      A     "Q 16.3 ! COT-IT"   Q16.3             -- FI control release
      =     "Q 15.1 ! General"  Q15.1             -- Inlet transport "is WORKING"
```

Network: 3

```
      A     "M 20.0 ! COT-IT"   M20.0             -- FI - ON/OFF
      AN    "M 20.7 ! COT-IT"   M20.7             -- FI - collective fault
      O
      A     "M 20.7 ! COT-IT"   M20.7             -- FI - collective fault
      A     "M 1.2 ! General"   M1.2              -- Flash frequency 3
      O     "I 2.2"             I2.2              -- Lamp test
      =     "Q 15.2 ! General"  Q15.2             -- Indication-FI contactor ON/NOISE
```

Network: 4

```
      A     "I 11.5"           I11.5             -- Checkback signal "CC-TP is working"
      A(
      ON    "I 2.0"            I2.0              -- Emergency-off
      O     "I 11.4"           I11.4             -- Pressure-pouring speed
      )
      =     "M 20.0 ! COT-IT"  M20.0             -- FI - ON/OFF
      =     "Q 16.3 ! COT-IT"  Q16.3             -- FI control release
```

Network: 5

```
      CALL  FC     6
```

Network: 6

```
A     "I 11.5"           I11.5             -- Checkback signal "CC-TP is working"
AN    M    113.4
AN    M    116.4
=     "M 22.2 ! COT-IT"  M22.2             -- Slow ON/OFF
```

Network: 7

```
A     "Q 20.1 ! CC-TP"   Q20.1             -- Curtain coater-High speed
S     "M 22.3 ! COT-IT"  M22.3             -- Speed ON/OFF
A     "I 2.0"            I2.0              -- Emergency-off
AN    "I 11.4"           I11.4             -- Pressure-pouring speed
O     "Q 20.0 ! CC-TP"   Q20.0             -- Curtain coater-Low speed
ON    "M 20.0 ! COT-IT"  M20.0             -- FI - ON/OFF
O     "M 22.7 ! COT-IT"  M22.7             -- Collective fault
O     M    113.4
O     M    115.5
O     M    116.4
R     "M 22.3 ! COT-IT"  M22.3             -- Speed ON/OFF
NOP   0
```

Network: 8

```
CALL  FC     7
```

Network: 9

```
A     "I 2.1"            I2.1              -- Alarm acknowledge
=     "Q 16.2 ! COT-IT"  Q16.2             -- FI reset
```

Network: 10

FC12 - <offline>


""

Name: **Family:**
Author: **Version:** 0.0
Block version: 2
Time stamp Code: 02/09/2024 02:37:22 PM
Interface: 11/02/2011 06:47:54 AM
Lengths (block/logic/data): 02232 01964 00002

Name	Data Type	Address	Comment
IN		0.0	
OUT		0.0	
IN_OUT		0.0	
TEMP		0.0	
RETURN		0.0	
RET_VAL		0.0	

Block: FC12


Network: 1

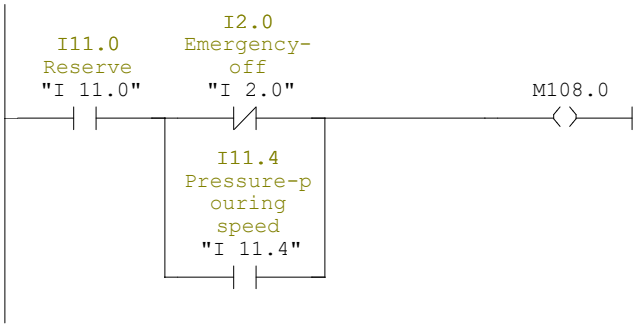


Network: 2




Network: 3

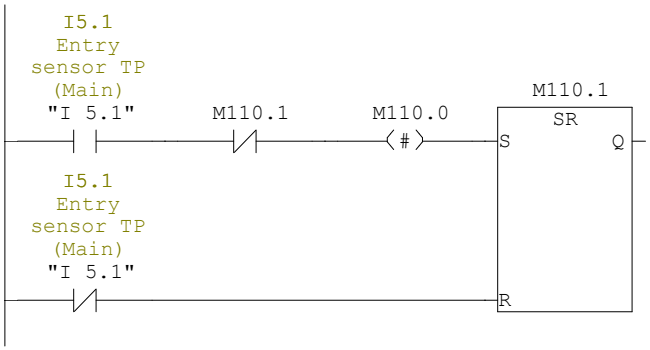


Network: 4

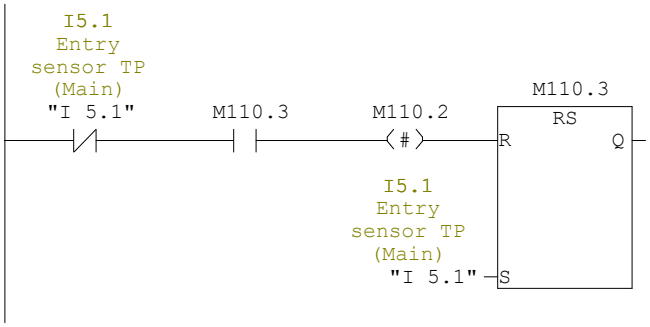


Network: 5

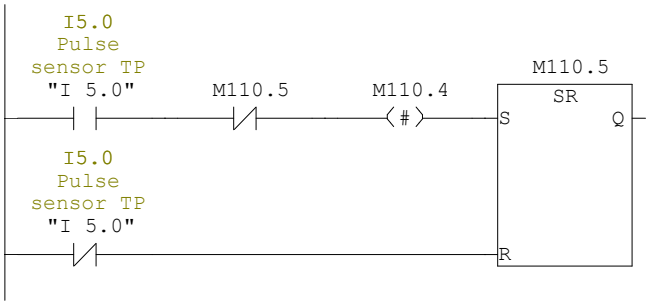


Network: 6

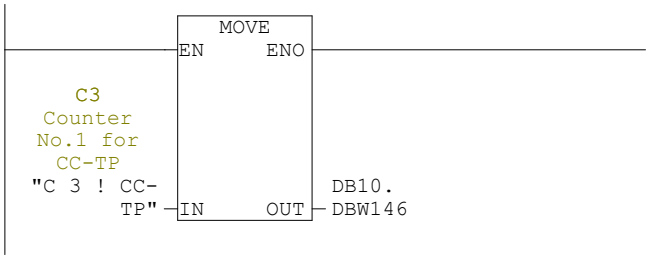

Network: 7

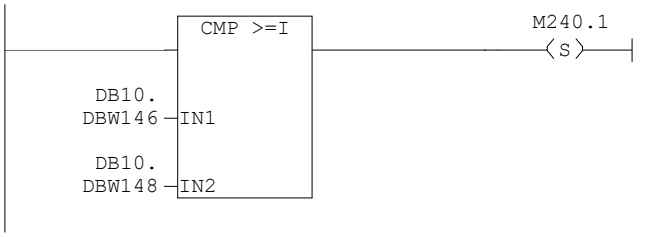

Network: 8 Pulse lowering

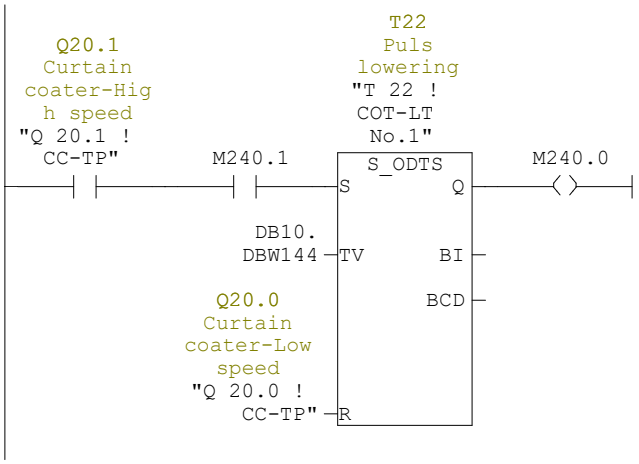

Network: 9



Network: 10




Network: 11

```
CALL  FC     1
 IN0 :=DB10
 IN1 :=M110.0
 IN2 :=M110.1
 IN3 :="I 5.0"           I5.0              -- Pulse sensor TP
 OUT4:="Q 20.7 ! CC-TP"  Q20.7             -- Curtain coatar-enabling the counter
```


Network: 12




Network: 13

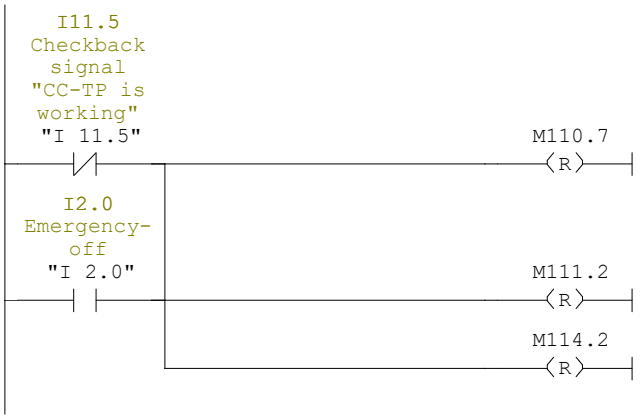


Network: 14 Main contactor - checkback monitoring

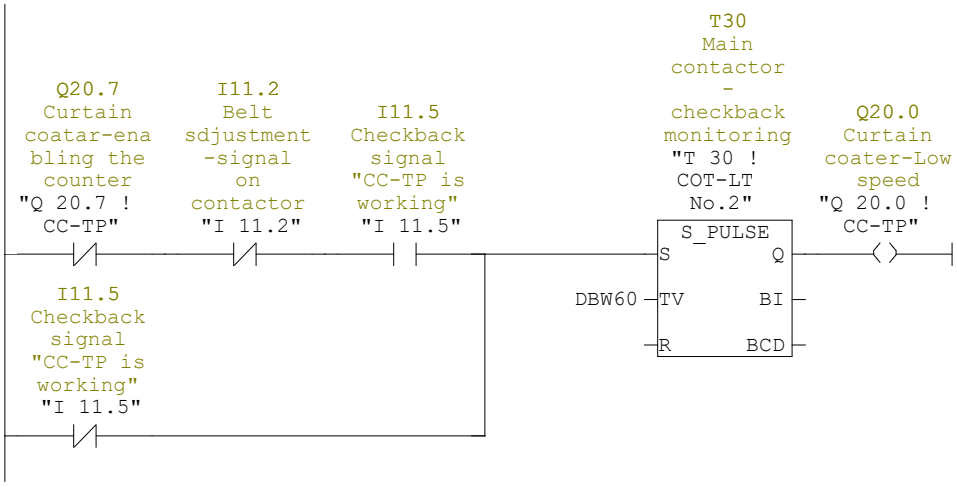


Network: 15 Pulse lifting

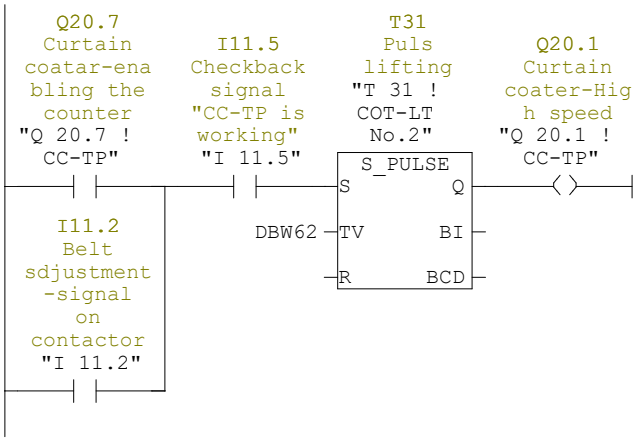


Network: 16 Pulse lowering

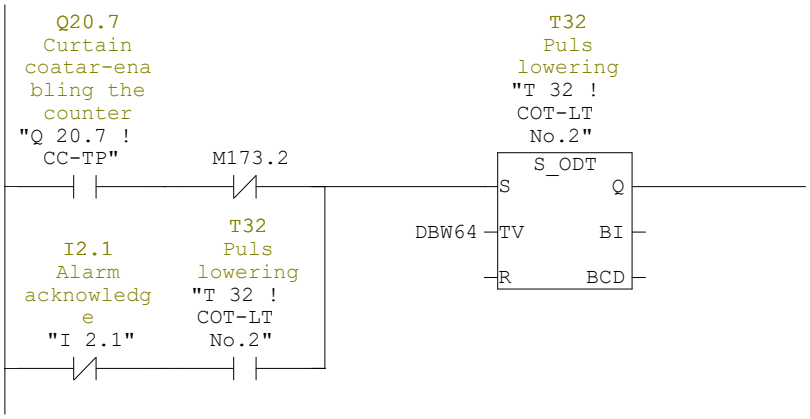

Network: 17 Reserve

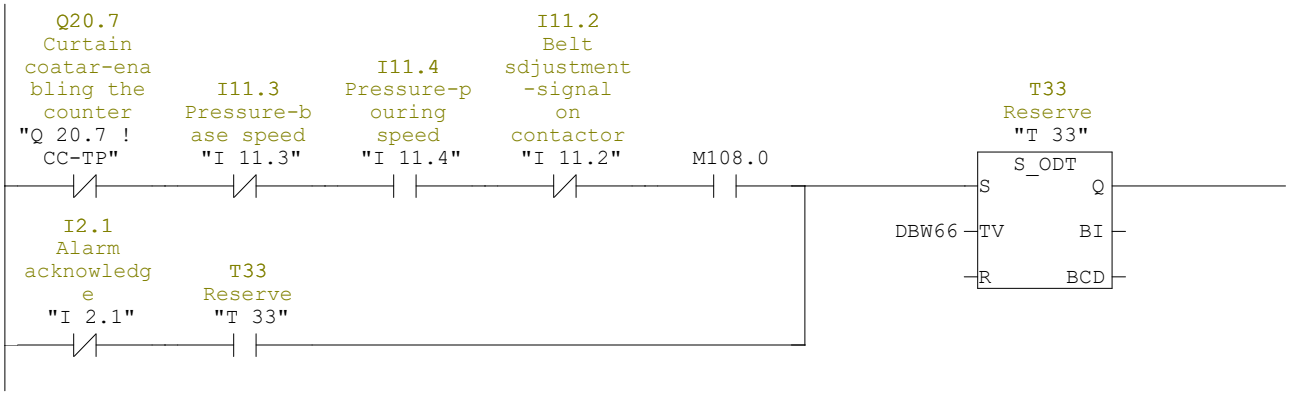


Network: 18 Curtain coater-run-up fault

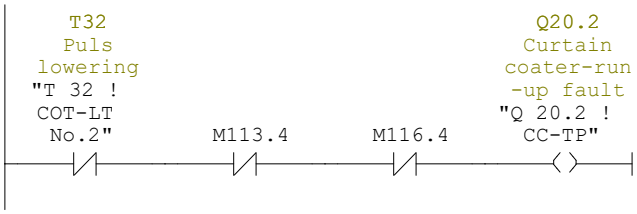


Network: 19 Curtain coater-retardation fault




Network: 20 Curtain coater-run-up fault

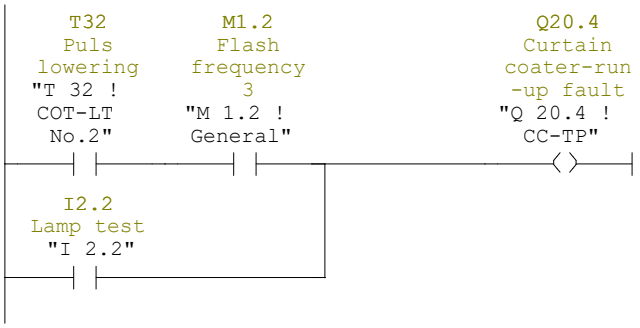

Network: 21 Curtain coater-retardation fault

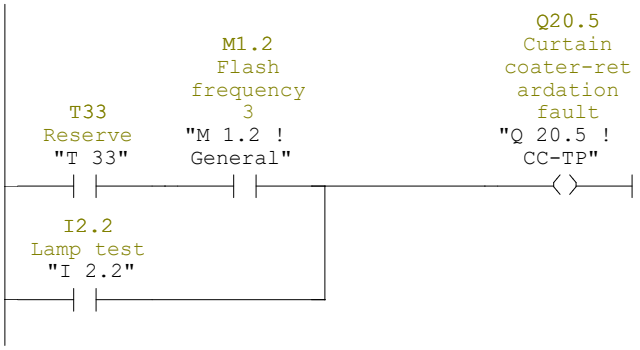


Network: 22 Chrage too long

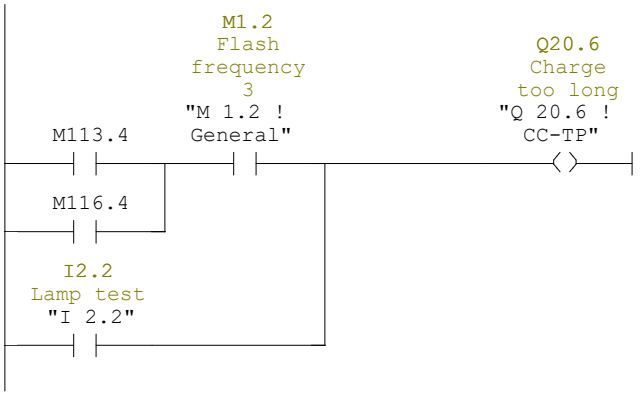


Network: 23 Reserve




Network: 24 Feedback base paint conveyor (Sawang modify all below)

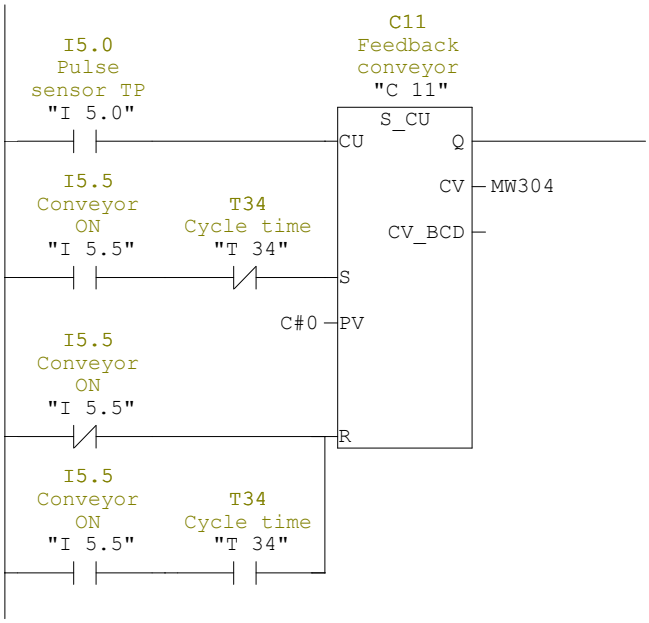


Network: 25 Confirm Conveyor ON

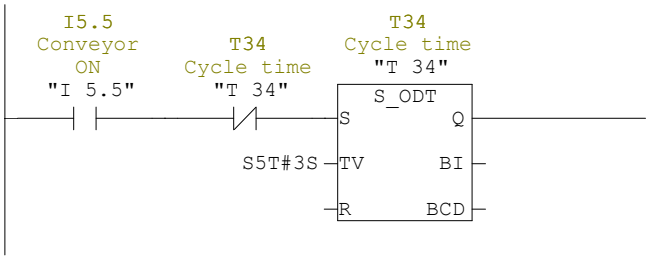

Network: 26 Confirm Conveyor is running

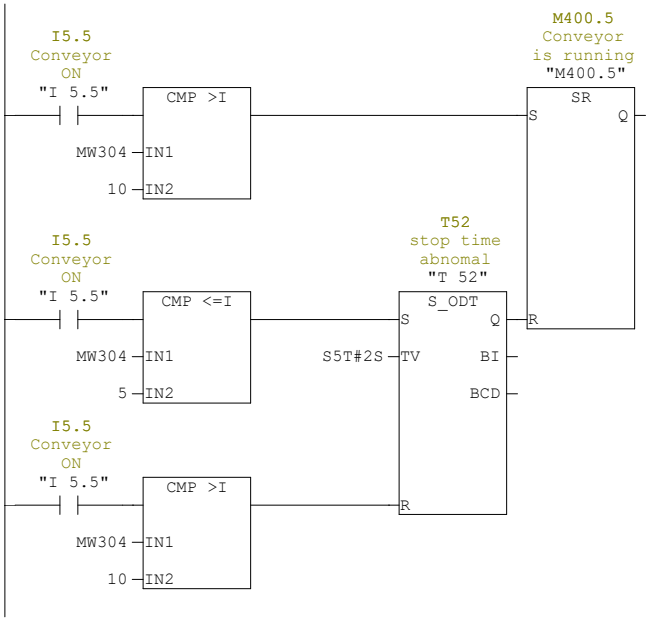


Network: 27 Conveyor not running

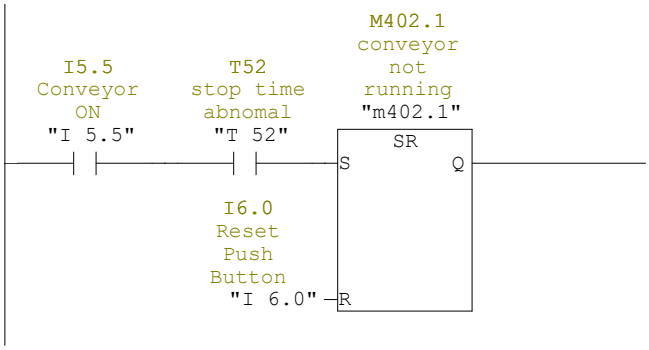


Network: 28 Alarm : Double check TP Entry sensor (Part 1/3) (M401.6)


Abnormal with Entry sensor I5.1 or I5.2

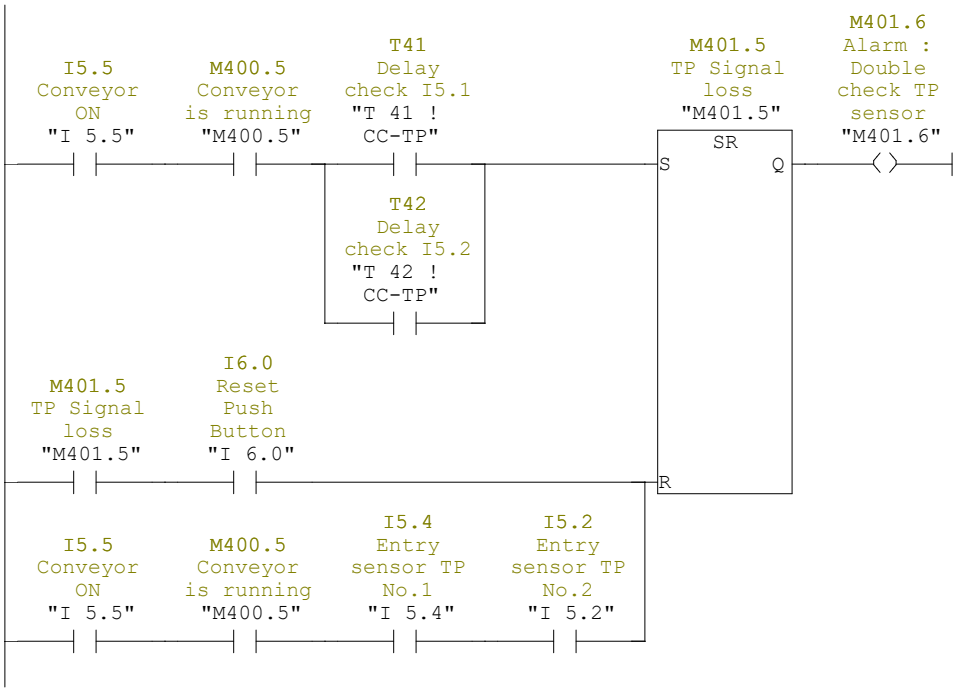


Network: 29 If no signal from I5.2 (Part 2/3)

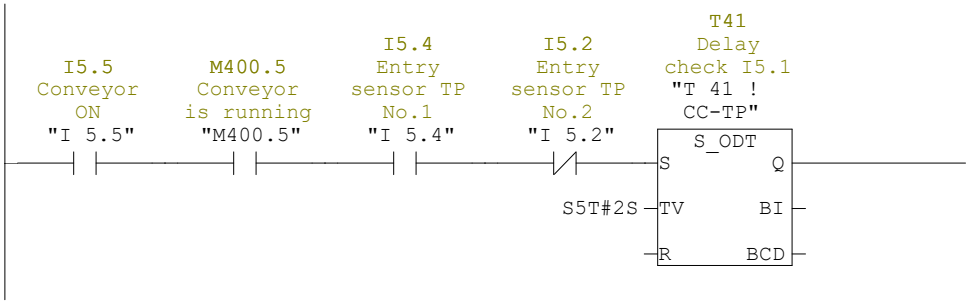


Network: 30 If no signal from I5.1 (Part 3/3)

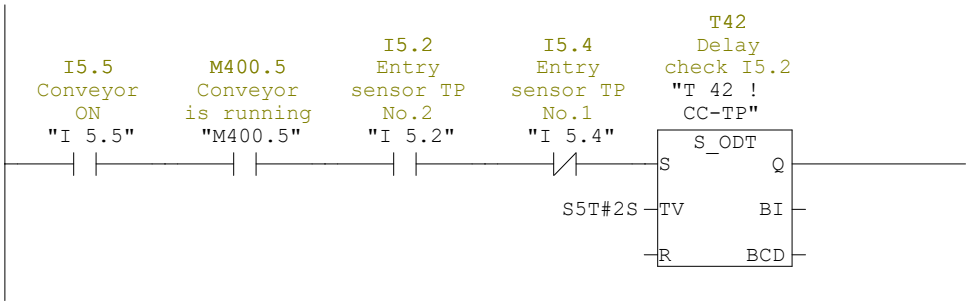


Network: 31 ENTRY Measuring glass (ENTRY 1/4)

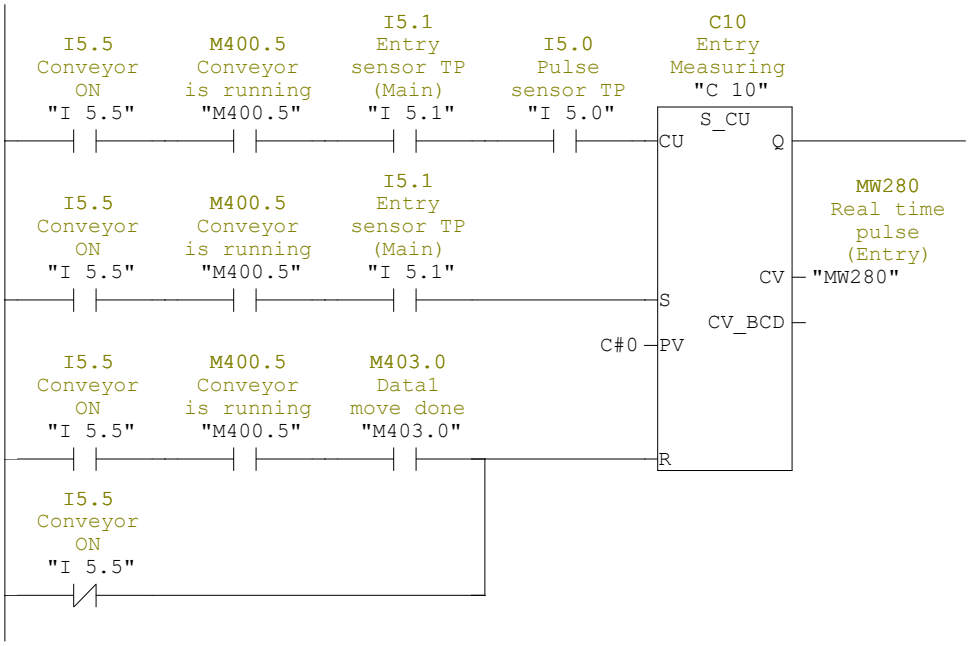


Network: 32 Confirm Glass out of Entry sensor (ENTRY 2/4)

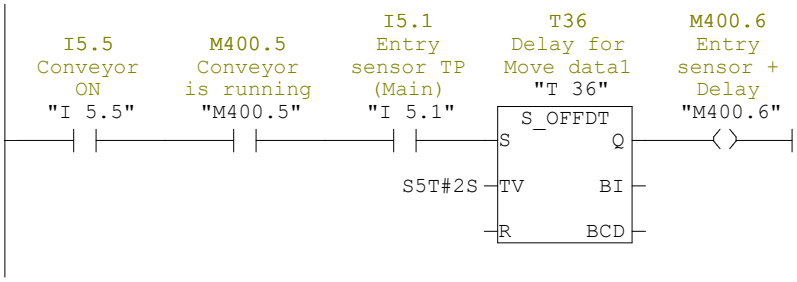


Network: 33 Confirm move final data of MW280 >> MW300 (ENTRY 3/4)

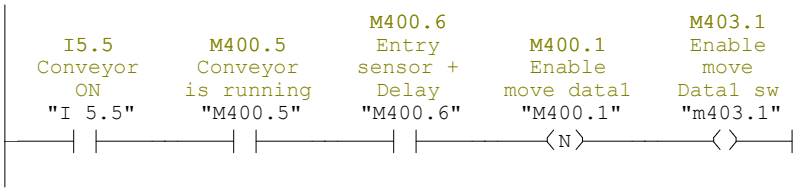


Network: 34 Move MW280 >> MW300 (ENTRY 4/4)

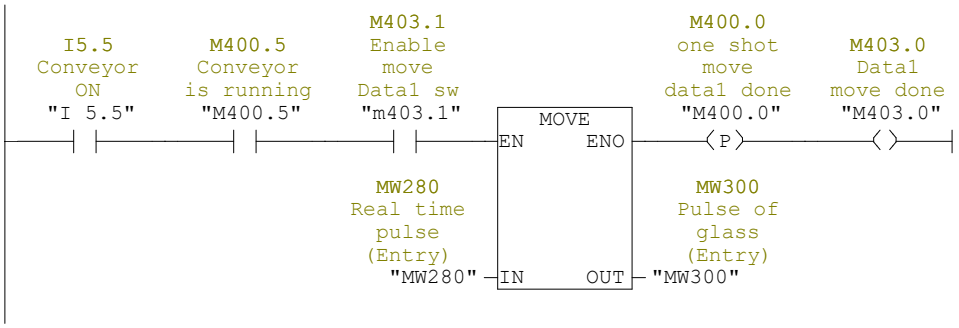


Network: 35 Move Max size to MW270 (Charge too long 1/2)

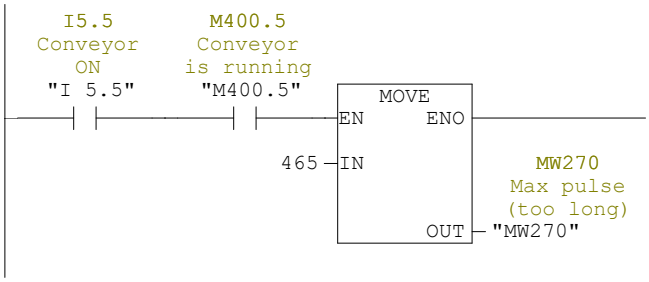


Network: 36 Alarm : Charge too long (M401.2) (Charge too long 2/2)

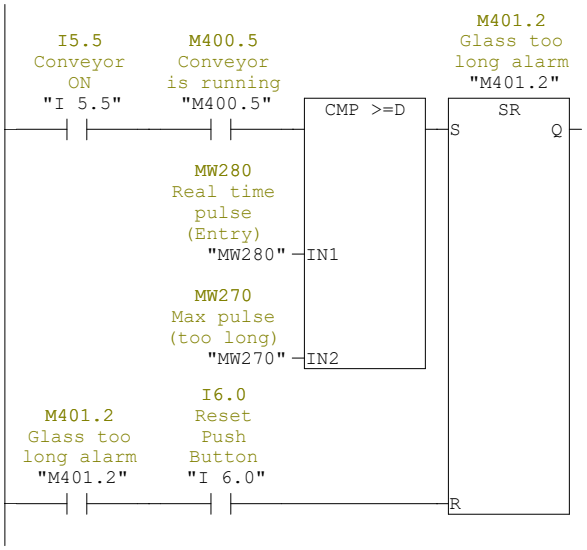


Network: 37 EXIT Measuring glass (EXIT 1/4)

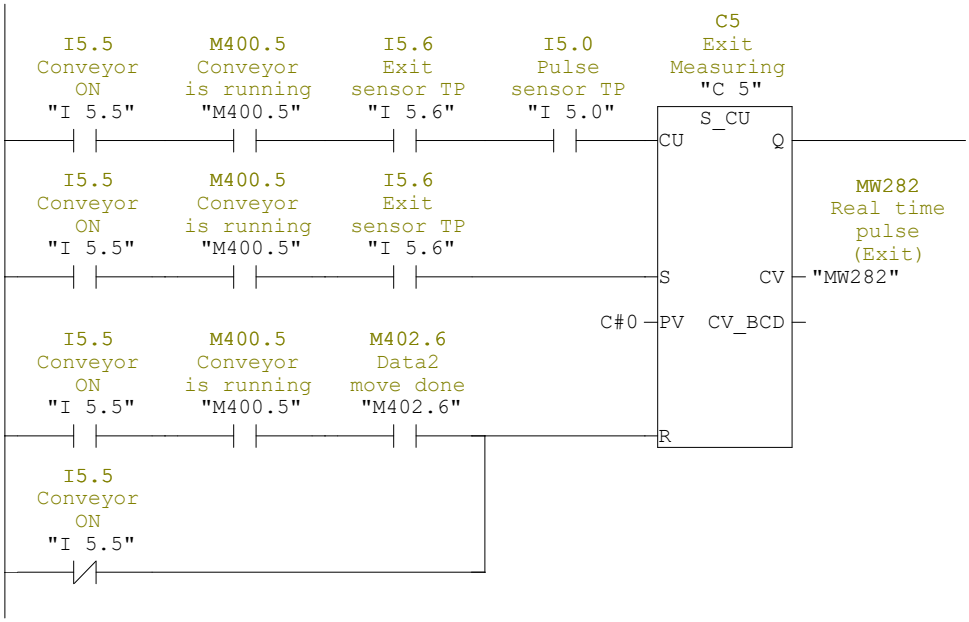


Network: 38 Confirm Glass out of Exit sensor (EXIT 2/4)

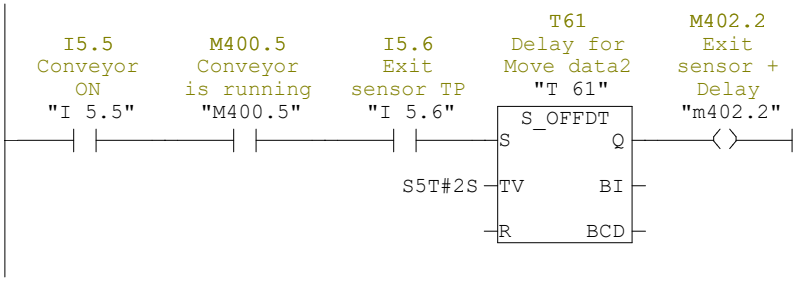


Network: 39 Confirm move final data of MW282 to MW284 (EXIT 3/4)

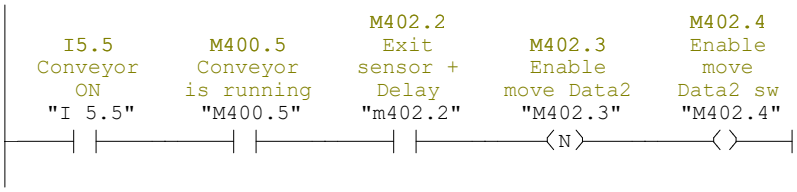


Network: 40 Move MW282 >> MW284 (EXIT 4/4)

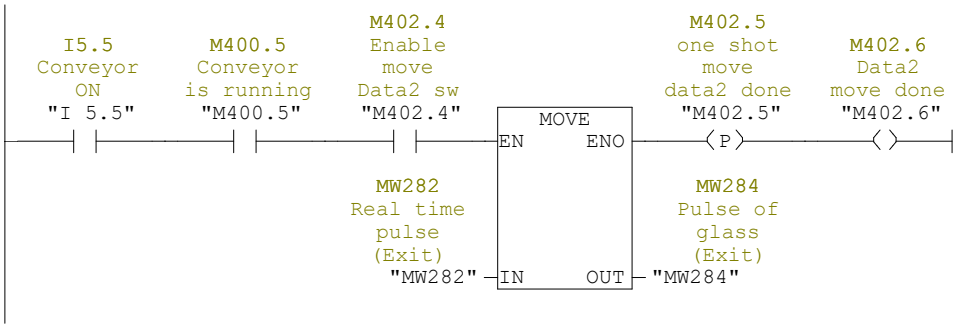


Network: 41 Mode compare glass (Compare Entry vs Exit 1/3)

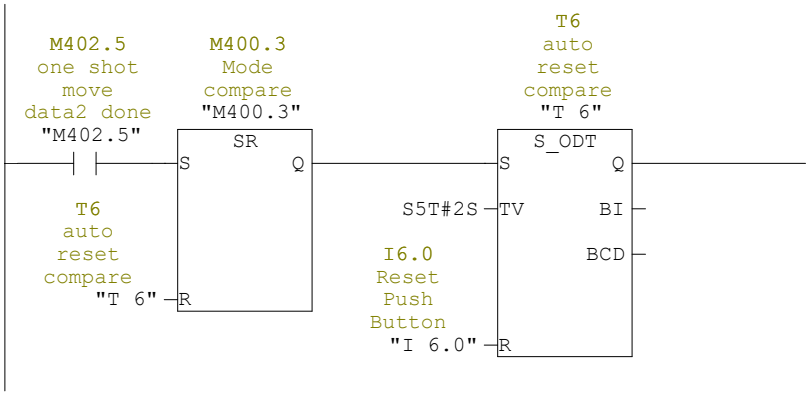


Network: 42 Calculation is done (Compare Entry vs Exit 2/3)

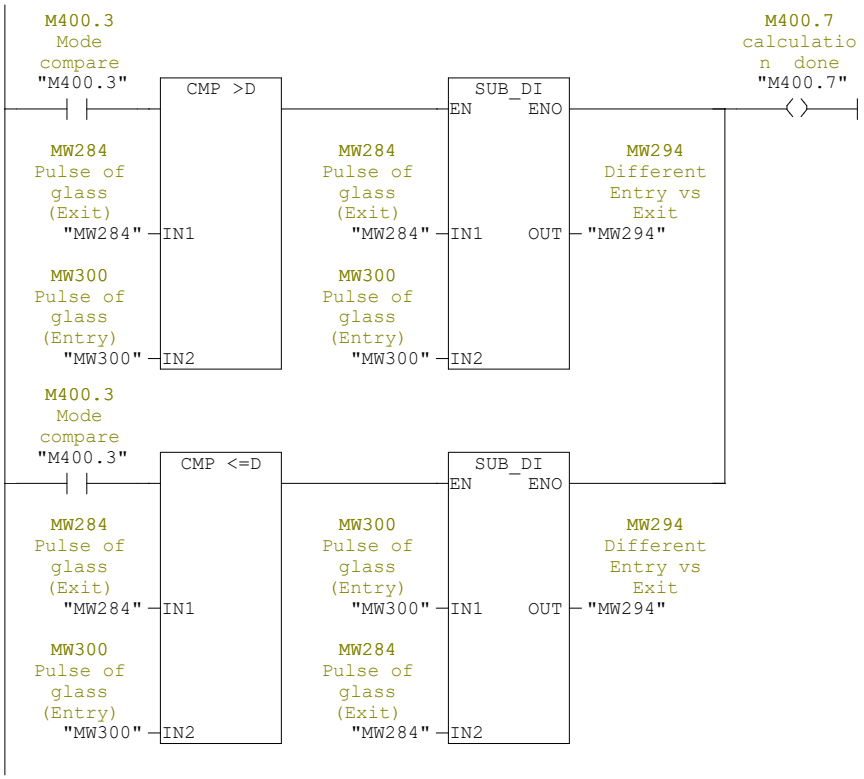


Network: 43 Alarm : Glass not equal (M400.2) (Compare Entry vs Exit 3/3)

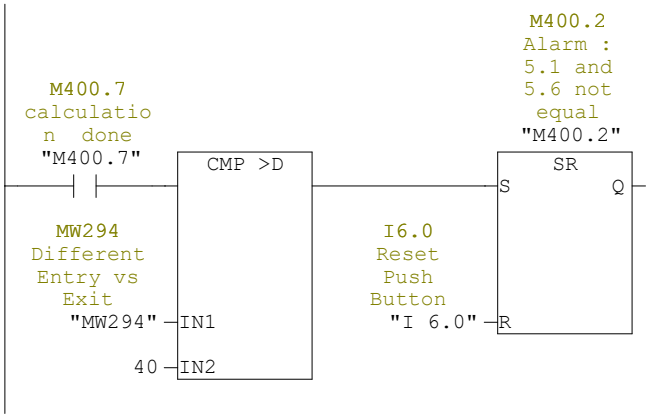


Network: 44 Alarm : If I4.2 Missing [Time 5.1 to 4.2 (T4)] (M401.7)

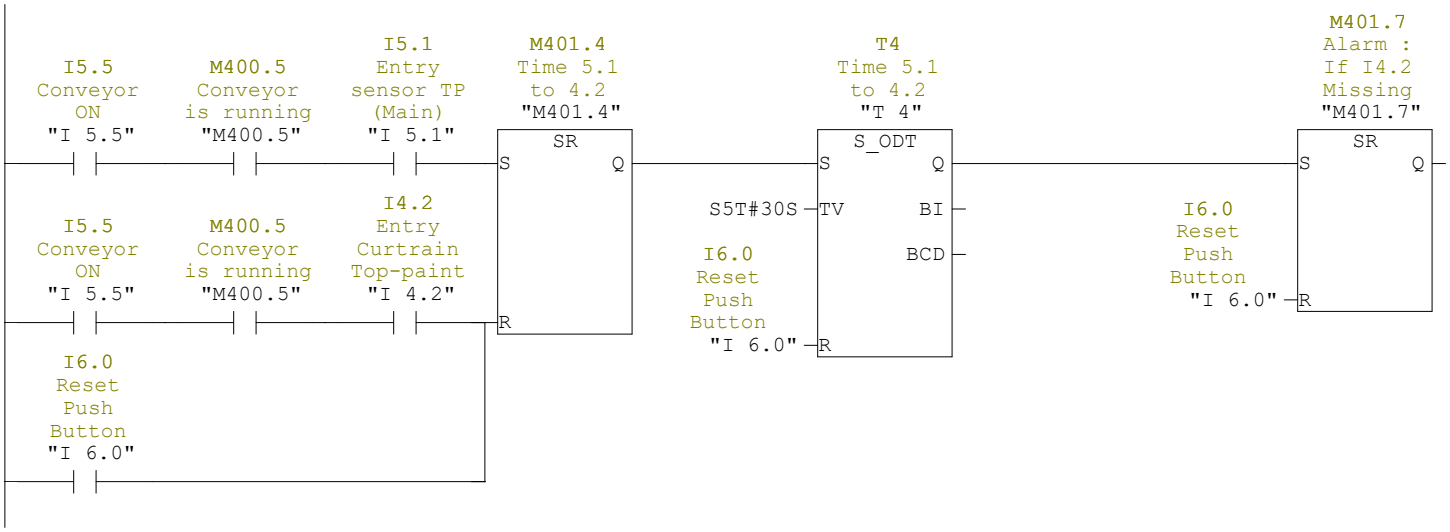

Network: 45 Time High to Low speed (T3)

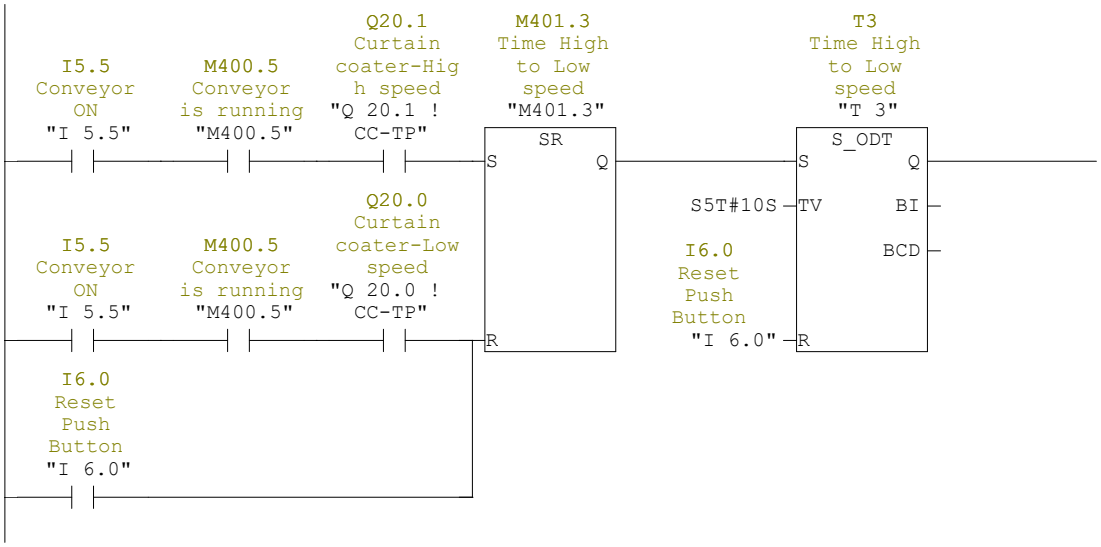


Network: 46 Delay I5.1 to I4.2

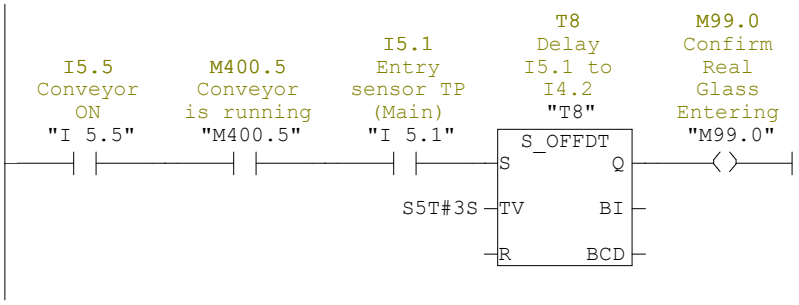


Network: 47 Alarm : Glass delay (Over Timer) (M402.0)


Over the timer/Out of timer

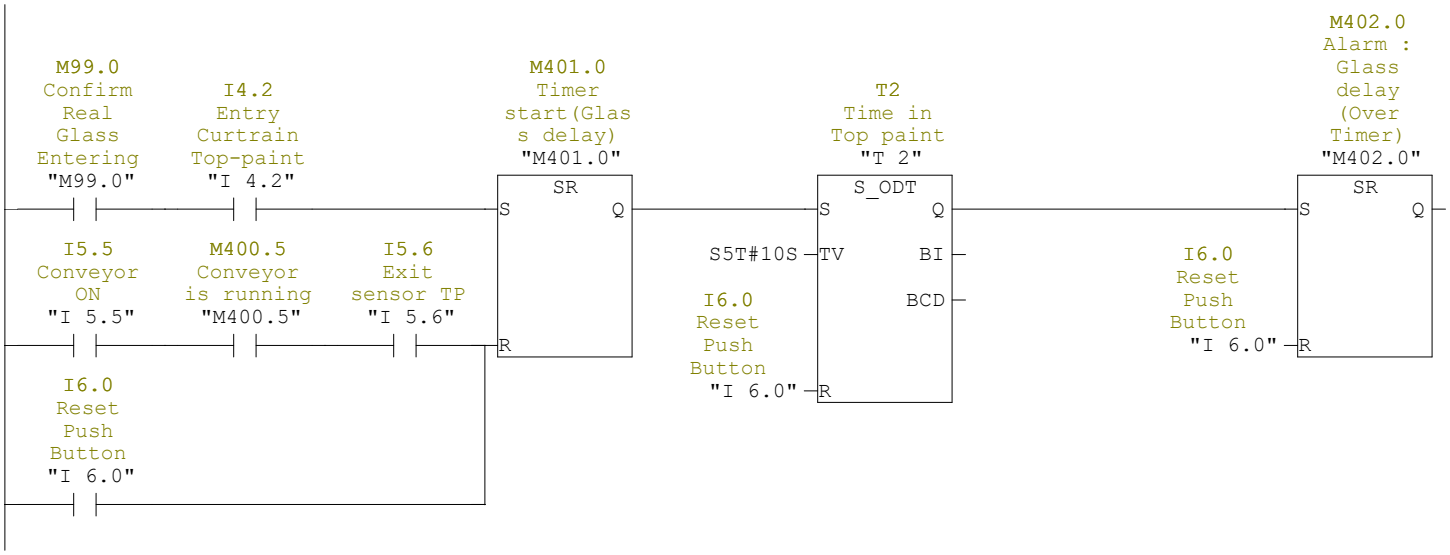


Network: 48 LOAD Measuring glass (LOAD 1/4)

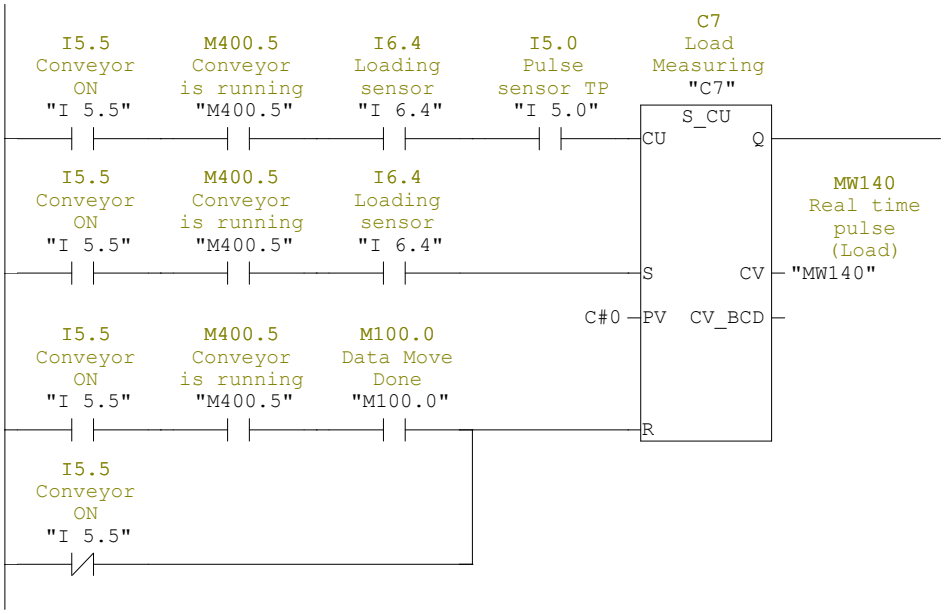


Network: 49 Confirm Glass out of LOAD sensor (LOAD 2/4)

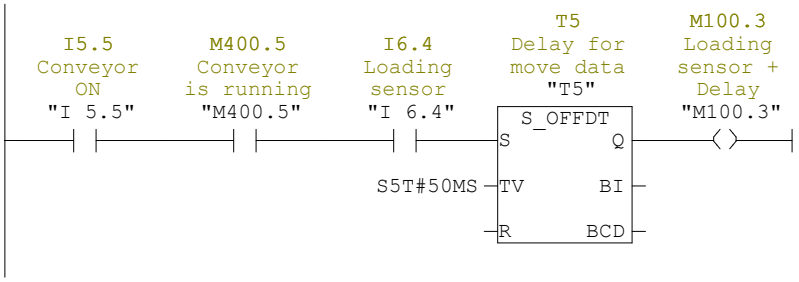


Network: 50 Confirm move final data of MW140 >> MW320 (LOAD 3/4)

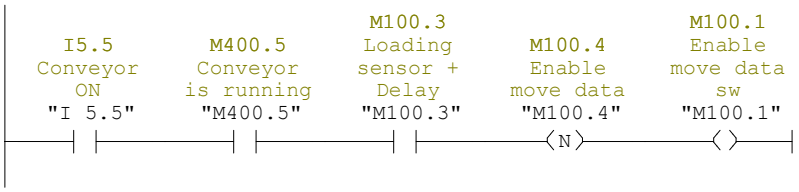


Network: 51 Move MW140 >> MW320 (LOAD 4/4)

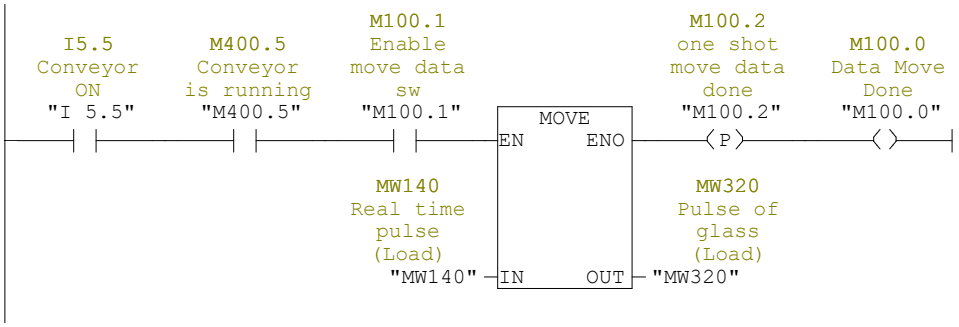


Network: 52 Compare Load vs Entry 1/3

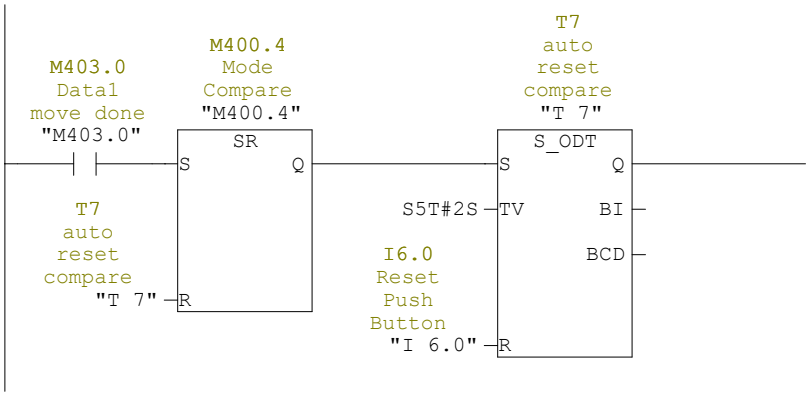

Network: 53 Compare Load vs Entry 2/3

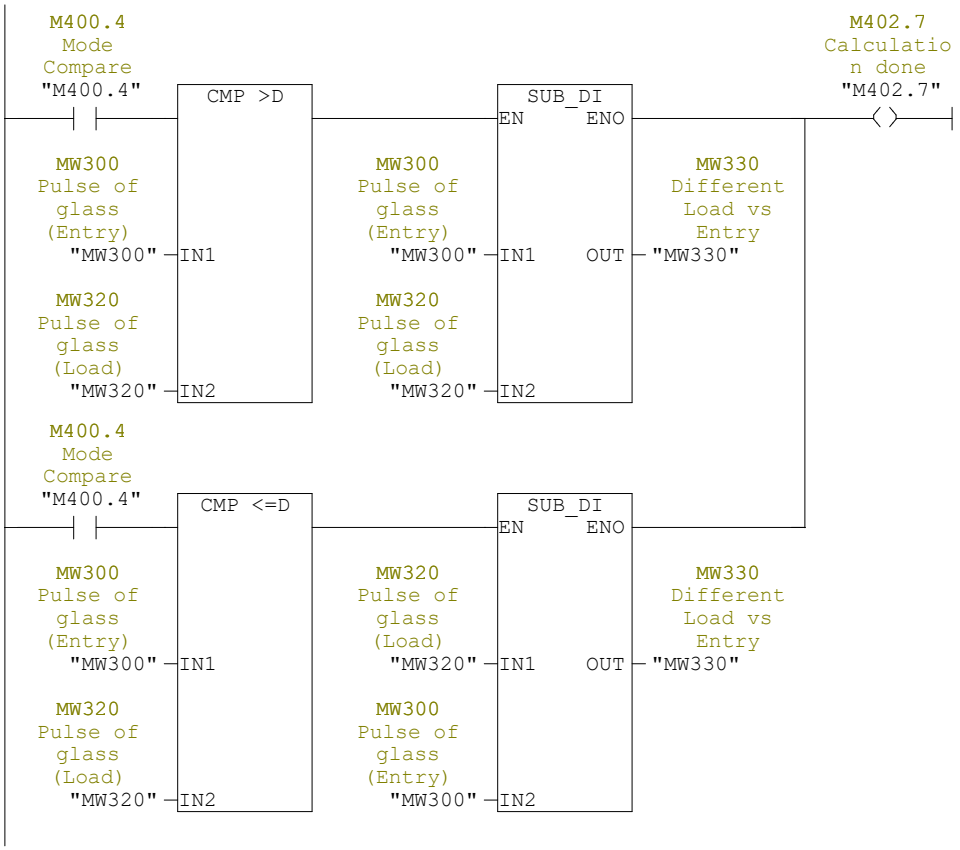

Network: 54 Compare Load vs Entry 3/3

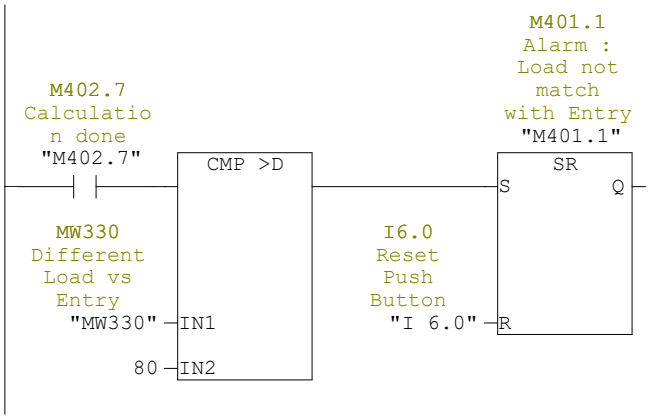

Network: 55 Alarm : Conveyor not running



Network: 56 Alarm : Double check Entry sensor



Network: 57 Alarm : Glass too long



Network: 58 Alarm : Glass delay (Over Timer)



Network: 59 Alarm : Entry /= Exit




Network: 60 Alarm : If I4.2 Missing




Network: 61 Alarm : Load /= Entry




Network: 62

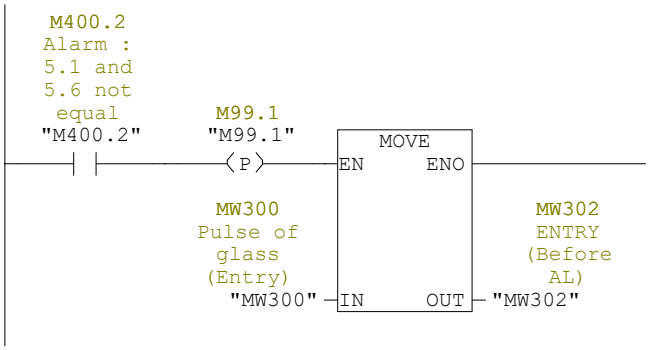


Network: 63

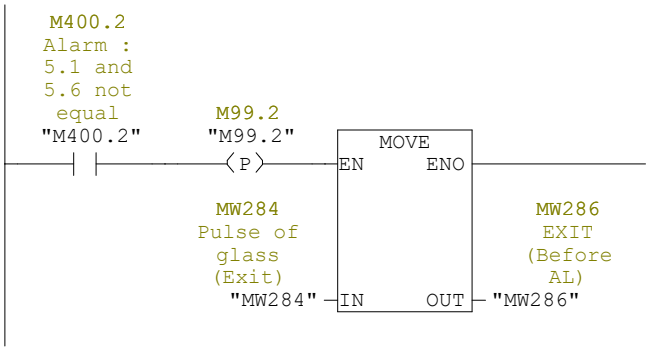


Network: 64

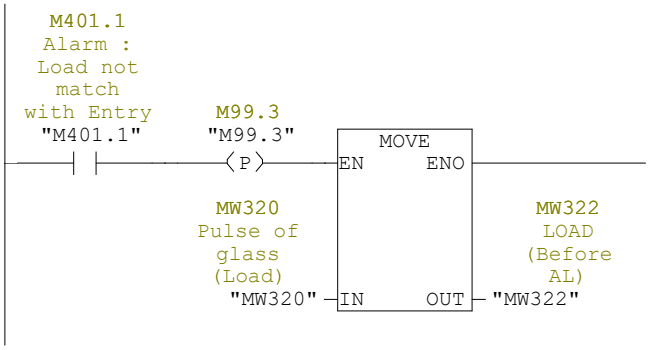


Network: 65

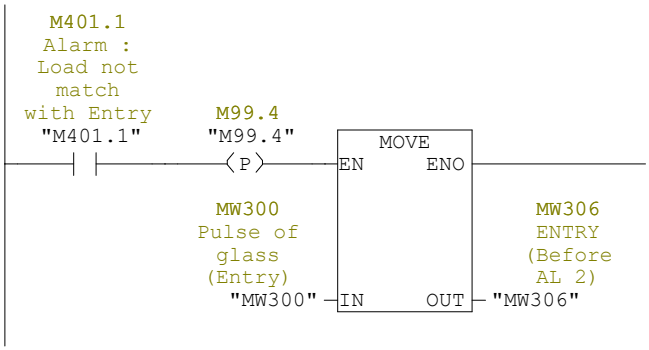


Network: 66

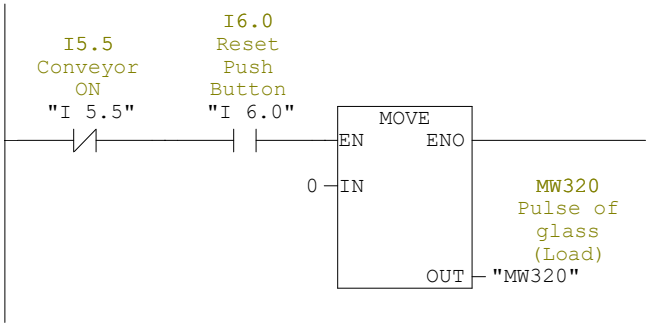

Network: 67

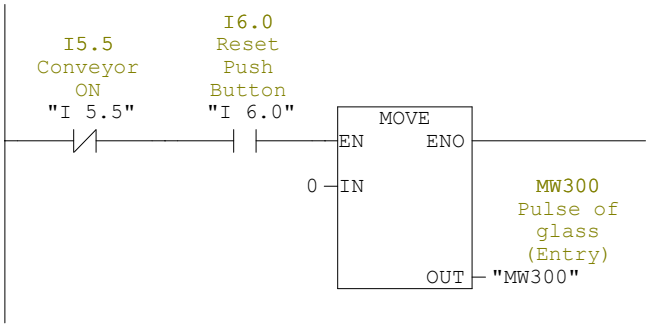


Network: 68

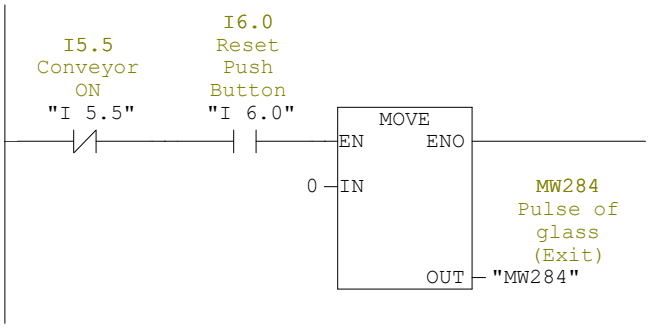


Network: 69 Alarm : Double check BP Entry sensor (Part 1/3) (M401.6)


Abnormal with Entry sensor I3.1 or I5.3

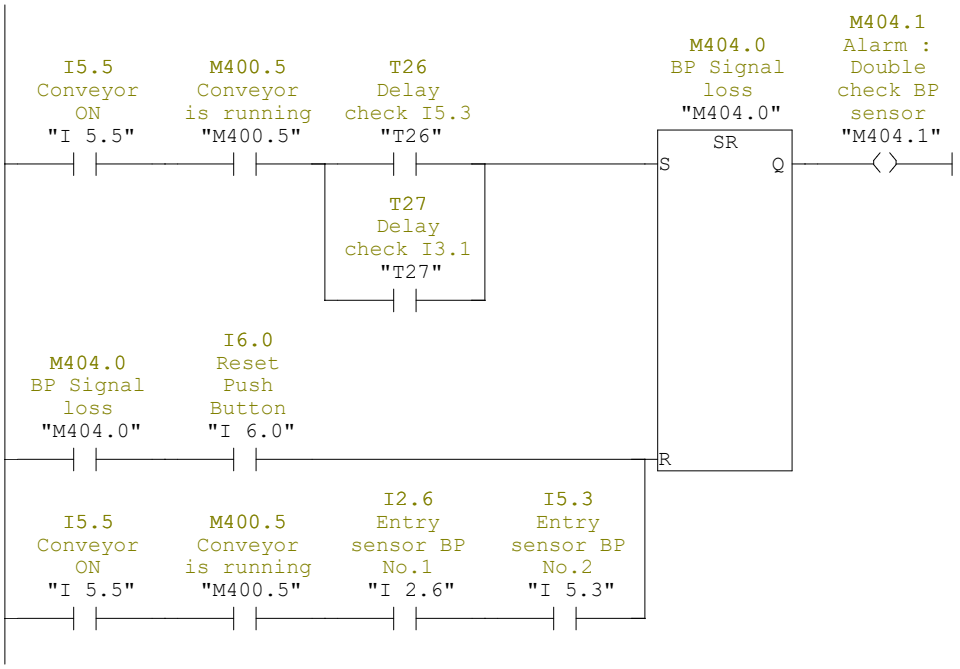


Network: 70 If no signal from I5.3 (Part 2/3)

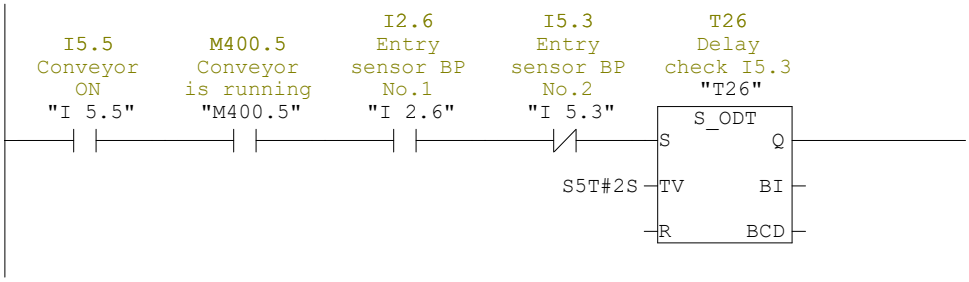

Network: 71 If no signal from I3.1 (Part 3/3)

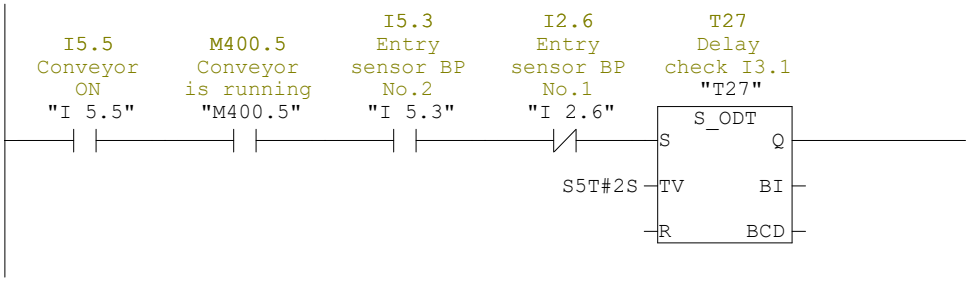


Network: 72 Lamp Alarm

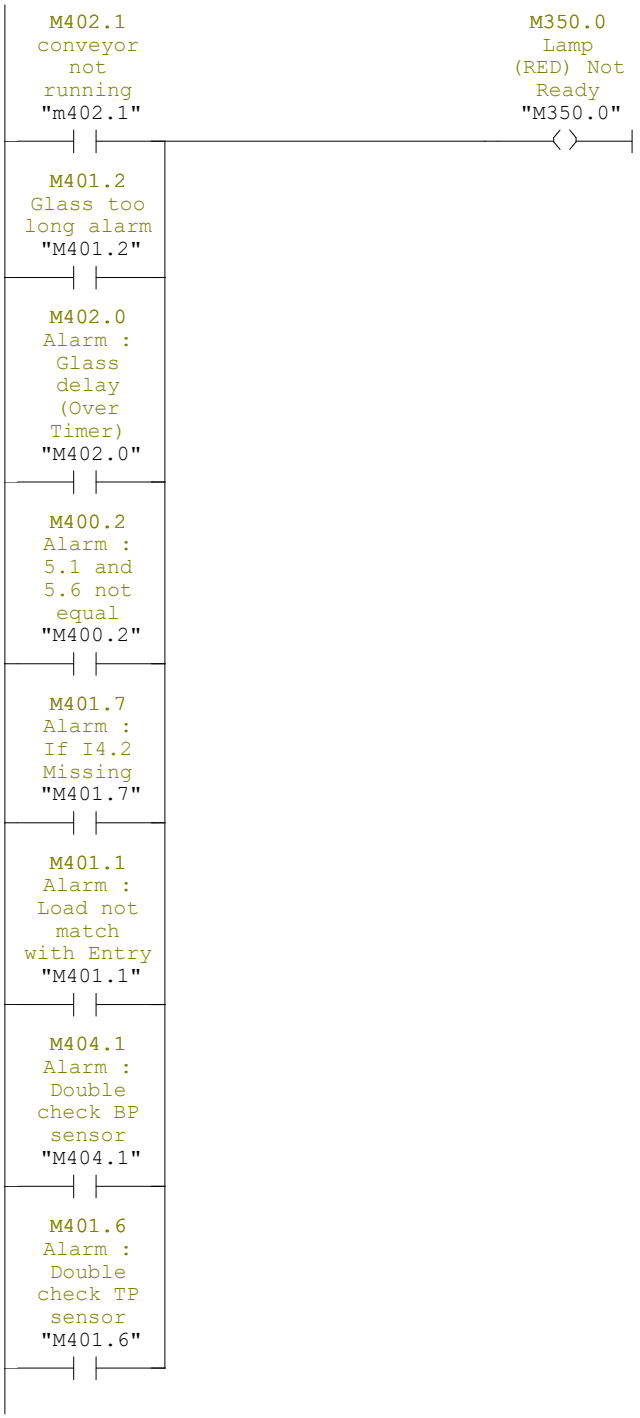

Network: 73 Lamp READY (WHITE)



Network: 74 Lamp NOT READY (RED)

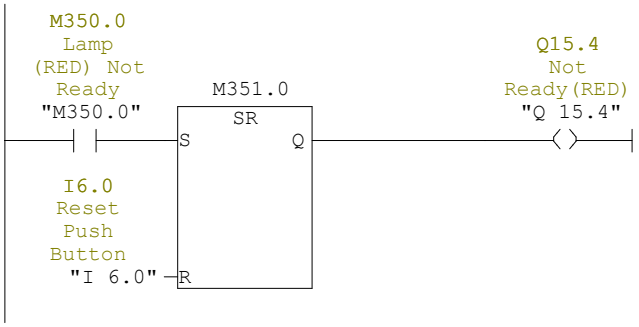

FC100 - <offline>

"fill_app" Application fill unit and frequency meas.

Name: **Family:**
Author: **Version:** 1.0
Block version: 2
Time stamp Code: 09/29/2003 02:19:34 PM
Interface: 09/29/2003 01:53:20 PM
Lengths (block/logic/data): 00410 00274 00004

Name	Data Type	Address	Comment
IN		0.0	
IN0	Word	0.0	
IN1	Word	2.0	
IN2	Bool	4.0	
IN3	Bool	4.1	
IN4	Bool	4.2	
IN5	Bool	4.3	
IN6	Bool	4.4	
OUT		0.0	
OUT7	Bool	6.0	
OUT8	Bool	6.1	
OUT9	Bool	6.2	
OUT10	Bool	6.3	
OUT11	Bool	6.4	
IN_OUT		0.0	
TEMP		0.0	
TEMP12	Word	0.0	
RETURN		0.0	
RET_VAL		0.0	

Block: FC100

Network: 1

```
      L     #IN0          #IN0
      T     #TEMP12       #TEMP12
      OPN   DB [#TEMP12]  #TEMP12
      Call
      BLD   1
      =     L      2.0
      UC    FC     2
            P#L 0.0
      BLD   2
      End Call
      A     DBX   36.7
      JCN   M001
      A     DBX   38.4
      =     #OUT11        #OUT11
      A     DBX   39.4
      =     #OUT10        #OUT10
      A     #IN3          #IN3
      =     DBX   23.0
      =     DBX   23.1
      A     #IN3          #IN3
      A     DBX   43.0
      =     DBX   21.0
      A     #IN3          #IN3
      AN    DBX   42.0
      =     DBX   21.1
      =     DBX   22.1
```

```
      A     #IN4          #IN4
      =     DBX   23.4
```

Network: 2

```
      SET
      SAVE
      OPN   DB [#TEMP12]      #TEMP12
      A     DBX    1.0
      JC    M002
      A     DBX   42.1
      JCN   M003
      A     #IN2              #IN2
      FP    "M 10.0 ! CC-BP"  M10.0             -- Puls flag-front edge of sheet discernd
      JCN   M003
      L     #IN1              #IN1
      T     DBD  116
      L     30
      T     DBB    0
      Call
M002: BLD   1
      =     L      2.0
      UC    FC     3
            P#L 0.0
            P#M 6.0
      BLD   2
      End Call
M003: AN    BR
      =     #OUT8             #OUT8
      AN    #IN2              #IN2
      R     DBX    1.1
      A     DBX    1.1
      =     #OUT9             #OUT9
```

Network: 3

```
      SET
      SAVE
      OPN   DB [#TEMP12]  #TEMP12
      A     DBX    3.0
      JC    M004
      AN    #IN5          #IN5
      JC    M005
      L     100
      AN    #IN6          #IN6
      JC    M006
      L     101
M006: T     DBB    2
      Call
M004: BLD   1
      =     L      2.0
      UC    FC     4
            P#L 0.0
            P#M 8.0
      BLD   2
      End Call
M005: AN    BR
      =     #OUT7         #OUT7
M001: BE
```

FC140 - <offline>

""

Name: **Family:**
Author: **Version:** 1.0
Block version: 2
Time stamp Code: 11/04/2011 07:40:56 AM
Interface: 11/03/2011 05:05:40 PM
Lengths (block/logic/data): 00388 00250 00004

Name	Data Type	Address	Comment
IN		0.0	
IN0	Word	0.0	
IN1	Word	2.0	
IN2	Bool	4.0	
IN3	Bool	4.1	
IN4	Bool	4.2	
IN5	Bool	4.3	
IN6	Bool	4.4	
IN7	Bool	4.5	
OUT		0.0	
OUT8	Bool	6.0	
OUT9	Bool	6.1	
OUT10	Bool	6.2	
OUT11	Bool	6.3	
OUT12	Bool	6.4	
IN_OUT		0.0	
TEMP		0.0	
TEMP13	Word	0.0	
RETURN		0.0	
RET_VAL		0.0	

Block: FC140

Network: 1

```
      L     #IN0           #IN0
      T     #TEMP13        #TEMP13
      OPN   DB [#TEMP13]   #TEMP13
      CALL  FC   132
       IN0:=#TEMP13        #TEMP13
      A     DBX   36.7
      JCN   M001
      A     DBX   38.4
      =     #OUT12         #OUT12
      A     DBX   39.4
      =     #OUT11         #OUT11
      A     #IN3           #IN3
      =     DBX   23.0
      =     DBX   23.2
      A     #IN7           #IN7
      =     DBX   23.1
      =     DBX   23.3
```

Network: 2

```
      SET
      SAVE
      OPN   DB [#TEMP13]     #TEMP13
      A     DBX    1.0
      JC    M002
      A     DBX   42.1
      JCN   M003
      A     #IN2             #IN2
      FP    M    200.0
      JCN   M003
      L     #IN1             #IN1
      T     DBD  116
      L     30
      T     DBB    0
M002: CALL  FC   133
       IN0    :=#TEMP13      #TEMP13
       RET_VAL:="retval_wr"  MW156             -- Return value from SFC58 "WR_REC"
M003: AN    BR
      =     #OUT9            #OUT9
      AN    #IN2             #IN2
      R     DBX    1.1
      A     DBX    1.1
      =     #OUT10           #OUT10
```

Network: 3

```
      SET
      SAVE
      OPN   DB [#TEMP13]     #TEMP13
      A     DBX    3.0
      JC    M004
      AN    #IN5             #IN5
      JC    M005
      L     100
      AN    #IN6             #IN6
      JC    M006
      L     101
M006: T     DBB    2
M004: CALL  FC   134
       IN0    :=#TEMP13      #TEMP13
       RET_VAL:="retval_rd"  MW158             -- Return value from SFC59 "RD_REC"
M005: AN    BR
      =     #OUT8            #OUT8
M001: BE
```

DB10 - <offline> - Declaration view

""

Global data block DB 10

Name: **Family:**
Author: **Version:** 0.0
Block version: 2
Time stamp Code: 12/13/2013 10:09:07 AM
Interface: 12/13/2013 10:09:07 AM
Lengths (block/logic/data): 00418 00152 00000

Block: DB10

Address	Name	Type	Initial value	Comment
0.0		STRUCT		
+0.0	STAT0	WORD	W#16#0	
+2.0	STAT1	WORD	W#16#0	
+4.0	STAT2	WORD	W#16#0	
+6.0	STAT3	WORD	W#16#0	
+8.0	STAT4	WORD	W#16#0	
+10.0	STAT5	WORD	W#16#0	
+12.0	STAT6	WORD	W#16#0	
+14.0	STAT7	WORD	W#16#0	
+16.0	STAT8	WORD	W#16#0	
+18.0	STAT9	WORD	W#16#0	
+20.0	STAT10	WORD	W#16#0	
+22.0	STAT11	WORD	W#16#0	
+24.0	STAT12	WORD	W#16#3	
+26.0	STAT13	WORD	W#16#0	
+28.0	STAT14	WORD	W#16#0	
+30.0	STAT15	WORD	W#16#96	
+32.0	STAT16	WORD	W#16#1E	
+34.0	STAT17	WORD	W#16#1C2	
+36.0	STAT18	WORD	W#16#0	
+38.0	STAT19	WORD	W#16#0	
+40.0	STAT20	WORD	W#16#0	
+42.0	STAT21	WORD	W#16#0	
+44.0	STAT22	WORD	W#16#0	
+46.0	STAT23	WORD	W#16#0	
+48.0	STAT24	WORD	W#16#0	
+50.0	STAT25	WORD	W#16#0	
+52.0	STAT26	WORD	W#16#0	
+54.0	STAT27	WORD	W#16#AA	
+56.0	STAT28	WORD	W#16#0	
+58.0	STAT29	WORD	W#16#0	
+60.0	STAT30	WORD	W#16#0	
+62.0	STAT31	WORD	W#16#0	
+64.0	STAT32	WORD	W#16#3	
+66.0	STAT33	WORD	W#16#0	
+68.0	STAT34	WORD	W#16#0	
+70.0	STAT35	WORD	W#16#96	
+72.0	STAT36	WORD	W#16#1E	
+74.0	STAT37	WORD	W#16#1C2	
+76.0	STAT38	WORD	W#16#0	
+78.0	STAT39	WORD	W#16#0	
+80.0	STAT40	WORD	W#16#0	
+82.0	STAT41	WORD	W#16#0	
+84.0	STAT42	WORD	W#16#0	
+86.0	STAT43	WORD	W#16#0	
+88.0	STAT44	WORD	W#16#0	
+90.0	STAT45	WORD	W#16#0	
+92.0	STAT46	WORD	W#16#0	
+94.0	STAT47	WORD	W#16#AA	
+96.0	STAT48	WORD	W#16#0	
+98.0	STAT49	WORD	W#16#0	
+100.0	STAT50	WORD	W#16#0	
+102.0	STAT51	WORD	W#16#0	
+104.0	STAT52	WORD	W#16#0	
+106.0	STAT53	WORD	W#16#0	
+108.0	STAT54	WORD	W#16#0	
+110.0	STAT55	WORD	W#16#0	

Address	Name	Type	Initial value	Comment
+112.0	STAT56	WORD	W#16#0	
+114.0	STAT57	WORD	W#16#0	
+116.0	STAT58	WORD	W#16#0	
+118.0	STAT59	WORD	W#16#0	
+120.0	STAT60	WORD	W#16#0	
+122.0	STAT61	WORD	W#16#0	
+124.0	STAT62	WORD	W#16#3	
+126.0	STAT63	WORD	W#16#0	
+128.0	STAT64	WORD	W#16#0	
+130.0	STAT65	WORD	W#16#0	
+132.0	STAT66	WORD	W#16#73	
+134.0	STAT67	WORD	W#16#0	
+136.0	STAT68	WORD	W#16#0	
+138.0	STAT69	WORD	W#16#0	
+140.0	STAT70	INT	150	
+142.0	STAT71	INT	150	
+144.0	STAT72	TIME	T#0MS	
+148.0	STAT73	INT	0	
+150.0	STAT74	INT	0	
=152.0		END_STRUCT		

DB1 - <offline> - Declaration view

""

Global data block DB 1

Name: **Family:**
Author: **Version:** 0.0
Block version: 2
Time stamp Code: 11/02/2011 06:47:54 AM
Interface: 11/02/2011 06:47:54 AM
Lengths (block/logic/data): 00904 00272 00000

Block: DB1

Address	Name	Type	Initial value	Comment
0.0		STRUCT		
+0.0	STAT0	WORD	W#16#4442	
+2.0	STAT1	WORD	W#16#3120	
+4.0	STAT2	WORD	W#16#2320	
+6.0	STAT3	WORD	W#16#534C	
+8.0	STAT4	WORD	W#16#313A	
+10.0	STAT5	WORD	W#16#2053	
+12.0	STAT6	WORD	W#16#4C4E	
+14.0	STAT7	WORD	W#16#2031	
+16.0	STAT8	WORD	W#16#2020	
+18.0	STAT9	WORD	W#16#2020	
+20.0	STAT10	WORD	W#16#2053	
+22.0	STAT11	WORD	W#16#4620	
+24.0	STAT12	WORD	W#16#4442	
+26.0	STAT13	WORD	W#16#3220	
+28.0	STAT14	WORD	W#16#2044	
+30.0	STAT15	WORD	W#16#5730	
+32.0	STAT16	WORD	W#16#2020	
+34.0	STAT17	WORD	W#16#2045	
+36.0	STAT18	WORD	W#16#4620	
+38.0	STAT19	WORD	W#16#4442	
+40.0	STAT20	WORD	W#16#3320	
+42.0	STAT21	WORD	W#16#2044	
+44.0	STAT22	WORD	W#16#5730	
+46.0	STAT23	WORD	W#16#2020	
+48.0	STAT24	WORD	W#16#204B	
+50.0	STAT25	WORD	W#16#4245	
+52.0	STAT26	WORD	W#16#204D	
+54.0	STAT27	WORD	W#16#4231	
+56.0	STAT28	WORD	W#16#3030	
+58.0	STAT29	WORD	W#16#204B	
+60.0	STAT30	WORD	W#16#4253	
+62.0	STAT31	WORD	W#16#204D	
+64.0	STAT32	WORD	W#16#4231	
+66.0	STAT33	WORD	W#16#3031	
+68.0	STAT34	WORD	W#16#2020	
+70.0	STAT35	WORD	W#16#2020	
+72.0	STAT36	WORD	W#16#5047	
+74.0	STAT37	WORD	W#16#4E20	
+76.0	STAT38	WORD	W#16#3120	
+78.0	STAT39	WORD	W#16#203B	
+80.0	STAT40	WORD	W#16#2020	
+82.0	STAT41	WORD	W#16#434C	
+84.0	STAT42	WORD	W#16#503A	
+86.0	STAT43	WORD	W#16#2043	
+88.0	STAT44	WORD	W#16#4620	
+90.0	STAT45	WORD	W#16#3020	
+92.0	STAT46	WORD	W#16#2020	
+94.0	STAT47	WORD	W#16#2020	
+96.0	STAT48	WORD	W#16#434C	
+98.0	STAT49	WORD	W#16#4B20	
+100.0	STAT50	WORD	W#16#4442	
+102.0	STAT51	WORD	W#16#3520	
+104.0	STAT52	WORD	W#16#2044	
+106.0	STAT53	WORD	W#16#5730	
+108.0	STAT54	WORD	W#16#2020	
+110.0	STAT55	WORD	W#16#2053	

Address	Name	Type	Initial value	Comment
+112.0	STAT56	WORD	W#16#5457	
+114.0	STAT57	WORD	W#16#2020	
+116.0	STAT58	WORD	W#16#2020	
+118.0	STAT59	WORD	W#16#2020	
+120.0	STAT60	WORD	W#16#4D57	
+122.0	STAT61	WORD	W#16#3130	
+124.0	STAT62	WORD	W#16#3220	
+126.0	STAT63	WORD	W#16#2020	
+128.0	STAT64	WORD	W#16#2020	
+130.0	STAT65	WORD	W#16#2020	
+132.0	STAT66	WORD	W#16#5354	
+134.0	STAT67	WORD	W#16#5020	
+136.0	STAT68	WORD	W#16#5920	
+138.0	STAT69	WORD	W#16#5341	
+140.0	STAT70	WORD	W#16#5620	
+142.0	STAT71	WORD	W#16#5920	
+144.0	STAT72	WORD	W#16#4F48	
+146.0	STAT73	WORD	W#16#4520	
+148.0	STAT74	WORD	W#16#4E20	
+150.0	STAT75	WORD	W#16#2020	
+152.0	STAT76	WORD	W#16#2053	
+154.0	STAT77	WORD	W#16#4554	
+156.0	STAT78	WORD	W#16#2034	
+158.0	STAT79	WORD	W#16#2030	
+160.0	STAT80	WORD	W#16#312E	
+162.0	STAT81	WORD	W#16#3034	
+164.0	STAT82	WORD	W#16#2E39	
+166.0	STAT83	WORD	W#16#3220	
+168.0	STAT84	WORD	W#16#3132	
+170.0	STAT85	WORD	W#16#3A31	
+172.0	STAT86	WORD	W#16#303A	
+174.0	STAT87	WORD	W#16#3030	
+176.0	STAT88	WORD	W#16#2020	
+178.0	STAT89	WORD	W#16#2020	
+180.0	STAT90	WORD	W#16#2054	
+182.0	STAT91	WORD	W#16#4953	
+184.0	STAT92	WORD	W#16#2034	
+186.0	STAT93	WORD	W#16#2020	
+188.0	STAT94	WORD	W#16#2020	
+190.0	STAT95	WORD	W#16#2020	
+192.0	STAT96	WORD	W#16#3031	
+194.0	STAT97	WORD	W#16#2E30	
+196.0	STAT98	WORD	W#16#342E	
+198.0	STAT99	WORD	W#16#2031	
+200.0	STAT100	WORD	W#16#333A	
+202.0	STAT101	WORD	W#16#3030	
+204.0	STAT102	WORD	W#16#3A30	
+206.0	STAT103	WORD	W#16#3020	
+208.0	STAT104	WORD	W#16#2020	
+210.0	STAT105	WORD	W#16#2020	
+212.0	STAT106	WORD	W#16#4F48	
+214.0	STAT107	WORD	W#16#5320	
+216.0	STAT108	WORD	W#16#3030	
+218.0	STAT109	WORD	W#16#3030	
+220.0	STAT110	WORD	W#16#3030	
+222.0	STAT111	WORD	W#16#3A30	
+224.0	STAT112	WORD	W#16#303A	
+226.0	STAT113	WORD	W#16#3030	
+228.0	STAT114	WORD	W#16#203B	
+230.0	STAT115	WORD	W#16#2320	
+232.0	STAT116	WORD	W#16#5344	
+234.0	STAT117	WORD	W#16#503A	
+236.0	STAT118	WORD	W#16#2057	
+238.0	STAT119	WORD	W#16#4420	
+240.0	STAT120	WORD	W#16#2035	
+242.0	STAT121	WORD	W#16#3030	
+244.0	STAT122	WORD	W#16#203B	
+246.0	STAT123	WORD	W#16#2020	
+248.0	STAT124	WORD	W#16#5446	
+250.0	STAT125	WORD	W#16#423A	
+252.0	STAT126	WORD	W#16#204F	
+254.0	STAT127	WORD	W#16#4231	
+256.0	STAT128	WORD	W#16#3320	
+258.0	STAT129	WORD	W#16#2031	

Address	Name	Type	Initial value	Comment
+260.0	STAT130	WORD	W#16#3030	
+262.0	STAT131	WORD	W#16#2020	
+264.0	STAT132	WORD	W#16#203B	
+266.0	STAT133	WORD	W#16#2045	
+268.0	STAT134	WORD	W#16#4E44	
+270.0	STAT135	WORD	W#16#2020	
=272.0		END_STRUCT		

DB2 - <offline>

Data view

"fill_unit1" Counter data block for application

Data block type: UDT1 data block

Name: **Family:**

Author: **Version:** 1.0

Block version: 2

Lengths (Block / Data): 00696 / 00228

Time stamp

Code: 03/30/2009 02:55:13 PM

Interface: 04/03/2003 11:12:53 AM

Comment:

Address	Name	Type	Initial value	Actual value	Comment
0.0	STAT0.STAT1	BYTE	B#16#0	B#16#0	
1.0	STAT0.STAT2	BOOL	FALSE	FALSE	
1.1	STAT0.STAT3	BOOL	FALSE	FALSE	
1.2	STAT0.STAT4	BOOL	FALSE	FALSE	
1.3	STAT0.STAT5	BOOL	FALSE	FALSE	
2.0	STAT6.STAT7	BYTE	B#16#0	B#16#0	
3.0	STAT6.STAT8	BOOL	FALSE	FALSE	
3.1	STAT6.STAT9	BOOL	FALSE	TRUE	
3.2	STAT6.STAT10	BOOL	FALSE	FALSE	
3.3	STAT6.STAT11	BOOL	FALSE	FALSE	
4.0	STAT12[1]	WORD	W#16#0	W#16#0	
6.0	STAT12[2]	WORD	W#16#0	W#16#0	
8.0	STAT12[3]	WORD	W#16#0	W#16#0	
10.0	STAT13	WORD	W#16#0	W#16#0	
12.0	STAT14	WORD	W#16#0	W#16#120	
14.0	STAT15	DWORD	DW#16#0	DW#16#900	
18.0	STAT16	BYTE	B#16#0	B#16#0	
19.0	STAT17	BYTE	B#16#0	B#16#0	
20.0	STAT18.STAT19	BOOL	FALSE	FALSE	
20.1	STAT18.STAT20	BOOL	FALSE	FALSE	
20.2	STAT18.STAT21	BOOL	FALSE	FALSE	
20.3	STAT18.STAT22	BOOL	FALSE	TRUE	
20.4	STAT18.STAT23	BOOL	FALSE	FALSE	
20.5	STAT18.STAT24	BOOL	FALSE	FALSE	
20.6	STAT18.STAT25	BOOL	FALSE	FALSE	
20.7	STAT18.STAT26	BOOL	FALSE	FALSE	
21.0	STAT18.STAT27	BOOL	FALSE	FALSE	
21.1	STAT18.STAT28	BOOL	FALSE	FALSE	
21.2	STAT18.STAT29	BOOL	FALSE	FALSE	
21.3	STAT18.STAT30	BOOL	FALSE	FALSE	
21.4	STAT18.STAT31	BOOL	FALSE	FALSE	
21.5	STAT18.STAT32	BOOL	FALSE	FALSE	
21.6	STAT18.STAT33	BOOL	FALSE	FALSE	
21.7	STAT18.STAT34	BOOL	FALSE	FALSE	

Address	Name	Type	Initial value	Actual value	Comment
22.0	STAT18.STAT35	BOOL	FALSE	FALSE	
22.1	STAT18.STAT36	BOOL	FALSE	FALSE	
22.2	STAT18.STAT37	BOOL	FALSE	FALSE	
22.3	STAT18.STAT38	BOOL	FALSE	FALSE	
22.4	STAT18.STAT39	BOOL	FALSE	FALSE	
22.5	STAT18.STAT40	BOOL	FALSE	FALSE	
22.6	STAT18.STAT41	BOOL	FALSE	FALSE	
22.7	STAT18.STAT42	BOOL	FALSE	FALSE	
23.0	STAT18.STAT43	BOOL	FALSE	FALSE	
23.1	STAT18.STAT44	BOOL	FALSE	FALSE	
23.2	STAT18.STAT45	BOOL	FALSE	FALSE	
23.3	STAT18.STAT46	BOOL	FALSE	FALSE	
23.4	STAT18.STAT47	BOOL	FALSE	FALSE	
23.5	STAT18.STAT48	BOOL	FALSE	FALSE	
23.6	STAT18.STAT49	BOOL	FALSE	FALSE	
23.7	STAT18.STAT50	BOOL	FALSE	FALSE	
24.0	STAT18.STAT51	DWORD	DW#16#0	DW#16#0	
28.0	STAT18.STAT52	DWORD	DW#16#0	DW#16#0	
32.0	STAT18.STAT53	DWORD	DW#16#0	DW#16#0	
36.0	STAT54.STAT55	BOOL	FALSE	FALSE	
36.1	STAT54.STAT56	BOOL	FALSE	FALSE	
36.2	STAT54.STAT57	BOOL	FALSE	FALSE	
36.3	STAT54.STAT58	BOOL	FALSE	FALSE	
36.4	STAT54.STAT59	BOOL	FALSE	FALSE	
36.5	STAT54.STAT60	BOOL	FALSE	TRUE	
36.6	STAT54.STAT61	BOOL	FALSE	FALSE	
36.7	STAT54.STAT62	BOOL	FALSE	TRUE	
37.0	STAT54.STAT63	BOOL	FALSE	TRUE	
37.1	STAT54.STAT64	BOOL	FALSE	TRUE	
37.2	STAT54.STAT65	BOOL	FALSE	TRUE	
37.3	STAT54.STAT66	BOOL	FALSE	TRUE	
37.4	STAT54.STAT67	BOOL	FALSE	FALSE	
37.5	STAT54.STAT68	BOOL	FALSE	FALSE	
37.6	STAT54.STAT69	BOOL	FALSE	FALSE	
37.7	STAT54.STAT70	BOOL	FALSE	FALSE	
38.0	STAT54.STAT71	BOOL	FALSE	FALSE	
38.1	STAT54.STAT72	BOOL	FALSE	FALSE	
38.2	STAT54.STAT73	BOOL	FALSE	FALSE	
38.3	STAT54.STAT74	BOOL	FALSE	FALSE	
38.4	STAT54.STAT75	BOOL	FALSE	FALSE	
38.5	STAT54.STAT76	BOOL	FALSE	FALSE	
38.6	STAT54.STAT77	BOOL	FALSE	FALSE	
38.7	STAT54.STAT78	BOOL	FALSE	FALSE	
39.0	STAT54.STAT79	BOOL	FALSE	FALSE	
39.1	STAT54.STAT80	BOOL	FALSE	FALSE	
39.2	STAT54.STAT81	BOOL	FALSE	FALSE	
39.3	STAT54.STAT82	BOOL	FALSE	FALSE	
39.4	STAT54.STAT83	BOOL	FALSE	FALSE	
39.5	STAT54.STAT84	BOOL	FALSE	FALSE	
39.6	STAT54.STAT85	BOOL	FALSE	FALSE	
39.7	STAT54.STAT86	BOOL	FALSE	FALSE	
40.0	STAT54.STAT87	BOOL	FALSE	FALSE	

Address	Name	Type	Initial value	Actual value	Comment
40.1	STAT54.STAT88	BOOL	FALSE	FALSE	
40.2	STAT54.STAT89	BOOL	FALSE	FALSE	
40.3	STAT54.STAT90	BOOL	FALSE	FALSE	
40.4	STAT54.STAT91	BOOL	FALSE	FALSE	
40.5	STAT54.STAT92	BOOL	FALSE	FALSE	
40.6	STAT54.STAT93	BOOL	FALSE	FALSE	
40.7	STAT54.STAT94	BOOL	FALSE	FALSE	
41.0	STAT54.STAT95	BOOL	FALSE	FALSE	
41.1	STAT54.STAT96	BOOL	FALSE	FALSE	
41.2	STAT54.STAT97	BOOL	FALSE	FALSE	
41.3	STAT54.STAT98	BOOL	FALSE	FALSE	
41.4	STAT54.STAT99	BOOL	FALSE	FALSE	
41.5	STAT54.STAT100	BOOL	FALSE	FALSE	
41.6	STAT54.STAT101	BOOL	FALSE	FALSE	
41.7	STAT54.STAT102	BOOL	FALSE	FALSE	
42.0	STAT54.STAT103	BOOL	FALSE	FALSE	
42.1	STAT54.STAT104	BOOL	FALSE	FALSE	
42.2	STAT54.STAT105	BOOL	FALSE	FALSE	
42.3	STAT54.STAT106	BOOL	FALSE	FALSE	
42.4	STAT54.STAT107	BOOL	FALSE	FALSE	
42.5	STAT54.STAT108	BOOL	FALSE	FALSE	
42.6	STAT54.STAT109	BOOL	FALSE	FALSE	
42.7	STAT54.STAT110	BOOL	FALSE	FALSE	
43.0	STAT54.STAT111	BOOL	FALSE	FALSE	
43.1	STAT54.STAT112	BOOL	FALSE	FALSE	
43.2	STAT54.STAT113	BOOL	FALSE	FALSE	
43.3	STAT54.STAT114	BOOL	FALSE	FALSE	
43.4	STAT54.STAT115	BOOL	FALSE	FALSE	
43.5	STAT54.STAT116	BOOL	FALSE	FALSE	
43.6	STAT54.STAT117	BOOL	FALSE	FALSE	
43.7	STAT54.STAT118	BOOL	FALSE	FALSE	
44.0	STAT54.STAT119	WORD	W#16#0	W#16#0	
46.0	STAT54.STAT120	WORD	W#16#0	W#16#0	
48.0	STAT54.STAT121	WORD	W#16#0	W#16#0	
50.0	STAT54.STAT122	WORD	W#16#0	W#16#0	
52.0	STAT123	DINT	L#0	L#0	
56.0	STAT124	DINT	L#0	L#0	
60.0	STAT125	DINT	L#0	L#0	
64.0	STAT126	DINT	L#0	L#0	
68.0	STAT127	DINT	L#0	L#0	
72.0	STAT128	DINT	L#0	L#0	
76.0	STAT129	DINT	L#0	L#0	
80.0	STAT130	DINT	L#0	L#0	
84.0	STAT131	DINT	L#0	L#0	
88.0	STAT132	DINT	L#0	L#0	
92.0	STAT133	DINT	L#0	L#0	
96.0	STAT134	DINT	L#0	L#0	
100.0	STAT135	DINT	L#0	L#0	
104.0	STAT136	DINT	L#0	L#0	
108.0	STAT137	DINT	L#0	L#0	
112.0	STAT138	DINT	L#0	L#0	
116.0	STAT139	DINT	L#0	L#0	

Address	Name	Type	Initial value	Actual value	Comment
120.0	STAT140	DINT	L#0	L#0	
124.0	STAT141	DINT	L#0	L#0	
128.0	STAT142	DINT	L#0	L#0	
132.0	STAT143	DINT	L#0	L#0	
136.0	STAT144	DINT	L#0	L#0	
140.0	STAT145	DINT	L#0	L#0	
144.0	STAT146	DINT	L#0	L#0	
148.0	STAT147	DINT	L#0	L#0	
152.0	STAT148	DINT	L#0	L#0	
156.0	STAT149	DINT	L#0	L#0	
160.0	STAT150	DINT	L#0	L#0	
164.0	STAT151	DINT	L#0	L#0	
168.0	STAT152	DINT	L#0	L#0	
172.0	STAT153	DINT	L#0	L#0	
176.0	STAT154	DINT	L#0	L#0	
180.0	STAT155	DINT	L#0	L#0	
184.0	STAT156	DINT	L#0	L#0	
188.0	STAT157	DINT	L#0	L#0	
192.0	STAT158	DINT	L#0	L#0	
196.0	STAT159	DINT	L#0	L#0	
200.0	STAT160	DINT	L#0	L#0	
204.0	STAT161	DINT	L#0	L#0	
208.0	STAT162	DINT	L#0	L#0	
212.0	STAT163.STAT164	BYTE	B#16#0	B#16#0	
213.0	STAT163.STAT165	BYTE	B#16#0	B#16#0	
214.0	STAT163.STAT166	BYTE	B#16#0	B#16#0	
215.0	STAT163.STAT167	BYTE	B#16#0	B#16#0	
216.0	STAT163.STAT168	BYTE	B#16#0	B#16#0	
217.0	STAT163.STAT169	BYTE	B#16#0	B#16#0	
218.0	STAT163.STAT170	BYTE	B#16#0	B#16#0	
219.0	STAT163.STAT171	BYTE	B#16#0	B#16#0	
220.0	STAT163.STAT172	BYTE	B#16#0	B#16#0	
221.0	STAT163.STAT173	BYTE	B#16#0	B#16#0	
222.0	STAT163.STAT174	BYTE	B#16#0	B#16#0	
223.0	STAT163.STAT175	BYTE	B#16#0	B#16#0	
224.0	STAT163.STAT176	BYTE	B#16#0	B#16#0	
225.0	STAT163.STAT177	BYTE	B#16#0	B#16#0	
226.0	STAT163.STAT178	BYTE	B#16#0	B#16#0	
227.0	STAT163.STAT179	BYTE	B#16#0	B#16#0	

DB3 - <offline> - Declaration view

"fill_unit2"
Global data block DB 3

Name: **Family:**
Author: **Version:** 0.1
Block version: 2
Time stamp Code: 11/04/2011 06:23:23 AM
Interface: 11/04/2011 06:23:23 AM
Lengths (block/logic/data): 00104 00008 00000

Block: DB3

Address	Name	Type	Initial value	Comment
0.0		STRUCT		
+0.0	STAT0	INT	0	
+2.0	STAT1	INT	0	
+4.0	STAT2	INT	0	
+6.0	STAT3	INT	0	
=8.0		END_STRUCT		

DB8 - <offline> - Declaration view

""

Global data block DB 8

Name: **Family:**
Author: **Version:** 0.0
Block version: 2
Time stamp Code: 11/02/2011 06:47:54 AM
Interface: 11/02/2011 06:47:54 AM
Lengths (block/logic/data): 00330 00102 00000

Block: DB8

Address	Name	Type	Initial value	Comment
0.0		STRUCT		
+0.0	STAT0	WORD	W#16#0	
+2.0	STAT1	WORD	W#16#1	
+4.0	STAT2	WORD	W#16#0	
+6.0	STAT3	WORD	W#16#0	
+8.0	STAT4	WORD	W#16#0	
+10.0	STAT5	WORD	W#16#0	
+12.0	STAT6	WORD	W#16#0	
+14.0	STAT7	WORD	W#16#0	
+16.0	STAT8	WORD	W#16#0	
+18.0	STAT9	WORD	W#16#0	
+20.0	STAT10	WORD	W#16#100	
+22.0	STAT11	WORD	W#16#100	
+24.0	STAT12	WORD	W#16#300	
+26.0	STAT13	WORD	W#16#150	
+28.0	STAT14	WORD	W#16#0	
+30.0	STAT15	WORD	W#16#100	
+32.0	STAT16	WORD	W#16#100	
+34.0	STAT17	WORD	W#16#400	
+36.0	STAT18	WORD	W#16#200	
+38.0	STAT19	WORD	W#16#1060	
+40.0	STAT20	WORD	W#16#400	
+42.0	STAT21	WORD	W#16#0	
+44.0	STAT22	WORD	W#16#0	
+46.0	STAT23	WORD	W#16#0	
+48.0	STAT24	WORD	W#16#0	
+50.0	STAT25	WORD	W#16#100	
+52.0	STAT26	WORD	W#16#100	
+54.0	STAT27	WORD	W#16#400	
+56.0	STAT28	WORD	W#16#200	
+58.0	STAT29	WORD	W#16#0	
+60.0	STAT30	WORD	W#16#100	
+62.0	STAT31	WORD	W#16#100	
+64.0	STAT32	WORD	W#16#150	
+66.0	STAT33	WORD	W#16#150	
+68.0	STAT34	WORD	W#16#0	
+70.0	STAT35	WORD	W#16#0	
+72.0	STAT36	WORD	W#16#0	
+74.0	STAT37	WORD	W#16#0	
+76.0	STAT38	WORD	W#16#0	
+78.0	STAT39	WORD	W#16#0	
+80.0	STAT40	WORD	W#16#0	
+82.0	STAT41	WORD	W#16#0	
+84.0	STAT42	WORD	W#16#0	
+86.0	STAT43	WORD	W#16#0	
+88.0	STAT44	WORD	W#16#0	
+90.0	STAT45	WORD	W#16#0	
+92.0	STAT46	WORD	W#16#0	
+94.0	STAT47	WORD	W#16#0	
+96.0	STAT48	WORD	W#16#0	
+98.0	STAT49	WORD	W#16#0	
+100.0	STAT50	WORD	W#16#0	
=102.0		END_STRUCT		

DB9 - <offline> - Declaration view

""

Global data block DB 9

Name: **Family:**
Author: **Version:** 0.0
Block version: 2
Time stamp Code: 12/13/2013 10:07:32 AM
Interface: 12/13/2013 10:07:32 AM
Lengths (block/logic/data): 00452 00152 00000

Block: DB9

Address	Name	Type	Initial value	Comment
0.0		STRUCT		
+0.0	STAT0	WORD	W#16#0	
+2.0	STAT1	WORD	W#16#0	
+4.0	STAT2	WORD	W#16#0	
+6.0	STAT3	WORD	W#16#0	
+8.0	STAT4	WORD	W#16#0	
+10.0	STAT5	WORD	W#16#0	
+12.0	STAT6	WORD	W#16#0	
+14.0	STAT7	WORD	W#16#0	
+16.0	STAT8	WORD	W#16#0	
+18.0	STAT9	WORD	W#16#0	
+20.0	STAT10	WORD	W#16#A0	
+22.0	STAT11	WORD	W#16#A0	
+24.0	STAT12	WORD	W#16#3	
+26.0	STAT13	WORD	W#16#35	
+28.0	STAT14	WORD	W#16#1	
+30.0	STAT15	WORD	W#16#1AC	
+32.0	STAT16	WORD	W#16#1E	
+34.0	STAT17	WORD	W#16#1C2	
+36.0	STAT18	WORD	W#16#0	
+38.0	STAT19	WORD	W#16#0	
+40.0	STAT20	WORD	W#16#0	
+42.0	STAT21	WORD	W#16#0	
+44.0	STAT22	WORD	W#16#0	
+46.0	STAT23	WORD	W#16#0	
+48.0	STAT24	WORD	W#16#0	
+50.0	STAT25	WORD	W#16#14B	
+52.0	STAT26	WORD	W#16#A0	
+54.0	STAT27	WORD	W#16#AA	
+56.0	STAT28	WORD	W#16#0	
+58.0	STAT29	WORD	W#16#0	
+60.0	STAT30	WORD	W#16#A0	
+62.0	STAT31	WORD	W#16#A0	
+64.0	STAT32	WORD	W#16#3	
+66.0	STAT33	WORD	W#16#35	
+68.0	STAT34	WORD	W#16#1	
+70.0	STAT35	WORD	W#16#1AD	
+72.0	STAT36	WORD	W#16#1E	
+74.0	STAT37	WORD	W#16#1C2	
+76.0	STAT38	WORD	W#16#0	
+78.0	STAT39	WORD	W#16#0	
+80.0	STAT40	WORD	W#16#0	
+82.0	STAT41	WORD	W#16#0	
+84.0	STAT42	WORD	W#16#0	
+86.0	STAT43	WORD	W#16#0	
+88.0	STAT44	WORD	W#16#0	
+90.0	STAT45	WORD	W#16#14C	
+92.0	STAT46	WORD	W#16#A1	
+94.0	STAT47	WORD	W#16#AA	
+96.0	STAT48	WORD	W#16#0	
+98.0	STAT49	WORD	W#16#0	
+100.0	STAT50	WORD	W#16#14C	
+102.0	STAT51	WORD	W#16#A1	
+104.0	STAT52	WORD	W#16#0	
+106.0	STAT53	WORD	W#16#0	
+108.0	STAT54	WORD	W#16#0	
+110.0	STAT55	WORD	W#16#0	

Address	Name	Type	Initial value	Comment
+112.0	STAT56	WORD	W#16#0	
+114.0	STAT57	WORD	W#16#0	
+116.0	STAT58	WORD	W#16#0	
+118.0	STAT59	WORD	W#16#0	
+120.0	STAT60	WORD	W#16#0	
+122.0	STAT61	WORD	W#16#A1	
+124.0	STAT62	WORD	W#16#3	
+126.0	STAT63	WORD	W#16#35	
+128.0	STAT64	WORD	W#16#2	
+130.0	STAT65	WORD	W#16#0	
+132.0	STAT66	WORD	W#16#73	
+134.0	STAT67	WORD	W#16#0	
+136.0	STAT68	WORD	W#16#0	
+138.0	STAT69	WORD	W#16#0	
+140.0	STAT70	INT	150	
+142.0	STAT71	INT	150	
+144.0	STAT72	TIME	T#0MS	
+148.0	STAT73	INT	0	
+150.0	STAT74	INT	0	
=152.0		END_STRUCT		