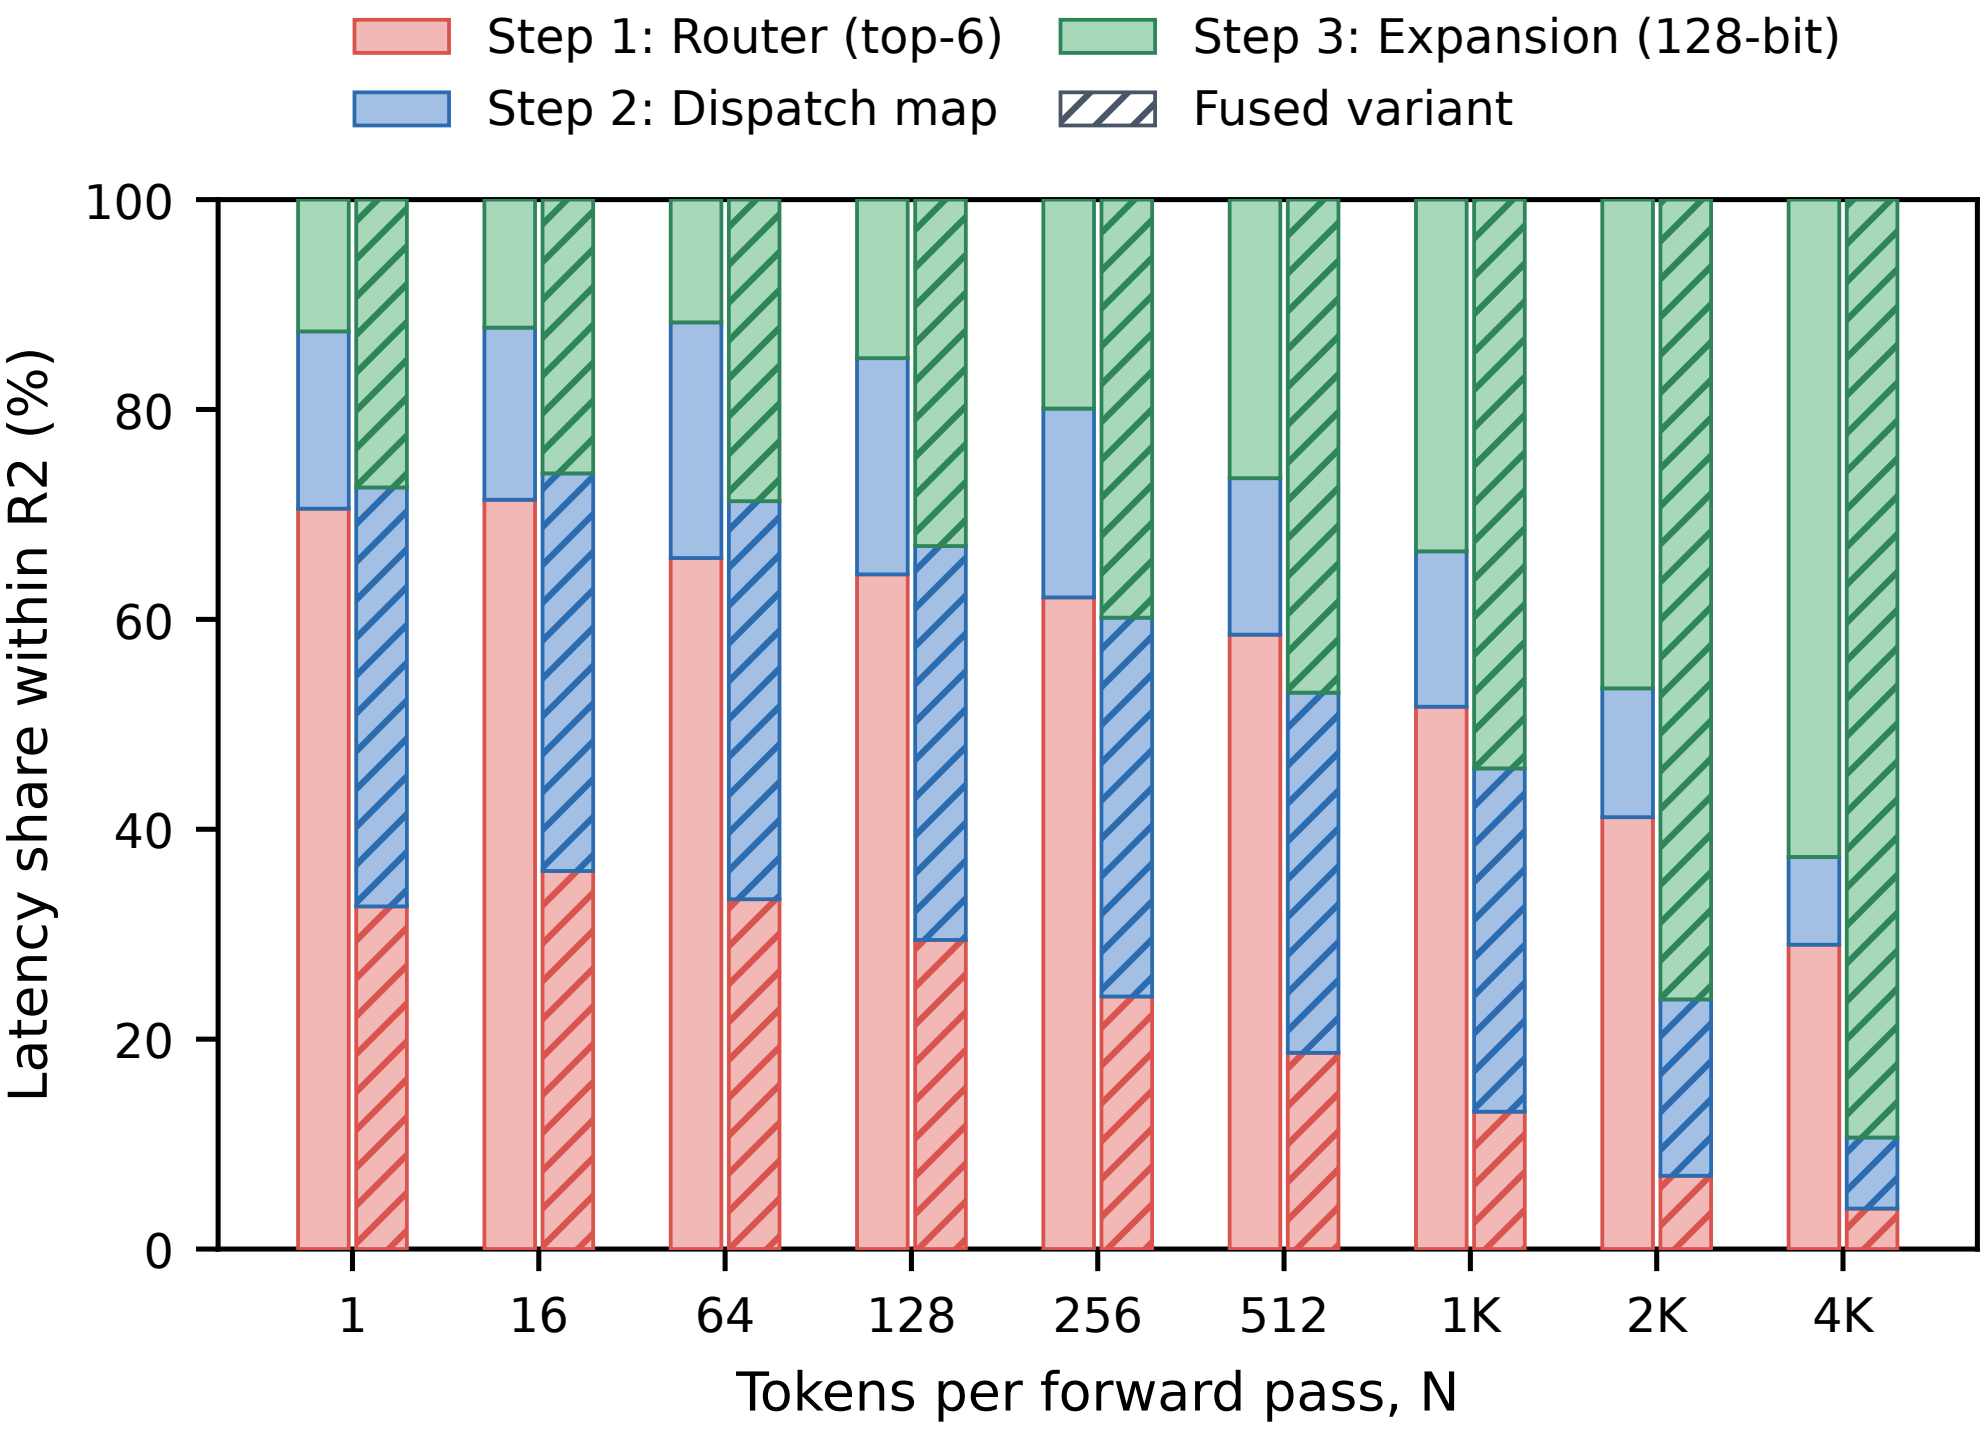
Step 1: Router (top-6)
Step 2: Dispatch map
Step 3: Expansion (128-bit)
Fused variant
Latency share within R2 (%)
100
80
60
40
20
0
1
16
64
128
256
512
1K
2K
4K
Tokens per forward pass, N