World Leader in Microwave Amplifiers



JCA TECHNOLOGY

CAPABILITIES & PRODUCT CATALOG

GaAs FET Amplifiers 10 KHz to 40 GHz

JCA TECHNOLOGY

table of contents

Our Commitment	2
Capabilities	3
Design Capabilities	3
Manufacturing Capabilities	5
Test Equipment	6
Reliability and Quality	6
Quality Assurance	7
Microwave Amplifiers	8
Thermal Considerations	15
Other Considerations	17
Ultra-Low Noise Amplifiers	20
Octave-Band Amplifiers	28
Ultra-Broad Band Amplifiers from 0.5 to 20 GHz	43
Multi-Octave EW and ECM Amplifiers	47
Extended Radar-Band FET Amplifiers	65
Ka-Band Amplifiers 26.0 GHz and above	75
Limiting Amplifiers	78
Tri-Band Amplifiers	80
10 MHz to 18 GHz Ultra-Broadband amplifiers for Fiberoptic and Telecommunications	82
Low-Noise, High IP3 L-Band Amplifiers for Cellular, PCS, WLL Applications	88
Narrow Band Power Amplifiers	89
Outline Drawings	94
Data Sheets	100

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

www.jcatech.com e-mail jca@jcatech.com

our commitment

JCA Technology, Inc., established in 1985, is a quality-driven team committed to technological leadership and expertise in 'State of the Art', thin-film hybrid microwave amplifiers, switches, and sub-assemblies for the defense and commercial markets.



our management team consists of

specialists in design engineering, applications engineering and sales and marketing with over 100 man-years of experience. This team is dedicated to manufacturing microwave products in a well equipped, clean, quality-oriented environment.

Jca is customer focused and committed to

Optimizing Designs for maximum RF performance and minimum sensitivity to manufacturing and environmental tolerances.

Doing The Job Correctly, which provides quality and reliability in a competitively priced product.

Continually Searching For and implementing improvements in the quality of our facility and products.

Responding Promptly to changing customer requirements and product needs.



4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

www.jcatech.com e-mail jca@jcatech.com

capabilities

JCA ships thousands of amplifiers and control components per month from our clean, secure facilities. Operating from a State of the Art 42,000 sq. ft. facility with ample room for expansion available, JCA continues its history of solid growth.

JCA's customers include many United States government Agencies, Major Prime Contractors, and a substantial number of International Firms as well as numerous major Telecom and Fiber Optic Systems Integrators and OEMs.






design capabilities

All designs are developed using computer aided design and drafting (CADD) techniques. JCA uses proprietary software to enhance the modeling process. Circuit modeling is based on detailed understanding of each parameter, and is confirmed by lab tests. Mechanical design and packaging techniques reflect our more than 100 man-years of experience in the microwave business.

FET amplifiers represent only one of our product capabilities. JCA has developed many other active and passive microwave integrated circuit (MIC) components, which can be integrated with FET amplifiers to form super-components and systems.

these components capabilities include

- **BITE detectors**
- **PIN diode attenuators, modulators, and switches**
- **Limiters**
- **Double-balanced mixers**
- **Analog and digital phase shifters**
- **Upconverters and Downconverters**
- **Equalized gain/power amplifiers**
- **TTL gain control & linearized gain control amplifiers**

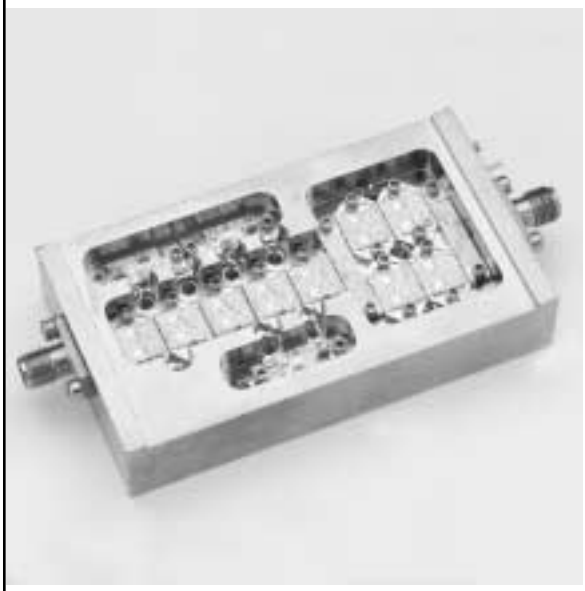




Because of JCA's experience with these components, and extensive background in systems analysis, we can provide custom designs for entire receiver front-ends, transmitter subsystems or any other similar super-component requirements you may have .Our engineers will be glad to work closely with you to ensure compliance with all of your needs and specifications.

manufacturing capabilities

JCA Technology's manufacturing facilities have been established with "State of the Art" technology for manufacturing microwave integrated circuit (MIC) hardware that meets the strict visual and screening requirements of MIL-STD-883. Total process control is fundamental to our success in meeting these requirements. All process steps are completely documented and include the necessary controls to ensure the best results. An Electrostatic Discharge (ESD) Control Program in accordance with MIL-STD-1686C provides for protection of electronic parts and equipment.



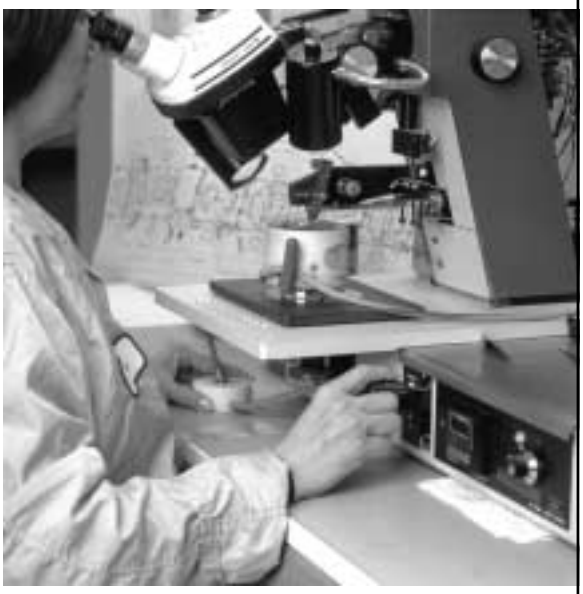

Our fully equipped Microwave Integrated Circuits (MIC) laboratory has the following process capabilities

Thermo-compression wire bonding

Semi-automatic die attach

Microwelding

Eutectic attach

Extensive screening tests are incorporated to both qualitfy and/or certify all production operations, materials and processes. These tests include:

Wire bond pull testing to certify operators, materials, and equipment

Tape pull and temperature testing to certify metalization adhesion on substrates


Visual inspection on all Critical Control points (CCP) to ensure conformance to established workmanship criterion


4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

www.jcatech.com e-mail jca@jcatech.com

test equipment

JCA Technology maintains an extensive inventory of microwave, mechanical, and electronic equipment. This test equipment is capable of performing all of the microwave measurements associated with GaAs FET amplifiers, filters, preamplifiers, modules and switches. Test equipment maintenance and calibration is performed to the requirements of MIL-STD-45662A and fully traceable to all NIST/ANSI standards.

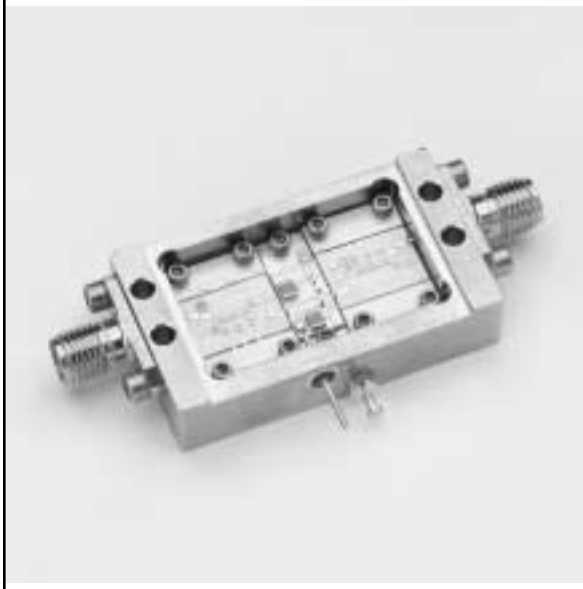

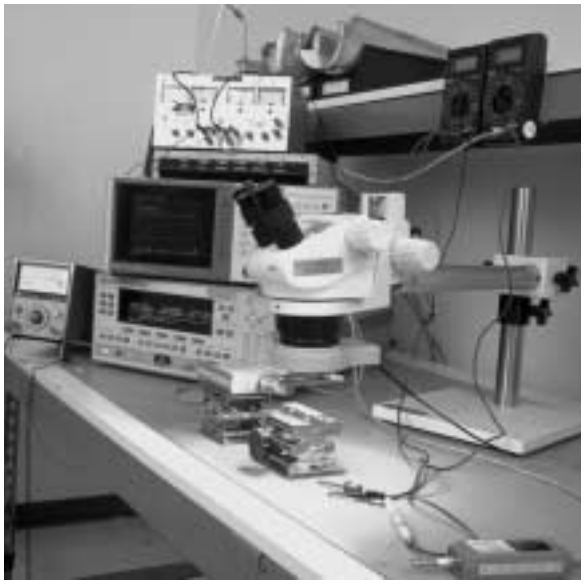

reliability and quality

JCA uses CADD techniques to maximize RF performance and minimize sensitivity to manufacturing and environmental tolerances. Reliability is designed into our products by the careful selection of components, materials, and processes. Manufacturing and testing all of our products in accordance with recognized industry and military quality standards support JCA's reliability-by-design approach.

quality assurance

JCA's commitment to furnish thin-film hybrid microwave amplifiers, switches and sub-assemblies of the highest quality starts with a comprehensive Quality System that meets the intent if ISO 9001. JCA is recognized for its commitment to quality by many within the aerospace and defense industry certifying JCA as compliant to both Mil-I-45208A and Mil-Q-9858A. The quality system is designed to ensure that specific criterion and requirements are well defined and complete in all areas of quality from initial quality planning, design development, manufacturing, purchasing, special processes, vendor rating, calibration, inspection, testing and documentation.



All materials and vendors are continuously evaluated to ensure compliance to set quality standards. JCA performs 100% inspection on all received material. This information is then used to formulate vendor overall performance ratings.



JCA is uniquely aware of its continuing commitment to provide quality products that meet and/or exceed our customers expectations. Copies of JCA's Quality and Workmanship Standards manuals are available for customer review which define the current methods utilized in controlling product conformance here at JCA.


microwave amplifiers

an overview

JCA Technology manufactures a comprehensive product line of microwave integrated circuit (MIC) devices that includes amplifiers, switches, and sub-assemblies. The microwave amplifier products shown in this catalog include a full line of standard amplifiers. Models available include Ultra-Low noise, Standard Octave Bandwidth EQ and ECM Amplifiers, and Narrow Bandwidth Radar and Communications Amplifiers, Broadband Power Amplifiers, Ultra-broadband Power Amplifiers, Extended Radar Bands, Fiber-Optic Amplifiers, and Narrow Band Power Amplifiers up to 5 Watts, with Frequencies ranging from 10 KHz up to 40 GHz. JCA Technology has designed and produced many specialized amplifiers for a variety of customers.

JCA continually updates its product line on the 'On-Line' catalog at JCA's internet site at jcatech.com. JCA's most up-to-date catalog can be found here.



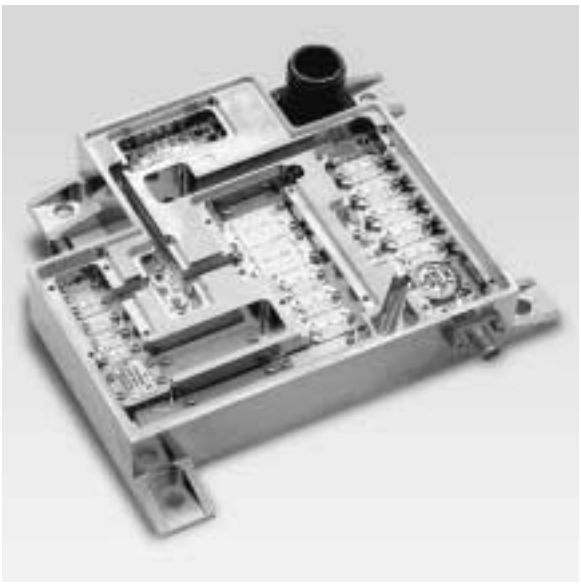

these GaAs FET amplifiers have been successfully used in many applications including

- Preamplifiers in receiver front ends
- General-purpose linear gain blocks
- Driver amplifiers in transmitters
- IF preamplifiers for millimeter-wave applications
- Limiting used in instantaneous frequency measurement receivers, channelized receivers, and frequency memory loops
- AGC amplifiers
- Variable gain amplifiers
- Buffer amplifiers
- Lasers and forward error correction systems
- Driver amplifiers for Traveling -wave-tubes (TWT)

Whatever your application, JCA can provide a responsive and cost effective solution for your microwave amplifier requirements.



key parameters

Some of the key parameters that are used to describe an amplifier's performance are:

- Noise Figure
- Gain
- Gain Variation as a function of frequency and temperature
- VSWR
- Output power capability

The following sections will provide a basic discussion of each of these parameters, and provide some practical guidelines for their use and interpretation.

noise figure

All of the components in a microwave system generate their own internal noise. Noise that is added at the front end of a microwave receiving system can greatly influence the cost and complexity of the overall system. Amplifiers used in these applications are commonly called low noise amplifiers (LNAs) or pre-amplifiers. An amplifier's internally generated noise is the key parameter for these amplifiers.

The most common measurements of an amplifier's internally generated noise is called the amplifier's Noise Figure (F). Noise Figure is defined as:

$$F = 10 \text{ Log } 10 \frac{S/N \text{ In}}{S/N \text{ Out}}$$

Where
- F = Noise Figure
- S/N In = Signal to Noise Ratio of the input signal
- S/N Out = Signal to Noise Ratio of the output signal

The noise figure is a measure of how the noise generated within a device degrades the Signal to Noise Ratio.

Effective Noise Temperature (Te) is a sensitive measure of noise that is used primarily by satellite systems and communications systems designers. The effective Noise Temperature of an amplifier is related to Noise Figure by the equations:



$$F = 10 \text{ Log } 10 \left(1 + \frac{Te}{To} \right)$$

and

$$F = (10 \text{ Log } ^{(0.1F)} - 1) \times To$$

Where:
- F = Noise figure
- Te = Effective noise temperature in degrees Kelvin (°K)
- To = Source temperature in degrees Kelvin (°K)

notes:

1. Te is given in degrees Kelvin.
2. To is commonly assumed to be 290 °K

This is the average source temperature for terrestrial systems. For some applications (e.g., deep space applications) this may not be a good assumption.

In JCA Technology's production testing, Noise Figure is usually measured with an automatic noise meter. These noise figure readings are corrected for noise source variations and for receiver noise contributions. Accuracy of the noise figure reading is normally within ±0.2 dB. At JCA Technology we frequently validate automatic noise figure measurements with hot-cold noise measurements using the "Y - Factor" test method.





A chart showing the relationship between amplifier noise figure stated in dB and noise temperature given in °K is shown in Figure 1 on page 12.


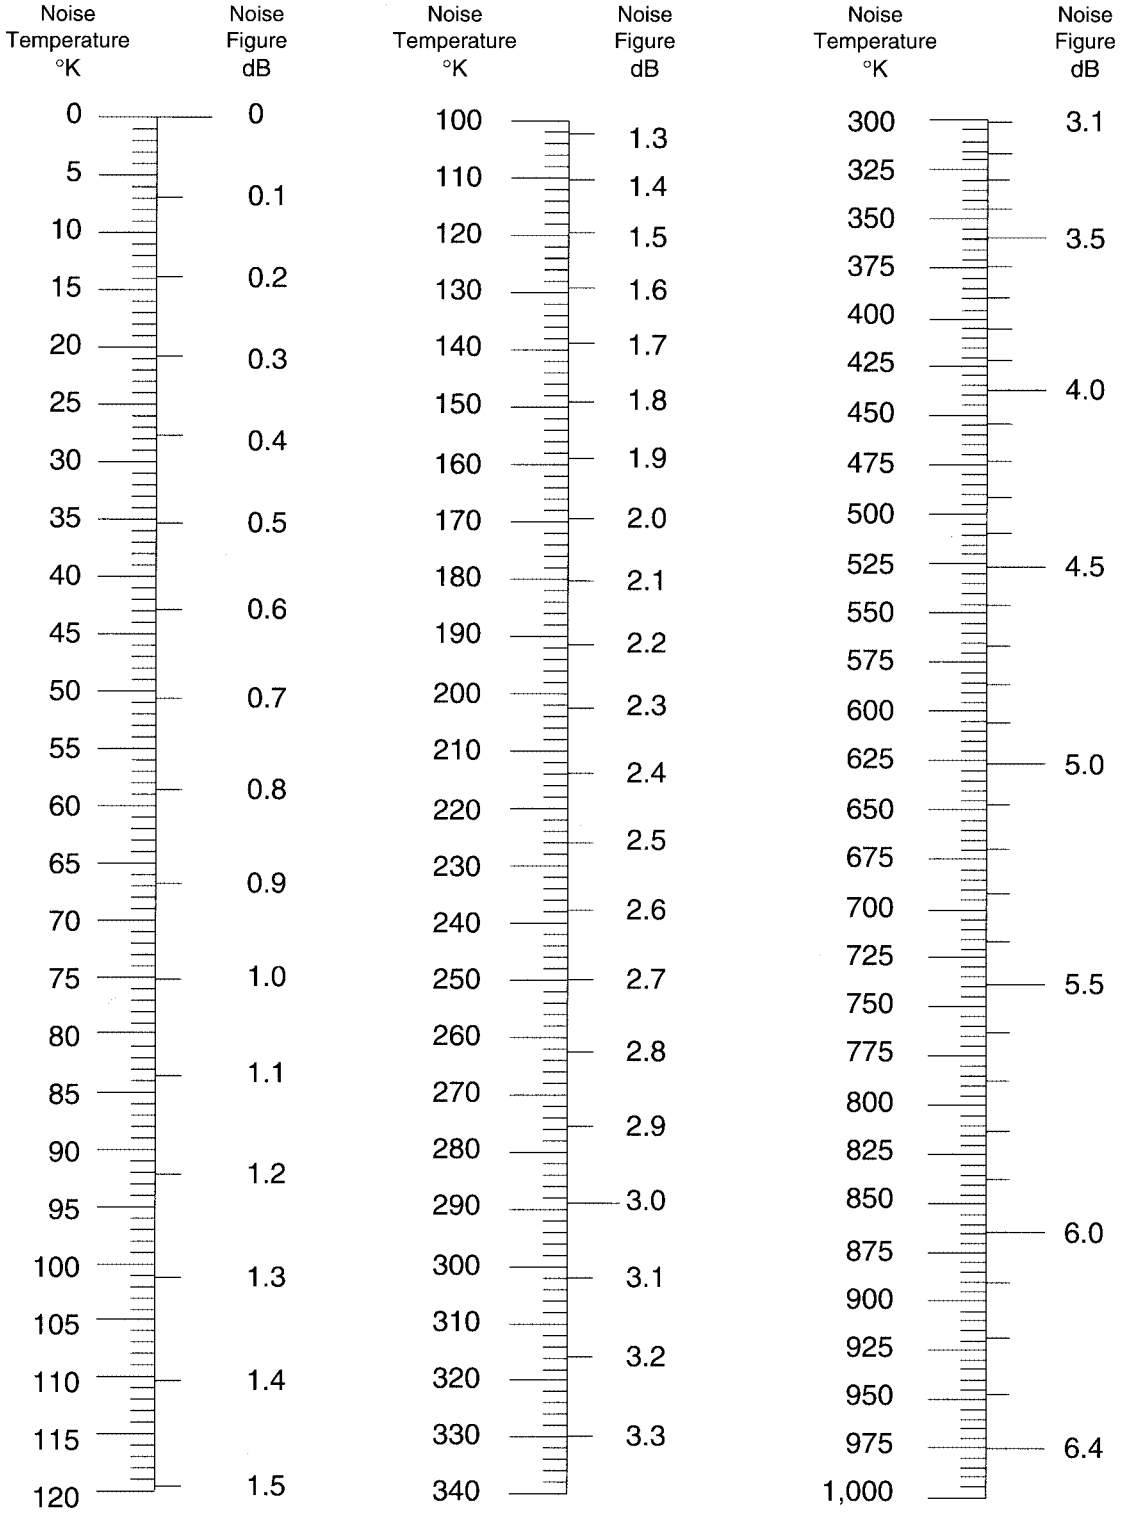


Figure 1. Noise figure (dB) versus noise temperature in degrees Kelvin (°K)

gain

Gain is commonly defined as the logarithmic ratio between the output power and the input power of an amplifier. Small signal gain is measured in the linear gain region. This measurement should be made at least 10 dB below the 1 dB gain compression point. Source and load VSWR must be kept to a minimum to avoid test equipment errors in the measurement.



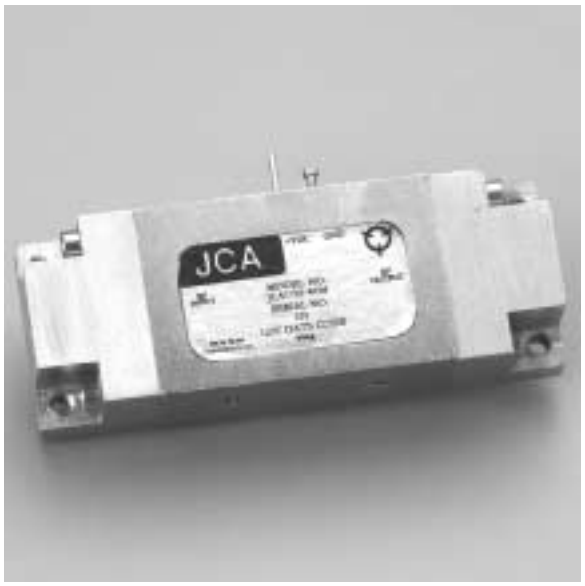

gain flatness

Gain Flatness is a measurement of the gain variation across the frequency bandwidth of the amplifier. This is usually specified at a fixed baseplate temperature. Test equipment source and load mismatches should be minimized to avoid frequency response ripples due to measurement or test equipment errors.

dynamic range

Microwave amplifiers are commonly used in their linear range. The dynamic range of these amplifiers is limited at the low-end by the amplifier noise figure and by the predicted bandwidth. The noise floor is the point at which the input signal would be equal to the amplifier's internally generated noise.

At the input to the amplifier this is:

$$\text{Noise Floor} = -114\ \text{dBm/MHz} + 10\log(\text{BW}) + \text{NF}$$

Of course, amplifiers should be operated with the signal(s) a few dBm above this noise floor.

At the high power end of an amplifier's dynamic range, non-linearities can produce harmonics of the input signals. Intermodulation products can be produced if multiple signals are present. The most common measure of non-linearity is known as the 1 dB compression point. This is typically determined by measuring the output power from the amplifier at a level 10 dB below the specified 1 dB compression point. The input power is increased by 10 dB and the output power is measured. At the specified 1 dB compression point the output power should increase at least 9.0 dB.

The third-order intermodulation intercept products are the most troublesome spurious signals generated in most amplifier applications. The third-order intercept point (ICP3) is typically 10 dB above the 1 dB compression point. Note that this intercept point is a theoretical point: amplifiers cannot actually be operated there. Third order harmonic output response, vs. input power for the ICP3 is a 3:1 slope whereas the fundamental power follows a 1:1 slope in the linear region. Since the difference between the third-order products will be removed from the fundamental by twice the amount (in decibels) that the fundamental is below the ICP3.

To summarize, the dynamic range of the amplifier can be defined as:


$$\text{Dynamic Range} = P_I - P_o - 10\log_{10}\text{BW} - \text{NF} - \text{NFM} - \text{IMM}$$

Where:

PI = Input Intercept Point in dBm; also
PI = ICP3-gain
P_o = Input Nose power in a 1 MHz bandwidth with no signal, nominally - 114 dBm
BW = System Noise Bandwidth in MHz
NF = Amplifier Noise Figure
NFM = Noise Floor Margin. This is determined by the required signal to noise ratio
IMM = Intermodulation Products Margin. This is the intercept point minus the maximum operating power level.

thermal considerations

The following are some rough order of magnitude guidelines for the changes in performance of an amplifier with variations in temperature.

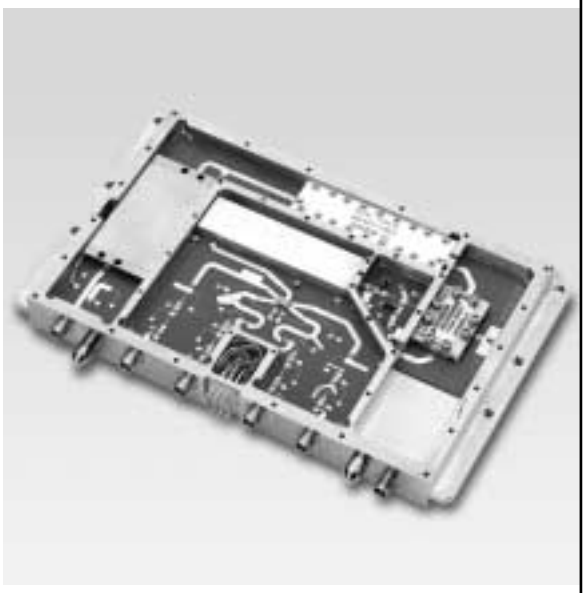


gain

The gain of a typical GaAs FET amplifier that does not include special compensation circuitry decreases as operating temperature is increased. Over the temperature range of -54˚C to +75˚C the temperature coefficient of an uncompensated amplifier is approximately:

Temperature Coefficienct = -0.012 dB/ ˚C / stage

This coefficient normally increases above +75˚C. Feedback stabilized GaAs FET amplifiers typically have a temperature coefficient of approximately:

Temperature Coefficienct = -0.005 dB/ ˚C / stage

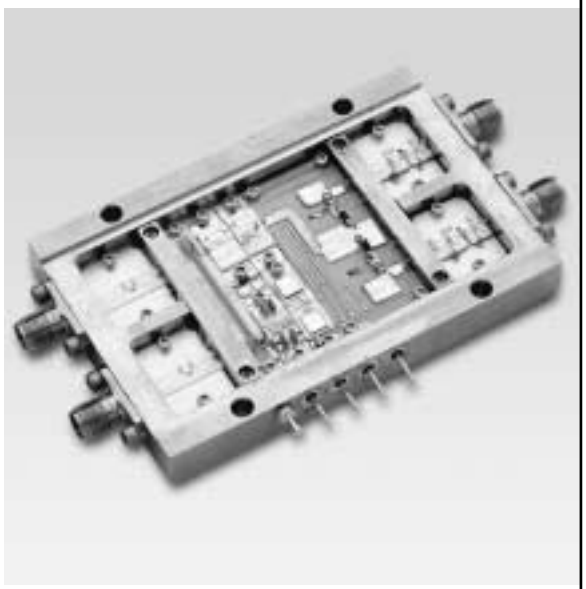

Temperature compensation can provide stable gain performance over a wide operating temperature range. Improvements between two and ten times can be obtained, depending on amplifier type, temperature range, gain, and bandwidth.

1dB compression point


An amplifier's power output capability varies inversely with operating temperature. The 1 dB gain compression point will decrease by roughly 0.01 dB/˚C for increasing temperature in the -54˚C to +75˚C range.


noise figure

An amplifier's noise figure will increase by roughly 0.01 dB/°C with increasing the temperature range from -54°C to 75°C. For amplifiers with extremely low noise, the noise temperature will increase by a ratio that is approximately proportional to the ratio of the absolute temperatures expressed in degrees Kelvin (°K).

heat sinks

All amplifiers must be properly mounted to ensure adequate heat sinking during operation. All components that internally dissipate heat can be damaged, even at extremely cold environmental temperatures, if the internally generated heat is not removed from the component's package. For instance, an amplifier without a heat sink can "burn out" if it is operating while being subjected to the low temperature (-54°C) cycle of the military "Thermal Vacuum" environmental test, because there is no way for the internally dissipated heat to be removed from the package.

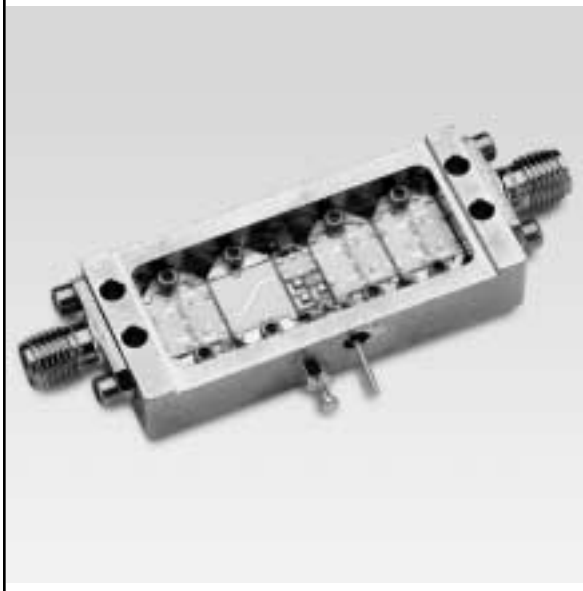

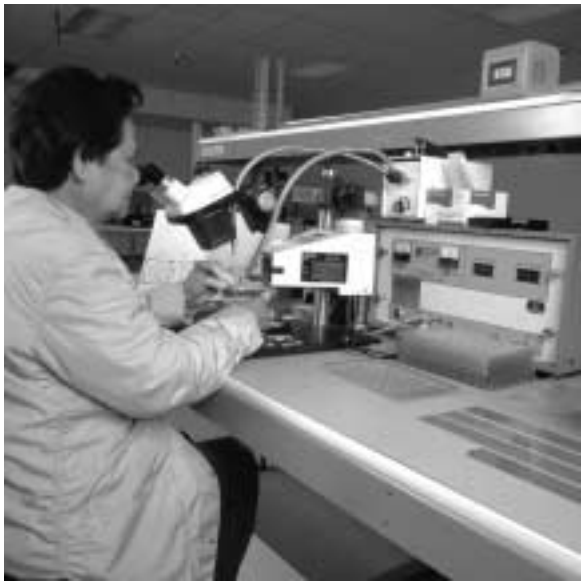

other considerations

Other items that should be considered in the application of JCA Technology GaAs FET amplifiers includes the following

Maximum input power without damage for all standard amplifiers is +20dBm CW. For the Ultra-Low Noise series of amplifiers, the maximum recommended input power is +15dBm CW.

Input protection circuits are available as an addition to the capabilities of the standard models. Please contact JCA Technology or your local representative for additional information if input protection is required.

All specifications for the JCA Technology amplifiers shown in this catalog are for operation at normal room ambient environments, and assume that the amplifier will be at a temperature of +25˚C. If there is a requirement for specifications for operation at other temperatures, please contact JCA Technology or your local representative for additional information.

All standard JCA Technology amplifiers are manufactured according to our standard flow procedures (shown in figure 2 on page 18). We can also provide amplifiers manufactured to meet the processing, inspection, and screening requirements used for screening amplifiers (shown in figure 3 on page 19). If your application contains MIL-STD-883 requirements or other additional screening specifications, please contact JCA Technology or your local representative for additional information.





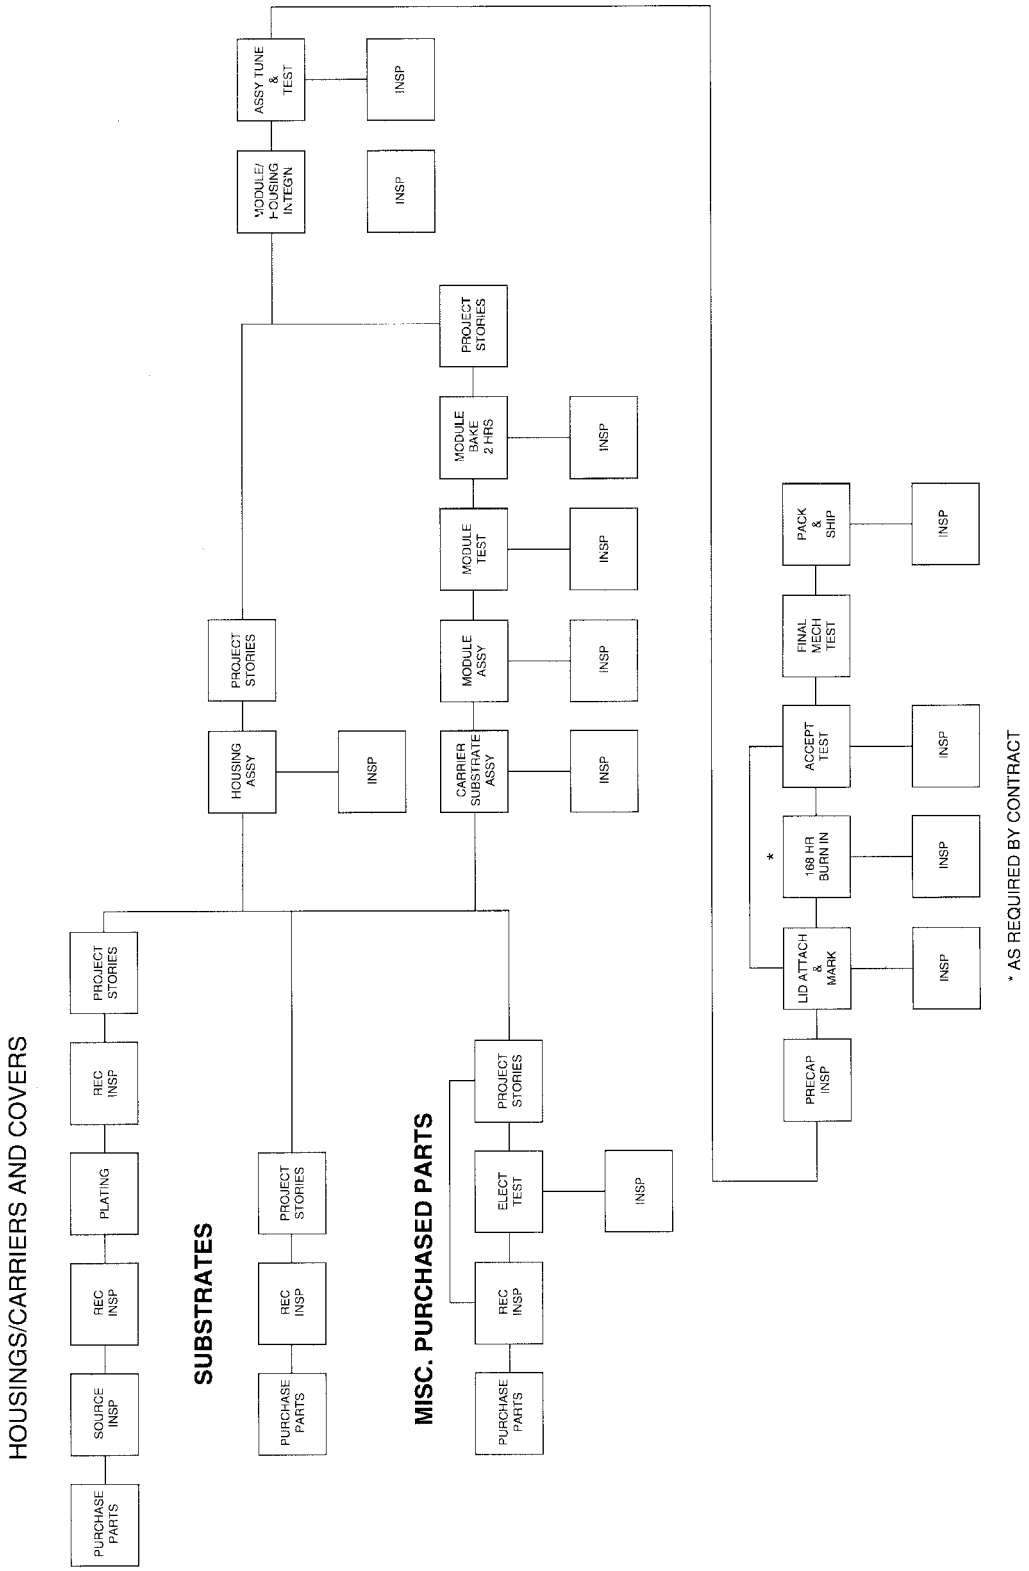


Figure 2. JCA Technology's standard amplifier process flow control diagram

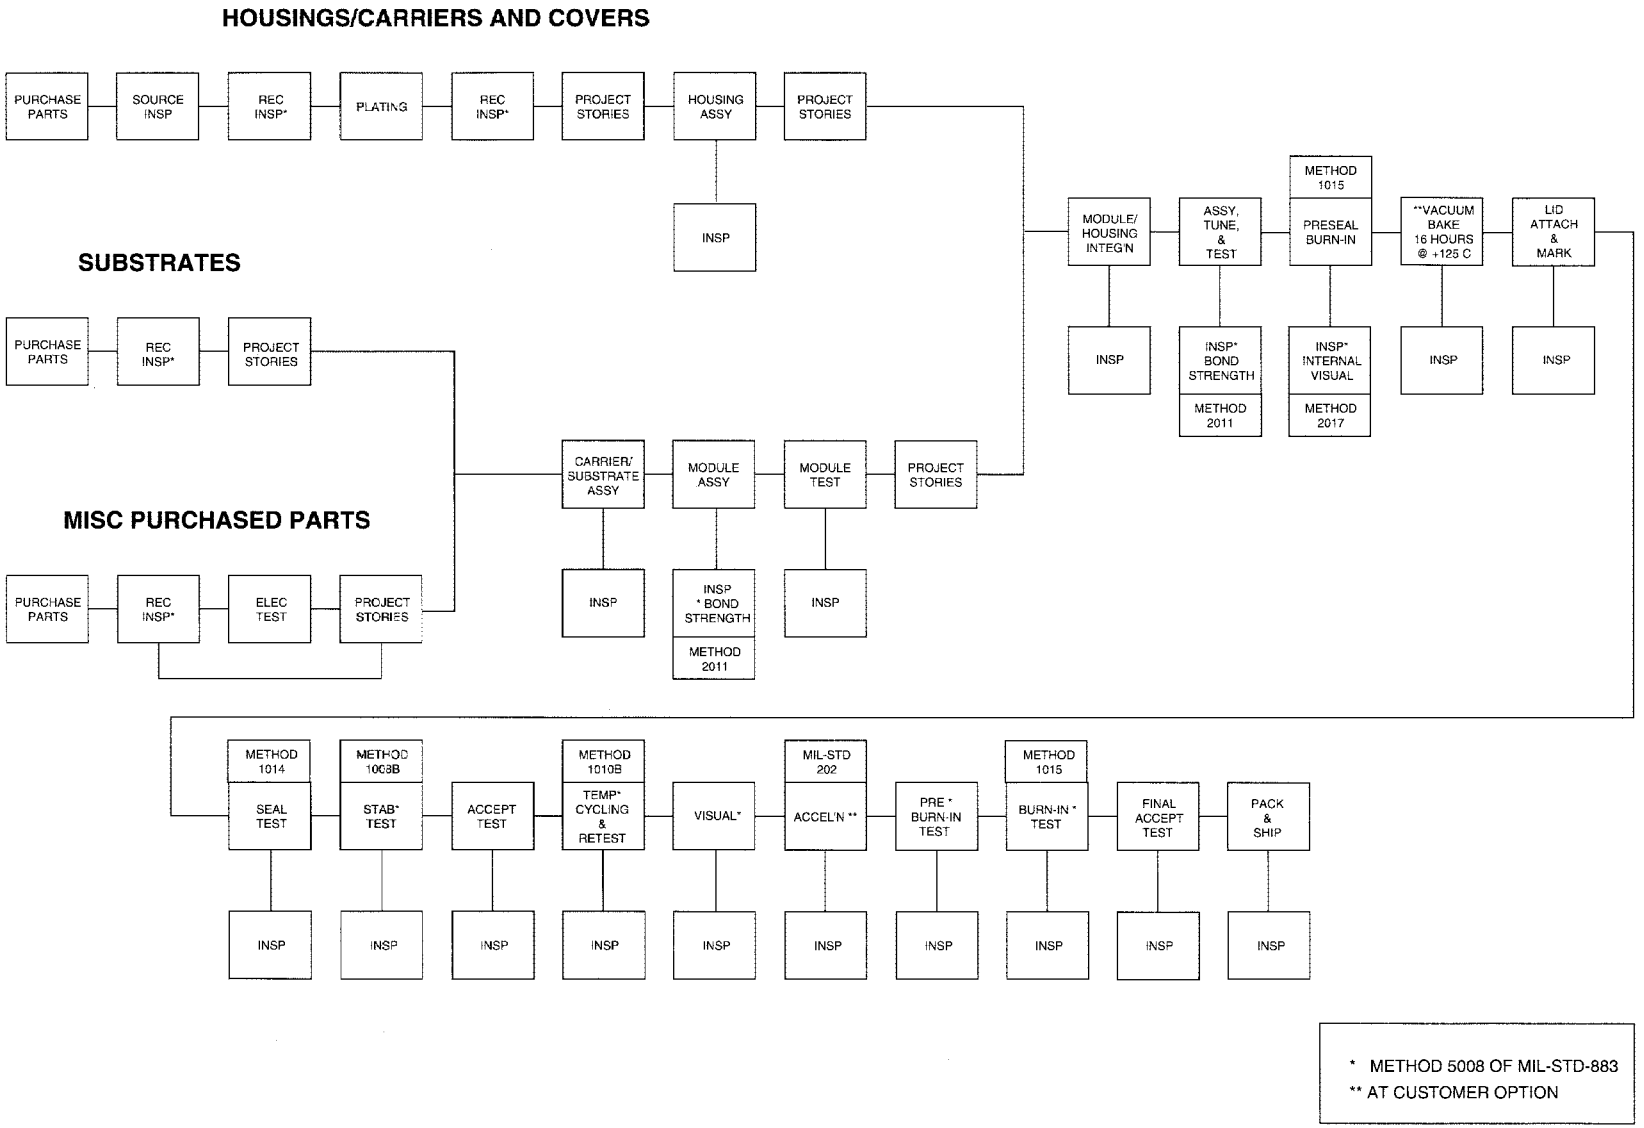


Figure 3. JCA Technology's screened amplifier process flow control diagram

www.jcatech.com e-mail jca@jcatech.com 4000 Via Pescador, Camarillo, CA 93012 Phone 805-445-9888 Fax 805-987-6990

ultra-low noise amplifiers

features

Coverage from 0.5 GHz to 18 GHz
Noise figure as low as 1.0 dB
Attractively priced
Removable SMA female connectors
Compact size

description

This series of HEMT and GaAs Fet amplifiers offers a compact and cost effective solution to most low noise requirements in the microwave bands. Balanced circuitry ensures stable operation with excellent dynamic range and low return losses.

Thin film MIC construction ensures optimum reliability. Specifications are given at +25 deg °C, yet the amplifiers will operate over the full military temperature ranges. Temperature compensated versions are available. The SMA connectors are removable for drop-in applications.

Narrow Band LNA's from 0.5 to 2.0 GHz (100 MHz Bandwidth)

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Narrow Band LNA's from 0.5 to 1.0 GHz (100 MHz Bandwidth)									
JCA01-2010	0.5-0.6	20	1.0	0.5	10	20	2.0:1	60	LCFB1
JCA01-2011	0.6-0.7	20	1.0	0.5	10	20	2.0:1	60	LCFB1
JCA01-2012	0.7-0.8	20	1.0	0.5	10	20	2.0:1	60	LCFB1
JCA01-2013	0.8-0.9	20	1.0	0.5	10	20	2.0:1	60	LCFB1
JCA01-2014	0.9-1.0	20	1.0	0.5	10	20	2.0:1	60	LCFB1
JCA01-3010	0.5-0.6	30	0.9	0.5	10	20	2.0:1	90	FB2
JCA01-3011	0.6-0.7	30	0.9	0.5	10	20	2.0:1	90	FB2
JCA01-3012	0.7-0.8	30	0.9	0.5	10	20	2.0:1	90	FB2
JCA01-3013	0.8-0.9	30	0.9	0.5	10	20	2.0:1	90	FB2
JCA01-3014	0.9-1.0	30	0.9	0.5	10	20	2.0:1	90	FB2
JCA01-4010	0.5-0.6	40	0.8	0.5	10	20	2.0:1	120	FB2
JCA01-4011	0.6-0.7	40	0.8	0.5	10	20	2.0:1	120	FB2
JCA01-4012	0.7-0.8	40	0.8	0.5	10	20	2.0:1	120	FB2
JCA01-4013	0.8-0.9	40	0.8	0.5	10	20	2.0:1	120	FB2
JCA01-4014	0.9-1.0	40	0.8	0.5	10	20	2.0;1	120	FB2

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Narrow Band LNA's from 1.0 to 1.5 GHz (100 MHz BANDWIDTH)									
JCA12-2010	1.0 - 1.1	22	0.9	0.5	10	20	2.0:1	60	LCFB1
JCA12-2011	1.1 - 1.2	22	0.9	0.5	10	20	2.0:1	60	LCFB1
JCA12-2012	1.2 - 1.3	22	0.9	0.5	10	20	2.0:1	60	LCFB1
JCA12-2013	1.3 - 1.4	22	0.9	0.5	10	20	2.0:1	60	LCFB1
JCA12-2014	1.4 - 1.5	22	0.9	0.5	10	20	2.0:1	60	LCFB1
JCA12-3010	1.0 - 1.1	33	0.8	0.5	10	20	2.0:1	120	FB2
JCA12-3011	1.1 - 1.2	33	0.8	0.5	10	20	2.0:1	120	FB2
JCA12-3012	1.2 - 1.3	33	0.8	0.5	10	20	2.0:1	120	FB2
JCA12-3013	1.3 - 1.4	33	0.8	0.5	10	20	2.0:1	120	FB2
JCA12-3014	1.4 - 1.5	33	0.8	0.5	10	20	2.0:1	120	FB2
JCA12-4010	1.0 - 1.1	44	0.8	0.5	10	20	2.0:1	120	FB2
JCA12-4011	1.1 - 1.2	44	0.8	0.5	10	20	2.0:1	120	FB2
JCA12-4012	1.2 - 1.3	44	0.8	0.5	10	20	2.0:1	120	FB2
JCA12-4013	1.3 - 1.4	44	0.8	0.5	10	20	2.0:1	120	FB2
JCA12-4014	1.4 - 1.5	44	0.8	0.5	10	20	2.0:1	120	FB2
Narrow Band LNA's from 1.5 TO 2.0 GHz (100 MHz BANDWIDTH)									
JCA12-2015	1.5 - 1.6	20	0.9	0.5	10	20	2.0:1	60	LCFB1
JCA12-2016	1.6 - 1.7	20	0.9	0.5	10	20	2.0:1	60	LCFB1
JCA12-2017	1.7 - 1.8	20	0.9	0.5	10	20	2.0:1	60	LCFB1
JCA12-2018	1.8 - 1.9	20	0.9	0.5	10	20	2.0:1	60	LCFB1
JCA12-2019	1.9 - 2.0	20	0.9	0.5	10	20	2.0:1	60	LCFB1
JCA12-3015	1.5 - 1.6	30	0.8	0.5	10	20	2.0:1	90	FB2
JCA12-3016	1.6 - 1.7	30	0.8	0.5	10	20	2.0:1	90	FB2
JCA12-3017	1.7 - 1.8	30	0.8	0.5	10	20	2.0:1	90	FB2
JCA12-3018	1.8 - 1.9	30	0.8	0.5	10	20	2.0:1	90	FB2
JCA12-3019	1.9 - 2.0	30	0.8	0.5	10	20	2.0:1	90	FB2
JCA12-4015	1.5 - 1.6	40	0.8	0.5	10	20	2.0:1	120	FB2
JCA12-4016	1.6 - 1.7	40	0.8	0.5	10	20	2.0:1	120	FB2
JCA12-4017	1.7 - 1.8	40	0.8	0.5	10	20	2.0:1	120	FB2
JCA12-4018	1.8 - 1.9	40	0.8	0.5	10	20	2.0:1	120	FB2
JCA12-4019	1.9 - 2.0	40	0.8	0.5	10	20	2.0:1	120	FB2

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Narrow Band LNA's from 0.5 TO 1.0 GHz (200 MHz BANDWIDTH)									
JCA01-2020	0.5 - 0.7	22	1.0	0.5	10	20	2.0:1	60	LCFB1
JCA01-2021	0.6 - 0.8	22	1.0	0.5	10	20	2.0:1	60	LCFB1
JCA01-2022	0.7 - 0.9	22	1.0	0.5	10	20	2.0:1	60	LCFB1
JCA01-2023	0.8 - 1.0	22	1.0	0.5	10	20	2.0:1	60	LCFB1
JCA01-2024	0.9 - 1.1	22	1.0	0.5	10	20	2.0:1	60	LCFB1
JCA01-3030	0.5 - 0.7	33	0.9	0.5	10	20	2.0:1	90	FB2
JCA01-3031	0.6 - 0.8	33	0.9	0.5	10	20	2.0:1	90	FB2
JCA01-3032	0.7 - 0.9	33	0.9	0.5	10	20	2.0:1	90	FB2
JCA01-3033	0.8 - 1.0	33	0.9	0.5	10	20	2.0:1	90	FB2
JCA01-3034	0.9 - 1.1	33	0.9	0.5	10	20	2.0:1	90	FB2
JCA01-4040	0.5 - 0.7	44	0.9	0.5	10	20	2.0:1	120	FB2
JCA01-4041	0.6 - 0.8	44	0.9	0.5	10	20	2.0:1	120	FB2
JCA01-4042	0.7 - 0.9	44	0.9	0.5	10	20	2.0:1	120	FB2
JCA01-4043	0.8 - 1.0	44	0.9	0.5	10	20	2.0:1	120	FB2
JCA01-4044	0.9 - 1.1	44	0.9	0.5	10	20	2.0:1	120	FB2
Narrow Band LNA's from 1.0 TO 1.5 GHz (200 MHz BANDWIDTH)									
JCA12-2020	1.0 - 1.2	22	0.9	0.5	10	20	2.0:1	60	LCFB1
JCA12-2021	1.1 - 1.3	22	0.9	0.5	10	20	2.0:1	60	LCFB1
JCA12-2022	1.2 - 1.4	22	0.9	0.5	10	20	2.0:1	60	LCFB1
JCA12-2023	1.3 - 1.5	22	0.9	0.5	10	20	2.0:1	60	LCFB1
JCA12-2024	1.4 - 1.6	22	0.9	0.5	10	20	2.0:1	60	LCFB1
JCA12-3030	1.0 - 1.2	33	0.8	0.5	10	20	2.0:1	90	FB2
JCA12-3031	1.1 - 1.3	33	0.8	0.5	10	20	2.0:1	90	FB2
JCA12-3032	1.2 - 1.4	33	0.8	0.5	10	20	2.0:1	90	FB2
JCA12-3033	1.3 - 1.5	33	0.8	0.5	10	20	2.0:1	90	FB2
JCA12-3034	1.4 - 1.6	33	0.8	0.5	10	20	2.0:1	90	FB2
JCA12-4040	1.0 - 1.2	44	0.8	0.5	10	20	2.0:1	120	FB2
JCA12-4041	1.1 - 1.3	44	0.8	0.5	10	20	2.0:1	120	FB2
JCA12-4042	1.2 - 1.4	44	0.8	0.5	10	20	2.0:1	120	FB2
JCA12-4043	1.3 - 1.5	44	0.8	0.5	10	20	2.0:1	120	FB2
JCA12-4044	1.4 - 1.6	44	0.8	0.5	10	20	2.0:1	120	FB2

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Narrow Band LNA's from 1.5 TO 2.0 GHz (200 MHz BANDWIDTH)									
JCA12-2025	1.5-1.7	22	0.9	0.5	10	20	2.0:1	60	LCFB1
JCA12-2026	1.6-1.8	22	0.9	0.5	10	20	2.0:1	60	LCFB1
JCA12-2027	1.7-1.9	22	0.9	0.5	10	20	2.0:1	60	LCFB1
JCA12-2028	1.8-2.0	22	0.9	0.5	10	20	2.0:1	60	LCFB1
JCA12-2029	1.9-2.1	22	0.9	0.5	10	20	2.0:1	60	LCFB1
JCA12-3035	1.5-1.7	33	0.8	0.5	10	20	2.0:1	90	FB2
JCA12-3036	1.6-1.8	33	0.8	0.5	10	20	2.0:1	90	FB2
JCA12-3037	1.7-1.9	33	0.8	0.5	10	20	2.0:1	90	FB2
JCA12-3038	1.8-2.0	33	0.8	0.5	10	20	2.0:1	90	FB2
JCA12-3039	1.9-2.1	33	0.8	0.5	10	20	2.0:1	90	FB2
JCA12-4045	1.5-1.7	44	0.8	0.5	10	20	2.0:1	120	FB2
JCA12-4046	1.6-1.8	44	0.8	0.5	10	20	2.0:1	120	FB2
JCA12-4047	1.7-1.9	44	0.8	0.5	10	20	2.0:1	120	FB2
JCA12-4048	1.8-2.0	44	0.8	0.5	10	20	2.0:1	120	FB2
JCA12-4049	1.9-2.1	44	0.8	0.5	10	20	2.0:1	120	FB2
Narrow Band LNA's from 2.0 to 2.6 GHz (200 MHz BANDWIDTH)									
JCA23-2020	2.0-2.2	22	0.9	0.5	10	20	2.0:1	60	LCFB1
JCA23-2021	2.1-2.3	22	0.9	0.5	10	20	2.0:1	60	LCFB1
JCA23-2022	2.2-2.4	22	0.9	0.5	10	20	2.0:1	60	LCFB1
JCA23-2023	2.3-2.5	22	0.9	0.5	10	20	2.0:1	60	LCFB1
JCA23-2024	2.4-2.6	22	0.9	0.5	10	20	2.0:1	60	LCFB1
JCA23-3020	2.0-2.2	34	0.8	0.5	10	20	2.0:1	90	FB2
JCA23-3021	2.1-2.3	34	0.8	0.5	10	20	2.0:1	90	FB2
JCA23-3022	2.2-2.4	34	0.8	0.5	10	20	2.0:1	90	FB2
JCA23-3023	2.3-2.5	34	0.8	0.5	10	20	2.0:1	90	FB2
JCA23-3024	2.4-2.6	34	0.8	0.5	10	20	2.0:1	90	FB2
JCA23-4020	2.0-2.2	45	0.8	0.5	10	20	2.0:1	120	FB2
JCA23-4021	2.1-2.3	45	0.8	0.5	10	20	2.0:1	120	FB2
JCA23-4022	2.2-2.4	45	0.8	0.5	10	20	2.0:1	120	FB2
JCA23-4023	2.3-2.5	45	0.8	0.5	10	20	2.0:1	120	FB2
JCA23-4024	2.4-2.6	45	0.8	0.5	10	20	2.0:1	120	FB2

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

www.jcatech.com e-mail jca@jcatech.com

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Narrow Band LNA's from 2.5 to 3.1 GHz (200 MHz BANDWIDTH)									
JCA23-2025	2.5-2.7	22	0.9	0.5	10	20	2.0:1	60	LCFB1
JCA23-2026	2.6-2.8	22	0.9	0.5	10	20	2.0:1	60	LCFB1
JCA23-2027	2.7-2.9	22	0.9	0.5	10	20	2.0:1	60	LCFB1
JCA23-2028	2.8-3.0	22	0.9	0.5	10	20	2.0:1	60	LCFB1
JCA23-2029	2.9-3.1	22	0.9	0.5	10	20	2.0:1	60	LCFB1
JCA23-3025	2.5-2.7	34	0.8	0.5	10	20	2.0:1	90	FB2
JCA23-3026	2.6-2.8	34	0.8	0.5	10	20	2.0:1	90	FB2
JCA23-3027	2.7-2.9	34	0.8	0.5	10	20	2.0:1	90	FB2
JCA23-3028	2.8-3.0	34	0.8	0.5	10	20	2.0:1	90	FB2
JCA23-3029	2.9-3.1	34	0.8	0.5	10	20	2.0:1	90	FB2
JCA23-4025	2.5-2.7	45	0.8	0.5	10	20	2.0:1	120	FB2
JCA23-4026	2.6-2.8	45	0.8	0.5	10	20	2.0:1	120	FB2
JCA23-4027	2.7-2.9	45	0.8	0.5	10	20	2.0:1	120	FB2
JCA23-4028	2.8-3.0	45	0.8	0.5	10	20	2.0:1	120	FB2
JCA23-4029	2.9-3.1	45	0.8	0.5	10	20	2.0:1	120	FB2
Narrow Band LNA's from 3.0 to 3.6 GHz (200 MHz BANDWIDTH)									
JCA34-2020	3.0-3.2	20	1.0	0.5	10	20	2.0:1	60	LCFB1
JCA34-2021	3.1-3.3	20	1.0	0.5	10	20	2.0:1	60	LCFB1
JCA34-2022	3.2-3.4	20	1.0	0.5	10	20	2.0:1	60	LCFB1
JCA34-2023	3.3-3.5	20	1.0	0.5	10	20	2.0:1	60	LCFB1
JCA34-2024	3.4-3.6	20	1.0	0.5	10	20	2.0:1	60	LCFB1
JCA34-3020	3.0-3.2	32	0.9	0.5	10	20	2.0:1	90	FB2
JCA34-3021	3.1-3.3	32	0.9	0.5	10	20	2.0:1	90	FB2
JCA34-3022	3.2-3.4	32	0.9	0.5	10	20	2.0:1	90	FB2
JCA34-3023	3.3-3.5	32	0.9	0.5	10	20	2.0:1	90	FB2
JCA34-3024	3.4-3.6	32	0.9	0.5	10	20	2.0:1	90	FB2
JCA34-4020	3.0-3.2	42	0.9	0.5	10	20	2.0:1	120	FB2
JCA34-4021	3.1-3.3	42	0.9	0.5	10	20	2.0:1	120	FB2
JCA34-4022	3.2-3.4	42	0.9	0.5	10	20	2.0:1	120	FB2
JCA34-4023	3.3-3.5	42	0.9	0.5	10	20	2.0:1	120	FB2
JCA34-4024	3.4-3.6	42	0.9	0.5	10	20	2.0:1	120	FB2

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Narrow Band LNA's from 3.5 to 4.1 GHz (200 MHz BANDWIDTH)									
JCA34-2025	3.5-3.7	20	1.0	0.5	10	20	2.0:1	60	LCFB1
JCA34-2026	3.6-3.8	20	1.0	0.5	10	20	2.0:1	60	LCFB1
JCA34-2027	3.7-3.9	20	1.0	0.5	10	20	2.0:1	60	LCFB1
JCA34-2028	3.8-4.0	20	1.0	0.5	10	20	2.0:1	60	LCFB1
JCA34-2029	3.9-4.1	20	1.0	0.5	10	20	2.0:1	60	LCFB1
JCA34-3025	3.5-3.7	30	1.0	0.5	10	20	2.0:1	90	FB2
JCA34-3026	3.6-3.8	30	1.0	0.5	10	20	2.0:1	90	FB2
JCA34-3027	3.7-3.9	30	1.0	0.5	10	20	2.0:1	90	FB2
JCA34-3028	3.8-4.0	30	1.0	0.5	10	20	2.0:1	90	FB2
JCA34-3029	3.9-4.1	30	1.0	0.5	10	20	2.0:1	90	FB2
JCA34-4025	3.5-3.7	40	1.0	0.5	10	20	2.0:1	120	FB2
JCA34-4026	3.6-3.8	40	1.0	0.5	10	20	2.0:1	120	FB2
JCA34-4027	3.7-3.9	40	1.0	0.5	10	20	2.0:1	120	FB2
JCA34-4028	3.8-4.0	40	1.0	0.5	10	20	2.0:1	120	FB2
JCA34-4029	3.9-4.1	40	1.0	0.5	10	20	2.0:1	120	FB2
LNA's from 1.0 GHz to 4.2 GHz (500 MHz Bandwidth)									
Low Noise Amplifiers from 1.0 GHz to 1.5 GHz (500 MHz bandwidth)									
JCA12-2050	1.0-1.5	24	1.2	0.5	10	20	2.0:1	60	LCFB1
JCA12-2051	1.0-1.5	24	1.0	0.5	10	20	2.0:1	60	LCFB1
JCA12-2052	1.0-1.5	24	0.9	0.5	10	20	2.0:1	60	LCFB1
JCA12-3050	1.0-1.5	35	1.2	0.5	10	20	2.0:1	90	FB2
JCA12-3051	1.0-1.5	35	1.0	0.5	10	20	2.0:1	90	FB2
JCA12-3052	1.0-1.5	35	0.8	0.5	10	20	2.0:1	90	FB2
JCA12-4050	1.0-1.5	42	1.2	0.5	10	20	2.0:1	120	FB2
JCA12-4051	1.0-1.5	42	1.0	0.5	10	20	2.0:1	120	FB2
JCA12-4052	1.0-1.5	42	0.8	0.5	10	20	2.0:1	120	FB2

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Ultra Low Noise Amplifiers from 1.5 TO 2.0 GHz (500 MHz BANDWIDTH)									
JCA12-2053	1.5-2.0	24	1.2	0.5	10	20	2.0:1	60	LCFB1
JCA12-2054	1.5-2.0	24	1.0	0.5	10	20	2.0:1	60	LCFB1
JCA12-2055	1.5-2.0	24	0.9	0.5	10	20	2.0:1	60	LCFB1
JCA12-3053	1.5-2.0	35	1.2	0.5	10	20	2.0:1	90	FB2
JCA12-3054	1.5-2.0	35	1.0	0.5	10	20	2.0:1	90	FB2
JCA12-3055	1.5-2.0	35	0.8	0.5	10	20	2.0:1	90	FB2
JCA12-4053	1.5-2.0	42	1.2	0.5	10	20	2.0:1	120	FB2
JCA12-4054	1.5-2.0	42	1.0	0.5	10	20	2.0:1	120	FB2
JCA12-4055	1.5-2.0	42	0.8	0.5	10	20	2.0:1	120	FB2
Ultra Low Noise Amplifiers from 2.0 TO 2.5 GHz (500 MHz BANDWIDTH)									
JCA23-2050	2.0-2.5	24	1.2	0.5	10	20	2.0:1	60	LCFB1
JCA23-2051	2.0-2.5	24	1.0	0.5	10	20	2.0:1	60	LCFB1
JCA23-2052	2.0-2.5	24	0.8	0.5	10	20	2.0:1	60	LCFB1
JCA23-3050	2.0-2.5	35	1.2	0.5	10	20	2.0:1	90	FB2
JCA23-3051	2.0-2.5	35	1.0	0.5	10	20	2.0:1	90	FB2
JCA23-3052	2.0-2.5	35	0.8	0.5	10	20	2.0:1	90	FB2
JCA23-4050	2.0-2.5	42	1.2	0.5	10	20	2.0:1	120	FB2
JCA23-4051	2.0-2.5	42	1.0	0.5	10	20	2.0:1	120	FB2
JCA23-4052	2.0-2.5	42	0.8	0.5	10	20	2.0:1	120	FB2
Ultra Low Noise Amplifiers from 2.5 TO 3.0 GHz (500 MHz BANDWIDTH)									
JCA23-2053	2.5-3.0	24	1.3	0.5	10	20	2.0:1	60	LCFB1
JCA23-2054	2.5-3.0	24	1.1	0.5	10	20	2.0:1	60	LCFB1
JCA23-2055	2.5-3.0	24	0.9	0.5	10	20	2.0:1	60	LCFB1
JCA23-3053	2.5-3.0	35	1.3	0.5	10	20	2.0:1	90	FB2
JCA23-3054	2.5-3.0	35	1.1	0.5	10	20	2.0:1	90	FB2
JCA23-3055	2.5-3.0	35	0.9	0.5	10	20	2.0:1	90	FB2
JCA23-4053	2.5-3.0	42	1.3	0.5	10	20	2.0:1	120	FB2
JCA23-4054	2.5-3.0	42	1.1	0.5	10	20	2.0:1	120	FB2
JCA23-4055	2.5-3.0	42	0.9	0.5	10	20	2.0:1	120	FB2

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Ultra Low Noise Amplifiers from 3.0-3.5 GHz (500 MHz BANDWIDTH)									
JCA34-2056	3.0-3.5	22	1.4	0.5	10	20	2.0:1	60	LCFB1
JCA34-2057	3.0-3.5	22	1.2	0.5	10	20	2.0:1	60	LCFB1
JCA34-2058	3.0-3.5	22	1.0	0.5	10	20	2.0:1	60	LCFB1
JCA34-3056	3.0-3.5	33	1.4	0.5	10	20	2.0:1	90	FB2
JCA34-3057	3.0-3.5	33	1.2	0.5	10	20	2.0:1	90	FB2
JCA34-3058	3.0-3.5	33	1.0	0.5	10	20	2.0:1	90	FB2
JCA34-4056	3.0-3.5	40	1.4	0.5	10	20	2.0:1	120	FB2
JCA34-4057	3.0-3.5	40	1.2	0.5	10	20	2.0:1	120	FB2
JCA34-4058	3.0-3.5	40	1.0	0.5	10	20	2.0:1	120	FB2
Ultra Low Noise Amplifiers from 3.5 to 4.0 GHz (500 MHz BANDWIDTH)									
JCA34-2059	3.5-4.0	22	1.4	0.5	10	20	2.0:1	60	LCFB1
JCA34-2060	3.5-4.0	22	1.2	0.5	10	20	2.0:1	60	LCFB1
JCA34-2061	3.5-4.0	22	1.0	0.5	10	20	2.0:1	60	LCFB1
JCA34-3059	3.5-4.0	33	1.4	0.5	10	20	2.0:1	90	FB2
JCA34-3060	3.5-4.0	33	1.2	0.5	10	20	2.0:1	90	FB2
JCA34-3061	3.5-4.0	33	1.0	0.5	10	20	2.0:1	90	FB2
JCA34-4059	3.5-4.0	40	1.4	0.5	10	20	2.0:1	120	FB2
JCA34-4060	3.5-4.0	40	1.2	0.5	10	20	2.0:1	120	FB2
JCA34-4061	3.5-4.0	40	1.0	0.5	10	20	2.0:1	120	FB2
Ultra Low Noise Amplifiers from 3.7 to 4.2 GHz (500 MHz BANDWIDTH)									
JCA34-2050	3.7-4.2	22	1.4	0.5	10	20	2.0:1	60	LCFB1
JCA34-2051	3.7-4.2	22	1.2	0.5	10	20	2.0:1	60	LCFB1
JCA34-2052	3.7-4.2	22	1.0	0.5	10	20	2.0:1	60	LCFB1
JCA34-3050	3.7-4.2	33	1.4	0.5	10	20	2.0:1	90	FB2
JCA34-3051	3.7-4.2	33	1.2	0.5	10	20	2.0:1	90	FB2
JCA34-3052	3.7-4.2	33	1.0	0.5	10	20	2.0:1	90	FB2
JCA34-4050	3.7-4.2	40	1.4	0.5	10	20	2.0:1	120	FB2
JCA34-4051	3.7-4.2	40	1.2	0.5	10	20	2.0:1	120	FB2
JCA34-4052	3.7-4.2	40	1.0	0.5	10	20	2.0:1	120	FB2

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

octave band amplifiers

features

- Removable SMA female connectors
- Class octave band converge from 0.5 GHz to 26.0 GHz
- Competitively priced
- Up to 1 WATT output power (at 1dB compression point)
- Compact size

description

This series for GaAs FET amplifiers offers a highly reliable yet cost effective solutions for most microwave applications. Balanced circuitry ensures stable operation with excellent Dynamic Range and Low Return Losses.

Thin film MIC constructions ensures optimum reliability. Specifications are given at +25°C, yet the amplifiers will operate over the full military temperature ranges. Temperature compensated versions are available. The SMA connectors are removable for drop-in applications.

Octave Band LNA'S from 1.0 GHz to 26.0 GHz

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Octave Bands LNA's from 1.0 GHz to 2.0 GHz									
JCA12-200	1.0-2.0	22	1.2	1.0	10	20	2.0:1	60	LFCBI
JCA12-300	1.0-2.0	33	1.2	1.0	10	20	2.0:1	90	FB2
JCA12-400	1.0-2.0	44	1.2	1.5	10	20	2.0:1	120	FB2
Octave Band LNA's from 2.0 GHz to 4.0 GHz									
JCA24-100	2.0-4.0	14	1.9	1.0	10	20	2.0:1	60	LCFBI
JCA24-200	2.0-4.0	22	1.9	1.0	10	20	2.0:1	80	LCFBI
JCA24-300	2.0-4.0	32	1.4	1.0	10	20	2.0:1	120	FB2
JCA24-400	2.0-4.0	42	1.4	1.5	10	20	2.0:1	160	FB2
JCA24-500	2.0-4.0	48	1.4	1.5	10	20	2.0:1	240	FB2
JCA24-600	2.0-4.0	54	1.4	1.5	10	20	2.0:1	300	FB3P
Octave Band LNA's from 4.0 GHz to 8.0 GHz									
JCA48-100	4.0-8.0	12	2.2	1.0	10	20	2.0:1	80	C2
JCA48-200	4.0-8.0	20	1.6	1.0	10	20	2.0:1	100	C2
JCA48-300	4.0-8.0	30	1.6	1.0	10	20	2.0:1	120	C3
JCA48-400	4.0-8.0	40	1.6	1.5	10	20	2.0:1	160	C4
JCA48-500	4.0-8.0	50	1.6	1.5	10	20	2.0:1	350	C6
JCA48-600	4.0-8.0	52	1.6	1.5	10	20	2.0:1	400	C6/P

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Octave Band LNA's from 8.0 GHz to 12.0 GHz									
JCA812-100	8.0-12.0	10	3.0	1.0	10	20	2.0:1	80	XK2
JCA812-200	8.0-12.0	16	2.5	1.0	10	20	2.0:1	100	XK2
JCA812-300	8.0-12.0	24	2.2	1.0	10	20	2.0:1	120	XK3
JCA812-400	8.0-12.0	32	2.2	1.5	10	20	2.0:1	160	XK4
JCA812-500	8.0-12.0	40	2.2	1.5	10	20	2.0:1	200	XK6
JCA812-600	8.0-12.0	48	2.2	1.5	10	20	2.0:1	240	XK6
Octave Band LNA's from 10.0 GHz to 20.0 GHz									
JCA1020-300	10.0-20.0	18	3.5	1.0	10	20	2.0:1	120	Q4
JCA1020-200	10.0-20.0	24	3.5	1.5	10	20	2.0:1	160	Q4
JCA1020-300	10.0-20.0	30	3.5	2.0	10	20	2.0:1	200	Q6
JCA1020-400	10.0-20.0	36	3.5	2.0	10	20	2.0:1	240	Q6
Octave Band LNA's from 12.0 GHz to 18.0 GHz									
JCA1218-200	12.0-18.0	10	3.2	1.0	10	20	2.0:1	80	K2
JCA1218-300	12.0-18.0	20	2.8	1.0	10	20	2.0:1	120	K4
JCA1218-400	12.0-18.0	28	2.8	1.5	10	20	2.0:1	160	K4
JCA1218-500	12.0-18.0	35	2.8	1.5	10	20	2.0:1	300	K6
JCA1218-600	12.0-18.0	42	2.8	2.0	10	20	2.0:1	240	K6
JCA1218-700	12.0-18.0	48	2.8	2.0	10	20	2.0:1	280	K8
Octave Band LNA's from 12.0 GHz to 24.0 GHz									
JCA1224-300	12.0-24.0	15	3.8	1.0	10	20	2.0:1	120	Q4
JCA1224-400	12.0-24.0	20	3.8	1.5	10	20	2.0:1	160	Q4
JCA1224-500	12.0-24.0	25	3.8	2.0	10	20	2.0:1	200	Q6
JCA1224-600	12.0-24.0	30	3.8	2.0	10	20	2.0:1	240	Q6
Octave Band LNA's from 18.0 GHz to 26.0 GHz									
JCA1826-300	18.0-26.0	15	4.0	1.0	10	20	2.0:1	120	Q4
JCA1826-400	18.0-26.0	20	4.0	1.3	10	20	2.0:1	160	Q4
JCA1826-500	18.0-26.0	25	4.0	2.0	10	20	2.0:1	200	Q6
JCA1826-600	18.0-26.0	30	4.0	2.0	10	20	2.0:1	240	Q6

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

Octave-Band LNA's from 0.5 GHz to 3.0 GHz

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Octave Band LNA's from 0.5 GHz to 1.0 GHz									
JCA01-215	0.5-1.0	20	2.0	1.0	13	23	2.0:1	100	LCFB1
JCA01-301	0.5-1.0	30	2.0	1.0	13	20	2.0:1	150	FB2
JCA01-302	0.5-1.0	28	2.0	1.0	20	30	2.0:1	250	FB2
JCA01-303	0.5-1.0	27	2.5	1.5	23	30	2.0:1	250	FB2
JCA01-304	0.5-1.0	26	3.0	1.5	27	30	2.0:1	250	FB2
JCA01-305	0.5-1.0	25	3.5	1.5	30	30	2.0:1	250	FB2
Octave Band LNA's from 0.5 GHz to 2.0 GHz									
JCA02-301	0.5-2.0	30	3.0	1.5	10	20	2.0:1	150	FB2
JCA02-302	0.5-2.0	28	3.0	1.5	20	30	2.0:1	250	FB2
JCA02-332	0.5-2.0	26	5.0	2.0	23	33	2.0:1	400	FB2
Octave Band LNA's from 1.0 GHz to 1.5 Ghz									
JCA12-301	1.0-1.5	30	2.0	1.0	13	23	2.0:1	150	FB2
JCA12-340	1.0-1.5	29	2.0	1.0	17	27	2.0:1	200	FB2
JCA12-341	1.0-1.5	28	2.0	1.0	20	30	2.0:1	300	FB2
JCA12-347	1.0-1.5	27	2.5	1.5	23	33	2.0:1	400	FB2
JCA12-348	1.0-1.5	26	2.5	1.5	27	37	2.0:1	650	FB2
JCA12-349	1.0-1.5	25	3.0	1.5	30	40	2.0:1	850	FB2
JCA12-404	1.0-1.5	32	5.0	2.0	30	40	2.0:1	900	FB2
Octave Band LNA's from 1.5 GHz to 2.0 GHz									
JCA12-350	1.5-2.0	30	2.0	1.0	13	23	2.0:1	150	FB2
JCA12-351	1.5-2.0	29	2.0	1.0	17	27	2.0:1	200	FB2
JCA12-352	1.5-2.0	28	2.0	1.0	20	30	2.0:1	300	FB2
JCA12-353	1.5-2.0	27	2.5	1.5	23	33	2.0:1	400	FB2
JCA12-354	1.5-2.0	26	2.5	1.5	27	37	2.0:1	650	FB2
JCA12-355	1.5-2.0	25	3.0	1.5	30	40	2.0:1	850	FB2
JCA12-405	1.5-2.0	32	3.0	2.0	30	40	2.0:1	900	FB2

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Octave Band LNA's from 1.0 GHz to 2.0 GHz									
JCA12-215	1.0-2.0	20	2.0	1.0	13	23	2.0:1	100	LCFB1
JCA12-302	1.0-2.0	30	2.0	1.0	13	23	2.0:1	150	FB2
JCA12-303	1.0-2.0	30	2.0	1.5	17	27	2.0:1	200	FB2
JCA12-306	1.0-2.0	30	2.0	1.5	20	30	2.0:1	400	FB2
JCA12-1001	1.0-2.0	10	1.9	1.0	10	20	2.0;1	90	LCFB1
JCA12-2001	1.0-2.0	20	1.9	1.0	10	20	2.0:1	100	LCFB1
JCA12-3001	1.0-2.0	30	1.0	1.0	10	20	2.0:1	125	FB2
JCA12-4001	1.0-2.0	40	1.0	1.0	10	20	2.0:1	150	FB2
JCA12-4002	1.0-2.0	45	1.0	1.0	10	20	2.0:1	200	FB2
JCA12-1003	1.0-2.0	10	1.9	1.0	15	25	2.0:1	100	LCFB1
JCA12-2003	1.0-2.0	20	1.9	1.0	15	25	2.0:1	125	FB2
JCA12-3003	1.0-2.0	30	1.0	1.0	15	25	2.0:1	175	FB2
JCA12-4003	1.0-2.0	40	1.0	1.0	15	25	2.0:1	225	FB2
JCA12-4004	1.0-2.0	45	1.0	1.0	15	25	2.0:1	275	FB2
JCA12-1005	1.0-2.0	10	2.0	1.0	20	20	2.0:1	150	LCFB1
JCA12-2005	1.0-2.0	20	1.8	1.0	20	30	2.0:1	185	FB2
JCA12-3005	1.0-2.0	30	1.0	1.0	20	30	2.0:1	225	FB2
JCA12-4005	1.0-2.0	40	1.0	1.0	20	30	2.0:1	275	FB2
JCA12-4006	1.0-2.0	45	1.0	1.0	20	30	2.0:1	325	FB2
JCA12-1007	1.0-2.0	10	3.0	1.0	25	35	2.0:1	300	LCFB1
JCA12-2007	1.0-2.0	20	1.8	1.0	25	35	2.0:1	450	FB2
JCA12-3007	1.0-2.0	30	1.5	1.0	25	35	2.0:1	650	FB2
JCA12-4007	1.0-2.0	40	1.5	1.0	25	35	2.0;1	700	FB2
JCA12-4008	1.0-2.0	45	1.5	1.0	25	35	2.0:1	775	FB2
JCA12-1009	1.0-2.0	10	5.0	1.0	30	38	2.0:1	750	LCFB1
JCA12-2009	1.0-2.0	20	3.0	1.0	30	38	2.0:1	800	FB2
JCA12-3009	1.0-2.0	30	1.9	1.0	30	38	2.0:1	850	FB2
JCA12-4009	1.0-2.0	40	1.7	1.0	30	38	2.0:1	900	FB2

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

www.jcatech.com e-mail jca@jcatech.com

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Octave Band Amplifiers from 1.0 GHz to 2.0 GHz									
JCAI2-2006	1.0-1.5	20	5.0	1.0	33	41	2.0:1	900	FB2
JCAI2-2008	1.5-2.0	20	5.0	1.0	33	41	2.0:1	900	FB2
JCAI2-3006	1.0-1.5	27	5.0	1.0	33	41	2.0:1	950	FB2
JCAI2-3008	1.5-2.0	27	5.0	1.0	33	41	2.0:1	950	FB2
JCAI2-4020	1.0-1.5	35	5.0	1.0	33	41	2.0:1	1000	FB2
JCAI2-4021	1.5-2.0	35	5.0	1.0	33	41	2.0:1	1000	FB2
JCAI2-5006	1.0-1.5	42	5.0	1.0	33	41	2.0:1	1200	FB2
JCAI2-5008	1.5-2.0	42	5.0	1.0	33	41	2.0:1	1200	FB2
JCAI2-307	1.0-2.0	27	2.5	1.5	23	33	2.0:1	400	FB2
JCAI2-308	1.0-2.0	26	2.5	1.5	27	37	2.0:1	700	FB2
JCAI2-309	1.0-2.0	25	3.0	1.5	30	40	2.0:1	900	FB2
JCAI2-406	1.0-2.0	32	3.0	2.0	30	40	2.0:1	800	FB2
Octave Band Amplifiers from 1.5 GHz to 3.0 GHz									
JCAI3-215	1.5-3.0	18	2.5	1.5	10	20	2.0:1	100	LCFBI
JCAI3-216	1.5-3.0	18	3.0	1.5	13	23	2.0:1	125	LCFBI
JCAI3-217	1.5-3.0	18	3.5	1.5	17	27	2.0:1	150	LCFBI
JCAI3-300	1.5-3.0	24	2.5	1.5	10	20	2.0:1	150	FB2
JCAI3-301	1.5-3.0	24	3.0	1.5	13	23	2.0:1	175	FB2
JCAI3-302	1.5-3.0	24	3.5	1.5	17	27	2.0:1	200	FB2
JCAI3-400	1.5-3.0	30	2.5	2.0	10	20	2.0:1	200	FB2
JCAI3-401	1.5-3.0	30	2.5	2.0	13	23	2.0:1	225	FB2
JCAI3-402	1.5-3.0	30	3.0	2.0	17	27	2.0:1	250	FB2
Octave Band Amplifiers from 2.0 GHz to 4.0 GHz									
JCA24-115	2.0-4.0	14	3.0	1.0	10	20	2.0:1	100	CI
JCA24-201	2.0-4.0	22	2.0	1.0	13	23	2.0:1	100	C2
JCA24-202	2.0-4.0	22	2.0	1.0	17	27	2.0:1	140	C2
JCA24-203	2.0-4.0	21	2.0	1.5	20	30	2.0:1	200	C2

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Octave Band Amplifiers from 2.0 GHz to 4.0 GHz									
JCA24-204	2.0-4.0	20	3.0	1.5	23	33	2.0:1	350	C2
JCA24-205	2.0-4.0	19	4.0	2.0	27	37	2.0:1	600	C2
JCA24-206	2.0-4.0	19	5.0	2.0	30	40	2.0:1	750	C2
JCA24-207	2.0-4.0	22	1.8	1.0	10	20	2.0:1	100	LCFBI
JCA24-301	2.0-4.0	32	2.0	1.0	13	23	2.0:1	150	C3
JCA24-302	2.0-4.0	32	2.0	1.0	16	26	2.0:1	190	C3
JCA24-303	2.0-4.0	31	2.0	1.0	19	29	2.0:1	250	C3
JCA24-304	2.0-4.0	30	2.0	1.0	23	33	2.0:1	400	C3
JCA24-305	2.0-4.0	29	3.0	1.0	27	37	2.0:1	650	C3
JCA24-306	2.0-4.0	25	4.0	1.0	30	40	2.0:1	800	C4
JCA24-307	2.0-4.0	28	1.8	1.0	10	20	2.0:1	100	FB2
JCA24-308	2.0-4.0	30	1.5	1.0	10	20	2.0:1	100	FB2
JCA24-309	2.0-4.0	28	1.3	1.0	10	20	2.0:1	100	FB2
JCA24-401	2.0-4.0	42	2.0	1.5	13	23	2.0:1	200	C4
JCA24-402	2.0-4.0	42	2.0	1.5	16	26	2.0:1	240	C4
JCA24-403	2.0-4.0	41	2.0	1.5	19	29	2.0:1	300	C4
JCA24-404	2.0-4.0	40	2.0	1.5	23	33	2.0:1	450	C4
JCA24-405	2.0-4.0	39	3.0	1.5	27	35	2.0:1	700	C4
JCA24-406	2.0-4.0	35	4.0	1.5	30	38	2.0:1	850	C6
JCA24-407	2.0-4.0	40	1.8	1.5	10	20	2.0:1	200	C6
JCA24-501	2.0-4.0	48	2.0	1.5	10	20	2.0:1	225	C6
JCA24-502	2.0-4.0	46	2.0	1.5	13	23	2.0:1	250	C6
JCA24-503	2.0-4.0	45	2.0	1.5	16	26	2.0:1	275	C6
JCA24-504	2.0-4.0	45	2.0	1.5	19	29	2.0:1	350	C6
JCA24-505	2.0-4.0	44	2.0	1.5	23	33	2.0:1	480	C6
JCA24-506	2.0-4.0	44	3.0	1.5	27	35	2.0:1	750	C6
Multi-Octave Band Amplifiers from 2.0 GHz to 6.0 GHz									
JCA26-202	2.0-6.0	18	4.5	1.0	16	26	2.0:1	150	XK2
JCA26-203	2.0-6.0	18	4.5	1.0	19	29	2.0:1	250	XK2
JCA26-204	2.0-6.0	18	5.0	1.0	22	32	2.0:1	300	C2
JCA26-205	2.0-6.0	16	6.0	1.0	23	34	2.0:1	350	C2
JCA26-206	2.0-6.0	16	6.0	1.0	25	37	2.0:1	400	C2
JCA26-207	2.0-6.0	15	6.0	1.5	27	38	2.0:1	450	C3
JCA26-208	2.0-6.0	15	8.0	1.5	30	40	2.0:1	550	C3
JCA26-209	2.0-6.0	14	9.0	1.5	31	41	2.0:1	650	C3

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

www.jcatech.com e-mail jca@jcatech.com

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Octave Band Amplifiers from 2.0 GHz to 6.0 GHz									
JCA26-301	2.0-6.0	27	4.0	1.0	13	23	2.0:1	180	XK3
JCA26-302	2.0-6.0	27	4.0	1.0	16	26	2.0:1	210	XK3
JCA26-303	2.0-6.0	26	4.0	1.0	19	29	2.0:1	300	XK3
JCA26-304	2.0-6.0	25	4.0	1.0	22	32	2.0:1	350	C3
JCA26-305	2.0-6.0	24	4.0	1.0	23	34	2.0:1	475	C3
JCA26-306	2.0-6.0	24	4.5	1.0	25	37	2.0:1	550	C3
JCA26-307	2.0-6.0	23	5.0	1.5	27	38	2.0:1	650	C4
JCA26-308	2.0-6.0	23	5.5	1.5	30	40	2.0:1	750	C4
JCA26-309	2.0-6.0	21	7.0	1.5	31	41	2.0:1	800	C4
JCA26-401	2.0-6.0	36	4.0	1.5	13	23	2.0:1	250	XK4
JCA26-402	2.0-6.0	36	4.0	1.5	16	26	2.0:1	280	XK4
JCA26-403	2.0-6.0	35	4.0	1.5	19	29	2.0:1	350	XK4
JCA26-404	2.0-6.0	35	4.0	1.5	22	32	2.0:1	400	C4
JCA26-405	2.0-6.0	31	4.0	1.0	23	34	2.0:1	500	C4
JCA26-406	2.0-6.0	31	4.5	1.0	25	37	2.0:1	675	C4
JCA26-407	2.0-6.0	30	5.0	1.5	27	38	2.0:1	750	C4
JCA26-408	2.0-6.0	30	5.5	1.5	30	40	2.0:1	850	C4
JCA26-409	2.0-6.0	29	7.0	1.5	31	41	2.0:1	900	C4
JCA26-505	2.0-6.0	39	4.0	1.0	23	33	2.0:1	700	C6
JCA26-506	2.0-6.0	39	4.5	1.0	25	35	2.0:1	800	C6
JCA26-507	2.0-6.0	37	5.0	1.5	27	37	2.0:1	900	C6
JCA26-508	2.0-6.0	36	5.5	1.5	30	40	2.0:1	1000	C6
JCA26-509	2.0-6.0	35	7.0	1.5	31	41	2.0:1	1100	C6
Octave Band Amplifiers from 2.0 GHz to 8.0 GHz									
JCA28-201	2.0-8.0	18	3.5	1.0	10	20	2.0:1	120	XK2
JCA28-202	2.0-8.0	17	3.5	1.0	10	20	2.0:1	160	XK2
JCA28-203	2.0-8.0	17	3.5	1.0	16	26	2.0:1	200	XK2
JCA28-204	2.0-8.0	17	4.0	1.5	17	27	2.0:1	240	XK2
JCA28-205	2.0-8.0	16	4.0	1.5	19	29	2.0:1	275	XK2
JCA28-206	2.0-8.0	15	4.5	1.5	21	31	2.0:1	325	XK2
JCA28-207	2.0-8.0	15	5.0	2.0	24	34	2.0:1	380	XK2
JCA28-208	2.0-8.0	14	6.0	2.0	25	37	2.0:1	450	XK3
JCA28-301	2.0-8.0	24	3.5	1.5	10	20	2.0:1	180	XK3
JCA28-302	2.0-8.0	24	3.5	1.5	13	23	2.0:1	220	XK3
JCA28-303	2.0-8.0	24	3.5	1.5	16	26	2.0:1	260	XK3

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Octave Band Amplifiers from 2.0 GHz to 8.0 GHz									
JCA28-304	2.0-8.0	24	3.5	1.5	17	27	2.0:1	300	XK3
JCA28-305	2.0-8.0	23	3.5	1.5	19	29	2.0:1	340	XK3
JCA28-306	2.0-8.0	23	3.8	1.5	21	31	2.0:1	385	XK3
JCA28-307	2.0-8.0	22	4.0	2.0	24	34	2.0:1	450	XK3
JCA28-308	2.0-8.0	21	5.0	2.0	25	37	2.0:1	500	XK3
JCA28-401	2.0-8.0	32	3.5	2.0	10	20	2.0:1	240	XK4
JCA28-402	2.0-8.0	32	3.5	2.0	13	23	2.0:1	280	XK4
JCA28-403	2.0-8.0	32	3.5	2.0	16	26	2.0:1	320	XK4
JCA28-404	2.0-8.0	31	3.5	1.5	17	27	2.0:1	360	XK4
JCA28-405	2.0-8.0	30	3.5	1.5	19	29	2.0:1	400	XK4
JCA28-406	2.0-8.0	30	3.8	1.5	21	31	2.0:1	445	XK4
JCA28-407	2.0-8.0	29	4.0	2.0	24	34	2.0:1	510	XK4
JCA28-408	2.0-8.0	27	5.0	2.0	25	37	2.0:1	560	XK4
JCA28-501	2.0-8.0	38	3.5	1.5	10	20	2.0:1	380	XK4
JCA28-502	2.0-8.0	38	3.5	1.5	13	23	2.0:1	395	XK4
JCA28-503	2.0-8.0	38	3.5	1.5	16	26	2.0:1	410	XK4
JCA28-504	2.0-8.0	35	3.5	1.5	17	27	2.0:1	420	XK4
JCA28-505	2.0-8.0	34	3.5	1.5	19	29	2.0:1	480	XK4
JCA28-506	2.0-8.0	34	3.8	1.5	21	31	2.0:1	545	XK6
JCA28-507	2.0-8.0	33	4.0	2.0	24	34	2.0:1	600	XK6
JCA28-508	2.0-8.0	32	5.0	2.0	25	37	2.0:1	660	XK6
JCA28-601	2.0-8.0	42	3.5	2.0	10	20	2.0:1	360	XK6
JCA28-602	2.0-8.0	42	3.5	2.0	13	23	2.0:1	420	XK6
JCA28-603	2.0-8.0	42	3.5	2.0	16	26	2.0:1	480	XK6
JCA28-604	2.0-8.0	41	3.5	1.5	17	27	2.0:1	480	XK6
JCA28-605	2.0-8.0	41	3.5	1.5	19	29	2.0:1	540	XK6
JCA28-606	2.0-8.0	40	3.8	1.5	21	31	2.0:1	600	XK6
JCA28-607	2.0-8.0	39	4.0	2.0	24	34	2.0:1	660	XK6
JCA28-608	2.0-8.0	38	5.0	2.0	25	37	2.0:1	750	XK6

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

Octave Band Amplifiers from 4.0 GHz to 8.0 GHz

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
JCA48-101	4.0-8.0	8	2.5	1.0	10	20	2.0:1	100	C2
JCA48-102	4.0-8.0	10	3.0	1.0	13	23	2.0:1	125	C2
JCA48-103	4.0-8.0	13	3.5	1.0	16	26	2.0:1	150	C2
JCA48-104	4.0-8.0	12	4.0	1.0	19	29	2.0:1	175	C2
JCA48-105	4.0-8.0	14	5.0	1.0	23	33	2.0:1	225	C2
JCA48-106	4.0-8.0	13	6.0	1.0	27	35	2.0:1	400	C2
JCA48-201	4.0-8.0	18	2.5	1.0	13	23	2.0:1	120	C2
JCA48-202	4.0-8.0	18	2.5	1.0	16	26	2.0:1	150	C2
JCA48-203	4.0-8.0	18	3.0	1.0	19	29	2.0:1	200	C2
JCA48-204	4.0-8.0	17	4.0	1.0	22	32	2.0:1	250	C2
JCA48-205	4.0-8.0	16	5.0	1.0	25	35	2.0:1	400	C2
JCA48-206	4.0-8.0	20	5.0	1.0	27	35	2.0:1	700	C2
JCA48-207	4.0-8.0	15	3.0	1.0	15	20	2.0:1	100	C2
JCA48-208	4.0-8.0	22	2.2	1.0	10	20	2.0:1	100	C2
JCA48-209	4.0-8.0	24	6.0	1.0	30	38	2.0:1	750	C2
JCA48-301	4.0-8.0	27	2.5	1.0	13	23	2.0:1	160	C3
JCA48-302	4.0-8.0	27	2.5	1.0	16	26	2.0:1	200	C3
JCA48-303	4.0-8.0	27	2.5	1.0	19	29	2.0:1	250	C3
JCA48-304	4.0-8.0	26	2.5	1.0	22	32	2.0:1	300	C3
JCA48-305	4.0-8.0	25	2.5	1.0	25	35	2.0:1	450	C3
JCA48-306	4.0-8.0	24	1.8	1.0	27	35	2.0:1	650	C3
JCA48-307	4.0-8.0	30	1.9	1.0	15	25	2.0:1	200	C3
JCA48-308	4.0-8.0	28	2.0	1.0	10	20	2.0:1	160	C3
JCA48-309	4.0-8.0	32	3.0	1.0	27	35	2.0:1	750	C3
JCA48-310	4.0-8.0	30	1.6	1.0	10	20	2.0:1	150	C3
JCA48-401	4.0-8.0	36	2.0	1.5	13	23	2.0:1	210	C4
JCA48-402	4.0-8.0	36	2.5	1.5	16	26	2.0:1	260	C4
JCA48-403	4.0-8.0	36	2.5	1.5	19	29	2.0:1	300	C4
JCA48-404	4.0-8.0	35	2.5	1.5	22	32	2.0:1	350	C4
JCA48-405	4.0-8.0	34	2.5	1.5	25	35	2.0:1	500	C4
JCA48-406	4.0-8.0	37	2.5	1.5	27	35	2.0:1	750	C4
JCA48-407	4.0-8.0	35	2.0	1.5	15	25	2.0:1	260	C4
JCA48-408	4.0-8.0	38	1.8	1.5	10	20	2.0:1	150	C4
JCA48-409	4.0-8.0	38	6.0	1.5	30	38	2.0:1	825	C4

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Octave Band Amplifiers from 4.0 GHz to 8.0 GHz									
JCA48-501	4.0-8.0	45	2.5	1.5	13	23	2.0:1	260	C6
JCA48-502	4.0-8.0	45	2.5	1.5	16	26	2.0:1	310	C6
JCA48-503	4.0-8.0	45	2.5	1.5	19	29	2.0:1	350	C6
JCA48-504	4.0-8.0	44	2.5	1.5	22	32	2.0:1	400	C6
JCA48-505	4.0-8.0	43	2.5	1.5	25	35	2.0:1	550	C6
JCA48-506	4.0-8.0	40	3.0	1.5	27	35	2.0:1	750	C6
JCA48-507	4.0-8.0	42	2.2	1.5	15	25	2.0:1	200	C6
JCA48-508	4.0-8.0	45	1.8	1.5	10	20	2.0:1	240	C6
JCA48-509	4.0-8.0	44	6.0	1.5	30	38	2.0:1	850	C6
Octave Band Amplifiers from 8.0 GHz to 12.0 GHz									
JCA812-215	8.0-12.0	14	3.5	1.0	10	20	2.0:1	100	XK2
JCA812-201	8.0-12.0	10	3.5	1.0	13	23	2.0:1	100	XK2
JCA812-202	8.0-12.0	15	4.0	1.0	16	26	2.0:1	160	XK2
JCA812-203	8.0-12.0	12	4.0	1.0	19	29	2.0:1	250	XK2
JCA812-204	8.0-12.0	10	4.0	1.0	21	31	2.0:1	300	XK2
JCA812-205	8.0-12.0	13	4.0	1.0	24	34	2.0:1	400	XK2
JCA812-206	8.0-12.0	14	4.0	1.0	26	36	2.0:1	700	XK2
JCA812-301	8.0-12.0	24	3.5	1.0	12	22	2.0:1	150	XK3
JCA812-302	8.0-12.0	23	4.0	1.0	15	25	2.0:1	200	XK3
JCA812-303	8.0-12.0	22	4.0	1.0	18	28	2.0:1	270	XK3
JCA812-304	8.0-12.0	22	4.0	1.0	21	31	2.0:1	350	XK3
JCA812-305	8.0-12.0	24	4.0	1.0	24	34	2.0:1	500	XK3
JCA812-306	8.0-12.0	25	4.0	1.0	26	36	2.0:1	650	XK3
JCA812-307	8.0-12.0	26	2.8	1.0	10	20	2.0:1	150	XK3
JCA812-308	8.0-12.0	25	2.5	1.0	10	20	2.0:1	150	XK3
JCA812-401	8.0-12.0	32	3.5	1.5	12	22	2.0:1	200	XK4
JCA812-402	8.0-12.0	31	4.0	1.5	15	25	2.0:1	250	XK4
JCA812-403	8.0-12.0	30	4.0	1.5	18	28	2.0:1	320	XK4
JCA812-404	8.0-12.0	29	4.0	1.5	21	31	2.0:1	450	XK4
JCA812-405	8.0-12.0	28	4.0	1.5	24	34	2.0:1	550	XK4
JCA812-406	8.0-12.0	26	5.0	2.0	27	35	2.0:1	800	XK4
JCA812-407	8.0-12.0	30	3.0	1.5	10	20	2.0:1	150	XK4
JCA812-408	8.0-12.0	32	2.8	1.5	13	23	2.0:1	250	XK4
JCA812-409	8.0-12.0	31	2.5	1.5	10	20	2.0:1	200	XK4

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

www.jcatech.com e-mail jca@jcatech.com

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Octave Band Amplifiers from 8.0 GHz to 12.0 GHz									
JCA8I2-50I	8.0-12.0	40	3.5	1.5	12	22	2.0:1	250	XK6
JCA8I2-502	8.0-12.0	39	4.0	1.5	15	25	2.0:1	300	XK6
JCA8I2-503	8.0-12.0	38	4.0	1.5	18	28	2.0:1	370	XK6
JCA8I2-504	8.0-12.0	37	4.0	1.5	21	31	2.0:1	500	XK6
JCA8I2-505	8.0-12.0	36	4.0	1.5	24	34	2.0:1	600	XK6
JCA8I2-506	8.0-12.0	34	5.0	2.0	26	36	2.0:1	850	XK6
JCA8I2-507	8.0-12.0	35	2.8	1.5	10	20	2.0:1	250	XK6
JCA8I2-508	8.0-12.0	33	2.5	1.5	10	20	2.0:1	250	XK6
JCA8I2-509	8.0-12.0	35	4.5	1.5	25	35	2.0:1	650	XK6
JCA8I2-60I	8.0-12.0	48	3.5	2.0	12	22	2.0:1	300	XK6
JCA8I2-602	8.0-12.0	47	4.0	2.0	15	25	2.0:1	350	XK6
JCA8I2-603	8.0-12.0	46	4.0	2.0	18	28	2.0:1	420	XK6
JCA8I2-604	8.0-12.0	45	4.0	2.0	21	31	2.0:1	550	XK6
JCA8I2-605	8.0-12.0	44	4.0	2.0	24	34	2.0:1	650	XK6
JCA8I2-606	8.0-12.0	42	4.0	2.0	26	36	2.0:1	800	XK6
JCA8I2-202I	8.0-12.0	20	5.0	1.5	27	35	2.0:1	700	XK4
JCA8I2-2022	8.0-12.0	19	5.5	1.5	30	38	2.0:1	1100	XPA6
JCA8I2-2023	8.0-12.0	17	7.0	1.5	32	40	2.0:1	1200	XPA6
JCA8I2-2024	8.0-12.0	16	8.0	1.5	33	41	2.0:1	1300	XPA6
JCA8I2-302I	8.0-12.0	27	5.0	1.5	27	35	2.0:1	800	XK4
JCA8I2-3022	8.0-12.0	26	5.0	1.5	30	38	2.0:1	1200	XPA6
JCA8I2-3023	8.0-12.0	24	5.0	1.5	32	40	2.0:1	1300	XPA6
JCA8I2-3024	8.0-12.0	23	5.0	1.5	33	41	2.0:1	1400	XPA6
JCA8I2-402I	8.0-12.0	32	5.0	1.5	27	35	2.0:1	900	XK6
JCA8I2-4022	8.0-12.0	31	5.0	1.5	30	38	2.0:1	1400	XPA6
JCA8I2-4023	8.0-12.0	30	5.0	1.5	32	40	2.0:1	1500	XPA6
JCA8I2-4024	8.0-12.0	29	5.0	1.5	33	41	2.0:1	1600	XPA6
JCA8I2-502I	8.0-12.0	38	5.0	1.5	27	35	2.0:1	1000	XK6
JCA8I2-5022	8.0-12.0	37	5.0	1.5	30	38	2.0:1	1500	XPA6
JCA8I2-5023	8.0-12.0	36	5.0	1.5	32	40	2.0:1	1600	XPA6
JCA8I2-5024	8.0-12.0	34	5.0	1.5	33	41	2.0:1	1700	XPA6
JCA8I2-602I	8.0-12.0	45	5.0	1.5	27	35	2.0:1	1100	XK6
JCA8I2-6022	8.0-12.0	44	5.0	1.5	30	38	2.0:1	1600	XPA6
JCA8I2-6023	8.0-12.0	45	5.0	1.5	32	40	2.0:1	1700	XPA6
JCA8I2-6024	8.0-12.0	41	5.0	1.5	33	41	2.0:1	1800	XPA6

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Octave Band Amplifiers from 12.0 GHz to 18.0 GHz									
JCA1218-301	12.0-18.0	16	5.0	1.0	10	20	2.0:1	150	K3
JCA1218-302	12.0-18.0	15	4.0	1.0	13	23	2.0:1	200	K4
JCA1218-303	12.0-18.0	14	4.0	1.0	15	25	2.0:1	250	K4
JCA1218-304	12.0-18.0	13	4.0	1.0	20	30	2.0:1	300	K4
JCA1218-305	12.0-18.0	15	4.5	1.5	23	33	2.0:1	350	K4
JCA1218-306	12.0-18.0	16	4.5	1.5	25	35	2.0:1	400	K4
JCA1218-401	12.0-18.0	22	4.0	1.5	10	20	2.0:1	200	K4
JCA1218-402	12.0-18.0	21	4.0	1.5	13	23	2.0:1	250	K4
JCA1218-403	12.0-18.0	20	4.0	1.5	15	25	2.0:1	300	K4
JCA1218-404	12.0-18.0	19	4.0	1.5	20	30	2.0:1	400	K4
JCA1218-405	12.0-18.0	18	4.0	1.5	23	33	2.0:1	550	K6
JCA1218-406	12.0-18.0	18	4.0	1.5	25	35	2.0:1	650	K6
JCA1218-501	12.0-18.0	27	4.0	1.5	10	20	2.0:1	270	K4
JCA1218-502	12.0-18.0	26	4.0	1.5	13	23	2.0:1	300	K4
JCA1218-503	12.0-18.0	25	4.0	1.5	15	25	2.0:1	350	K4
JCA1218-504	12.0-18.0	24	4.0	1.5	20	30	2.0:1	450	K4
JCA1218-505	12.0-18.0	24	4.0	1.5	23	33	2.0:1	600	K6
JCA1218-506	12.0-18.0	22	4.0	1.5	25	35	2.0:1	700	K6
JCA1218-601	12.0-18.0	32	4.0	2.0	10	20	2.0:1	300	K6
JCA1218-602	12.0-18.0	31	4.0	2.0	13	23	2.0:1	350	K6
JCA1218-603	12.0-18.0	30	4.0	2.0	15	25	2.0:1	400	K6
JCA1218-604	12.0-18.0	29	4.0	2.0	20	30	2.0:1	500	K6
JCA1218-605	12.0-18.0	29	4.0	2.0	23	33	2.0:1	650	K6
JCA1218-606	12.0-18.0	27	4.0	2.0	25	35	2.0:1	750	K6
JCA1218-801	12.0-18.0	42	4.0	2.0	10	20	2.0:1	400	K8
JCA1218-802	12.0-18.0	41	4.0	2.0	13	23	2.0:1	450	K8
JCA1218-803	12.0-18.0	40	4.0	2.0	15	25	2.0:1	500	K8
JCA1218-804	12.0-18.0	39	4.0	2.0	30	30	2.0:1	600	K8
JCA1218-805	12.0-18.0	37	4.0	2.0	23	33	2.0:1	750	K8
JCA1218-806	12.0-18.0	35	4.0	2.0	25	35	2.0:1	850	K8

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Octave Band LNA's from 5.0 GHz to 10.0 GHz									
JCA510-201	5.0-10.0	12	5.0	1.0	10	20	2.0:1	85	K2
JCA510-202	5.0-10.0	13	4.5	1.0	13	23	2.0:1	95	K2
JCA510-203	5.0-10.0	14	4.5	1.0	15	25	2.0:1	110	K2
JCA510-204	5.0-10.0	15	4.5	1.0	17	27	2.0:1	130	K2
JCA510-205	5.0-10.0	16	4.5	1.0	22	32	2.0:1	140	K2
JCA510-206	5.0-10.0	17	5.0	1.0	24	34	2.0:1	175	K2
JCA510-301	5.0-10.0	21	4.0	1.5	10	20	2.0:1	140	K3
JCA510-302	5.0-10.0	23	4.0	1.5	13	23	2.0:1	155	K3
JCA510-303	5.0-10.0	24	4.0	1.5	15	25	2.0:1	175	K3
JCA510-304	5.0-10.0	24	4.0	1.5	17	27	2.0:1	190	K3
JCA510-305	5.0-10.0	23	4.0	1.5	22	32	2.0:1	210	K3
JCA510-306	5.0-10.0	22	4.5	1.5	24	34	2.0:1	220	K3
JCA510-401	5.0-10.0	29	3.0	1.5	10	20	2.0:1	210	K4
JCA510-402	5.0-10.0	30	3.0	1.5	13	23	2.0:1	230	K4
JCA510-403	5.0-10.0	30	3.5	1.5	15	25	2.0:1	255	K4
JCA510-404	5.0-10.0	31	4.0	1.5	17	27	2.0:1	275	K4
JCA510-405	5.0-10.0	28	4.0	1.5	22	32	2.0:1	285	K4
JCA510-406	5.0-10.0	26	4.5	1.5	24	34	2.0:1	300	K4
JCA510-501	5.0-10.0	37	3.0	1.5	10	20	2.0:1	280	K6
JCA510-502	5.0-10.0	36	3.0	1.5	13	23	2.0:1	330	K6
JCA510-503	5.0-10.0	35	3.5	1.5	15	25	2.0:1	360	K6
JCA510-504	5.0-10.0	38	4.0	1.5	17	27	2.0:1	375	K6
JCA510-505	5.0-10.0	36	4.0	1.5	22	32	2.0:1	385	K6
JCA510-506	5.0-10.0	34	4.5	1.5	24	34	2.0:1	400	K6
Octave Band LNA's from 6.0 GHz to 12.0 GHz									
JCA612-201	6.0-12.0	14	5.0	1.5	10	20	2.0:1	75	K2
JCA612-202	6.0-12.0	16	5.0	1.5	13	23	2.0:1	90	K2
JCA612-203	6.0-12.0	15	5.0	1.5	15	25	2.0:1	110	K2
JCA612-301	6.0-12.0	21	4.0	1.5	10	20	2.0:1	140	K3
JCA612-302	6.0-12.0	23	4.0	1.5	13	23	2.0:1	155	K3
JCA612-303	6.0-12.0	22	4.0	1.5	15	25	2.0:1	170	K3

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Octave Band LNA's from 6.0 to 12.0 GHz									
JCA612-401	6.0-12.0	28	4.0	1.5	10	20	2.0:1	200	K4
JCA612-402	6.0-12.0	30	4.0	1.5	13	23	2.0:1	220	K4
JCA612-403	6.0-12.0	29	4.0	1.5	15	25	2.0:1	235	K4
JCA612-501	6.0-12.0	38	3.5	1.5	10	20	2.0:1	260	K6
JCA612-502	6.0-12.0	36	3.5	1.5	13	23	2.0:1	280	K6
JCA612-503	6.0-12.0	34	3.5	1.5	15	25	2.0:1	295	K6
Octave Band LNA's from 7.0 to 14.0 GHz									
JCA714-201	7.0-14.0	14	5.0	1.5	10	20	2.0:1	75	K2
JCA714-202	7.0-14.0	16	5.0	1.5	13	23	2.0:1	90	K2
JCA714-203	7.0-14.0	15	5.0	1.5	15	25	2.0:1	110	K2
JCA714-301	7.0-14.0	21	4.0	1.5	10	20	2.0:1	140	K3
JCA714-302	7.0-14.0	24	4.0	1.5	13	23	2.0:1	155	K3
JCA714-303	7.0-14.0	23	4.0	1.5	15	25	2.0:1	170	K3
JCA714-401	7.0-14.0	29	4.0	1.5	10	20	2.0:1	200	K4
JCA714-402	7.0-14.0	30	4.0	1.5	13	23	2.0:1	225	K4
JCA714-403	7.0-14.0	28	4.0	1.5	15	25	2.0:1	240	K4
JCA714-501	7.0-14.0	35	4.0	1.5	10	20	2.0:1	260	K6
JCA714-502	7.0-14.0	34	4.0	1.5	13	23	2.0:1	275	K6
JCA714-503	7.0-14.0	34	4.0	1.5	15	25	2.0:1	295	K6
Octave Band LNA's from 8.0 to 16.0 GHz									
JCA816-201	8.0-16.0	18	5.0	1.5	10	20	2.0:1	100	K2
JCA816-202	8.0-16.0	16	5.0	1.5	13	23	2.0:1	110	K2
JCA816-203	8.0-16.0	17	5.0	1.5	15	25	2.0:1	125	K2
JCA816-301	8.0-16.0	25	4.5	1.5	10	20	2.0:1	150	K3
JCA816-302	8.0-16.0	24	4.5	1.5	13	23	2.0:1	165	K3
JCA816-303	8.0-16.0	22	4.5	1.5	15	25	2.0:1	180	K3
JCA816-401	8.0-16.0	31	4.0	1.5	10	20	2.0:1	220	K4
JCA816-402	8.0-16.0	31	4.2	1.5	13	23	2.0:1	235	K4
JCA816-403	8.0-16.0	30	4.2	1.5	15	25	2.0:1	245	K4

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

www.jcatech.com e-mail jca@jcatech.com

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Octave Band Amplifiers from 8.0 to 16.0 GHz									
JCA816-501	8.0-16.0	38	4.0	1.5	10	20	2.0:1	285	K6
JCA816-502	8.0-16.0	37	4.2	1.5	13	23	2.0:1	295	K6
JCA816-503	8.0-16.0	36	4.2	1.5	15	25	2.0:1	305	K6
Octave Band Amplifiers from 10.0 to 20.0 GHz									
JCA1020-201	10.0-20.0	12	6.0	2.0	5	15	2.0:1	100	Q2
JCA1020-202	10.0-20.0	13	6.0	2.0	10	20	2.0:1	115	Q2
JCA1020-203	10.0-20.0	12	6.0	2.0	12	22	2.0:1	125	Q2
JCA1020-301	10.0-20.0	18	5.5	2.0	5	15	2.0:1	145	Q4
JCA1020-302	10.0-20.0	19	5.5	2.0	10	20	2.0:1	160	Q4
JCA1020-303	10.0-20.0	17	5.5	2.0	12	22	2.0:1	170	Q4
JCA1020-401	10.0-20.0	24	5.5	2.0	5	15	2.0:1	195	Q4
JCA1020-402	10.0-20.0	23	5.5	2.0	10	20	2.0:1	210	Q4
JCA1020-403	10.0-20.0	24	5.5	2.0	12	22	2.0:1	220	Q4
JCA1020-501	10.0-20.0	30	5.0	2.0	5	15	2.0:1	250	Q6
JCA1020-502	10.0-20.0	31	5.0	2.0	10	20	2.0:1	260	Q6
JCA1020-503	10.0-20.0	29	5.0	2.0	12	22	2.0:1	275	Q6
Octave Band Amplifiers from 12.0 to 24.0 GHz									
JCA1224-201	12.0-24.0	12	6.0	2.0	5	15	2.0:1	100	Q2
JCA1224-202	12.0-24.0	14	6.0	2.0	10	20	2.0:1	115	Q2
JCA1224-203	12.0-24.0	11	6.0	2.0	12	22	2.0:1	125	Q2
JCA1224-301	12.0-24.0	18	6.0	2.0	5	15	2.0:1	150	Q4
JCA1224-302	12.0-24.0	17	6.0	2.0	10	20	2.0:1	165	Q4
JCA1224-303	12.0-24.0	17	6.0	2.0	12	22	2.0:1	175	Q4
JCA1224-401	12.0-24.0	25	6.0	2.0	5	15	2.0:1	200	Q4
JCA1224-402	12.0-24.0	25	6.0	2.0	10	20	2.0:1	215	Q4
JCA1224-403	12.0-24.0	23	6.0	2.0	12	22	2.0:1	230	Q4
JCA1224-501	12.0-24.0	31	6.0	2.0	5	15	2.0:1	250	Q6
JCA1224-502	12.0-24.0	29	6.0	2.0	10	20	2.0:1	260	Q6
JCA1224-503	12.0-24.0	28	6.0	2.0	12	22	2.0:1	275	Q6

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Octave Band Amplifiers from 18.0 to 26.0 GHz									
JCA1826-201	18.0-26.0	13	6.0	2.5	5	15	2.0:1	110	Q2
JCA1826-202	18.0-26.0	14	6.0	2.5	8	18	2.0:1	120	Q2
JCA1826-203	18.0-26.0	12	6.0	2.5	12	22	2.0:1	130	Q2
JCA1826-301	18.0-26.0	19	6.0	2.5	5	15	2.0:1	160	Q4
JCA1826-302	18.0-26.0	20	6.0	2.5	8	18	2.0:1	175	Q4
JCA1826-303	18.0-26.0	18	6.0	2.5	12	22	2.0:1	190	Q4
JCA1826-401	18.0-26.0	26	6.0	2.5	5	15	2.0:1	210	Q4
JCA1826-402	18.0-26.0	24	6.0	2.5	8	18	2.0:1	220	Q4
JCA1826-403	18.0-26.0	25	6.0	2.5	12	22	2.0:1	235	Q6
JCA1826-501	18.0-26.0	34	6.0	2.5	5	15	2.0:1	260	Q6
JCA1826-502	18.0-26.0	31	6.0	2.5	8	18	2.0:1	275	Q6
JCA1826-503	18.0-26.0	32	6.0	2.5	12	22	2.0:1	290	Q6
Ultra-Broad Band Amplifiers from 0.5 to 20.0 Ghz									
Ultra-Broad Band Amplifiers from 0.5 to 18.0 GHz									
JCA018-200	0.5-18.0	24	3.8	2.5	0	10	2.0:1	160	K2
JCA018-201	0.5-18.0	22	4.0	2.5	3	13	2.0:1	200	K2
JCA018-202	0.5-18.0	21	4.5	2.5	5	15	2.0:1	220	K2
JCA018-203	0.5-18.0	20	5.0	2.5	7	17	2.0:1	250	K2
JCA018-204	0.5-18.0	19	5.0	2.5	9	19	2.0:1	325	K2
JCA018-205	0.5-18.0	16	5.5	2.5	10	20	2.0:1	385	K2
JCA018-300	0.5-18.0	30	3.8	2.5	0	10	2.0:1	195	K3
JCA018-301	0.5-18.0	28	4.0	2.5	3	13	2.0:1	245	K3
JCA018-302	0.5-18.0	27	4.5	2.5	5	15	2.0:1	270	K3
JCA018-303	0.5-18.0	27	5.0	2.5	7	17	2.0:1	300	K3
JCA018-304	0.5-18.0	25	5.0	2.5	9	19	2.0:1	400	K3
JCA018-305	0.5-18.0	23	5.5	2.5	10	20	2.0:1	475	K3
JCA018-400	0.5-18.0	37	3.8	2.5	0	10	2.0:1	345	Special
JCA018-401	0.5-18.0	35	4.0	2.5	3	13	2.0:1	370	Special
JCA018-402	0.5-18.0	36	4.5	2.5	5	15	2.0:1	395	Special
JCA018-403	0.5-18.0	35	5.0	2.5	7	17	2.0:1	435	Special
JCA018-404	0.5-18.0	33	5.5	2.5	9	19	2.0:1	500	Special
JCA018-405	0.5-18.0	30	5.5	2.5	10	20	2.0:1	550	Special

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

www.jcatech.com e-mail jca@jcatech.com

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Ultra-Broad Band Amplifiers from 0.5 to 18.0 GHz									
JCA018-500	0.5-18.0	44	4.0	2.5	0	10	2.0:1	375	Special
JCA018-501	0.5-18.0	45	4.0	2.5	3	13	2.0:1	425	Special
JCA018-502	0.5-18.0	42	4.5	2.5	5	15	2.0:1	460	Special
JCA018-503	0.5-18.0	41	5.0	2.5	7	17	2.0:1	495	Special
JCA018-504	0.5-18.0	39	5.5	2.5	9	19	2.0:1	550	Special
JCA018-505	0.5-18.0	36	5.5	2.5	10	20	2.0:1	625	Special
Ultra-Broad Band Amplifiers from 1.0 18.0 GHz									
JCA118-200	1.0-18.0	23	3.8	2.5	3	13	2.0:1	165	K2
JCA118-201	1.0-18.0	23	4.0	2.5	5	15	2.0:1	200	K2
JCA118-202	1.0-18.0	21	4.5	2.5	8	18	2.0:1	250	K2
JCA118-203	1.0-18.0	20	5.0	2.5	10	20	2.0:1	275	K2
JCA118-204	1.0-18.0	18	5.5	2.5	12	22	2.0:1	350	K2
JCA118-300	1.0-18.0	30	38.0	2.5	3	13	2.0:1	205	K3
JCA118-301	1.0-18.0	28	4.0	2.5	5	15	2.0:1	245	K3
JCA118-302	1.0-18.0	28	4.5	2.5	8	18	2.0:1	275	K3
JCA118-303	1.0-18.0	27	5.0	2.5	10	20	2.0:1	325	K3
JCA118-304	1.0-18.0	25	5.5	2.5	12	22	2.0:1	400	K3
JCA118-400	1.0-18.0	39	4.0	2.5	3	13	2.0:1	260	Special
JCA118-401	1.0-18.0	37	4.2	2.5	5	15	2.0:1	305	Special
JCA118-402	1.0-18.0	37	4.5	2.5	8	18	2.0:1	360	Special
JCA118-403	1.0-18.0	35	5.0	2.5	10	20	2.0:1	405	Special
JCA118-404	1.0-18.0	32	5.5	2.5	12	22	2.0:1	495	Special
JCA118-500	1.0-18.0	45	4.0	2.5	3	13	2.0:1	300	Special
JCA118-501	1.0-18.0	44	4.2	2.5	5	15	2.0:1	345	Special
JCA118-502	1.0-18.0	42	4.5	2.5	8	18	2.0:1	390	Special
JCA118-503	1.0-18.0	41	5.0	2.5	10	20	2.0:1	450	Special
JCA118-504	1.0-18.0	38	5.5	2.5	12	22	2.0:1	550	Special
Ultra-Broad Band Amplifiers from 2.0 to 18.0 GHz									
JCA218-200	2.0-18.0	15	5.0	2.5	10	20	2.0:1	120	K2
JCA218-201	2.0-18.0	17	4.5	2.5	10	20	2.0:1	120	K2
JCA218-202	2.0-18.0	19	4.0	2.5	10	20	2.0:1	120	K2
JCA218-203	2.0-18.0	21	3.8	2.5	10	20	2.0:1	120	K2
JCA218-204	2.0-18.0	19	4.2	2.5	12	22	2.0:1	165	K2

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Ultra-Broad Band Amplifiers from 2.0 to 18.0 GHz									
JCA218-205	2.0-18.0	16	4.8	2.5	14	24	2.0:1	185	K2
JCA218-206	2.0-18.0	17	5.0	2.5	15	25	2.0:1	220	K2
JCA218-207	2.0-18.0	17	5.0	2.5	17	27	2.0:1	230	K2
JCA218-208	2.0-18.0	16	5.0	2.5	19	29	2.0:1	240	K2
JCA218-209	2.0-18.0	16	5.0	2.5	21	31	2.0:1	250	K2
JCA218-300	2.0-18.0	23	5.0	2.5	10	20	2.0:1	140	K2
JCA218-301	2.0-18.0	25	4.5	2.5	10	20	2.0:1	140	K2
JCA218-302	2.0-18.0	24	4.0	2.5	10	20	2.0:1	140	K2
JCA218-303	2.0-18.0	23	3.8	2.5	10	20	2.0:1	140	K2
JCA218-304	2.0-18.0	22	4.2	2.5	12	22	2.0:1	185	K2
JCA218-305	2.0-18.0	24	4.8	2.5	14	24	2.0:1	225	K2
JCA218-306	2.0-18.0	22	5.0	2.5	15	25	2.0:1	245	K2
JCA218-307	2.0-18.0	22	5.0	2.5	17	27	2.0:1	255	K2
JCA218-308	2.0-18.0	21	5.0	2.5	19	29	2.0:1	265	K2
JCA218-309	2.0-18.0	21	5.0	2.5	21	31	2.0:1	275	K2
JCA218-400	2.0-18.0	29	5.0	2.5	10	20	2.0:1	225	K3
JCA218-401	2.0-18.0	30	4.5	2.5	10	20	2.0:1	225	K3
JCA218-402	2.0-18.0	32	4.0	2.5	10	20	2.0:1	225	K3
JCA218-403	2.0-18.0	31	3.8	2.5	10	20	2.0:1	225	K3
JCA218-404	2.0-18.0	30	4.2	2.5	12	22	2.0:1	250	K3
JCA218-405	2.0-18.0	29	4.8	2.5	14	24	2.0:1	290	K3
JCA218-406	2.0-18.0	30	5.0	2.5	15	25	2.0:1	320	K3
JCA218-407	2.0-18.0	30	5.0	2.5	17	27	2.0:1	330	Special
JCA218-408	2.0-18.0	29	5.0	2.5	19	29	2.0:1	340	Special
JCA218-409	2.0-18.0	29	5.0	2.5	21	31	2.0:1	350	Special
JCA218-500	2.0-18.0	39	5.0	2.5	10	20	2.0:1	245	Special
JCA218-501	2.0-18.0	37	4.5	2.5	10	20	2.0:1	245	Special
JCA218-502	2.0-18.0	38	4.0	2.5	10	20	2.0:1	245	Special
JCA218-503	2.0-18.0	36	3.8	2.5	10	20	2.0:1	245	Special
JCA218-504	2.0-18.0	40	4.2	2.5	12	22	2.0:1	280	Special
JCA218-505	2.0-18.0	39	4.8	2.5	14	24	2.0:1	310	Special
JCA218-506	2.0-18.0	35	5.0	2.5	15	25	2.0:1	345	Special
JCA218-507	2.0-18.0	35	5.0	2.5	17	27	2.0:1	330	Special
JCA218-508	2.0-18.0	34	5.0	2.5	19	29	2.0:1	340	Special
JCA218-509	2.0-18.0	34	5.0	2.5	21	31	2.0:1	350	Special

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Ultra-Broad Band Amplifiers from 2.0 to 20.0 GHz									
JCA220-200	2.0-20.0	21	5.0	3.0	0	10	2.0:1	170	K2
JCA220-201	2.0-20.0	20	5.0	3.0	3	13	2.0:1	175	K2
JCA220-202	2.0-20.0	20	5.0	3.0	5	15	2.0:1	180	K2
JCA220-203	2.0-20.0	19	5.0	3.0	7	17	2.0:1	190	K2
JCA220-204	2.0-20.0	19	5.0	3.0	10	20	2.0:1	195	K2
JCA220-205	2.0-20.0	18	5.0	3.0	12	22	2.0:1	200	K2
JCA220-206	2.0-20.0	18	5.0	3.0	13	23	2.0:1	210	K2
JCA220-207	2.0-20.0	17	5.0	3.0	15	25	2.0:1	220	K2
JCA220-208	2.0-20.0	21	5.0	3.0	17	27	2.0:1	230	K2
JCA220-209	2.0-20.0	20	5.0	3.0	20	30	2.0:1	240	K2
JCA220-300	2.0-20.0	28	5.0	3.0	0	10	2.0:1	190	K3
JCA220-301	2.0-20.0	27	5.0	3.0	3	13	2.0:1	195	K3
JCA220-302	2.0-20.0	27	5.0	3.0	5	15	2.0:1	200	K3
JCA220-303	2.0-20.0	26	5.0	3.0	7	17	2.0:1	210	K3
JCA220-304	2.0-20.0	26	5.0	3.0	10	20	2.0:1	215	K3
JCA220-305	2.0-20.0	25	5.0	3.0	12	22	2.0:1	220	K3
JCA220-306	2.0-20.0	25	5.0	3.0	13	23	2.0:1	225	K3
JCA220-307	2.0-20.0	24	5.0	3.0	15	25	2.0:1	230	K3
JCA220-308	2.0-20.0	28	5.0	3.0	17	27	2.0:1	240	K3
JCA220-309	2.0-20.0	27	5.0	3.0	20	30	2.0:1	250	K3
JCA220-400	2.0-20.0	35	5.0	2.5	0	10	2.0:1	200	Special
JCA220-401	2.0-20.0	34	5.0	2.5	3	13	2.0:1	210	Special
JCA220-402	2.0-20.0	34	5.0	2.5	5	15	2.0:1	215	Special
JCA220-403	2.0-20.0	33	5.0	2.5	7	17	2.0:1	225	Special
JCA220-404	2.0-20.0	33	5.0	2.5	10	20	2.0:1	230	Special
JCA220-405	2.0-20.0	32	5.0	2.5	12	22	2.0:1	240	Special
JCA220-406	2.0-20.0	32	5.0	2.5	13	23	2.0:1	245	Special
JCA220-407	2.0-20.0	31	5.0	2.5	15	25	2.0:1	250	Special
JCA220-408	2.0-20.0	35	5.0	2.5	17	27	2.0:1	260	Special
JCA220-409	2.0-20.0	34	5.0	2.5	20	30	2.0:1	270	Special
Ultra-Broad Band Amplifiers from 2.0 to 22.0 GHz									
JCA222-204	2.0-22.0	19	5.0	3.0	10	20	2.0:1	195	K2
JCA222-207	2.0-22.0	17	5.0	3.0	15	25	2.0:1	220	K2
JCA222-304	2.0-22.0	26	5.0	3.0	10	20	2.0:1	215	K2
JCA222-307	2.0-22.0	24	5.0	3.0	15	25	2.0:1	230	K2
JCA222-404	2.0-22.0	33	5.0	2.5	10	20	2.0:1	230	Special
JCA222-407	2.0-22.0	31	5.0	2.5	15	25	2.0:1	250	Special

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

multi-octave ew & ecm amplifiers

features:

Multi-Octave band Coverage from 0.5 GHz to 18 GHz
Removable SMA Female Connectors
Compact Size
Attractively priced

Multi-Octave EW and ECM amplifiers from 0.5 GHz to 18.0 GHz

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Multi-Octave EW and ECM amplifiers from 0.5 GHz to 4.0 GHz									
JCA04-215	0.5-4.0	18	3.0	1.0	10	20	2.0:1	100	XK2
JCA04-301	0.5-4.0	21	3.0	1.0	10	20	2.0:1	150	XK2
JCA04-302	0.5-4.0	20	3.0	1.0	13	23	2.0:1	180	XK2
JCA04-303	0.5-4.0	20	3.0	1.0	17	27	2.0:1	220	XK2
JCA04-401	0.5-4.0	28	5.0	1.5	10	20	2.0:1	160	XK2
JCA04-402	0.5-4.0	27	5.0	1.5	13	23	2.0:1	200	XK2
JCA04-403	0.5-4.0	27	5.0	1.5	17	27	2.0:1	260	XK2
JCA04-415	0.5-4.0	36	5.0	1.5	10	20	2.0:1	200	XK2
Multi-Octave EW and ECM Amplifiers from 0.5 to 6.0 GHz									
JCA06-215	0.5-6.0	18	3.5	1.0	10	20	2.0:1	120	XK2
JCA06-415	0.5-6.0	36	3.5	1.5	10	20	2.0:1	250	XK4
JCA06-416	0.5-6.0	34	4.0	1.5	13	23	2.0:1	300	XK4
JCA06-417	0.5-6.0	32	4.5	2.0	17	27	2.0:1	350	XK4
Multi-Octave EW and ECM Amplifiers from 0.5 GHz to 8.0 GHz									
JCA08-215	0.5-8.0	18	3.5	1.0	10	20	2.0:1	100	XK2
JCA08-415	0.5-8.0	36	3.5	1.5	10	20	2.0:1	200	XK4
JCA08-416	0.5-8.0	34	4.0	1.5	13	23	2.0:1	240	XK4
JCA08-417	0.5-8.0	32	4.5	1.5	17	27	2.0:1	300	XK4

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**
www.jcatech.com e-mail jca@jcatech.com

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Multi-Octave EW and ECM Amplifiers from 0.5 GHz to 10.0 GHz									
JCA010-215	0.5-10.0	18	6.0	1.5	10	20	2.0:1	110	XK2
JCA010-415	0.5-10.0	36	6.0	2.5	10	20	2.0:1	250	XK4
JCA010-416	0.5-10.0	34	6.0	2.5	13	23	2.0:1	300	XK4
Multi-Octave EW and ECM Amplifiers from 0.5 GHz to 12.0 GHz									
JCA012-215	0.5-12.0	18	6.0	1.5	10	20	2.0:1	150	XK2
JCA012-415	0.5-12.0	36	6.0	3.0	10	20	2.0:1	350	XK4
JCA012-416	0.5-12.0	34	6.0	2.5	13	23	2.0:1	400	XK4
Multi-Octave EW and ECM Amplifiers from 2.0 GHz to 10.0 GHz									
JCA210-201	2.0-10.0	12	5.0	2.0	10	20	2.0:1	100	K2
JCA210-202	2.0-10.0	15	5.0	2.0	13	23	2.0:1	125	K2
JCA210-203	2.0-10.0	14	6.0	2.0	15	25	2.0:1	145	K2
JCA210-300	2.0-10.0	20	5.0	2.0	17	27	2.0:1	150	K2
JCA210-301	2.0-10.0	18	5.0	2.0	10	20	2.0:1	150	K3
JCA210-302	2.0-10.0	20	5.0	2.0	13	23	2.0:1	160	K3
JCA210-303	2.0-10.0	22	4.7	2.0	15	25	2.0:1	175	K3
JCA210-401	2.0-10.0	24	4.5	2.0	10	20	2.0:1	180	K3
JCA210-402	2.0-10.0	28	4.5	2.0	13	23	2.0:1	190	K4
JCA210-403	2.0-10.0	27	4.5	2.0	15	25	2.0:1	200	K4
JCA210-501	2.0-10.0	34	4.5	2.0	10	20	2.0:1	215	K4
JCA210-502	2.0-10.0	40	4.5	2.0	13	23	2.0:1	240	K4
JCA210-503	2.0-10.0	42	4.5	2.0	15	25	2.0:1	255	K4
Multi-Octave EW and ECM Amplifiers from 2.0 to 12.0 GHz									
JCA212-201	2.0-12.0	12	6.0	2.0	10	20	2.0:1	100	K2
JCA212-202	2.0-12.0	14	6.0	2.0	13	23	2.0:1	125	K2
JCA212-203	2.0-12.0	15	6.0	2.0	15	25	2.0:1	130	K2
JCA212-301	2.0-12.0	17	5.0	2.0	10	20	2.0:1	140	K2
JCA212-302	2.0-12.0	17	5.0	2.0	13	23	2.0:1	160	K3
JCA212-303	2.0-12.0	16	6.0	2.0	15	25	2.0:1	175	K3

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Multi-Octave EW and ECM Amplifiers from 2.0 to 12.0 GHz									
JCA212-401	2.0-12.0	24	5.0	2.0	10	20	2.0:1	175	K4
JCA212-402	2.0-12.0	22	5.0	2.0	13	23	2.0:1	190	K4
JCA212-403	2.0-12.0	20	5.0	2.0	15	25	2.0:1	210	K4
JCA212-501	2.0-12.0	31	5.0	2.0	10	20	2.0:1	215	K4
JCA212-502	2.0-12.0	30	5.0	2.0	13	23	2.0:1	240	K4
JCA212-503	2.0-12.0	29	5.0	2.0	15	25	2.0:1	260	K4
JCA212-601	2.0-12.0	36	5.0	3.0	10	20	2.0:1	300	K6
JCA212-602	2.0-12.0	34	5.0	3.0	12	22	2.0:1	330	K6
JCA212-603	2.0-12.0	32	5.0	3.0	14	24	2.0:1	360	K6
Multi-Octave Band Amplifiers from 4.0 GHz to 12.0 GHz									
JCA412-201	4.0-12.0	12	6.0	1.5	10	20	2.0:1	60	K2
JCA412-202	4.0-12.0	13	6.0	1.5	12	22	2.0:1	120	K2
JCA412-203	4.0-12.0	14	6.0	1.5	14	24	2.0:1	130	K2
JCA412-301	4.0-12.0	19	6.0	1.5	10	20	2.0:1	160	K2
JCA412-302	4.0-12.0	21	5.0	1.5	12	22	2.0:1	175	K3
JCA412-303	4.0-12.0	20	5.0	1.5	14	24	2.0:1	180	K3
JCA412-401	4.0-12.0	27	5.0	1.5	10	20	2.0:1	190	K3
JCA412-402	4.0-12.0	29	4.5	1.5	12	22	2.0:1	215	K4
JCA412-403	4.0-12.0	30	4.5	1.5	14	24	2.0:1	225	K4
JCA412-501	4.0-12-0	35	4.5	1.5	10	20	2.0:1	250	K4
JCA412-502	4.0-12.0	38	4.5	1.5	12	22	2.0:1	300	K4
JCA412-503	4.0-12.0	36	4.5	1.5	14	24	2.0:1	325	K4
JCA412-2021	4.0-12.0	19	5.0	1.5	0	10	2.0:1	200	K2
JCA412-2022	4.0-12.0	19	5.0	1.5	3	13	2.0:1	200	K2
JCA412-2023	4.0-12.0	19	5.0	1.5	5	15	2.0:1	200	K2
JCA412-2024	4.0-12.0	18	5.0	1.5	10	20	2.0:1	200	K2
JCA412-2025	4.0-12.0	18	5.0	1.5	13	23	2.0:1	200	K2
JCA412-2026	4.0-12.0	17	5.0	1.5	15	25	2.0:1	200	K2
JCA412-2027	4.0-12.0	17	5.0	1.5	17	27	2.0:1	225	K2

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Multi-Octave Band Amplifiers from 4.0 GHz to 12.0 GHz									
JCA412-3021	4.0-12.0	26	5.0	1.5	0	10	2.0:1	300	K3
JCA412-3022	4.0-12.0	26	5.0	1.5	3	13	2.0:1	300	K3
JCA412-3023	4.0-12.0	26	5.0	1.5	5	15	2.0:1	300	K3
JCA412-3024	4.0-12.0	25	5.0	1.5	10	20	2.0:1	300	K3
JCA412-3025	4.0-12.0	25	5.0	1.5	13	23	2.0:1	300	K3
JCA412-3026	4.0-12.0	24	5.0	1.5	15	25	2.0:1	300	K3
JCA412-3027	4.0-12.0	24	5.0	1.5	17	27	2.0:1	325	K3
JCA412-4021	4.0-12.0	32	5.0	1.5	0	10	2.0:1	400	K4
JCA412-4022	4.0-12.0	32	5.0	1.5	3	13	2.0:1	400	K4
JCA412-4023	4.0-12.0	32	5.0	1.5	5	15	2.0:1	400	K4
JCA412-4024	4.0-12.0	31	5.0	1.5	10	20	2.0:1	400	K4
JCA412-4025	4.0-12.0	31	5.0	1.5	13	23	2.0:1	400	K4
JCA412-4026	4.0-12.0	30	5.0	1.5	15	25	2.0:1	400	K4
JCA412-4027	4.0-12.0	30	5.0	2.0	17	27	2.0:1	425	K4
JCA412-5021	4.0-12.0	39	5.0	2.0	0	10	2.0:1	500	K6
JCA412-5022	4.0-12.0	39	5.0	2.0	3	13	2.0:1	500	K6
JCA412-5023	4.0-12.0	39	5.0	2.0	5	15	2.0:1	500	K6
JCA412-5024	4.0-12.0	38	5.0	2.0	10	20	2.0:1	500	K6
JCA412-5025	4.0-12.0	38	5.0	2.0	13	23	2.0:1	500	K6
JCA412-5026	4.0-12.0	37	5.0	2.0	15	25	2.0:1	500	K6
JCA412-5027	4.0-12.0	37	5.0	2.0	17	27	2.0:1	525	K6
Multi-Octave Band Amplifiers from 5.0 GHz to 15.0 GHz									
JCA515-201	5.0-15.0	14	6.0	2.0	10	20	2.0:1	100	K2
JCA515-202	5.0-15.0	15	6.0	2.0	12	22	2.0:1	110	K2
JCA515-203	5.0-15.0	13	6.0	2.0	15	25	2.0:1	120	K2
JCA515-301	5.0-15.0	23	5.5	2.0	10	20	2.0:1	150	K3
JCA515-302	5.0-15.0	21	5.5	2.0	12	22	2.0:1	165	K3
JCA515-303	5.0-15.0	20	5.5	2.0	15	25	2.0:1	175	K3
JCA515-401	5.0-15.0	28	5.0	2.0	10	20	2.0:1	200	K4
JCA515-402	5.0-15.0	27	5.0	2.0	12	22	2.0:1	215	K4
JCA515-403	5.0-15.0	25	5.0	2.0	15	25	2.0:1	225	K4
JCA515-501	5.0-15.0	34	4.5	2.0	10	20	2.0:1	250	K6
JCA515-502	5.0-15.0	32	4.5	2.0	12	22	2.0:1	265	K6
JCA515-503	5.0-15.0	31	4.5	2.0	15	25	2.0:1	280	K6

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Multi-Octave Band Amplifiers from 11.0 to 18.0 GHz									
JCA1118-201	11.0-18.0	18	5.0	1.5	10	20	2.0:1	120	K2
JCA1118-202	11.0-18.0	17	5.0	1.5	13	23	2.0:1	135	K2
JCA1118-203	11.0-18.0	15	5.0	1.5	16	26	2.0:1	145	K3
JCA1118-301	11.0-18.0	23	4.7	1.5	10	20	2.0:1	165	K3
JCA1118-302	11.0-18.0	24	4.7	1.5	13	23	2.0:1	180	K3
JCA1118-303	11.0-18.0	21	4.7	1.5	16	26	2.0:1	200	K3
JCA1118-401	11.0-18.0	29	4.5	1.5	10	20	2.0:1	225	K4
JCA1118-402	11.0-18.0	28	4.5	1.5	13	23	2.0:1	240	K4
JCA1118-403	11.0-18.0	26	4.5	1.5	16	26	2.0:1	250	K4
JCA1118-501	11.0-18.0	35	4.0	1.5	10	20	2.0:1	280	K6
JCA1118-502	11.0-18.0	34	4.0	1.5	13	23	2.0:1	300	K6
JCA1118-503	11.0-18.0	32	4.0	1.5	16	26	2.0:1	315	K6
Multi-Octave EW and ECM Amplifiers from 6.0 GHz to 18.0 GHz									
JCA618-301	6.0-18.0	15	6.0	1.5	10	20	2.0:1	120	K4
JCA618-302	6.0-18.0	14	6.0	1.5	13	23	2.0:1	160	K4
JCA618-303	6.0-18.0	14	6.0	1.5	15	25	2.0:1	200	K4
JCA618-304	6.0-18.0	14	6.0	1.5	17	27	2.0:1	200	K4
JCA618-305	6.0-18.0	14	6.0	1.5	20	30	2.0:1	200	K4
JCA618-306	6.0-18.0	14	6.0	1.5	23	33	2.0:1	380	K4
JCA618-401	6.0-18.0	20	6.0	1.5	10	20	2.0:1	160	K4
JCA618-402	6.0-18.0	20	6.0	1.5	13	23	2.0:1	200	K4
JCA618-403	6.0-18.0	19	6.0	1.5	15	25	2.0:1	240	K4
JCA618-404	6.0-18.0	19	6.0	1.5	17	27	2.0:1	280	K4
JCA618-405	6.0-18.0	18	6.0	1.5	10	20	2.0:1	340	K4
JCA618-406	6.0-18.0	18	6.0	2.0	23	33	2.0:1	440	K4
JCA618-501	6.0-18.0	25	6.0	2.0	10	20	2.0:1	200	K6
JCA618-502	6.0-18.0	25	6.0	2.0	13	23	2.0:1	260	K4
JCA618-503	6.0-18.0	24	6.0	2.0	15	25	2.0:1	280	K6
JCA618-504	6.0-18.0	24	6.0	2.0	17	27	2.0:1	320	K6
JCA618-505	6.0-18.0	23	6.0	2.0	20	30	2.0:1	380	K6
JCA618-506	6.0-18.0	23	6.0	2.0	23	33	2.0:1	480	K6
JCA618-601	6.0-18.0	30	6.0	2.5	10	20	2.0:1	240	K6
JCA618-602	6.0-18.0	30	6.0	2.5	13	23	2.0:1	280	K6

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

www.jcatech.com e-mail jca@jcatech.com

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Multi-Octave EW and ECM Amplifiers from 6.0 GHz to 18.0 GHz									
JCA618-603	6.0-18.0	29	6.0	2.5	15	25	2.0:1	320	K6
JCA618-604	6.0-18.0	29	6.0	2.5	17	27	2.0:1	360	K6
JCA618-605	6.0-18.0	28	6.0	2.5	20	30	2.0:1	420	K6
JCA618-606	6.0-18.0	28	6.0	2.5	23	33	2.0:1	520	K6
JCA618-801	6.0-18.0	40	6.0	3.0	10	20	2.0:1	320	K8
JCA618-802	6.0-18.0	40	6.0	3.0	13	23	2.0:1	360	K8
JCA618-803	6.0-18.0	39	6.0	3.0	15	25	2.0:1	400	K8
JCA618-804	6.0-18.0	39	6.0	3.0	17	27	2.0:1	440	K8
JCA618-805	6.0-18.0	38	6.0	3.0	20	30	2.0:1	500	K8
JCA618-806	6.0-18.0	38	6.0	3.0	23	33	2.0:1	600	K8
Multi-octave EW and ECM amplifiers from 8.0 GHz to 18.0 GHz									
JCA818-401	8.0-18.0	18	6.0	1.0	10	20	2.0:1	160	K4
JCA818-402	8.0-18.0	17	6.0	1.0	13	23	2.0:1	200	K4
JCA818-403	8.0-18.0	17	6.0	1.0	15	25	2.0:1	240	K4
JCA818-404	8.0-18.0	16	6.0	1.0	17	27	2.0:1	280	K4
JCA818-405	8.0-18.0	16	6.0	1.0	20	30	2.0:1	340	K4
JCA818-406	8.0-18.0	15	6.0	1.0	23	33	2.0:1	440	K4
JCA818-501	8.0-18.0	25	6.0	1.5	10	20	2.0:1	200	K6
JCA818-502	8.0-18.0	24	6.0	1.5	13	23	2.0:1	240	K6
JCA818-503	8.0-18.0	24	6.0	1.5	15	25	2.0:1	280	K6
JCA818-504	8.0-18.0	23	6.0	1.5	17	27	2.0:1	320	K6
JCA818-505	8.0-18.0	23	6.0	1.5	20	30	2.0:1	380	K6
JCA818-506	8.0-18.0	22	6.0	1.5	23	33	2.0:1	440	K6
JCA818-601	8.0-18.0	31	6.0	1.5	10	20	2.0:1	240	K6
JCA818-602	8.0-18.0	30	6.0	1.5	13	23	2.0:1	280	K6
JCA818-603	8.0-18.0	30	6.0	1.5	15	25	2.0:1	320	K6
JCA818-604	8.0-18.0	29	6.0	1.5	17	27	2.0:1	360	K6
JCA818-605	8.0-18.0	29	6.0	1.5	20	30	2.0:1	420	K6
JCA818-606	8.0-18.0	28	6.0	1.5	23	33	2.0:1	520	K6
JCA818-801	8.0-18.0	23	6.0	2.0	10	20	2.0:1	320	K6
JCA818-802	8.0-18.0	42	6.0	2.0	13	23	2.0:1	360	K6
JCA818-803	8.0-18.0	42	6.0	2.0	15	25	2.0:1	400	K6
JCA818-804	8.0-18.0	41	6.0	2.0	17	27	2.0:1	440	K6
JCA818-805	8.0-18.0	41	6.0	2.0	20	30	2.0:1	500	K6
JCA818-806	8.0-18.0	40	6.0	2.0	23	33	2.0:1	600	K6

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

radar communications band amplifiers

features:

- Coverage 2.2 to 14.5 GHZ
- Noise Figure as low as 1.0 dB
- Thin Film MIC Construction
- Compact Size
- Attractively Priced

Radar and Communications Band Amplifiers from 2.2 GHz to 31.0 GHz

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Radar and Communications Band Amplifiers from 2.2 GHz to 2.3 GHz									
JCA23-302	2.2-2.3	30	0.8	0.5	10	20	2.0:1	80	FB2
JCA23-401	2.2-2.3	40	0.8	0.5	10	20	2.0:1	120	FB2
JCA23-501	2.2-2.3	50	0.8	0.5	10	20	2.0:1	160	FB2
JCA23-303	2.2-2.3	30	1.2	0.5	10	20	2.0:1	80	FB2
JCA23-402	2.2-2.3	40	1.2	0.5	10	20	2.0:1	120	FB2
JCA23-340	2.2-2.3	30	1.5	0.5	17	27	2.0:1	160	C3
JCA23-341	2.2-2.3	30	1.5	0.5	20	30	2.0:1	200	C3
JCA23-304	2.2-2.3	30	2.0	0.5	23	33	2.0:1	250	C3
JCA23-310	2.2-2.3	30	3.0	0.5	27	37	2.0:1	500	C3
JCA23-403	2.2-2.3	30	3.0	0.5	30	40	2.0:1	750	C4
Radar and Communications Band Amplifiers from 2.7 GHz to 2.9 GHz									
JCA23-305	2.7-2.9	30	0.9	0.5	10	20	2.0:1	80	FB2
JCA23-404	2.7-2.9	40	0.9	0.5	10	20	2.0:1	120	FB2
JCA23-502	2.7-2.9	50	0.9	0.5	10	20	2.0:1	160	FB2
JCA23-306	2.7-2.9	30	1.2	0.5	10	20	2.0:1	80	FB2
JCA23-405	2.7-2.9	40	1.2	0.5	10	20	2.0:1	120	FB2
				0.5					
JCA23-342	2.7-2.9	30	2.0	0.5	17	27	2.0:1	160	C3
JCA23-343	2.7-2.9	30	2.0	0.5	20	30	2.0:1	200	C3
JCA23-307	2.7-2.9	30	2.0	0.5	23	33	2.0:1	250	C3
JCA23-406	2.7-2.9	30	3.0	0.5	27	37	2.0:1	500	C4
JCA23-407	2.7-2.9	30	3.0	0.5	30	40	2.0:1	750	C4

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

www.jcatech.com e-mail jca@jcatech.com

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Radar and Communications Band Amplifiers from 2.9 GHz to 3.5 GHz									
JCA23-308	2.9-3.5	30	1.0	0.5	10	20	2.0:1	80	FB2
JCA23-408	2.9-3.5	40	1.0	0.5	10	20	2.0:1	120	FB2
JCA23-508	2.9-3.5	50	1.0	0.5	10	20	2.0:1	160	FB2
JCA23-309	2.9-3.5	30	1.2	0.5	10	20	2.0:1	80	FB2
JCA23-409	2.9-3.5	40	1.2	0.5	10	20	2.0:1	120	FB2
JCA23-344	2.9-3.5	30	2.0	0.5	17	27	2.0:1	160	C3
JCA23-345	2.9-3.5	30	2.0	0.5	20	30	2.0:1	200	C3
JCA23-316	2.9-3.5	30	2.0	0.5	23	33	2.0:1	250	C3
JCA23-412	2.9-3.5	30	3.0	0.5	27	37	2.0:1	500	C4
JCA23-413	2.9-3.5	30	3.0	0.5	30	40	2.0:1	750	C4
Radar and Communications Band Amplifiers from 3.7 GHz to 4.2 GHz									
JCA34-301	3.7-4.2	30	1.0	0.5	10	20	2.0:1	80	FC2
JCA34-402	3.7-4.2	40	1.0	0.5	10	20	2.0:1	120	FC4
JCA34-501	3.7-4.2	50	1.0	0.5	10	20	2.0:1	160	FC4
JCA34-302	3.7-4.2	30	1.3	0.5	10	20	2.0:1	80	FC2
JCA34-403	3.7-4.2	40	1.3	0.5	10	20	2.0:1	120	FC4
JCA34-304	3.7-4.2	30	2.0	0.5	17	27	2.0:1	350	C3
JCA34-305	3.7-4.2	30	2.0	0.5	20	30	2.0:1	350	C3
JCA34-303	3.7-4.2	30	2.0	0.5	23	33	2.0:1	350	C3
JCA34-404	3.7-4.2	30	2.0	0.5	27	37	2.0:1	550	C4
JCA34-405	3.7-4.2	30	2.0	0.5	30	40	2.0:1	850	C4
Radar and Communications Band Amplifiers from 4.4 GHz to 5.0 GHz									
JCA45-302	4.4-5.0	30	1.0	0.5	10	20	2.0:1	80	FC2
JCA45-401	4.4-5.0	40	1.0	0.5	10	20	2.0:1	120	FC3
JCA45-502	4.4-5.0	50	1.0	0.5	10	20	2.0:1	160	FC4
JCA45-303	4.4-5.0	30	1.3	0.5	10	20	2.0:1	80	FC2
JCA45-402	4.4-5.0	35	1.3	0.5	10	20	2.0:1	120	FC2
JCA45-304	4.4-5.0	30	2.0	0.5	23	33	2.0:1	350	C3
JCA45-403	4.4-5.0	30	3.0	0.5	27	37	2.0:1	550	C4
JCA45-404	4.4-5.0	30	3.0	0.5	30	40	2.0:1	850	C4

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Radar and Communications Band Amplifiers from 5.4 GHz to 5.9 GHz									
JCA56-302	5.4-5.9	30	1.0	0.5	10	20	2.0:1	80	FC2
JCA56-401	5.4-5.9	40	1.0	0.5	10	20	2.0:1	120	FC2
JCA56-502	5.4-5.9	50	1.0	0.5	10	20	2.0:1	160	FC3
JCA56-303	5.4-5.9	30	1.3	0.5	10	20	2.0:1	80	FB2
JCA56-402	5.4-5.9	35	1.3	0.5	10	20	2.0:1	120	FB2
JCA56-304	5.4-5.9	30	2.0	0.5	23	33	2.0:1	350	C3
JCA56-403	5.4-5.9	30	3.0	0.5	27	37	2.0:1	550	C4
JCA56-404	5.4-5.9	30	3.0	0.5	30	40	2.0:1	850	C4
Radar and Communications Band Amplifiers from 5.9 GHz to 6.4 GHz									
JCA56-305	5.9-6.4	30	1.0	0.5	10	20	2.0:1	80	FC2
JCA56-405	5.9-6.4	40	1.0	0.5	10	20	2.0:1	120	FC2
JCA56-503	5.9-6.4	50	1.0	0.5	10	20	2.0:1	160	Special
JCA56-306	5.9-6.4	30	1.3	0.5	10	20	2.0:1	80	FB2
JCA56-405	5.9-6.4	35	1.3	0.5	10	20	2.0:1	120	FB2
JCA56-307	5.9-6.4	30	2.0	0.5	23	33	2.0:1	350	C3
JCA56-407	5.9-6.4	30	3.0	0.5	27	37	2.0:1	550	C4
JCA56-408	5.9-6.4	30	3.0	0.5	30	40	2.0:1	850	C4
Radar and Communications Band Amplifiers from 7.25 GHz to 7.75 GHz									
JCA78-200	7.25-7.75	18	2.5	0.5	10	20	1.5:1	80	C2
JCA78-201	7.25-7.75	18	1.7	0.5	10	20	1.5:1	80	C2
JCA78-202	7.25-7.75	18	1.2	0.5	10	20	1.5:1	80	Special
JCA78-300	7.25-7.75	27	2.5	0.5	13	23	1.5:1	120	C3
JCA78-301	7.25-7.75	27	1.7	0.5	13	23	1.5:1	120	C3
JCA78-302	7.25-7.75	27	1.2	0.5	13	23	1.5:1	100	Special
JCA78-400	7.25-7.75	36	2.5	0.5	13	23	1.5:1	160	C4
JCA78-401	7.25-7.75	36	1.7	0.5	13	23	1.5:1	160	C4
JCA78-402	7.25-7.75	36	1.2	0.5	13	23	1.5:1	140	Special
JCA78-403	7.25-7.75	30	3.0	0.5	23	33	2.0:1	350	C3
JCA78-501	7.25-7.75	30	4.0	0.5	27	37	2.0:1	550	C6
JCA78-502	7.25-7.75	30	4.0	0.5	30	40	2.0:1	900	C6

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

www.jcatech.com e-mail jca@jcatech.com

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Radar and Communications Band Amplifiers from 7.9 GHz to 8.4 GHz									
JCA78-203	7.9-8.4	18	2.5	0.5	10	20	1.5:1	80	XK2
JCA78-204	7.9-8.4	18	1.7	0.5	10	20	1.5:1	80	XK2
JCA78-205	7.9-8.4	18	1.2	0.5	10	20	1.5:1	80	Special
JCA78-303	7.9-8.4	27	2.5	0.5	13	23	1.5:1	120	XK4
JCA78-304	7.9-8.4	27	1.7	0.5	13	23	1.5:1	120	XK4
JCA78-305	7.9-8.4	27	1.2	0.5	13	23	1.5:1	100	Special
JCA78-405	7.9-8.4	36	2.5	0.5	13	23	1.5:1	160	XK4
JCA78-406	7.9-8.4	36	1.7	0.5	13	23	1.5:1	160	XK4
JCA78-407	7.9-8.4	36	1.2	0.5	13	23	1.5:1	140	Special
JCA78-404	7.9-8.4	30	3.0	0.5	23	33	2.0:1	350	XK4
JCA78-503	7.9-8.4	30	4.0	0.5	27	37	2.0:1	550	XK6
JCA78-504	7.9-8.4	30	4.0	0.5	30	40	2.0:1	900	XK6
Radar and Communications Band Amplifiers from 9.0 GHz to 9.5 GHz									
JCA910-200	9.0-9.5	18	2.2	0.5	10	20	1.5:1	100	XK2
JCA910-201	9.0-9.5	18	1.7	0.5	10	20	1.5:1	100	XK2
JCA910-205	9.0-9.5	18	1.4	0.5	10	20	1.5:1	100	Special
JCA910-300	9.0-9.5	27	2.2	0.5	13	23	1.5:1	150	XK3
JCA910-301	9.0-9.5	27	1.7	0.5	13	23	1.5:1	150	XK3
JCA910-305	9.0-9.5	27	1.4	0.5	13	23	1.5:1	150	Special
JCA910-400	9.0-9.5	36	2.2	0.5	13	23	1.5:1	200	XK4
JCA910-401	9.0-9.5	36	1.7	0.5	13	23	1.5:1	200	XK4
JCA910-405	9.0-9.5	36	1.4	0.5	13	23	1.5:1	200	Special
JCA910-406	9.0-9.5	30	3.0	0.5	23	33	1.5:1	350	XK4
JCA910-506	9.0-9.5	30	4.0	0.5	27	37	1.5:1	550	XK6
JCA910-507	9.0-9.5	30	4.0	0.5	30	38	1.5:1	900	XK6

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Radar and Communications Band Amplifiers from 9.5 GHz to 10.0 GHz									
JCA910-202	9.5-10.0	18	2.2	0.5	10	20	1.5:1	100	XK2
JCA910-203	9.5-10.0	18	1.7	0.5	10	20	1.5:1	100	XK2
JCA910-204	9.5-10.0	18	1.4	0.5	10	20	1.5:1	100	Special
JCA910-302	9.5-10.0	27	2.2	0.5	13	23	1.5:1	120	XK3
JCA910-303	9.5-10.0	27	1.7	0.5	13	23	1.5:1	120	XK3
JCA910-304	9.5-10.0	27	1.4	0.5	13	23	1.5:1	120	Special
JCA910-402	9.5-10.0	36	2.2	0.5	13	23	1.5:1	160	XK4
JCA910-403	9.5-10.0	36	1.7	0.5	13	23	1.5:1	160	XK4
JCA910-404	9.5-10.0	36	1.4	0.5	13	23	1.5:1	160	Special
JCA910-407	9.5-10.0	30	3.0	0.5	23	33	2.0:1	350	XK4
JCA910-504	9.5-10.0	30	4.0	0.5	27	37	2.0:1	550	XK6
JCA910-505	9.5-10.0	30	4.0	0.5	30	38	2.0:1	900	XK6
Radar and Communications Band Amplifiers from 10.7 GHz to 11.7 GHz									
JCA1011-202	10.7-11.7	18	2.2	0.5	10	20	1.5:1	100	XK2
JCA1011-203	10.7-11.7	18	1.9	0.5	10	20	1.5:1	100	XK2
JCA1011-204	10.7-11.7	18	1.6	0.5	10	20	1.5:1	100	Special
JCA1011-302	10.7-11.7	27	2.2	1.0	13	23	1.5:1	200	XK3
JCA1011-303	10.7-11.7	27	1.9	1.0	13	23	1.5:1	200	XK3
JCA1011-304	10.7-11.7	27	1.6	1.0	13	23	1.5:1	200	Special
JCA1011-402	10.7-11.7	33	2.2	1.0	13	23	1.5:1	250	XK4
JCA1011-403	10.7-11.7	33	1.9	1.0	13	23	1.5:1	250	XK4
JCA1011-404	10.7-11.7	33	1.6	1.0	13	23	1.5:1	250	Special
JCA1011-405	10.7-11.7	30	3.0	1.0	23	33	2.0:1	350	XK4
JCA1011-506	10.7-11.7	30	4.0	1.0	27	37	2.0:1	550	XK6
JCA1011-507	10.7-11.7	30	4.0	1.0	30	40	2.0:1	900	XK6
Radar and Communications Band Amplifiers from 11.7 GHz to 12.2 GHz									
JCA1112-200	11.7-12.2	18	3.0	0.5	10	20	1.5:1	100	XK2
JCA1112-201	11.7-12.2	18	2.0	0.5	10	20	1.5:1	100	Special
JCA1112-300	11.7-12.2	27	3.0	0.5	13	23	1.5:1	150	XK3
JCA1112-301	11.7-12.2	27	2.0	0.5	13	23	1.5:1	150	Special

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

www.jcatech.com e-mail jca@jcatech.com

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Radar and Communications Band Amplifiers from 11.7 GHz to 12.2 GHz									
JCA1112-400	11.7-12.2	36	3.0	0.5	13	23	1.5:1	200	XK4
JCA1112-401	11.7-12.2	36	2.0	0.5	13	23	1.5:1	200	Special
Radar and Communications Band Amplifiers from 12.2 GHz to 12.7 GHz									
JCA1213-401	12.2-12.7	22	3.0	0.5	10	20	1.5:1	100	XK4
JCA1213-402	12.2-12.7	22	2.5	0.5	10	20	1.5:1	100	XK4
JCA1213-403	12.2-12.7	22	1.7	0.5	10	20	1.5:1	100	Special
JCA1213-601	12.2-12.7	33	3.0	1.0	13	23	1.5:1	160	XK4
JCA1213-602	12.2-12.7	33	2.5	1.0	13	23	1.5:1	160	XK4
JCA1213-603	12.2-12.7	33	1.7	1.0	13	23	1.5:1	160	XK4
JCA1213-604	12.2-12.7	30	3.0	1.0	20	30	1.5:1	300	XK4
JCA1213-801	12.2-12.7	32	3.0	1.0	23	33	1.5:1	450	XK4
JCA1213-802	12.2-12.7	32	3.0	1.0	27	37	1.5:1	800	XK6
Radar and Communications Band Amplifiers from 12.7 GHz to 13.2 GHz									
JCA1213-200	12.2-12.7	16	3.0	0.5	13	23	1.5:1	60	XK2
JCA1213-201	12.2-12.7	16	2.0	0.5	13	23	1.5:1	60	XK2
JCA1213-300	12.7-13.2	24	3.0	0.5	13	23	1.5:1	90	XK3
JCA1213-301	12.7-13.2	24	2.0	0.5	13	23	1.5:1	90	XK3
JCA1213-406	12.7-13.2	30	1.7	0.5	10	20	1.5:1	120	K3
JCA1213-608	12.7-13.2	40	3.0	0.5	13	23	1.5:1	160	K4
JCA1213-605	12.7-13.2	40	2.5	0.5	13	23	1.5:1	160	K4
JCA1213-606	12.7-13.2	40	1.7	0.5	13	23	1.5:1	160	K4
JCA1213-607	12.7-13.2	32	3.0	0.5	20	30	1.5:1	350	K3
JCA1213-803	12.7-13.2	31	4.0	0.5	23	33	1.5:1	450	K3
JCA1213-804	12.7-13.2	30	4.0	0.5	27	37	1.5:1	800	K3
Radar and Communications band amplifiers from 14.0 GHz to 14.5 GHz									
JCA1415-200	14.0-14.5	13	3.0	0.5	10	20	1.5:1	80	K2
JCA1415-201	14.0-14.5	13	2.2	0.5	10	20	1.5:1	80	K2

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Radar and Communications band amplifiers from 14.0 GHz to 14.5 GHz									
JCA1415-300	14.0-14.5	20	3.0	0.5	10	20	1.5:1	120	K4
JCA1415-301	14.0-14.5	20	2.2	0.5	10	20	1.5:1	120	K4
JCA1415-400	14.0-14.5	26	3.5	0.5	13	23	1.5:1	160	K4
JCA1415-401	14.0-14.5	26	2.5	0.5	13	23	1.5:1	160	K4
JCA1415-402	14.0-14.5	26	3.5	0.5	10	20	1.5:1	160	K4
JCA1415-403	14.0-14.5	26	2.0	0.5	10	20	1.5:1	160	K4
JCA1415-601	14.0-14.5	35	3.0	0.5	15	25	1.5:1	200	K4
JCA1415-602	14.0-14.5	35	2.5	0.5	15	25	1.5:1	200	K4
JCA1415-603	14.0-14.5	35	2.0	0.5	15	25	1.5:1	200	K4
JCA1415-604	14.0-14.5	32	3.0	0.5	20	30	2.0:1	350	K4
JCA1415-605	14.0-14.5	31	4.0	0.5	23	33	2.0:1	450	K4
JCA1415-606	14.0-14.5	30	4.0	0.5	27	37	2.0:1	800	K4
Radar and Communications band amplifiers from 18.1 GHz to 18.6 GHz									
JCA1819-401	18.1-18.6	22	3.0	0.5	10	20	1.5:1	160	Q4
JCA1819-402	18.1-18.6	22	2.5	0.5	10	20	1.5:1	160	Q4
JCA1819-403	18.1-18.6	22	2.2	0.5	10	20	1.5:1	160	Q4
JCA1819-602	18.1-18.6	33	3.0	1.0	13	23	1.5:1	240	Q6
JCA1819-603	18.1-18.6	33	2.5	1.0	13	23	1.5:1	240	Q6
JCA1819-604	18.1-18.6	33	2.2	1.0	13	23	1.5:1	240	Q6
JCA1819-605	18.1-18.6	30	4.0	1.0	20	30	1.5:1	350	Q6
JCA1819-606	18.1-18.6	32	5.0	1.0	23	33	1.5:1	450	Q6
JCA1819-607	18.1-18.6	32	5.0	1.0	25	35	1.5:1	600	Q6
Radar and Communications band amplifiers from 17.7 GHz to 19.7 GHz									
JCA1719-401	17.7-19.7	22	3.0	0.5	10	20	1.5:1	160	Q4
JCA1719-402	17.7-19.7	22	2.7	0.5	10	20	1.5:1	160	Q4
JCA1719-403	17.7-19.7	22	2.5	0.5	10	20	1.5:1	160	Q4
JCA1719-602	17.7-19.7	33	3.0	1.0	13	23	1.5:1	240	Q6
JCA1719-603	17.7-19.7	33	2.7	1.0	13	23	1.5:1	240	Q6
JCA1719-604	17.7-19.7	33	2.5	1.0	13	23	1.5:1	240	Q6
JCA1719-605	17.7-19.7	30	4.0	1.0	20	30	2.1:1	300	Q6
JCA1719-606	17.7-19.7	32	5.0	1.0	23	33	2.1:1	400	Q6
JCA1719-607	17.7-19.7	32	5.0	1.0	25	35	2.1:1	500	Q6

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

www.jcatech.com e-mail jca@jcatech.com

Radar and Communications Band Amplifiers 19.2 GHz to 20.2 GHz

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
JCA1920-200	19.2-20.2	16	3.0	0.5	0	10	2.0:1	150	Q4
JCA1920-201	19.2-20.2	16	3.0	0.5	10	20	2.0:1	165	Q4
JCA1920-202	19.2-20.2	16	3.5	0.5	13	23	2.0:1	180	Q4
JCA1920-203	19.2-20.2	15	3.8	0.5	15	25	2.0:1	200	Q4
JCA1920-204	19.2-20.2	15	4.0	0.5	17	27	2.0:1	240	Q4
JCA1920-205	19.2-20.2	14	5.0	0.5	20	30	2.0:1	280	Q4
JCA1920-206	19.2-20.2	14	5.5	0.5	23	33	2.0:1	335	Q4
JCA1920-207	19.2-20.2	13	6.0	0.5	25	35	2.0:1	380	Q4
JCA1920-300	19.2-20.2	22	3.0	0.5	0	10	2.0:1	210	Q4
JCA1920-301	19.2-20.2	22	2.7	0.5	10	20	2.0:1	225	Q4
JCA1920-302	19.2-20.2	22	2.5	0.5	13	23	2.0:1	240	Q4
JCA1920-303	19.2-20.2	33	3.0	0.5	15	25	2.0:1	260	Q4
JCA1920-304	19.2-20.2	33	2.7	0.5	17	27	2.0:1	300	Q4
JCA1920-305	19.2-20.2	33	2.5	0.5	20	30	2.0:1	350	Q4
JCA1920-306	19.2-20.2	30	4.0	0.5	23	33	2.0:1	400	Q4
JCA1920-307	19.2-20.2	32	5.0	0.5	25	35	2.0:1	500	Q4
JCA1920-400	19.2-20.2	33	3.0	0.5	0	10	2.0:1	275	Q6
JCA1920-401	19.2-20.2	33	2.7	0.5	10	20	2.0:1	295	Q6
JCA1920-402	19.2-20.2	33	2.5	0.5	13	23	2.0:1	315	Q6
JCA1920-403	19.2-20.2	38	3.0	0.5	15	25	2.0:1	360	Q6
JCA1920-404	19.2-20.2	38	2.7	0.5	17	27	2.0:1	400	Q6
JCA1920-405	19.2-20.2	38	2.5	0.5	20	30	2.0:1	450	Q6
JCA1920-406	19.2-20.2	35	4.0	0.5	23	33	2.0:1	500	Q6
JCA1920-407	19.2-20.2	32	5.0	0.5	25	35	2.0:1	600	Q6
JCA1920-500	19.2-20.2	44	3.0	0.5	0	10	2.0:1	340	Q6
JCA1920-501	19.2-20.2	44	2.7	0.5	10	20	2.0:1	355	Q6
JCA1920-502	19.2-20.2	44	2.5	0.5	13	23	2.0:1	375	Q6
JCA1920-503	19.2-20.2	48	3.0	0.5	15	25	2.0:1	415	Q6
JCA1920-504	19.2-20.2	48	2.7	0.5	17	27	2.0:1	445	Q6
JCA1920-505	19.2-20.2	48	2.5	0.5	20	30	2.0:1	495	Q6
JCA1920-506	19.2-20.2	45	4.0	0.5	23	33	2.0:1	545	Q6
JCA1920-507	19.2-20.2	42	5.0	0.5	25	35	2.0:1	650	Q6

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Radar and Communications band amplifiers from 20.2 GHz to 21.2 GHz									
JCA2021-401	20.2-21.2	20	3.0	0.5	10	20	1.5:1	160	Q4
JCA2021-402	20.2-21.2	20	2.5	0.5	10	20	1.5:1	160	Q4
JCA2021-403	20.2-21.2	20	2.2	0.5	10	20	1.5:1	160	Q4
JCA2021-601	20.2-21.2	30	3.0	1.0	13	23	1.5:1	240	Q6
JCA2021-602	20.2-21.2	30	2.5	1.0	13	23	1.5:1	240	Q6
JCA2021-603	20.2-21.2	30	2.2	1.0	13	23	1.5:1	240	Q6
JCA2021-604	20.2-21.2	30	4.0	1.0	20	30	2.0:1	300	Q6
JCA2021-605	20.2-21.2	28	5.0	1.0	23	33	2.0:1	400	Q6
JCA2021-606	20.2-21.2	28	5.0	1.0	25	35	2.0:1	500	Q6
Radar and Communications band amplifiers from 21.2 GHz 23.6 GHz									
JCA2123-401	21.2-23.6	20	3.2	0.5	10	20	1.8:1	160	Q4
JCA2123-402	21.2-23.6	20	2.8	0.5	10	20	1.8:1	160	Q4
JCA2123-403	21.2-23.6	20	2.5	0.5	10	20	1.8:1	160	Q4
JCA2123-601	21.2-23.6	30	3.2	1.0	13	23	1.8:1	240	Q6
JCA2123-602	21.2-23.6	30	2.8	1.0	13	23	1.8:1	240	Q6
JCA2123-603	21.2-23.6	30	2.5	1.0	13	23	1.8:1	240	Q6
JCA2123-604	21.2-23.6	30	4.0	1.0	20	30	2.0:1	300	Q6
JCA2123-605	21.2-23.6	28	5.0	1.0	23	33	2.0:1	400	Q6
JCA2123-606	21.2-23.6	28	5.0	1.0	25	35	2.0:1	500	Q6
Radar and Communications Band Amplifiers 23.2 GHz to 24.6 GHz									
JCA2324-200	23.2-24.6	20	3.5	0.5	5	15	2.0:1	185	Q4
JCA2324-201	23.2-24.6	19	3.5	0.5	10	20	2.0:1	225	Q4
JCA2324-202	23.2-24.6	18	3.8	0.5	10	20	2.0:1	225	Q4
JCA2324-203	23.2-24.6	17	4.0	0.5	13	23	2.0:1	265	Q4
JCA2324-204	23.2-24.6	16	4.0	0.5	15	25	2.0:1	305	Q4
JCA2324-205	23.2-24.6	16	4.5	0.5	17	27	2.0:1	350	Q4
JCA2324-206	23.2-24.6	15	5.0	0.5	20	30	2.0:1	400	Q4
JCA2324-207	23.2-24.6	15	5.0	0.5	23	33	2.0:1	475	Q4
JCA2324-300	23.2-24.6	28	3.0	0.5	5	15	2.0:1	230	Q4
JCA2324-301	23.2-24.6	27	3.2	0.5	10	20	2.0:1	250	Q4
JCA2324-302	23.2-24.6	26	3.5	0.5	10	20	2.0:1	250	Q4

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

www.jcatech.com e-mail jca@jcatech.com

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Radar and Communications Band Amplifiers 23.2 GHz to 24.6 GHz									
JCA2324-303	23.2-24.6	25	3.8	0.5	13	23	2.0:1	300	Q4
JCA2324-304	23.2-24.6	25	4.0	0.5	15	25	2.0:1	345	Q4
JCA2324-305	23.2-24.6	24	4.5	0.5	17	27	2.0:1	400	Q4
JCA2324-306	23.2-24.6	23	5.0	0.5	20	30	2.0:1	475	Q4
JCA2324-307	23.2-24.6	23	5.0	0.5	23	33	2.0:1	550	Q4
JCA2324-400	23.2-24.6	35	3.0	0.5	5	15	2.0:1	300	Q6
JCA2324-401	23.2-24.6	34	3.2	0.5	10	20	2.0:1	325	Q6
JCA2324-402	23.2-24.6	33	3.5	0.5	10	20	2.0:1	325	Q6
JCA2324-403	23.2-24.6	32	3.8	0.5	13	23	2.0:1	360	Q6
JCA2324-404	23.2-24.6	31	4.0	0.5	15	25	2.0:1	450	Q6
JCA2324-405	23.2-24.6	31	4.5	0.5	17	27	2.0:1	500	Q6
JCA2324-406	23.2-24.6	30	5.0	0.5	20	30	2.0:1	575	Q6
JCA2324-407	23.2-24.6	30	5.0	0.5	23	33	2.0:1	650	Q6
JCA2324-500	23.2-24.6	22	3.0	0.5	5	15	2.0:1	400	Q6
JCA2324-501	23.2-24.6	22	3.2	0.5	10	20	2.0:1	425	Q6
JCA2324-502	23.2-24.6	22	3.5	0.5	10	20	2.0:1	425	Q6
JCA2324-503	23.2-24.6	33	3.8	0.5	13	23	2.0:1	470	Q6
JCA2324-504	23.2-24.6	33	4.0	0.5	15	25	2.0:1	560	Q6
JCA2324-505	23.2-24.6	33	4.5	0.5	17	27	2.0:1	600	Q6
JCA2324-506	23.2-24.6	30	5.0	0.5	20	30	2.0:1	676	Q6
JCA2324-507	23.2-24.6	32	5.0	0.5	23	33	2.0:1	750	Q6
Radar and Communications Band Amplifier 24.2 GHz to 25.6 GHz									
JCA2425-200	24.2-25.6	20	3.5	0.5	5	15	2.0:1	185	Q4
JCA2425-201	24.2-25.6	19	3.5	0.5	10	20	2.0:1	225	Q4
JCA2425-202	24.2-25.6	18	3.8	0.5	10	20	2.0:1	225	Q4
JCA2425-203	24.2-25.6	17	4.0	0.5	13	23	2.0:1	265	Q4
JCA2425-204	24.2-25.6	16	4.0	0.5	15	25	2.0:1	305	Q4
JCA2425-205	24.2-25.6	16	4.5	0.5	17	27	2.0:1	350	Q4
JCA2425-206	24.2-25.6	15	5.0	0.5	20	30	2.0:1	400	Q4
JCA2425-207	24.2-25.6	15	5.0	0.5	23	33	2.0:1	475	Q4
JCA2425-300	24.2-25.6	28	3.0	0.5	5	15	2.0:1	230	Q4
JCA2425-301	24.2-25.6	27	3.2	0.5	10	20	2.0:1	250	Q4
JCA2425-302	24.2-25.6	26	3.5	0.5	10	20	2.0:1	250	Q4
JCA2425-303	24.2-25.6	25	3.8	0.5	13	23	2.0:1	300	Q4
JCA2425-304	24.2-25.6	25	4.0	0.5	15	25	2.0:1	345	Q4

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Radar and Communications Band Amplifier 24.2 GHz to 25.6 GHz									
JCA2425-305	24.2-25.6	24	4.5	0.5	17	27	2.0:1	400	Q4
JCA2425-306	24.2-25.6	23	5.0	0.5	20	30	2.0:1	475	Q4
JCA2425-307	24.2-25.6	23	5.0	0.5	23	33	2.0:1	550	Q4
JCA2425-400	24.2-25.6	35	3.0	0.5	5	15	2.0:1	300	Q6
JCA2425-401	24.2-25.6	34	3.2	0.5	10	20	2.0:1	325	Q6
JCA2425-402	24.2-25.6	33	3.5	0.5	10	20	2.0:1	325	Q6
JCA2425-403	24.2-25.6	32	3.8	0.5	13	23	2.0:1	360	Q6
JCA2425-404	24.2-25.6	31	4.0	0.5	15	25	2.0:1	450	Q6
JCA2425-405	24.2-25.6	31	4.5	0.5	17	27	2.0:1	500	Q6
JCA2425-406	24.2-25.6	30	5.0	0.5	20	30	2.0:1	575	Q6
JCA2425-407	24.2-25.6	30	5.0	0.5	23	33	2.0:1	650	Q6
JCA2425-500	24.2-25.6	22	3.0	0.5	5	15	2.0:1	400	Q6
JCA2425-501	24.2-25.6	22	3.2	0.5	10	20	2.0:1	425	Q6
JCA2425-502	24.2-25.6	22	3.5	0.5	10	20	2.0:1	425	Q6
JCA2425-503	24.2-25.6	33	3.8	0.5	13	23	2.0:1	470	Q6
JCA2425-504	24.2-25.6	33	4.0	0.5	15	25	2.0:1	560	Q6
JCA2425-505	24.2-25.6	33	4.5	0.5	17	27	2.0:1	600	Q6
JCA2425-506	24.2-25.6	30	5.0	0.5	20	30	2.0:1	676	Q6
JCA2425-507	24.2-25.6	32	5.0	0.5	23	33	2.0:1	750	Q6
Radar and Communications Band Amplifiers 25.2 GHz to 26.6 GHz									
JCA2526-200	25.2-26.6	20	3.5	1.0	5	15	2.0:1	185	Q4
JCA2526-201	25.2-26.6	19	3.5	1.0	10	20	2.0:1	225	Q4
JCA2526-202	25.2-26.6	18	3.8	1.0	10	20	2.0:1	225	Q4
JCA2526-203	25.2-26.6	17	4.0	1.0	13	23	2.0:1	265	Q4
JCA2526-204	25.2-26.6	16	4.0	1.0	15	25	2.0:1	305	Q4
JCA2526-205	25.2-26.6	16	4.5	1.0	17	27	2.0:1	350	Q4
JCA2526-206	25.2-26.6	15	5.0	1.0	20	30	2.0:1	400	Q4
JCA2526-207	25.2-26.6	15	5.0	1.0	23	33	2.0:1	475	Q4
JCA2526-300	25.2-26.6	28	3.0	1.0	5	15	2.0:1	230	Q6
JCA2526-301	25.2-26.6	27	3.2	1.0	10	20	2.0:1	250	Q6
JCA2526-302	25.2-26.6	26	3.5	1.0	10	20	2.0:1	250	Q6
JCA2526-303	25.2-26.6	25	3.8	1.0	13	23	2.0:1	300	Q6
JCA2526-304	25.2-26.6	25	4.0	1.0	15	25	2.0:1	345	Q6
JCA2526-305	25.2-26.6	24	4.5	1.0	17	27	2.0:1	400	Q6
JCA2526-306	25.2-26.6	23	5.0	1.0	20	30	2.0:1	475	Q4
JCA2526-307	25.2-26.6	23	5.0	1.0	23	33	2.0:1	550	Q4

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

www.jcatech.com e-mail jca@jcatech.com

Radar and Communications Band Amplifiers 25.2 GHz to 26.6 GHz

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
JCA2526-400	25.2-26.6	35	3.0	1.0	5	15	2.0:1	300	Q6
JCA2526-401	25.2-26.6	34	3.2	1.0	10	20	2.0:1	325	Q6
JCA2526-402	25.2-26.6	33	3.5	1.0	10	20	2.0:1	325	Q6
JCA2526-403	25.2-26.6	32	3.8	1.0	13	23	2.0:1	360	Q6
JCA2526-404	25.2-26.6	31	4.0	1.0	15	25	2.0:1	450	Q6
JCA2526-405	25.2-26.6	31	4.5	1.0	17	27	2.0:1	500	Q6
JCA2526-406	25.2-26.6	30	5.0	1.0	20	30	2.0:1	575	Q6
JCA2526-407	25.2-26.6	30	5.0	1.0	23	33	2.0:1	650	Q6
JCA2526-500	25.2-26.6	22	3.0	1.0	5	15	2.0:1	400	Q4
JCA2526-501	25.2-26.6	22	3.2	1.0	10	20	2.0:1	425	Q4
JCA2526-502	25.2-26.6	22	3.5	1.0	10	20	2.0:1	425	Q6
JCA2526-503	25.2-26.6	33	3.8	1.0	13	23	2.0:1	470	Q6
JCA2526-504	25.2-26.6	33	4.0	1.0	15	25	2.0:1	560	Q6
JCA2526-505	25.2-26.6	33	4.5	1.0	17	27	2.0:1	600	Q6
JCA2526-506	25.2-26.6	30	5.0	1.0	20	30	2.0:1	676	Q6
JCA2526-507	25.2-26.6	32	5.0	1.0	23	33	2.0:1	750	Q6

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

octave band FET amplifiers

features:

Removable SMA Female Connectors
Extended coverage for multiple applications
Competitively Priced
Up to 1 Watt Output Power (at 1 dB Compression Point
Compact Size

description:

This series of GaAs Fet Amplifiers offers a compact and cost effective solution for most microwave applications balanced circuitry ensures stable operation with excellent dynamic range and low return losses. Thin Film MIC Construction ensures optimum reliability. Specifications are given at +25 °C, yet the amplifiers will operate over the full military temperatures ranges. Temperature compensated versions are available. The SMA connectors are removable for drop-in applications

Extended Radar Frequency Band Amplifiers from 1.0 to 26.0

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Extended Radar Frequency Band Amplifier 1.4 GHz to 2.4 GHz									
JCA12-1100	1.4-2.4	18	3.0	1.0	5	15	2.0:1	60	LCFB1
JCA12-1101	1.4-2.4	16	3.0	1.0	10	20	2.0:1	75	LCFB1
JCA12-1102	1.4-2.4	15	3.0	1.0	13	23	2.0:1	85	LCFB1
JCA12-1103	1.4-2.4	14	3.0	1.0	17	27	2.0:1	110	LCFB1
JCA12-1104	1.4-2.4	15	3.5	1.0	20	30	2.0:1	135	LCFB1
JCA12-1105	1.4-2.4	13	3.5	1.0	23	33	2.0:1	150	LCFB1
JCA12-1106	1.4-2.4	12	4.0	1.0	27	37	2.0:1	200	LCFB1
JCA24-2100	1.4-2.4	27	3.0	1.0	5	15	2.0:1	100	LCFB1
JCA24-2101	1.4-2.4	25	3.0	1.0	10	20	2.0:1	120	LCFB1
JCA24-2102	1.4-2.4	26	3.0	1.0	13	23	2.0:1	135	LCFB1
JCA24-2103	1.4-2.4	24	3.0	1.0	17	27	2.0:1	150	LCFB1
JCA24-2104	1.4-2.4	25	3.5	1.0	20	30	2.0:1	185	LCFB1
JCA24-2105	1.4-2.4	23	3.5	1.0	23	33	2.0:1	225	LCFB1
JCA24-2106	1.4-2.4	22	4.0	1.0	27	37	2.0:1	260	LCFB1
JCA12-3100	1.4-2.4	37	3.0	1.0	5	15	2.0:1	185	FB2
JCA12-3101	1.4-2.4	36	3.0	1.0	10	20	2.0:1	200	FB2
JCA12-3102	1.4-2.4	33	3.0	1.0	13	23	2.0:1	275	FB2
JCA12-3103	1.4-2.4	34	3.0	1.0	17	27	2.0:1	350	FB2

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**
www.jcatech.com e-mail jca@jcatech.com

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Extended Radar Frequency Band Amplifier 1.4 GHz to 2.4 GHz									
JCA12-3104	1.4-2.4	33	3.5	1.0	20	30	2.0:1	400	FB2
JCA12-3105	1.4-2.4	32	3.5	1.0	23	33	2.0:1	575	FB2
JCA12-3106	1.4-2.4	33	4.0	1.0	27	37	2.0:1	675	FB2
JCA12-4101	1.4-2.4	45	3.0	1.0	10	20	2.0:1	300	FB2
JCA12-4102	1.4-2.4	44	3.0	1.0	13	23	2.0:1	320	FB2
JCA12-4103	1.4-2.4	42	3.0	1.0	17	27	2.0:1	350	FB2
JCA12-4104	1.4-2.4	40	3.5	1.0	20	30	2.0:1	375	FB2
JCA12-4105	1.4-2.4	41	3.5	1.0	23	33	2.0:1	400	FB2
JCA12-4106	1.4-2.4	40	4.0	1.0	27	37	2.0:1	700	FB2
Extended Radar Frequency Band Amplifier 2.1 GHz to 3.5 GHz									
JCA23-1100	2.1-3.5	17	2.0	0.5	5	15	2.0:1	75	C2
JCA23-1101	2.1-3.5	16	2.0	0.5	10	20	2.0:1	95	C2
JCA23-1102	2.1-3.5	15	2.2	0.5	13	23	2.0:1	115	C2
JCA23-1103	2.1-3.5	14	2.4	0.5	17	26	2.0:1	145	C2
JCA23-1104	2.1-3.5	15	2.5	0.5	20	30	2.0:1	170	C2
JCA23-1105	2.1-3.5	16	3.0	0.5	23	33	2.0:1	200	C2
JCA23-1106	2.1-3.5	16	4.0	0.5	27	37	2.0:1	250	C2
JCA23-1107	2.1-3.5	14	5.0	0.5	30	40	2.0:1	325	C2
JCA23-2100	2.1-3.5	26	1.8	0.5	5	15	2.0:1	100	C2
JCA23-2101	2.1-3.5	27	1.8	0.5	10	20	2.0:1	110	C2
JCA23-2102	2.1-3.5	25	1.8	0.5	13	23	2.0:1	150	C2
JCA23-2103	2.1-3.5	24	2.2	0.5	17	27	2.0:1	185	C2
JCA23-2104	2.1-3.5	25	2.4	0.5	20	30	2.0:1	235	C2
JCA23-2105	2.1-3.5	24	2.6	0.5	23	33	2.0:1	275	C2
JCA23-2106	2.1-3.5	25	3.2	0.5	27	37	2.0:1	325	C2
JCA23-2107	2.1-3.5	23	3.8	0.5	30	40	2.0:1	400	C3
JCA23-3100	2.1-3.5	32	1.8	0.5	5	15	2.0:1	130	C3
JCA23-3101	2.1-3.5	33	1.8	0.5	10	20	2.0:1	150	C3
JCA23-3102	2.1-3.5	34	1.8	0.5	13	23	2.0:1	170	C3
JCA23-3103	2.1-3.5	32	2.2	0.5	17	27	2.0:1	200	C3
JCA23-3104	2.1-3.5	35	2.4	0.5	20	30	2.0:1	245	C3
JCA23-3105	2.1-3.5	33	2.6	0.5	23	33	2.0:1	375	C3
JCA23-3106	2.1-3.5	34	3.2	0.5	27	37	2.0:1	450	C3
JCA23-3107	2.1-3.5	32	3.5	0.5	30	40	2.0:1	500	C3

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Extended Radar Frequency Band Amplifier 2.1 GHz to 3.5 GHz									
JCA23-4100	2.1-3.5	43	1.8	0.5	5	15	2.0:1	200	C4
JCA23-4101	2.1-3.5	42	1.8	0.5	10	20	2.0:1	230	C4
JCA23-4102	2.1-3.5	44	1.8	0.5	13	23	2.0:1	245	C4
JCA23-4103	2.1-3.5	43	2.2	0.5	17	27	2.0:1	275	C4
JCA23-4104	2.1-3.5	41	2.4	0.5	20	30	2.0:1	350	C4
JCA23-4105	2.1-3.5	42	2.6	0.5	23	33	2.0:1	425	C4
JCA23-4106	2.1-3.5	43	3.2	0.5	27	37	2.0:1	500	C4
JCA23-4107	2.1-3.5	40	3.5	0.5	30	40	2.0:1	595	C4
Extended Radar Frequency Band Amplifiers 3.4 GHz to 5.9 GHz									
JCA35-1100	3.4-5.9	17	3.0	1.0	5	15	2.0:1	85	C2
JCA35-1101	3.4-5.9	16	3.0	1.0	10	20	2.0:1	100	C2
JCA35-1102	3.4-5.9	17	3.0	1.0	13	23	2.0:1	120	C2
JCA35-1103	3.4-5.9	15	3.0	1.0	17	27	2.0:1	150	C2
JCA35-1104	3.4-5.9	15	3.0	1.0	20	30	2.0:1	200	C2
JCA35-1105	3.4-5.9	14	3.2	1.0	23	33	2.0:1	285	C2
JCA35-1106	3.4-5.9	15	3.5	1.0	27	37	2.0:1	395	C2
JCA35-1107	3.4-5.9	13	3.5	1.0	30	40	2.0:1	450	C2
JCA35-2100	3.4-5.9	25	2.2	1.0	5	15	2.0:1	110	C2
JCA35-2101	3.4-5.9	25	2.2	1.0	10	20	2.0:1	125	C2
JCA35-2102	3.4-5.9	26	2.4	1.0	13	23	2.0:1	140	C2
JCA35-2103	3.4-5.9	24	2.5	1.0	16	26	2.0:1	175	C2
JCA35-2104	3.4-5.9	24	2.5	1.0	20	30	2.0:1	215	C2
JCA35-2105	3.4-5.9	23	2.8	1.0	23	33	2.0:1	325	C2
JCA35-2106	3.4-5.9	25	3.2	1.0	27	37	2.0:1	450	C2
JCA35-2107	3.4-5.9	22	3.5	1.0	30	40	2.0:1	550	C2
JCA35-3100	3.4-5.9	35	2.2	1.0	5	15	2.0:1	150	C3
JCA35-3101	3.4-5.9	35	2.2	1.0	10	20	2.0:1	165	C3
JCA35-3102	3.4-5.9	36	2.4	1.0	13	23	2.0:1	200	C3
JCA35-3103	3.4-5.9	34	2.5	1.0	17	27	2.0:1	275	C3
JCA35-3104	3.4-5.9	33	2.5	1.0	20	30	2.0:1	350	C3
JCA35-3105	3.4-5.9	32	2.8	1.0	23	33	2.0:1	500	C3
JCA35-3106	3.4-5.9	31	3.2	1.0	27	37	2.0:1	650	C3
JCA35-3107	3.4-5.9	32	3.5	1.0	30	40	2.0:1	800	C3
JCA35-4100	3.4-5.9	45	2.2	1.0	5	15	2.0:1	225	C4
JCA35-4101	3.4-5.9	45	2.2	1.0	10	20	2.0:1	250	C4
JCA35-4102	3.4-5.9	44	2.4	1.0	13	23	2.0:1	300	C4

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

www.jcatech.com e-mail jca@jcatech.com

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Extended Radar Frequency Band Amplifiers 3.4 GHz to 5.9 GHz									
JCA35-4103	3.4-5.9	42	2.5	1.0	17	27	2.0:1	375	C4
JCA35-4104	3.4-5.9	44	2.5	1.0	20	30	2.0:1	450	C4
JCA35-4105	3.4-5.9	43	2.8	1.0	23	33	2.0:1	600	C4
JCA35-4106	3.4-5.9	41	3.2	1.0	27	37	2.0:1	750	C4
JCA35-4107	3.4-5.9	40	3.5	1.0	30	40	2.0:1	900	C4
Extended Radar Frequency Band Amplifiers 5.4 GHz to 6.4 GHz									
JCA56-1100	5.4-6.4	15	3.0	0.5	5	15	2.0:1	90	C2
JCA56-1101	5.4-6.4	15	2.5	0.5	10	20	2.0:1	120	C2
JCA56-1102	5.4-6.4	14	2.5	0.5	13	23	2.0:1	130	C2
JCA56-1103	5.4-6.4	13	2.8	0.5	17	27	2.0:1	225	C2
JCA56-1104	5.4-6.4	13	2.8	0.5	20	30	2.0:1	250	C2
JCA56-1105	5.4-6.4	12	3.0	0.5	23	33	2.0:1	285	C2
JCA56-1106	5.4-6.4	11	4.0	0.5	27	37	2.0:1	350	C2
JCA56-1107	5.4-6.4	10	5.0	0.5	30	40	2.0:1	400	C2
JCA56-2100	5.4-6.4	26	2.2	0.5	5	15	2.0:1	150	C2
JCA56-2101	5.4-6.4	26	2.2	0.5	10	20	2.0:1	175	C2
JCA56-2102	5.4-6.4	24	2.2	0.5	13	23	2.0:1	195	C2
JCA56-2103	5.4-6.4	25	2.5	0.5	17	27	2.0:1	230	C2
JCA56-2104	5.4-6.4	23	3.0	0.5	20	30	2.0:1	295	C2
JCA56-2105	5.4-6.4	24	3.2	0.5	23	33	2.0:1	360	C2
JCA56-2106	5.4-6.4	23	3.5	0.5	27	37	2.0:1	450	C2
JCA56-2107	5.4-6.4	22	4.0	0.5	30	40	2.0:1	565	C3
JCA56-3100	5.4-6.4	35	2.2	0.5	5	15	2.0:1	225	C3
JCA56-3101	5.4-6.4	35	2.2	0.5	10	20	2.0:1	245	C3
JCA56-3102	5.4-6.4	34	2.2	0.5	13	23	2.0:1	265	C3
JCA56-3103	5.4-6.4	34	2.5	0.5	17	27	2.0:1	300	C3
JCA56-3104	5.4-6.4	32	3.0	0.5	20	30	2.0:1	350	C3
JCA56-3105	5.4-6.4	33	3.2	0.5	23	33	2.0:1	450	C3
JCA56-3106	5.4-6.4	30	3.5	0.5	27	37	2.0:1	600	C3
JCA56-3107	5.4-6.4	30	4.0	0.5	30	40	2.0:1	750	C3
JCA56-4100	5.4-6.4	45	2.2	0.5	5	15	2.0:1	260	C4
JCA56-4101	5.4-6.4	45	2.2	0.5	10	20	2.0:1	275	C4
JCA56-4102	5.4-6.4	43	2.2	0.5	13	23	2.0:1	300	C4
JCA56-4103	5.4-6.4	42	2.5	0.5	16	26	2.0:1	365	C4
JCA56-4104	5.4-6.4	44	3.0	0.5	20	30	2.0:1	450	C4

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Extended Radar Frequency Band Amplifiers 5.4 GHz to 6.4 GHz									
JCA56-4105	5.4-6.4	42	3.2	0.5	23	33	2.0:1	525	C4
JCA56-4106	5.4-6.4	40	3.5	0.5	27	37	2.0:1	700	C4
JCA56-4107	5.4-6.4	39	4.0	0.5	30	40	2.0:1	850	C4
Extended Radar Frequency Band Amplifiers 7.25 GHz to 8.4 GHz									
JCA78-1100	7.25-8.4	16	3.0	1.0	5	15	2.0:1	90	XK2
JCA78-1101	7.25-8.4	15	3.0	1.0	10	20	2.0:1	110	XK2
JCA78-1102	7.25-8.4	14	3.0	1.0	13	23	2.0:1	130	XK2
JCA78-1103	7.25-8.4	15	3.0	1.0	17	27	2.0:1	170	XK2
JCA78-1104	7.25-8.4	13	3.5	1.0	20	30	2.0:1	230	XK2
JCA78-1105	7.25-8.4	13	4.0	1.0	23	33	2.0:1	300	XK2
JCA78-1106	7.25-8.4	12	4.5	1.0	27	37	2.0:1	400	XK2
JCA78-1107	7.25-8.4	12	5.0	1.0	30	40	2.0:1	495	XK2
JCA78-2100	7.25-8.4	25	2.5	1.0	5	15	2.0:1	145	XK2
JCA78-2101	7.25-8.4	25	2.5	1.0	10	20	2.0:1	165	XK2
JCA78-2102	7.25-8.4	26	2.5	1.0	13	23	2.0:1	190	XK2
JCA78-2103	7.25-8.4	24	2.8	1.0	17	27	2.0:1	250	XK2
JCA78-2104	7.25-8.4	23	3.0	1.0	20	30	2.0:1	335	XK2
JCA78-2105	7.25-8.4	24	3.2	1.0	23	33	2.0:1	450	XK2
JCA78-2106	7.25-8.4	22	3.5	1.0	27	37	2.0:1	550	XK2
JCA78-2107	7.25-8.4	21	4.0	1.0	30	40	2.0:1	700	XK2
JCA78-3100	7.25-8.4	35	2.5	1.0	5	15	2.0:1	200	XK3
JCA78-3101	7.25-8.4	36	2.5	1.0	10	20	2.0:1	225	XK3
JCA78-3102	7.25-8.4	35	2.5	1.0	13	23	2.0:1	250	XK3
JCA78-3103	7.25-8.4	35	2.8	1.0	17	17	2.0:1	325	XK3
JCA78-3104	7.25-8.4	33	3.0	1.0	20	30	2.0:1	425	XK3
JCA78-3105	7.25-8.4	34	3.2	1.0	23	33	2.0:1	500	XK3
JCA78-3106	7.25-8.4	32	3.5	1.0	27	37	2.0:1	700	XK3
JCA78-3107	7.25-8.4	30	4.0	1.0	30	40	2.0:1	850	XK3
JCA78-4100	7.25-8.4	44	2.5	1.0	5	15	2.0:1	280	XK4
JCA78-4101	7.25-8.4	45	2.5	1.0	10	20	2.0:1	300	XK4
JCA78-4102	7.25-8.4	45	2.5	1.0	13	23	2.0:1	335	XK4
JCA78-4103	7.25-8.4	43	2.8	1.0	17	27	2.0:1	400	XK4
JCA78-4104	7.25-8.4	44	3.0	1.0	20	30	2.0:1	495	XK4
JCA78-4105	7.25-8.4	42	3.2	1.0	23	33	2.0:1	600	XK4
JCA78-4106	7.25-8.4	41	3.5	1.0	27	37	2.0:1	775	XK4
JCA78-4107	7.25-8.4	40	4.0	1.0	30	40	2.0:1	950	XK4

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

www.jcatech.com e-mail jca@jcatech.com

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Extended Radar Frequency Band Amplifiers 7.0 GHz to 12.4 GHz									
JCA7I2-1100	7.0-12.4	12	4.5	1.0	5	15	2.0:1	100	K2
JCA7I2-1101	7.0-12.4	12	4.5	1.0	10	20	2.0:1	120	K2
JCA7I2-1102	7.0-12.4	10	4.5	1.0	13	22	2.0:1	145	K2
JCA7I2-1103	7.0-12.4	11	4.8	1.0	15	25	2.0:1	195	K2
JCA7I2-1104	7.0-12.4	12	4.8	1.0	18	28	2.0:1	250	K2
JCA7I2-1105	7.0-12.4	11	5.0	1.0	21	31	2.0:1	300	K2
JCA7I2-1106	7.0-12.4	11	5.5	1.0	23	33	2.0:1	335	K2
JCA7I2-1107	7.0-12.4	10	6.0	1.0	25	35	2.0:1	360	K2
JCA7I2-2100	7.0-12.4	20	3.5	1.0	5	15	2.0:1	150	K3
JCA7I2-2101	7.0-12.4	20	3.5	1.0	10	20	2.0:1	175	K3
JCA7I2-2102	7.0-12.4	22	3.5	1.0	12	22	2.0:1	210	K3
JCA7I2-2103	7.0-12.4	23	3.5	1.0	15	25	2.0:1	260	K3
JCA7I2-2104	7.0-12.4	21	4.0	1.0	18	28	2.0:1	300	K3
JCA7I2-2105	7.0-12.4	22	4.5	1.0	21	31	2.0:1	350	K3
JCA7I2-2106	7.0-12.4	20	4.5	1.0	23	33	2.0:1	400	K3
JCA7I2-2107	7.0-12.4	19	5.0	1.0	25	35	2.0:1	475	K3
JCA7I2-3100	7.0-12.4	28	3.5	1.0	5	15	2.0:1	200	K4
JCA7I2-3101	7.0-12.4	27	3.5	1.0	10	20	2.0:1	225	K4
JCA7I2-3102	7.0-12.4	29	3.5	1.0	12	22	2.0:1	260	K4
JCA7I2-3103	7.0-12.4	28	3.5	1.0	15	25	2.0:1	310	K4
JCA7I2-3104	7.0-12.4	26	4.0	1.0	18	28	2.0:1	375	K4
JCA7I2-3105	7.0-12.4	29	4.5	1.0	21	31	2.0:1	450	K4
JCA7I2-3106	7.0-12.4	28	4.5	1.0	23	33	2.0:1	525	K4
JCA7I2-3107	7.0-12.4	27	5.0	1.0	25	35	2.0:1	600	K4
JCA7I2-4100	7.0-12.4	35	3.5	1.0	5	15	2.0:1	260	K4
JCA7I2-4101	7.0-12.4	34	3.5	1.0	10	20	2.0:1	275	K4
JCA7I2-4102	7.0-12.4	33	3.5	1.0	12	22	2.0:1	300	K4
JCA7I2-4103	7.0-12.4	34	3.5	1.0	15	25	2.0:1	345	K4
JCA7I2-4104	7.0-12.4	32	4.0	1.0	18	28	2.0:1	400	K4
JCA7I2-4105	7.0-12.4	32	4.5	1.0	21	31	2.0:1	480	K4
JCA7I2-4106	7.0-12.4	34	4.5	1.0	23	33	2.0:1	595	K6
JCA7I2-4107	7.0-12.4	31	5.0	1.0	25	35	2.0:1	675	K6
Extended Radar Frequency Band Amplifiers 10.7 GHz to 12.2 GHz									
JCA10I2-1100	10.7-12.2	13	3.5	1.0	5	15	2.0:1	100	K2
JCA10I2-1101	10.7-12.2	12	3.5	1.0	10	20	2.0:1	120	K2

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Extended Radar Frequency Band Amplifiers 10.7 GHz to 12.2 GHz									
JCA1012-1100	10.7-12.2	13	3.5	1.0	5	15	2.0:1	100	K2
JCA1012-1101	10.7-12.2	12	3.5	1.0	10	20	2.0:1	120	K2
JCA1012-1102	10.7-12.2	11	3.5	1.0	12	22	2.0:1	150	K2
JCA1012-1103	10.7-12.2	12	3.5	1.0	15	25	2.0:1	195	K2
JCA1012-1104	10.7-12.2	10	4.0	1.0	18	28	2.0:1	220	K2
JCA1012-1105	10.7-12.2	11	4.0	1.0	21	31	2.0:1	280	K2
JCA1012-1106	10.7-12.2	13	4.5	1.0	24	34	2.0:1	315	K2
JCA1012-1107	10.7-12.2	10	5.0	1.0	27	37	2.0:1	365	K2
JCA1012-2100	10.7-12.2	25	3.0	1.0	5	15	2.0:1	150	K2
JCA1012-2101	10.7-12.2	25	3.0	1.0	10	20	2.0:1	165	K2
JCA1012-2102	10.7-12.2	24	3.0	1.0	12	22	2.0:1	180	K2
JCA1012-2103	10.7-12.2	23	3.0	1.0	15	25	2.0:1	200	K2
JCA1012-2104	10.7-12.2	22	3.5	1.0	18	28	2.0:1	250	K2
JCA1012-2105	10.7-12.2	22	3.5	1.0	21	31	2.0:1	325	K2
JCA1012-2106	10.7-12.2	21	4.0	1.0	24	34	2.0:1	375	K2
JCA1012-2107	10.7-12.2	20	4.5	1.0	27	37	2.0:1	500	K2
JCA1012-3100	10.7-12.2	30	2.8	1.0	5	15	2.0:1	190	K3
JCA1012-3101	10.7-12.2	31	2.8	1.0	10	20	2.0:1	210	K3
JCA1012-3102	10.7-12.2	30	2.8	1.0	12	22	2.0:1	225	K3
JCA1012-3103	10.7-12.2	29	3.0	1.0	15	25	2.0:1	250	K3
JCA1012-3104	10.7-12.2	29	3.0	1.0	18	28	2.0:1	305	K3
JCA1012-3105	10.7-12.2	28	3.5	1.0	21	31	2.0:1	360	K3
JCA1012-3106	10.7-12.2	27	3.5	1.0	24	34	2.0:1	410	K3
JCA1012-3107	10.7-12.2	26	4.0	1.0	27	37	2.0:1	565	K3
JCA1012-4100	10.7-12.2	39	2.8	1.0	5	15	2.0:1	245	K4
JCA1012-4101	10.7-12.2	39	2.8	1.0	10	20	2.0:1	265	K4
JCA1012-4102	10.7-12.2	38	2.8	1.0	12	22	2.0:1	280	K4
JCA1012-4103	10.7-12.2	37	3.0	1.0	15	25	2.0:1	335	K4
JCA1012-4104	10.7-12.2	37	3.0	1.0	18	28	2.0:1	375	K4
JCA1012-4105	10.7-12.2	36	3.5	1.0	21	31	2.0:1	450	K4
JCA1012-4106	10.7-12.2	35	3.5	1.0	24	34	2.0:1	550	K4
JCA1012-4107	10.7-12.2	34	4.0	1.0	27	37	2.0:1	685	K4
Extended Radar Frequency Band Amplifiers 11.7 GHz to 13.2 GHz									
JCA1113-1100	11.7-13.2	14	3.5	1.0	5	15	2.0:1	100	K2
JCA1113-1101	11.7-13.2	13	3.5	1.0	10	20	2.0:1	120	K2

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

www.jcatech.com e-mail jca@jcatech.com

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Extended Radar Frequency Band Amplifiers 11.7 GHz to 13.2 GHz									
JCA1113-1102	11.7-13.2	13	3.5	1.0	12	22	2.0:1	140	K2
JCA1113-1103	11.7-13.2	11	3.5	1.0	15	25	2.0:1	175	K2
JCA1113-1104	11.7-13.2	10	4.0	1.0	18	28	2.0:1	200	K2
JCA1113-1105	11.7-13.2	11	4.0	1.0	21	31	2.0:1	245	K2
JCA1113-1106	11.7-13.2	10	4.5	1.0	24	34	2.0:1	300	K2
JCA1113-1107	11.7-13.2	10	5.0	1.0	27	37	2.0:1	365	K2
JCA1113-2100	11.7-13.2	26	3.0	1.0	5	15	2.0:1	160	K3
JCA1113-2101	11.7-13.2	25	3.0	1.0	10	20	2.0:1	175	K3
JCA1113-2102	11.7-13.2	24	3.0	1.0	12	22	2.0:1	200	K3
JCA1113-2103	11.7-13.2	24	3.0	1.0	15	25	2.0:1	250	K3
JCA1113-2104	11.7-13.2	23	3.5	1.0	18	28	2.0:1	295	K3
JCA1113-2105	11.7-13.2	23	3.5	1.0	21	31	2.0:1	300	K3
JCA1113-2106	11.7-13.2	22	4.0	1.0	24	34	2.0:1	380	K3
JCA1113-2107	11.7-13.2	21	4.5	1.0	27	37	2.0:1	450	K3
JCA1113-3100	11.7-13.2	35	3.0	1.0	5	15	2.0:1	210	K4
JCA1113-3101	11.7-13.2	35	3.0	1.0	10	20	2.0:1	230	K4
JCA1113-3102	11.7-13.2	34	3.0	1.0	12	22	2.0:1	250	K4
JCA1113-3103	11.7-13.2	33	3.0	1.0	15	25	2.0:1	300	K4
JCA1113-3104	11.7-13.2	33	3.5	1.0	18	28	2.0:1	345	K4
JCA1113-3105	11.7-13.2	32	3.5	1.0	21	31	2.0:1	385	K4
JCA1113-3106	11.7-13.2	31	4.0	1.0	24	34	2.0:1	465	K4
JCA1113-3107	11.7-13.2	30	4.5	1.0	27	37	2.0:1	550	K4
JCA1113-4100	11.7-13.2	44	3.0	1.0	5	15	2.0:1	265	K6
JCA1113-4101	11.7-13.2	44	3.0	1.0	10	20	2.0:1	280	K6
JCA1113-4102	11.7-13.2	43	3.0	1.0	12	22	2.0:1	295	K6
JCA1113-4103	11.7-13.2	42	3.0	1.0	15	25	2.0:1	350	K6
JCA1113-4104	11.7-13.2	42	3.5	1.0	18	28	2.0:1	395	K6
JCA1113-4105	11.7-13.2	41	3.5	1.0	21	31	2.0:1	435	K6
JCA1113-4106	11.7-13.2	40	4.0	1.0	24	34	2.0:1	495	K6
JCA1113-4107	11.7-13.2	39	4.5	1.0	27	37	2.0:1	600	K6
Extended Radar Frequency Band Amplifiers 13.75 GHz to 15.4 GHz									
JCA1315-1100	13.75-15.4	15	3.5	1.0	5	15	2.0:1	100	K2
JCA1315-1101	13.75-15.4	15	3.5	1.0	10	20	2.0:1	120	K2
JCA1315-1102	13.75-15.4	14	2.5	1.0	12	22	2.0:1	140	K2
JCA1315-1103	13.75-15.4	13	3.5	1.0	15	25	2.0:1	175	K2
JCA1315-1104	13.75-15.4	13	4.0	1.0	17	27	2.0:1	200	K2

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Extended Radar Frequency Band Amplifiers 13.75 GHz to 15.4 GHz									
JCA1315-1105	13.75-15.4	12	5.0	1.0	20	30	2.0:1	245	K2
JCA1315-1106	13.75-15.4	12	5.0	1.0	23	33	2.0:1	300	K2
JCA1315-1107	13.75-15.4	11	5.5	1.0	26	36	2.0:1	365	K3
JCA1315-2100	13.75-15.4	25	3.0	1.0	5	15	2.0:1	160	K4
JCA1315-2101	13.75-15.4	25	3.0	1.0	10	20	2.0:1	175	K4
JCA1315-2102	13.75-15.4	24	3.0	1.0	12	22	2.0:1	200	K4
JCA1315-2103	13.75-15.4	24	3.0	1.0	15	25	2.0:1	250	K4
JCA1315-2104	13.75-15.4	23	3.2	1.0	17	27	2.0:1	295	K4
JCA1315-2105	13.75-15.4	22	3.5	1.0	20	30	2.0:1	300	K4
JCA1315-2106	13.75-15.4	22	4.0	1.0	23	33	2.0:1	380	K4
JCA1315-2107	13.75-15.4	21	5.0	1.0	26	36	2.0:1	450	K4
JCA1113-3100	11.7-13.2	35	3.0	1.0	5	15	2.0:1	210	K4
JCA1113-3101	11.7-13.2	35	3.0	1.0	10	20	2.0:1	230	K4
JCA1113-3102	11.7-13.2	34	3.0	1.0	12	22	2.0:1	250	K4
JCA1113-3103	11.7-13.2	33	3.0	1.0	15	25	2.0:1	300	K4
JCA1113-3104	11.7-13.2	33	3.5	1.0	18	28	2.0:1	345	K4
JCA1113-3105	11.7-13.2	32	3.5	1.0	21	31	2.0:1	385	K4
JCA1113-3106	11.7-13.2	31	4.0	1.0	24	34	2.0:1	465	K4
JCA1113-3107	11.7-13.2	30	4.5	1.0	27	37	2.0:1	550	K4
JCA1113-4100	11.7-13.2	44	3.0	1.0	5	15	2.0:1	265	K6
JCA1113-4101	11.7-13.2	44	3.0	1.0	10	20	2.0:1	280	K6
JCA1113-4102	11.7-13.2	43	3.0	1.0	12	22	2.0:1	295	K6
JCA1113-4103	11.7-13.2	42	3.0	1.0	15	25	2.0:1	350	K6
JCA1113-4104	11.7-13.2	42	3.5	1.0	18	28	2.0:1	395	K6
JCA1113-4105	11.7-13.2	41	3.5	1.0	21	31	2.0:1	435	K6
JCA1113-4106	11.7-13.2	40	4.0	1.0	24	34	2.0:1	495	K6
JCA1113-4107	11.7-13.2	39	4.5	1.0	27	37	2.0:1	600	K6

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Extended Radar Frequency Band Amplifiers 17.7 GHz to 21.2 GHz									
JCA1721-1100	17.7-21.2	17	6.0	1.5	0	10	2.0:1	100	Q2
JCA1721-1101	17.7-21.2	17	6.0	1.5	10	20	2.0:1	115	Q2
JCA1721-1102	17.7-21.2	16	6.0	1.5	13	23	2.0:1	135	Q2
JCA1721-1103	17.7-21.2	15	6.0	1.5	15	25	2.0:1	150	Q2
JCA1721-1104	17.7-21.2	15	6.0	1.5	17	27	2.0:1	165	Q2
JCA1721-1105	17.7-21.2	14	6.0	1.5	19	29	2.0:1	250	Q2
JCA1721-1106	17.7-21.2	14	6.0	1.5	21	31	2.0:1	295	Q2
JCA1721-1107	17.7-21.2	13	6.0	1.5	24	34	2.0:1	335	Q2
JCA1721-2100	17.7-21.2	25	4.5	1.5	0	10	2.0:1	150	Q4
JCA1721-2101	17.7-21.2	24	4.5	1.5	10	20	2.0:1	170	Q4
JCA1721-2102	17.7-21.2	24	4.5	1.5	13	23	2.0:1	185	Q4
JCA1721-2103	17.7-21.2	23	5.0	1.5	15	25	2.0:1	225	Q4
JCA1721-2104	17.7-21.2	22	5.0	1.5	17	27	2.0:1	270	Q4
JCA1721-2105	17.7-21.2	22	5.5	1.5	19	29	2.0:1	300	Q4
JCA1721-2106	17.7-21.2	21	6.0	1.5	21	31	2.0:1	350	Q4
JCA1721-2107	17.7-21.2	20	6.0	1.5	24	34	2.0:1	400	Q4
JCA1721-3100	17.7-21.2	33	4.5	1.5	0	10	2.0:1	200	Q6
JCA1721-3101	17.7-21.2	32	4.5	1.5	10	20	2.0:1	220	Q4
JCA1721-3102	17.7-21.2	32	4.5	1.5	13	23	2.0:1	240	Q4
JCA1721-3103	17.7-21.2	31	5.0	1.5	15	25	2.0:1	300	Q4
JCA1721-3104	17.7-21.2	30	5.0	1.5	17	27	2.0:1	345	Q4
JCA1721-3105	17.7-21.2	30	5.5	1.5	19	29	2.0:1	375	Q4
JCA1721-3106	17.7-21.2	29	6.0	1.5	21	31	2.0:1	425	Q4
JCA1721-3107	17.7-21.2	28	6.0	1.5	24	34	2.0:1	500	Q4
JCA1721-4100	17.7-21.2	42	4.5	1.5	0	10	2.0:1	275	Q6
JCA1721-4101	17.7-21.2	42	4.5	1.5	10	20	2.0:1	295	Q6
JCA1721-4102	17.7-21.2	41	4.5	1.5	13	23	2.0:1	315	Q6
JCA1721-4103	17.7-21.2	40	5.0	1.5	15	25	2.0:1	375	Q6
JCA1721-4104	17.7-21.2	40	5.0	1.5	17	27	2.0:1	450	Q6
JCA1721-4105	17.7-21.2	39	5.5	1.5	19	29	2.0:1	500	Q6
JCA1721-4106	17.7-21.2	38	6.0	1.5	21	31	2.0:1	545	Q6
JCA1721-4107	17.7-21.2	37	6.0	1.5	24	34	2.0:1	625	Q6

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

Ka-Band Amplifiers 26 GHz and Above

Ka-Band amplifiers from 27.5 to 30.0 GHz

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
JCA2730-200	27.5-30.0	18	5.0	1.0	0	10	2.0:1	120	M2
JCA2730-201	27.5-30.0	19	5.0	1.0	5	15	2.0:1	145	M2
JCA2730-202	27.5-30.0	18	5.0	1.0	8	18	2.0:1	165	M2
JCA2730-203	27.5-30.0	17	5.0	1.0	10	20	2.0:1	185	M2
JCA2730-204	27.5-30.0	16	5.0	1.0	12	22	2.0:1	200	M2
JCA2730-205	27.5-30.0	15	5.0	1.0	15	25	2.0:1	225	M2
JCA2730-300	27.5-30.0	27	5.0	1.0	0	10	2.0:1	165	M3
JCA2730-301	27.5-30.0	27	5.0	1.0	5	15	2.0:1	185	M3
JCA2730-302	27.5-30.0	26	5.0	1.0	8	18	2.0:1	200	M3
JCA2730-303	27.5-30.0	25	5.0	1.0	10	20	2.0:1	225	M3
JCA2730-304	27.5-30.0	25	5.0	1.0	12	22	2.0:1	240	M3
JCA2730-305	27.5-30.0	23	5.0	1.0	15	25	2.0:1	265	M3
JCA2730-400	27.5-30.0	36	5.0	1.0	0	10	2.0:1	210	M4
JCA2730-401	27.5-30.0	35	5.0	1.0	5	15	2.0:1	225	M4
JCA2730-402	27.5-30.0	34	5.0	1.0	8	18	2.0:1	260	M4
JCA2730-403	27.5-30.0	34	5.0	1.0	10	20	2.0:1	300	M4
JCA2730-404	27.5-30.0	33	5.0	1.0	12	22	2.0:1	340	M4
JCA2730-405	27.5-30.0	31	5.0	1.0	15	25	2.0:1	375	M4
JCA2730-500	27.5-30.0	44	5.0	1.0	0	10	2.0:1	335	M6
JCA2730-501	27.5-30.0	43	5.0	1.0	5	15	2.0:1	350	M6
JCA2730-502	27.5-30.0	43	5.0	1.0	8	18	2.0:1	385	M6
JCA2730-503	27.5-30.0	42	5.0	1.0	10	20	2.0:1	415	M6
JCA2730-504	27.5-30.0	41	5.0	1.0	12	22	2.0:1	440	M6
JCA2730-505	27.5-30.0	40	5.0	1.0	15	25	2.0:1	500	M6

Ka-Band amplifiers from 26.0 to 29.0 GHz

JCA2629-200	26.0-29.0	18	5.0	1.5	0	10	2.0:1	335	M4
JCA2629-201	26.0-29.0	19	5.0	1.5	5	15	2.0:1	350	M4
JCA2629-202	26.0-29.0	18	5.0	1.5	8	18	2.0:1	385	M4
JCA2629-203	26.0-29.0	17	5.0	1.5	10	20	2.0:1	415	M4
JCA2629-204	26.0-29.0	16	5.0	1.5	12	22	2.0:1	440	M4
JCA2629-205	26.0-29.0	15	5.0	1.5	15	25	2.0:1	500	M4

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Ka-Band amplifiers from 26.0 to 29.0 GHz									
JCA2629-300	26.0-29.0	27	5.0	1.5	0	10	2.0:1	335	M4
JCA2629-301	26.0-29.0	27	5.0	1.5	5	15	2.0:1	350	M4
JCA2629-302	26.0-29.0	26	5.0	1.5	8	18	2.0:1	385	M4
JCA2629-303	26.0-29.0	25	5.0	1.5	10	20	2.0:1	415	M4
JCA2629-304	26.0-29.0	25	5.0	1.5	12	22	2.0:1	440	M4
JCA2629-305	26.0-29.0	23	5.0	1.5	15	25	2.0:1	500	M4
JCA2629-400	26.0-29.0	36	5.0	1.5	0	10	2.0:1	335	M4
JCA2629-401	26.0-29.0	35	5.0	1.5	5	15	2.0:1	350	M4
JCA2629-402	26.0-29.0	34	5.0	1.5	8	18	2.0:1	385	M4
JCA2629-403	26.0-29.0	34	5.0	1.5	10	20	2.0:1	415	M4
JCA2629-404	26.0-29.0	33	5.0	1.5	12	22	2.0:1	440	M4
JCA2629-405	26.0-29.0	31	5.0	1.5	15	25	2.0:1	500	M4
JCA2629-500	26.0-29.0	44	5.0	1.5	0	10	2.0:1	335	M6
JCA2629-501	26.0-29.0	43	5.0	1.5	5	15	2.0:1	350	M6
JCA2629-502	26.0-29.0	43	5.0	1.5	8	18	2.0:1	385	M6
JCA2629-503	26.0-29.0	42	5.0	1.5	10	20	2.0:1	415	M6
JCA2629-504	26.0-29.0	41	5.0	1.5	12	22	2.0:1	440	M6
JCA2629-505	26.0-29.0	40	5.0	1.5	15	25	2.0:1	500	M6
Ka-Band amplifiers from 30.0 to 31.0 GHz									
JCA3031-100	30.0-31.0	18	5.0	1.5	0	10	2.0:1	335	M4
JCA3031-101	30.0-31.0	19	5.0	1.5	5	15	2.0:1	350	M4
JCA3031-102	30.0-31.0	18	5.0	1.5	8	18	2.0:1	385	M4
JCA3031-103	30.0-31.0	17	5.0	1.5	10	20	2.0:1	415	M4
JCA3031-104	30.0-31.0	16	5.0	1.5	12	22	2.0:1	440	M4
JCA3031-105	30.0-31.0	15	5.0	1.5	15	25	2.0:1	500	M4
JCA3031-200	30.0-31.0	27	5.0	1.5	0	10	2.0:1	335	M4
JCA3031-201	30.0-31.0	27	5.0	1.5	5	15	2.0:1	350	M4
JCA3031-202	30.0-31.0	26	5.0	1.5	8	18	2.0:1	385	M4
JCA3031-203	30.0-31.0	25	5.0	1.5	10	20	2.0:1	415	M4
JCA3031-204	30.0-31.0	25	5.0	1.5	12	22	2.0:1	440	M4
JCA3031-205	30.0-31.0	23	5.0	1.5	15	25	2.0:1	500	M4
JCA3031-300	30.0-31.0	27	5.0	1.5	0	10	2.0:1	335	M4
JCA3031-301	30.0-31.0	27	5.0	1.5	5	15	2.0:1	350	M4
JCA3031-302	30.0-31.0	26	5.0	1.5	8	18	2.0:1	385	M4

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Ka-Band amplifiers from 30.0 to 31.0 GHz									
JCA3031-303	30.0-31.0	34	5.0	1.5	10	20	2.0:1	415	M4
JCA3031-304	30.0-31.0	33	5.0	1.5	12	22	2.0:1	440	M4
JCA3031-305	30.0-31.0	31	5.0	1.5	15	25	2.0:1	500	M4
JCA3031-400	30.0-31.0	44	5.0	1.5	0	10	2.0:1	335	M6
JCA3031-401	30.0-31.0	43	5.0	1.5	5	15	2.0:1	350	M6
JCA3031-402	30.0-31.0	43	5.0	1.5	8	18	2.0:1	385	M6
JCA3031-403	30.0-31.0	42	5.0	1.5	10	20	2.0:1	415	M6
JCA3031-404	30.0-31.0	41	5.0	1.5	12	22	2.0:1	440	M6
JCA3031-405	30.0-31.0	40	5.0	1.5	15	25	2.0:1	500	M6

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

www.jcatech.com e-mail jca@jcatech.com

limiting amplifiers

features:

Wide input dynamic range
Compressed output range
Fast response in saturated mode
Wideband coverage from 0.5 GHz to 18 GHz
Special package configuration to meet customer requirements

description:

Limiting amplifiers accept a wide range of input powers and provide a limited range of output powers. JCA Technology limiting amplifiers also provide fast pulse response, low AM/PM conversion, and harmonic suppression characteristics required for EW and Radar applications. Balanced circuitry ensures stable operation with low return loss. this film MIC construction ensures optimum reliability.

general specification:

Gain Flatness	+/- 1.5 dB
Gain Slope	+/- 0.1 dB / 10 MHz
Power Out @ 1 dB Comp.	0 - +5 dBm Min
Third Order Intercept Pt.	+15 dBm
Group Delay	
Linear	+/- 0.2 nS/100 MHz
Ripple	+/- 0.2 nS/100 MHz
AM/PM Conversion	0.03 Deg./ dB @ -10 dBm Output 0.5 Deg./ dB @ 0 dBm Output
VSWR In.Out	1.25:1 Max, L 2 S Band - 2.0:1 Input, 1.5:1 Output
Connectors In/Out	SMA M/F
Operating Temperature	20 °Kelvin
Packaging Size	Special-call factory or local representative

common specification:

Power output for 1 dB gain compression	maximum of 4 dB below saturated power output at any frequency
Saturated power flatness	2.0 dB peak-to-peak, maximum
Saturated power variation over temperature	1.5 dB peak-to-peak, maximum
Maximum input power without damage	+20 dBm (CW)
Harmonics	-9 dBm maximum (Note 1)
Pulse response	Overshoot 0.25 dB maximum
Setting time	25 ns maximum
Recovery time	100 ns maximum
Small signal suppression	3 dB minimum
AM/PM conversion 5 degrees per dB maximum	
Output noise power less than Psat (min) -6 dB	
DC supply voltage +12 vdc to +20 vdc, 3% maximum ripple (Note 2)	
reverse voltage and over protection	±25 vdc

Note 1: Except for model LA02-401 and LA02-801, where harmonics are -6 dBc for the 2nd harmonic, -8 dBc for the 3rd harmonic.
Note 2: All models contain internal voltage regulators, plus internal over voltage and reverse polarity protection.

Limiting amplifiers (medium gain)

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)
LA02-401	0.5 - 2.0	35	3.5	+3.0	+7.0	2.0:1	250
LA24-401	2.0 - 4.0	35	3.0	+7.0	+11.0	2.0:1	250
LA26-401	2.0 - 6.0	35	4.0	+14.0	+18.0	2.0:1	300
LA28-501	2.0 - 8.0	35	4.0	+8.0	+12.0	2.0:1	450
LA48-401	4.0 - 8.0	35	4.5	+14.0	+17.0	2.0:1	300
LA712-501	7.0 - 12.4	35	5.5	+14.0	+19.0	2.0:1	350
LA818-701	8.0 - 18.0	35	5.0	+14.0	+19.0	2.0:1	400
LA1218-701	12.0 - 18.0	35	5.0	+14.0	+19.0	2.0:1	400

Limiting amplifiers (high gain)

MODEL NUMBERS	Frequency Range GHz	Max Input Signal Range (dBm)	Sat.Power Output dB(min)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)
LA02-801	0.5 - 2.0	-61 to +20	+3.0	2.0:1	500
LA24-801	2.0 - 4.0	-57 to +20	+7.0	2.0:1	500
LA26-801	2.0 - 6.0	-50 to +20	+14.0	2.0:1	650
LA28-1001	2.0 - 8.0	-50 to +20	+8.0	2.0:1	550
LA48-801	4.0 - 8.0	-50 to +20	+14.0	2.0:1	600
LA712-1001	7.0 - 12.4	-50 to +20	+14.0	2.0:1	750
LA818-1401	8.0 - 18.0	-50 to +20	+14.0	2.0:1	800
LA1218-1401	12.0 - 18.0	-50 to +20	+14.0	2.0:1	800

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

tri-band amplifiers

features:

Specification Optimization Over Each Sub-Band of Interest
Attenauation Gain Control Option
Temperature Compensation
Positive Gain Slope
Attractively Priced
Alternate Gain, Noise, Power, VSWR Levels Available If Needed
Alternative Tri-Band Frequencies Available

Tri-Band Frequency Specific Frequency Bands:
5.85 - 6.425 GHz 7.9 - 8.4 GHz 14.0 -14.5 GHz

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
JCA514-201	5.85-14.5	8	7.0	1.5	10	20	2.0:1	100	K2
JCA514-202	5.85-14.5	12	7.0	1.5	10	20	2.0:1	100	K2
JCA514-300	5.85-14.5	14	6.0	1.5	10	20	2.0:1	150	K4
JCA514-301	5.85-14.5	18	6.0	1.5	16	26	2.0:1	300	K4
JCA514-302	5.85-14.5	22	6.0	1.5	20	30	2.0:1	350	K4
JCA514-304	5.85-14.5	22	6.0	1.5	23	33	2.0:1	400	K6
JCA514-400	5.85-14.5	25	6.0	1.5	10	20	2.0:1	250	K6
JCA514-401	5.85-14.5	27	6.0	1.5	16	26	2.0:1	325	K6
JCA514-402	5.85-14.5	30	6.0	1.5	20	30	2.0:1	375	K6
JCA514-403	5.85-14.5	32	6.0	1.5	23	33	2.0:1	500	K6
JCA514-500	5.85-14.5	33	6.0	1.5	10	20	2.0:1	325	K6
JCA514-501	5.85-14.5	35	6.0	1.5	16	26	2.0:1	375	K6
JCA514-502	5.85-14.5	39	6.0	1.5	20	30	2.0:1	450	K6
JCA514-503	5.85-14.5	41	6.0	1.5	23	33	2.0:1	500	K6

Tri-Band Frequency Specific Frequency Bands:
3.4 - 4.2 GHZ 7.25 - 7.75 GHZ 10.95 - 12.75 GHZ

JCA312-201	3.4-12.75	15	5.0	1.5	10	20	2.0:1	100	K2
JCA312-202	3.4-12.75	15	5.0	1.5	16	26	2.0:1	120	K2
JCA312-203	3.4-12.75	14	5.5	1.5	20	30	2.0:1	130	K3
JCA312-204	3.4-12.75	14	6.0	1.5	23	33	2.0:1	150	K3

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

Tri-Band Frequency Specific Frequency Bands:

3.4 - 4.2 GHZ 7.25 - 7.75 GHZ 10.95 - 12.75 GHZ

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
JCA312-301	3.4-12.75	22	4.0	1.5	10	20	2.0:1	150	K4
JCA312-302	3.4-12.75	21	4.5	1.5	16	26	2.0:1	300	K4
JCA312-303	3.4-12.75	20	5.0	1.5	20	30	2.0:1	350	K4
JCA312-304	3.4-12.75	20	5.0	1.5	23	33	2.0:1	400	K6
JCA312-401	3.4-12.75	28	4.0	1.5	10	20	2.0:1	250	K6
JCA312-402	3.4-12.75	28	4.5	1.5	16	26	2.0:1	325	K6
JCA312-403	3.4-12.75	27	5.0	1.5	20	30	2.0:1	375	K6
JCA312-404	3.4-12.75	26	5.0	1.5	23	33	2.0:1	500	K6
JCA312-501	3.4-12.75	36	4.0	1.5	10	20	2.0:1	325	K6
JCA312-502	3.4-12.75	35	4.5	1.5	16	26	2.0:1	375	K6
JCA312-503	3.4-12.75	33	5.0	1.5	20	30	2.0:1	450	K6
JCA312-504	3.4-12.75	32	5.0	1.5	23	33	2.0:1	500	K6

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

10 MHz to 18 GHz ultra-broadband amplifiers for fiberoptic and telecommunications

features:

Ideal for Fiberoptic, Telecommunications, and Test Equipment
Drop-In Style Packages
Multi-Octave Operation
Compact Size
Competitively Priced

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
JCA001-201	0.01-1.0	32	*5.0	1.5	0	10	2.0:1	310	XK3
JCA001-202	0.01-1.0	31	*5.0	1.5	5	15	2.0:1	320	XK3
JCA001-203	0.01-1.0	31	*5.0	1.5	10	20	2.0:1	330	XK3
JCA001-204	0.01-1.0	30	*5.0	1.5	12	22	2.0:1	340	XK3
JCA001-205	0.01-1.0	30	*5.0	1.5	15	25	2.0:1	350	XK3
JCA002-201	0.01-2.0	32	*5.0	1.5	0	10	2.0:1	310	XK3
JCA002-202	0.01-2.0	31	*5.0	1.5	5	15	2.0:1	320	XK3
JCA002-203	0.01-2.0	31	*5.0	1.5	10	20	2.0:1	330	XK3
JCA002-204	0.01-2.0	30	*5.0	1.5	12	22	2.0:1	340	XK3
JCA002-205	0.01-2.0	30	*5.0	1.5	15	25	2.0:1	350	XK3
JCA003-201	0.01-3.0	32	*5.0	1.5	0	10	2.0:1	310	XK3
JCA003-202	0.01-3.0	31	*5.0	1.5	5	15	2.0:1	320	XK3
JCA003-203	0.01-3.0	31	*5.0	1.5	10	20	2.0:1	330	XK3
JCA003-204	0.01-3.0	30	*5.0	1.5	12	22	2.0:1	340	XK3
JCA003-205	0.01-3.0	30	*5.0	1.5	15	25	2.0:1	350	XK3
JCA004-201	0.01-4.0	32	*5.0	1.5	0	10	2.0:1	310	XK3
JCA004-202	0.01-4.0	31	*5.0	1.5	5	15	2.0:1	320	XK3
JCA004-203	0.01-4.0	31	*5.0	1.5	10	20	2.0:1	330	XK3
JCA004-204	0.01-4.0	30	*5.0	1.5	12	22	2.0:1	340	XK3
JCA004-205	0.01-4.0	30	*5.0	1.5	15	25	2.0:1	350	XK3
JCA005-201	0.01-5.0	32	*5.0	1.5	0	10	2.0:1	310	XK3
JCA005-202	0.01-5.0	31	*5.0	1.5	5	15	2.0:1	320	XK3
JCA005-203	0.01-5.0	31	*5.0	1.5	10	20	2.0:1	330	XK3
JCA005-204	0.01-5.0	30	*5.0	1.5	12	22	2.0:1	340	XK3
JCA005-205	0.01-5.0	30	*5.0	1.5	15	25	2.0:1	350	XK3

*Noise Figure is specified above 300 Mhz

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
JCA006-201	0.01-6.0	32	*5.0	1.5	0	10	2.0:1	310	XK3
JCA006-202	0.01-6.0	31	*5.0	1.5	5	15	2.0:1	320	XK3
JCA006-203	0.01-6.0	31	*5.0	1.5	10	20	2.0:1	330	XK3
JCA006-204	0.01-6.0	30	*5.0	1.5	12	22	2.0:1	340	XK3
JCA006-205	0.01-6.0	30	*5.0	1.5	15	25	2.0:1	350	XK3
JCA007-201	0.01-7.0	32	*5.0	1.5	0	10	2.0:1	310	XK3
JCA007-202	0.01-7.0	31	*5.0	1.5	5	15	2.0:1	320	XK3
JCA007-203	0.01-7.0	31	*5.0	1.5	10	20	2.0:1	330	XK3
JCA007-204	0.01-7.0	30	*5.0	1.5	12	22	2.0:1	340	XK3
JCA007-205	0.01-7.0	30	*5.0	1.5	15	25	2.0:1	350	XK3
JCA008-201	0.01-8.0	25	*5.0	2.5	0	10	2.0:1	175	XK2
JCA008-202	0.01-8.0	24	*5.0	2.5	5	15	2.0:1	200	XK2
JCA008-203	0.01-8.0	22	*5.0	2.5	10	20	2.0:1	225	XK2
JCA008-204	0.01-8.0	20	*5.0	2.5	12	22	2.0:1	245	XK2
JCA008-205	0.01-8.0	20	*5.0	2.5	15	25	2.0:1	260	XK2
JCA008-301	0.01-8.0	35	*5.0	2.5	0	10	2.0:1	300	XK3
JCA008-302	0.01-8.0	34	*5.0	2.5	5	15	2.0:1	325	XK3
JCA008-303	0.01-8.0	32	*5.0	2.5	10	20	2.0:1	350	XK3
JCA008-304	0.01-8.0	30	*5.0	2.5	12	22	2.0:1	360	XK3
JCA008-305	0.01-8.0	30	*5.0	2.5	15	25	2.0:1	380	XK3
JCA0010-201	0.01-10.0	24	*5.0	2.5	0	10	2.0:1	175	XK2
JCA0010-202	0.01-10.0	22	*5.0	2.5	5	15	2.0:1	200	XK2
JCA0010-203	0.01-10.0	20	*5.0	2.5	10	20	2.0:1	225	XK2
JCA0010-204	0.01-10.0	19	*5.0	2.5	12	22	2.0:1	245	XK3
JCA0010-205	0.01-10.0	19	*5.0	2.5	15	25	2.0:1	260	XK3
JCA0010-301	0.01-10.0	34	*5.0	2.5	0	10	2.0:1	300	XK3
JCA0010-302	0.01-10.0	32	*5.0	2.5	5	15	2.0:1	325	XK3
JCA0010-303	0.01-10.0	30	*5.0	2.5	10	20	2.0:1	350	XK3
JCA0010-304	0.01-10.0	29	*5.0	2.5	12	22	2.0:1	360	XK3
JCA0010-305	0.01-10.0	29	*5.0	2.5	15	25	2.0:1	380	XK3
JCA0012-201	0.01-12.0	23	*5.0	2.5	0	10	2.0:1	175	XK2
JCA0012-202	0.01-12.0	21	*5.0	2.5	5	15	2.0:1	200	XK2
JCA0012-203	0.01-12.0	20	*5.0	2.5	10	20	2.0:1	225	XK2
JCA0012-204	0.01-12.0	19	*5.0	2.5	12	22	2.0:1	245	XK2
JCA0012-205	0.01-12.0	19	*5.0	2.5	15	25	2.0:1	260	XK2

*Noise Figure is specified above 300 Mhz

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

www.jcatech.com e-mail jca@jcatech.com

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
JCA0012-301	0.01-12.0	33	*5.0	2.5	0	10	2.0:1	300	XK3
JCA0012-302	0.01-12.0	31	*5.0	2.5	5	15	2.0:1	325	XK3
JCA0012-303	0.01-12.0	30	*5.0	2.5	10	20	2.0:1	350	XK3
JCA0012-304	0.01-12.0	29	*5.0	2.5	12	22	2.0:1	360	XK3
JCA0012-305	0.01-12.0	29	*5.0	2.5	15	25	2.0:1	380	XK3
JCA0014-201	0.01-14.0	32	*5.0	2.5	0	10	2.0:1	310	K3
JCA0014-202	0.01-14.0	31	*5.0	2.5	5	15	2.0:1	320	K3
JCA0014-203	0.01-14.0	31	*5.0	2.5	10	20	2.0:1	330	K3
JCA0014-204	0.01-14.0	30	*5.0	2.5	12	22	2.0:1	340	K3
JCA0014-205	0.01-14.0	30	*5.0	2.5	15	25	2.0:1	350	K3
JCA0016-201	0.01-16.0	32	*5.0	2.5	0	10	2.0:1	310	K3
JCA0016-202	0.01-16.0	31	*5.0	2.5	5	15	2.0:1	320	K3
JCA0016-203	0.01-16.0	31	*5.0	2.5	10	20	2.0:1	330	K3
JCA0016-204	0.01-16.0	30	*5.0	2.5	12	22	2.0:1	340	K3
JCA0016-205	0.01-16.0	30	*5.0	2.5	15	25	2.0:1	350	K3
JCA0018-201	0.01-18.0	32	*5.0	2.5	0	10	2.0:1	310	K3
JCA0018-202	0.01-18.0	31	*5.0	2.5	5	15	2.0:1	320	K3
JCA0018-203	0.01-18.0	31	*5.0	2.5	10	20	2.0:1	330	K3
JCA0018-204	0.01-18.0	30	*5.0	2.5	12	22	2.0:1	340	K3
JCA0018-205	0.01-18.0	30	*5.0	2.5	15	25	2.0:1	350	K3
Ultra-Broadband 10 MHz to 18 GHz									
JCA0101-201	0.1 to 1.0	26	**5.0	1.5	0	10	2.0:1	330	XK2
JCA0101-202	0.1 to 1.0	26	**5.0	1.5	5	15	2.0:1	340	XK2
JCA0101-203	0.1 to 1.0	24	**5.0	1.5	10	20	2.0:1	350	XK2
JCA0101-204	0.1 to 1.0	24	**5.0	1.5	12	22	2.0:1	360	XK2
JCA0101-205	0.1 to 1.0	23	**5.0	1.5	15	25	2.0:1	370	XK2
JCA0101-206	0.1 to 1.0	23	**5.0	1.5	17	27	2.0:1	380	XK2
JCA0101-207	0.1 to 1.0	21	**5.0	1.5	20	30	2.0:1	390	XK2
JCA0102-201	0.1 to 2.0	26	**5.0	1.5	0	10	2.0:1	330	XK2
JCA0102-202	0.1 to 2.0	26	**5.0	1.5	5	15	2.0:1	340	XK2
JCA0102-203	0.1 to 2.0	24	**5.0	1.5	10	20	2.0:1	350	XK2
JCA0102-204	0.1 to 2.0	24	**5.0	1.5	12	22	2.0:1	360	XK2
JCA0102-205	0.1 to 2.0	23	**5.0	1.5	15	25	2.0:1	370	XK2
JCA0102-206	0.1 to 2.0	23	**5.0	1.5	17	27	2.0:1	380	XK2
JCA0102-207	0.1 to 2.0	21	**5.0	1.5	20	30	2.0:1	390	XK2

*Noise Figure is specified above 300 Mhz **Noise Figure is specified above 500 Mhz

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
JCA0103-201	0.1 to 3.0	26	**5.0	1.5	0	10	2.0:1	330	XK2
JCA0103-202	0.1 to 3.0	26	**5.0	1.5	5	15	2.0:1	340	XK2
JCA0103-203	0.1 to 3.0	24	**5.0	1.5	10	20	2.0:1	350	XK2
JCA0103-204	0.1 to 3.0	24	**5.0	1.5	12	22	2.0:1	360	XK2
JCA0103-205	0.1 to 3.0	23	**5.0	1.5	15	25	2.0:1	370	XK2
JCA0103-206	0.1 to 3.0	23	**5.0	1.5	17	27	2.0:1	380	XK2
JCA0103-207	0.1 to 3.0	21	**5.0	1.5	20	30	2.0:1	390	XK2
JCA0104-201	0.1 to 4.0	26	**5.0	1.5	0	10	2.0:1	330	XK2
JCA0104-202	0.1 to 4.0	26	**5.0	1.5	5	15	2.0:1	340	XK2
JCA0104-203	0.1 to 4.0	24	**5.0	1.5	10	20	2.0:1	350	XK2
JCA0104-204	0.1 to 4.0	24	**5.0	1.5	12	22	2.0:1	360	XK2
JCA0104-205	0.1 to 4.0	23	**5.0	1.5	15	25	2.0:1	370	XK2
JCA0104-206	0.1 to 4.0	23	**5.0	1.5	17	27	2.0:1	380	XK2
JCA0104-207	0.1 to 4.0	21	**5.0	1.5	20	30	2.0:1	390	XK2
JCA0105-201	0.1 to 5.0	26	**5.0	1.5	0	10	2.0:1	330	XK2
JCA0105-202	0.1 to 5.0	26	**5.0	1.5	5	15	2.0:1	340	XK2
JCA0105-203	0.1 to 5.0	24	**5.0	1.5	10	20	2.0:1	350	XK2
JCA0105-204	0.1 to 5.0	24	**5.0	1.5	12	22	2.0:1	360	XK2
JCA0105-205	0.1 to 5.0	23	**5.0	1.5	15	25	2.0:1	370	XK2
JCA0105-206	0.1 to 5.0	23	**5.0	1.5	17	27	2.0:1	380	XK2
JCA0105-207	0.1 to 5.0	21	**5.0	1.5	20	30	2.0:1	390	XK2
JCA0106-201	0.1 to 6.0	26	**5.0	1.5	0	10	2.0:1	330	XK2
JCA0106-202	0.1 to 6.0	26	**5.0	1.5	5	15	2.0:1	340	XK2
JCA0106-203	0.1 to 6.0	24	**5.0	1.5	10	20	2.0:1	350	XK2
JCA0106-204	0.1 to 6.0	24	**5.0	1.5	12	22	2.0:1	360	XK2
JCA0106-205	0.1 to 6.0	23	**5.0	1.5	15	25	2.0:1	370	XK2
JCA0106-206	0.1 to 6.0	23	**5.0	1.5	17	27	2.0:1	380	XK2
JCA0106-207	0.1 to 6.0	21	**5.0	1.5	20	30	2.0:1	390	XK2
JCA0107-201	0.1 to 7.0	26	**5.0	1.5	0	10	2.0:1	330	XK2
JCA0107-202	0.1 to 7.0	26	**5.0	1.5	5	15	2.0:1	340	XK2
JCA0107-203	0.1 to 7.0	24	**5.0	1.5	10	20	2.0:1	350	XK2
JCA0107-204	0.1 to 7.0	24	**5.0	1.5	12	22	2.0:1	360	XK2
JCA0107-205	0.1 to 7.0	23	**5.0	1.5	15	25	2.0:1	370	XK2
JCA0107-206	0.1 to 7.0	23	**5.0	1.5	17	27	2.0:1	380	XK2
JCA0107-207	0.1 to 7.0	21	**5.0	1.5	20	30	2.0:1	390	XK2

**Noise Figure is specified above 500 Mhz

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

www.jcatech.com e-mail jca@jcatech.com

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
JCA0108-201	0.1-8.0	26	**5.0	1.5	0	10	2.0:1	330	XK2
JCA0108-202	0.1-8.0	26	**5.0	1.5	5	15	2.0:1	340	XK2
JCA0108-203	0.1-8.0	24	**5.0	1.5	10	20	2.0:1	350	XK2
JCA0108-204	0.1-8.0	24	**5.0	1.5	12	22	2.0:1	360	XK2
JCA0108-205	0.1-8.0	23	**5.0	1.5	15	25	2.0:1	370	XK2
JCA0108-206	0.1-8.0	23	**5.0	1.5	17	27	2.0:1	380	XK2
JCA0108-207	0.1-8.0	21	**5.0	1.5	20	30	2.0:1	390	XK2
JCA0110-201	0.1-10.0	32	**5.0	2.5	0	10	2.0:1	310	XK3
JCA0110-202	0.1-10.0	31	**5.0	2.5	5	15	2.0:1	320	XK3
JCA0110-203	0.1-10.0	31	**5.0	2.5	10	20	2.0:1	330	XK3
JCA0110-204	0.1-10.0	30	**5.0	2.5	12	15	2.0:1	340	XK3
JCA0110-205	0.1-10.0	30	**5.0	2.5	15	25	2.0:1	350	XK3
JCA0112-201	0.1-12.0	32	**5.0	2.5	0	10	2.0:1	310	XK3
JCA0112-202	0.1-12.0	31	**5.0	2.5	5	15	2.0:1	320	XK3
JCA0112-203	0.1-12.0	31	**5.0	2.5	10	20	2.0:1	330	XK3
JCA0112-204	0.1-12.0	30	**5.0	2.5	12	15	2.0:1	340	XK3
JCA0112-205	0.1-12.0	30	**5.0	2.5	15	25	2.0:1	350	XK3
JCA0114-201	0.1-14.0	32	**5.0	2.5	0	10	2.0:1	310	XK3
JCA0114-202	0.1-14.0	31	**5.0	2.5	5	15	2.0:1	320	XK3
JCA0114-203	0.1-14.0	31	**5.0	2.5	10	20	2.0:1	330	XK3
JCA0114-204	0.1-14.0	30	**5.0	2.5	12	15	2.0:1	340	XK3
JCA0114-205	0.1-14.0	30	**5.0	2.5	15	25	2.0:1	350	XK3
JCA0116-201	0.1-16.0	32	**5.0	2.5	0	10	2.0:1	310	XK3
JCA0116-202	0.1-16.0	31	**5.0	2.5	5	15	2.0:1	320	XK3
JCA0116-203	0.1-16.0	31	**5.0	2.5	10	20	2.0:1	330	XK3
JCA0116-204	0.1-16.0	30	**5.0	2.5	12	15	2.0:1	340	XK3
JCA0116-205	0.1-16.0	30	**5.0	2.5	15	25	2.0:1	350	XK3
JCA0118-201	0.1-18.0	22	**5.0	2.5	3	13	2.0:1	200	XK2
JCA0118-202	0.1-18.0	20	**5.0	2.5	5	15	2.0:1	250	XK2
JCA0118-203	0.1-18.0	20	**5.0	2.5	7	17	2.0:1	300	XK2
JCA0118-204	0.1-18.0	19	**5.0	2.5	10	20	2.0:1	330	XK2
JCA0118-205	0.1-18.0	19	**5.0	2.5	12	15	2.0:1	340	XK2
JCA0118-206	0.1-18.0	18	**5.0	2.5	15	25	2.0:1	350	XK2

**Noise Figure is specified above 500 Mhz

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
JCA0118-301	0.1-18.0	31	**5.0	2.5	3	13	2.0:1	250	XK3
JCA0118-302	0.1-18.0	29	**5.0	2.5	5	15	2.0:1	300	XK3
JCA0118-303	0.1-18.0	29	**5.0	2.5	7	17	2.0:1	350	XK3
JCA0118-304	0.1-18.0	28	**5.0	2.5	10	20	2.0:1	330	XK3
JCA0118-305	0.1-18.0	28	**5.0	2.5	12	15	2.0:1	340	XK3
JCA0118-306	0.1-18.0	27	**5.0	2.5	15	25	2.0:1	350	XK3
JCA0118-401	0.1-18.0	32	**5.0	2.5	0	10	2.0:1	310	XK3
JCA0118-402	0.1-18.0	31	**5.0	2.5	5	15	2.0:1	320	XK3
JCA0118-403	0.1-18.0	31	**5.0	2.5	10	20	2.0:1	330	XK3
JCA0118-404	0.1-18.0	30	**5.0	2.5	12	15	2.0:1	340	XK3
JCA0118-405	0.1-18.0	30	**5.0	2.5	15	25	2.0:1	350	XK3

**Noise Figure is specified above 500 Mhz

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

low-noise, high IP3 L-band amplifiers for cellular, PCS, WLL applications

JCA designs and manufactures amplifiers that have been optimized to cover each of the various " Cellular, PCS, and WLL Sub-Bands." JCA can also customize the amplifier specifications to meet the customer's exact performance requirements.

features:

Removable SMA Connectors for Drop-In/ Microstrip Applications
Competitive Pricing
Compact Size
Quick Delivery
2.0:1 VSWR In/ Out
+15VDC

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(Typ)	Gain Flatness +/-dB	1 dB Comp. Point dBm (Typ)	3rd Order IP dBm (min)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Cellular-Band Amplifiers									
JCA01-C01	800-860	24	0.9	0.5	10	20	2.0:1	80	LCFB1
JCA01-C02	800-860	24	1.1	0.5	10	20	2.0:1	80	LCFB1
JCA01-C03	800-860	24	1.2	0.5	10	20	2.0:1	80	LCFB1
JCA01-C04	800-860	24	1.3	0.5	10	20	2.0:1	80	LCFB1
JCA01-C05	860-960	24	0.9	0.5	10	20	2.0:1	80	LCFB1
JCA01-C06	860-960	24	1.1	0.5	10	20	2.0:1	80	LCFB1
JCA01-C07	860-960	24	1.2	0.5	10	20	2.0:1	80	LCFB1
JCA01-C08	860-960	24	1.3	0.5	10	20	2.0:1	80	LCFB1
PCS-Band Amplifiers									
JCA12-PC01	1.71-1.99	24	0.9	0.5	10	20	2.0:1	80	LCFB1
JCA12-PC02	1.71-1.99	24	1.1	0.5	10	20	2.0:1	80	LCFB1
JCA12-PC03	1.71-1.99	24	1.2	0.5	10	20	2.0:1	80	LCFB1
JCA12-PC04	1.71-1.99	24	1.3	0.5	10	20	2.0:1	80	LCFB1
WLL-Band Amplifiers									
JCA23-W01	2.3-2.5	24	1.0	0.5	10	20	2.0:1	80	LCFB1
JCA23-W02	2.3-2.5	24	1.2	0.5	10	20	2.0:1	80	LCFB1
JCA23-W03	2.3-2.5	24	1.3	0.5	10	20	2.0:1	80	LCFB1
JCA23-W04	2.3-2.5	24	1.5	0.5	10	20	2.0:1	80	LCFB1

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Narrow Band High Power Amplifiers from 0.5 GHz to 1.0 GHz (500 MHz)									
JCA01-PR01	0.5-1.0	30	5.0	0.5	30	38	2.0:1	800	FB2
JCA01-PR02	0.5-1.0	30	5.0	0.5	33	41	2.0:1	1. 5 A	FB2
JCA01-PR03	0.5-1.0	30	5.0	0.5	35	43	2.0:1	2. 5 A	SPECIAL
JCA01-PR04	0.5-1.0	30	5.0	0.5	36	44	2.0:1	3. 0 A	SPECIAL
JCA01-PR05	0.5-1.0	30	5.0	0.5	37	45	2.0:1	3. 2 A	SPECIAL
Narrow Band High Power Amplifiers from 1.0 GHz to 1.5 GHz (500 MHz)									
JCA12-PR01	1.0-1.5	30	5.0	0.5	30	38	2.0:1	800	FB2
JCA12-PR02	1.0-1.5	30	5.0	0.5	33	41	2.0:1	1. 5 A	FB2
JCA12-PR03	1.0-1.5	30	5.0	0.5	35	43	2.0:1	2. 5 A	SPECIAL
JCA12-PR04	1.0-1.5	30	5.0	0.5	36	44	2.0:1	3. 0 A	SPECIAL
JCA12-PR05	1.0-1.5	30	5.0	0.5	37	45	2.0:1	3. 2 A	SPECIAL
Narrow Band High Power Amplifiers from 1.5 GHz to 2.0 GHz (500 MHz)									
JCA12-PR011	1.5-2.0	30	5.0	0.5	30	38	2.0:1	800	FB2
JCA12-PR022	1.5-2.0	30	5.0	0.5	33	41	2.0:1	1. 5 A	FB2
JCA12-PR033	1.5-2.0	30	5.0	0.5	35	43	2.0:1	2. 5 A	SPECIAL
JCA12-PR044	1.5-2.0	30	5.0	0.5	36	44	2.0:1	3. 0 A	SPECIAL
JCA12-PR055	1.5-2.0	30	5.0	0.5	37	45	2.0:1	3. 2 A	SPECIAL
Narrow Band High Power Amplifiers from 2.0 GHz to 2.5 GHz (500 MHz)									
JCA23-PR01	2.0-2.5	30	5.0	0.5	30	38	2.0:1	800	FB2
JCA23-PR02	2.0-2.5	30	5.0	0.5	33	41	2.0:1	1. 5 A	FB2
JCA23-PR03	2.0-2.5	30	5.0	0.5	35	43	2.0:1	2. 5 A	SPECIAL
JCA23-PR04	2.0-2.5	30	5.0	0.5	36	44	2.0:1	3. 0 A	SPECIAL
JCA23-PR05	2.0-2.5	30	5.0	0.5	37	45	2.0:1	3. 2 A	SPECIAL
Narrow Band High Power Amplifiers from 2.5 GHz to 3.0 GHz (500 MHz)									
JCA23-PR011	2.5-3.0	30	5.0	0.5	30	38	2.0:1	800	FB2
JCA23-PR022	2.5-3.0	30	5.0	0.5	33	41	2.0:1	1. 5 A	FB2
JCA23-PR033	2.5-3.0	30	5.0	0.5	35	43	2.0:1	2. 5 A	SPECIAL
JCA23-PR044	2.5-3.0	30	5.0	0.5	36	44	2.0:1	3. 0 A	SPECIAL
JCA23-PR055	2.5-3.0	30	5.0	0.5	37	45	2.0:1	3. 2 A	SPECIAL

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Narrow Band High Power Amplifiers from 3.0 GHz to 3.5 GHz (500 MHz)									
JCA34-PR01	3.0-3.5	30	5.0	0.5	30	38	2.0:1	800	C4
JCA34-PR02	3.0-3.5	30	5.0	0.5	33	41	2.0:1	1.5 A	C4
JCA34-PR03	3.0-3.5	30	5.0	0.5	35	43	2.0:1	2.5 A	SPECIAL
JCA34-PR04	3.0-3.5	30	5.0	0.5	36	44	2.0:1	3.0 A	SPECIAL
JCA34-PR05	3.0-3.5	30	5.0	0.5	37	45	2.0:1	3.2 A	SPECIAL
Narrow Band High Power Amplifiers from 3.5 GHz to 4.0 GHz (500 MHz)									
JCA34-PR011	3.5-4.0	30	5.0	0.5	30	38	2.0:1	800	C4
JCA34-PR022	3.5-4.0	30	5.0	0.5	33	41	2.0:1	1.5 A	C4
JCA34-PR033	3.5-4.0	30	5.0	0.5	35	43	2.0:1	2.5 A	SPECIAL
JCA34-PR044	3.5-4.0	30	5.0	0.5	36	44	2.0:1	3.0 A	SPECIAL
JCA34-PR055	3.5-4.0	30	5.0	0.5	37	45	2.0:1	3.2 A	SPECIAL
Narrow Band High Power Amplifiers from 4.0 GHz to 4.5 GHz (500 MHz)									
JCA45-PR01	4.0-4.5	30	5.0	0.5	30	38	2.0:1	800	C4
JCA45-PR02	4.0-4.5	30	5.0	0.5	33	41	2.0:1	1.5 A	C4
JCA45-PR03	4.0-4.5	30	5.0	0.5	35	43	2.0:1	2.5 A	SPECIAL
JCA45-PR04	4.0-4.5	30	5.0	0.5	36	44	2.0:1	3.0 A	SPECIAL
JCA45-PR05	4.0-4.5	30	5.0	0.5	37	45	2.0:1	3.2 A	SPECIAL
Narrow Band High Power Amplifiers from 4.5 GHz to 5.0 GHz (500 MHz)									
JCA45-PR011	4.5-5.0	30	5.0	0.5	30	38	2.0:1	800	C4
JCA45-PR022	4.5-5.0	30	5.0	0.5	33	41	2.0:1	1.5 A	C4
JCA45-PR033	4.5-5.0	30	5.0	0.5	35	43	2.0:1	2.5 A	SPECIAL
JCA45-PR044	4.5-5.0	30	5.0	0.5	36	44	2.0:1	3.0 A	SPECIAL
JCA45-PR055	4.5-5.0	30	5.0	0.5	37	45	2.0:1	3.2 A	SPECIAL
Narrow Band High Power Amplifiers from 5.0 GHz to 5.5 GHz (500 MHz)									
JCA56-PR01	5.0-5.5	30	5.0	0.5	30	38	2.0:1	800	C4
JCA56-PR02	5.0-5.5	30	5.0	0.5	33	41	2.0:1	1.5 A	C4
JCA56-PR03	5.0-5.5	30	5.0	0.5	35	43	2.0:1	2.5 A	SPECIAL
JCA56-PR04	5.0-5.5	30	5.0	0.5	36	44	2.0:1	3.0 A	SPECIAL
JCA56-PR05	5.0-5.5	30	5.0	0.5	37	45	2.0:1	3.2 A	SPECIAL

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
Narrow Band High Power Amplifiers from 5.5 GHz to 6.0 GHz (500 MHz)									
JCA56-PR011	5.5-6.0	30	5.0	0.5	30	38	2.0:1	800	C4
JCA56-PR022	5.5-6.0	30	5.0	0.5	33	41	2.0:1	1.5 A	C4
JCA56-PR033	5.5-6.0	30	5.0	0.5	35	43	2.0:1	2.5 A	SPECIAL
JCA56-PR044	5.5-6.0	30	5.0	0.5	36	44	2.0:1	3.0 A	SPECIAL
JCA56-PR055	5.5-6.0	30	5.0	0.5	37	45	2.0:1	3.2 A	SPECIAL
Narrow Band High Power Amplifiers from 6.0 GHz to 6.5 GHz (500 MHz)									
JCA67-PR01	6.0-6.5	30	5.0	0.5	30	38	2.0:1	800	C4
JCA67-PR02	6.0-6.5	30	5.0	0.5	33	41	2.0:1	1.5 A	C4
JCA67-PR03	6.0-6.5	30	5.0	0.5	35	43	2.0:1	2.5 A	SPECIAL
JCA67-PR04	6.0-6.5	30	5.0	0.5	36	44	2.0:1	3.0 A	SPECIAL
JCA67-PR05	6.0-6.5	30	5.0	0.5	37	45	2.0:1	3.2 A	SPECIAL
Narrow Band High Power Amplifier from 6.5 GHz to 7.0 GHz (500 MHz)									
JCA67-PR011	6.5-7.0	30	5.0	0.5	30	38	2.0:1	800	C4
JCA67-PR022	6.5-7.0	30	5.0	0.5	31.5	41	2.0:1	1.5 A	C4
JCA67-PR033	6.5-7.0	30	5.0	0.5	33	43	2.0:1	2.5 A	SPECIAL
JCA67-PR044	6.5-7.0	30	5.0	0.5	35	44	2.0:1	3.0 A	SPECIAL
Narrow Band High Power Amplifier from 7.0 GHz to 7.5 GHz (500 MHz)									
JCA78-PR01	7.0-7.5	30	5.0	0.5	30	38	2.0:1	800	C4
JCA78-PR02	7.0-7.5	30	5.0	0.5	31.5	41	2.0:1	1.5 A	C4
JCA78-PR03	7.0-7.5	30	5.0	0.5	33	43	2.0:1	2.5 A	SPECIAL
JCA78-PR04	7.0-7.5	30	5.0	0.5	35	44	2.0:1	3.0 A	SPECIAL
Narrow Band High Power Amplifiers from 7.5 GHz to 8.0 GHz									
JCA78-PR011	7.5-8.0	30	5.0	0.5	30	38	2.0:1	800	C4
JCA78-PR022	7.5-8.0	30	5.0	0.5	31.5	41	2.0:1	1.5 A	C4
JCA78-PR033	7.5-8.0	30	5.0	0.5	33	43	2.0:1	2.5 A	SPECIAL
JCA78-PR044	7.5-8.0	30	5.0	0.5	35	44	2.0:1	3.0 A	SPECIAL

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

www.jcatech.com e-mail jca@jcatech.com

KU-Band High Power Amplifiers from 12.0 GHz to 14.0 GHz


MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
JCA1214-2000	12.0-14.0	26	5.0	1.0	0	10	2.0:1	120	K4
JCA1214-2011	12.0-14.0	25	5.0	1.0	5	15	2.0:1	120	K4
JCA1214-2012	12.0-14.0	25	5.0	1.0	10	20	2.0:1	120	K4
JCA1214-2013	12.0-14.0	24	5.0	1.0	13	23	2.0:1	130	K4
JCA1214-2014	12.0-14.0	24	5.0	1.0	15	25	2.0:1	130	K4
JCA1214-2015	12.0-14.0	23	5.0	1.0	17	27	2.0:1	160	K4
JCA1214-2016	12.0-14.0	23	5.0	1.0	20	30	2.0:1	160	K4
JCA1214-2017	12.0-14.0	22	5.0	1.0	23	33	2.0:1	180	K4
JCA1214-2018	12.0-14.0	22	5.0	1.0	27	37	2.0:1	400	K4
JCA1214-2019	12.0-14.0	20	5.0	1.0	30	40	2.0:1	1.5 A	SPECIAL
JCA1214-2020	12.0-14.0	20	6.0	1.0	33	43	2.0:1	2.0 A	SPECIAL
JCA1214-3000	12.0-14.0	38	5.0	1.0	0	10	2.0:1	220	K6
JCA1214-3011	12.0-14.0	38	5.0	1.0	5	15	2.0:1	220	K6
JCA1214-3012	12.0-14.0	37	5.0	1.0	10	20	2.0:1	220	K6
JCA1214-3013	12.0-14.0	37	5.0	1.0	13	23	2.0:1	230	K6
JCA1214-3014	12.0-14.0	36	5.0	1.0	15	25	2.0:1	230	K6
JCA1214-3015	12.0-14.0	36	5.0	1.0	17	27	2.0:1	260	K6
JCA1214-3016	12.0-14.0	35	5.0	1.0	20	30	2.0:1	260	K6
JCA1214-3017	12.0-14.0	35	5.0	1.0	23	33	2.0:1	280	K6
JCA1214-3018	12.0-14.0	34	5.0	1.0	27	37	2.0:1	600	K6
JCA1214-3019	12.0-14.0	34	5.0	1.0	30	40	2.0:1	1.5 A	SPECIAL
JCA1214-3020	12.0-14.0	33	6.0	1.0	33	43	2.0:1	2.0 A	SPECIAL
JCA1214-4000	12.0-14.0	48	5.0	1.0	0	10	2.0:1	320	K6
JCA1214-4011	12.0-14.0	48	5.0	1.0	5	15	2.0:1	320	K6
JCA1214-4012	12.0-14.0	47	5.0	1.0	10	20	2.0:1	320	K6
JCA1214-4013	12.0-14.0	47	5.0	1.0	13	23	2.0:1	330	K6
JCA1214-4014	12.0-14.0	46	5.0	1.0	15	25	2.0:1	330	K6
JCA1214-4015	12.0-14.0	46	5.0	1.0	17	27	2.0:1	360	K6
JCA1214-4016	12.0-14.0	45	5.0	1.0	20	30	2.0:1	360	K6
JCA1214-4017	12.0-14.0	45	5.0	1.0	23	33	2.0:1	380	K6
JCA1214-4018	12.0-14.0	44	5.0	1.0	27	37	2.0:1	800	K6
JCA1214-4019	12.0-14.0	44	5.0	1.0	30	40	2.0:1	1.5 A	SPECIAL
JCA1214-4020	12.0-14.0	43	6.0	1.0	33	43	2.0:1	2.0 A	SPECIAL

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

KU-Band High Power Amplifiers from 14.0 GHz to 15.0 GHz


MODEL NUMBERS	Frequency Range GHz	Gain dB (min)	Noise Figure dB(max)	Gain Flatness +/-dB	1 dB Comp. Point dBm (min)	3rd Order IP dBm (TYP)	VSWR In & Out (max)	DC Current @ +12 to +15 VDC mA (typ)	Package Type
JCA1415-2000	14.0-15.0	26	5.0	1.0	0	10	2.0:1	120	K4
JCA1415-2011	14.0-15.0	25	5.0	1.0	5	15	2.0:1	120	K4
JCA1415-2012	14.0-15.0	25	5.0	1.0	10	20	2.0:1	120	K4
JCA1415-2013	14.0-15.0	24	5.0	1.0	13	23	2.0:1	130	K4
JCA1415-2014	14.0-15.0	24	5.0	1.0	15	25	2.0:1	130	K4
JCA1415-2015	14.0-15.0	23	5.0	1.0	17	27	2.0:1	160	K4
JCA1415-2016	14.0-15.0	23	5.0	1.0	20	30	2.0:1	160	K4
JCA1415-2017	14.0-15.0	22	5.0	1.0	23	33	2.0:1	180	K4
JCA1415-2018	14.0-15.0	22	5.0	1.0	27	37	2.0:1	400	K4
JCA1415-2019	14.0-15.0	20	5.0	1.0	30	40	2.0:1	1.5 A	SPECIAL
JCA1415-2020	14.0-15.0	20	6.0	1.0	33	43	2.0:1	2.0 A	SPECIAL
JCA1415-3000	14.0-15.0	38	5.0	1.0	0	10	2.0:1	220	K6
JCA1415-3011	14.0-15.0	38	5.0	1.0	5	15	2.0:1	220	K6
JCA1415-3012	14.0-15.0	37	5.0	1.0	10	20	2.0:1	220	K6
JCA1415-3013	14.0-15.0	37	5.0	1.0	13	23	2.0:1	230	K6
JCA1415-3014	14.0-15.0	36	5.0	1.0	15	25	2.0:1	230	K6
JCA1415-3015	14.0-15.0	36	5.0	1.0	17	27	2.0:1	260	K6
JCA1415-3016	14.0-15.0	35	5.0	1.0	20	30	2.0:1	260	K6
JCA1415-3017	14.0-15.0	35	5.0	1.0	23	33	2.0:1	280	K6
JCA1415-3018	14.0-15.0	34	5.0	1.0	27	37	2.0:1	600	K6
JCA1415-3019	14.0-15.0	34	5.0	1.0	30	40	2.0:1	1.5 A	SPECIAL
JCA1415-3020	14.0-15.0	33	6.0	1.0	33	43	2.0:1	2.0 A	SPECIAL
JCA1415-4000	14.0-15.0	48	5.0	1.0	0	10	2.0:1	320	K6
JCA1415-4011	14.0-15.0	48	5.0	1.0	5	15	2.0:1	320	K6
JCA1415-4012	14.0-15.0	47	5.0	1.0	10	20	2.0:1	320	K6
JCA1415-4013	14.0-15.0	47	5.0	1.0	13	23	2.0:1	330	K6
JCA1415-4014	14.0-15.0	46	5.0	1.0	15.0	25	2.0:1	330	K6
JCA1415-4015	14.0-15.0	46	5.0	1.0	17.0	27	2.0:1	360	K6
JCA1415-4016	14.0-15.0	45	5.0	1.0	20.0	30	2.0:1	360	K6
JCA1415-4017	14.0-15.0	45	5.0	1.0	23.0	33	2.0:1	380	K6
JCA1415-4018	14.0-15.0	44	5.0	1.0	27.0	37	2.0:1	800	K6
JCA1415-4019	14.0-15.0	44	5.0	1.0	30.0	40	2.0:1	1.5 A	SPECIAL
JCA1415-4020	14.0-15.0	43	6.0	1.0	33.0	43	2.0:1	2.0 A	SPECIAL

All the above models can be modified to meet your noise figure, gain, and power output requirements. Typical delivery in 2 weeks ARO.

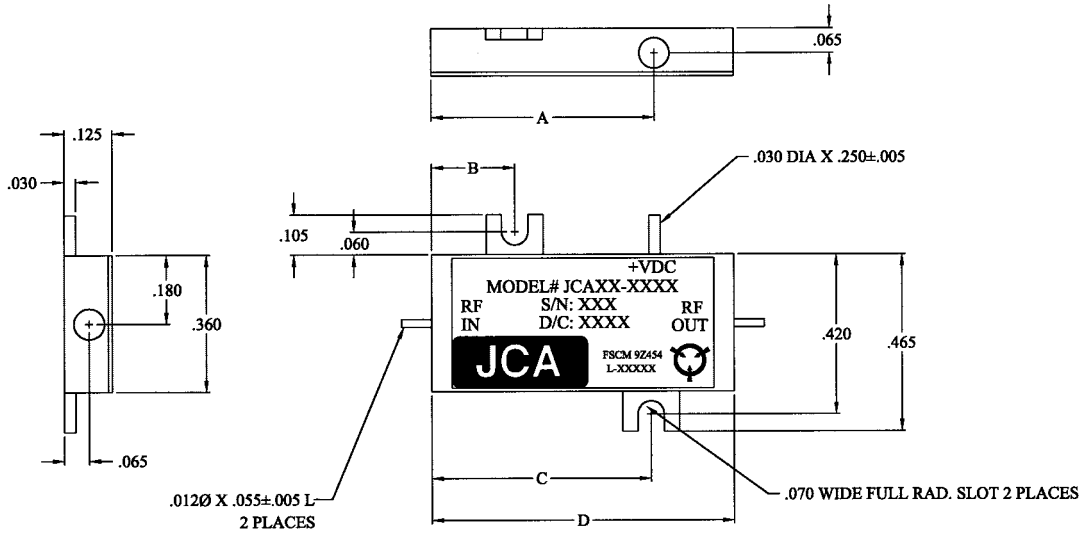


PACKAGE	A	B	C	D
MFB1	.430	.220	.420	.640
MFB1-S	.530	.220	.530	.750
MFB2	.590	.220	.580	.800
MFB3	.640	.220	.640	.860

Outline drawing for the MFB series packages

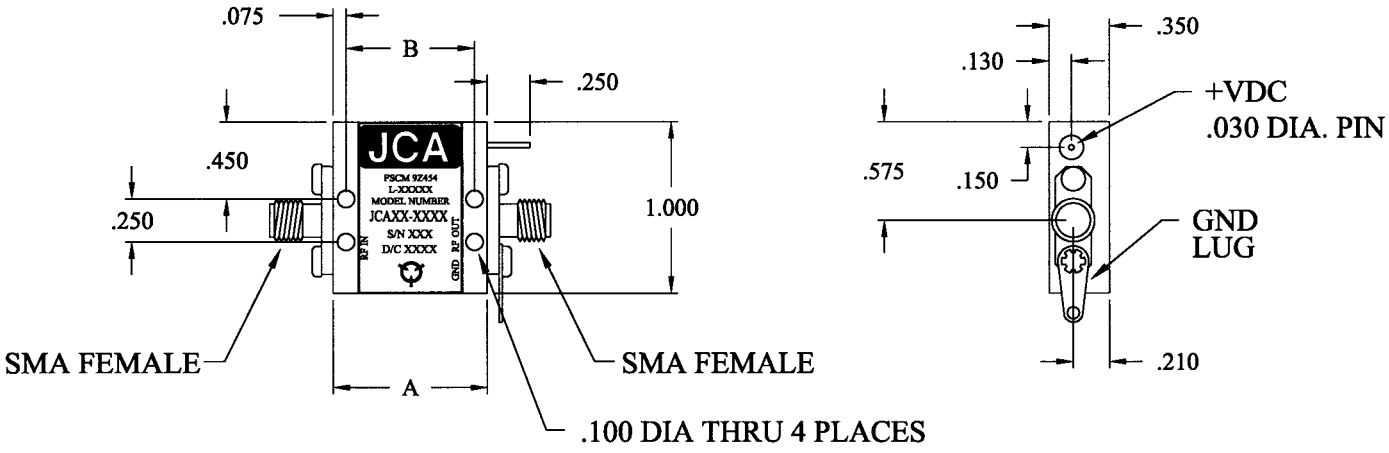


PACKAGE	A	B
LCFB1	0.90	0.75
LCFB2	1.37	1.22

Outline drawing for the LCFB series packages

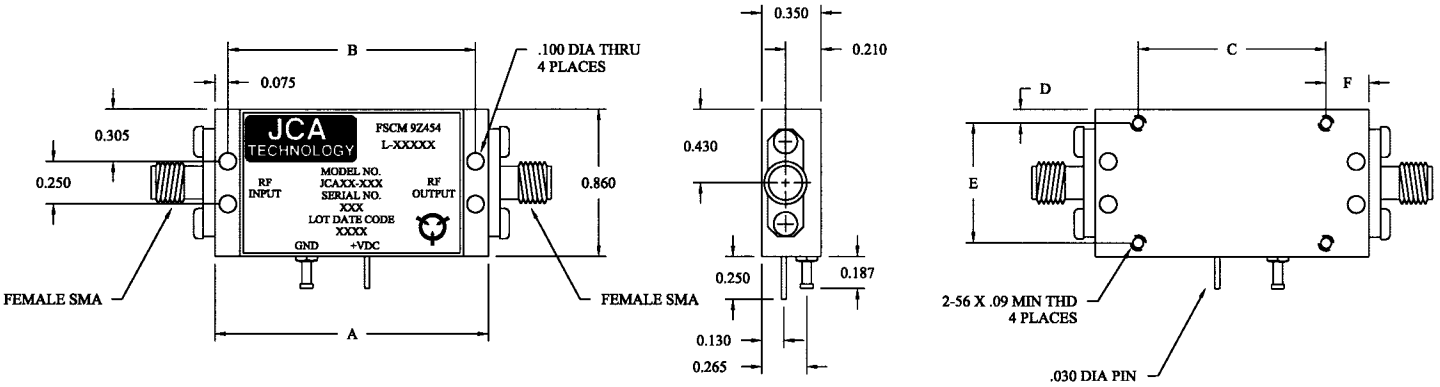


PACKAGE	A	B	C	D	E	F
FB2	1.59	1.44	1.09	0.08	0.70	0.25
FB3	2.07	1.92	1.57	0.10	0.66	0.25
FB4	2.37	2.22	1.57	0.10	0.66	0.40

Outline drawing for the FB series packages

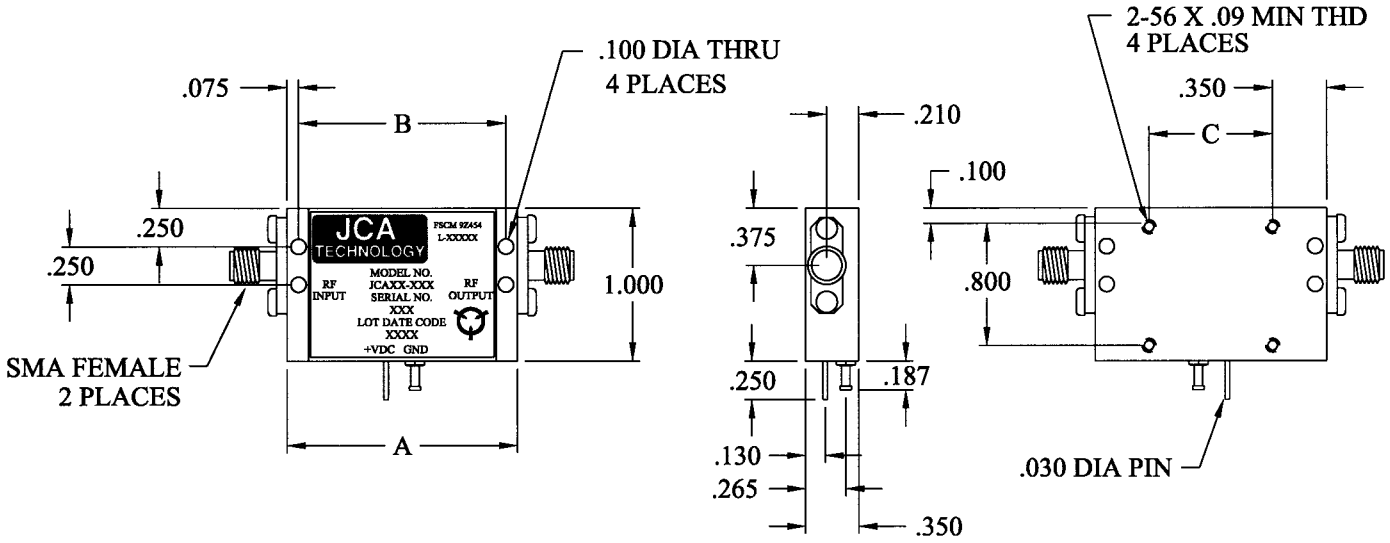


PACKAGE	A	B	C
FC2	1.50	1.35	0.80
FC3	1.93	1.78	1.23
FC4	2.37	2.22	1.67

Outline drawing for the FC series packages

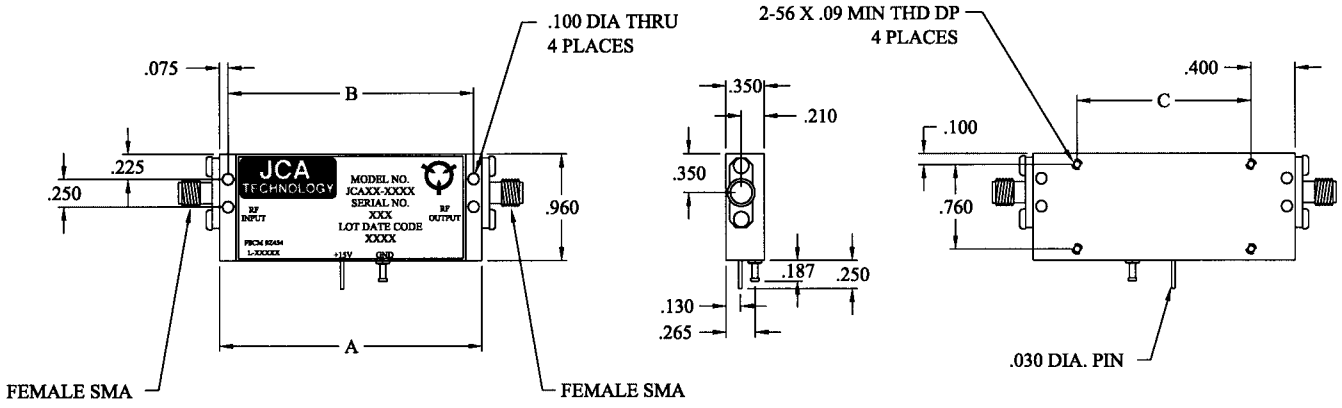


PACKAGE	A	B	C
C2	1.50	1.35	0.70
C4	2.37	2.22	1.57
C6	3.24	3.09	2.44

Outline drawing for the C packages (except C3)

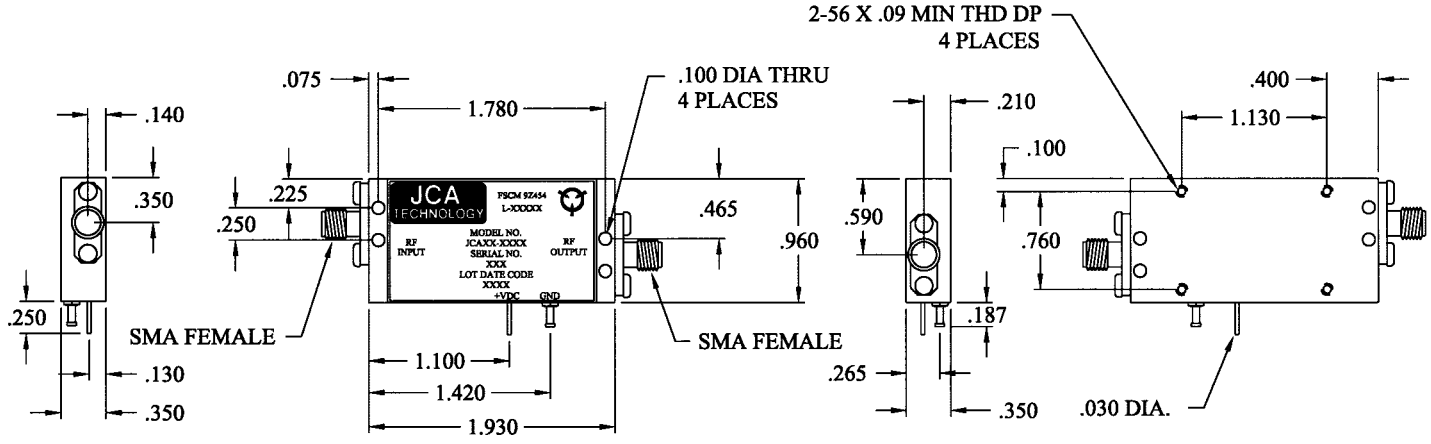


Outline drawing for the C3 packages

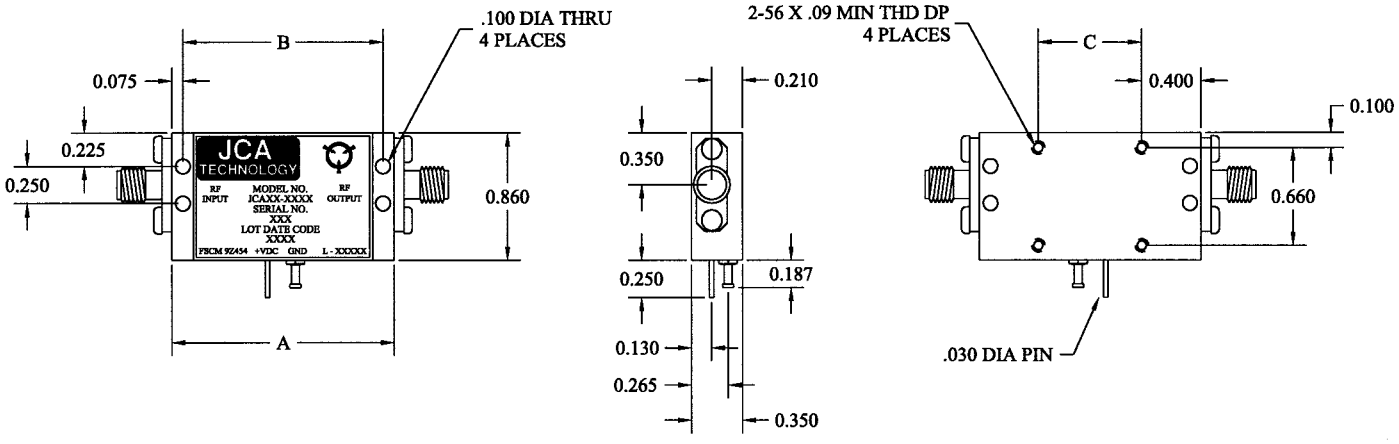


PACKAGE	A	B	C
XK2	1.50	1.35	0.70
XK4	2.37	2.22	1.57
XK6	3.24	3.09	2.44
XK8	4.11	3.96	3.31


Outline drawing for the XK series packages (except XK3)

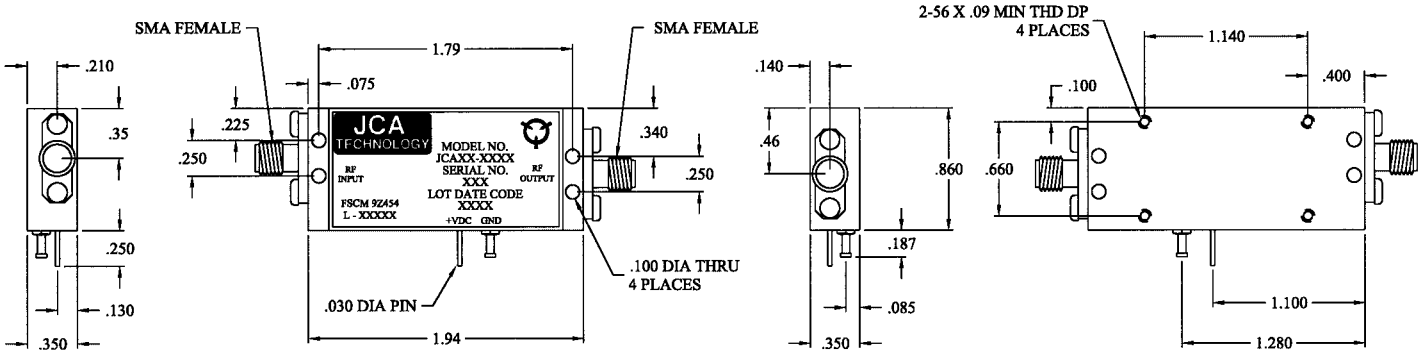

Outline drawing for the XK3 packages

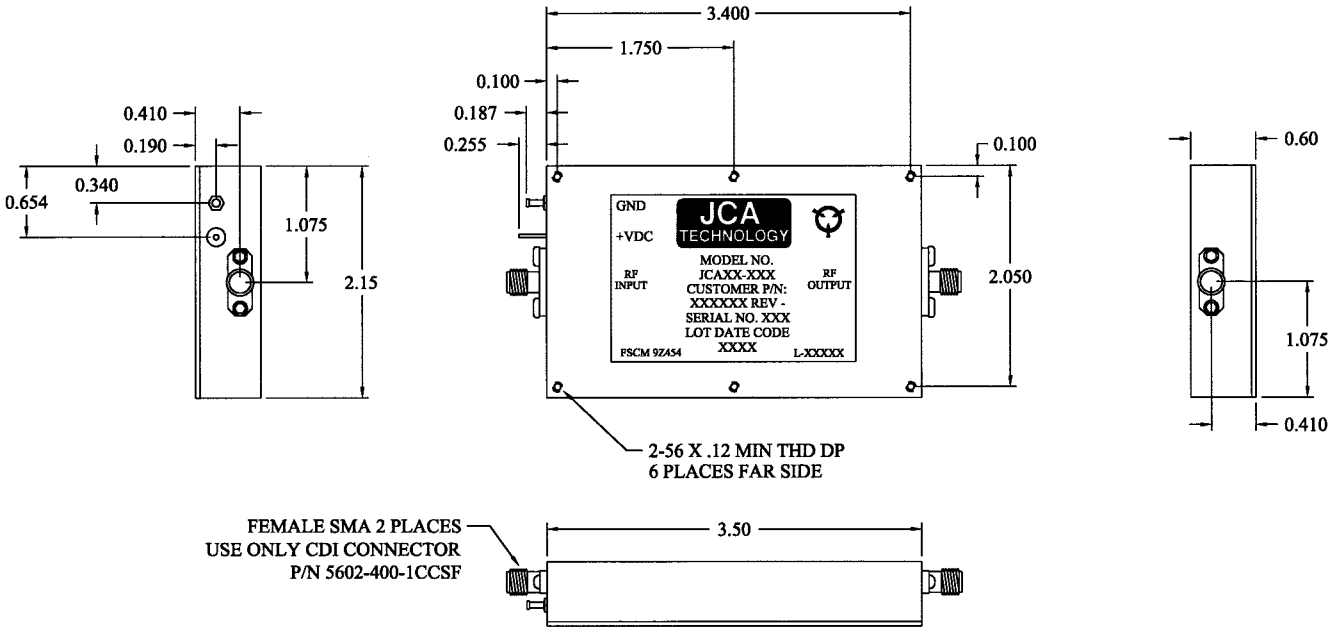


Outline drawing for the XPA6 packages

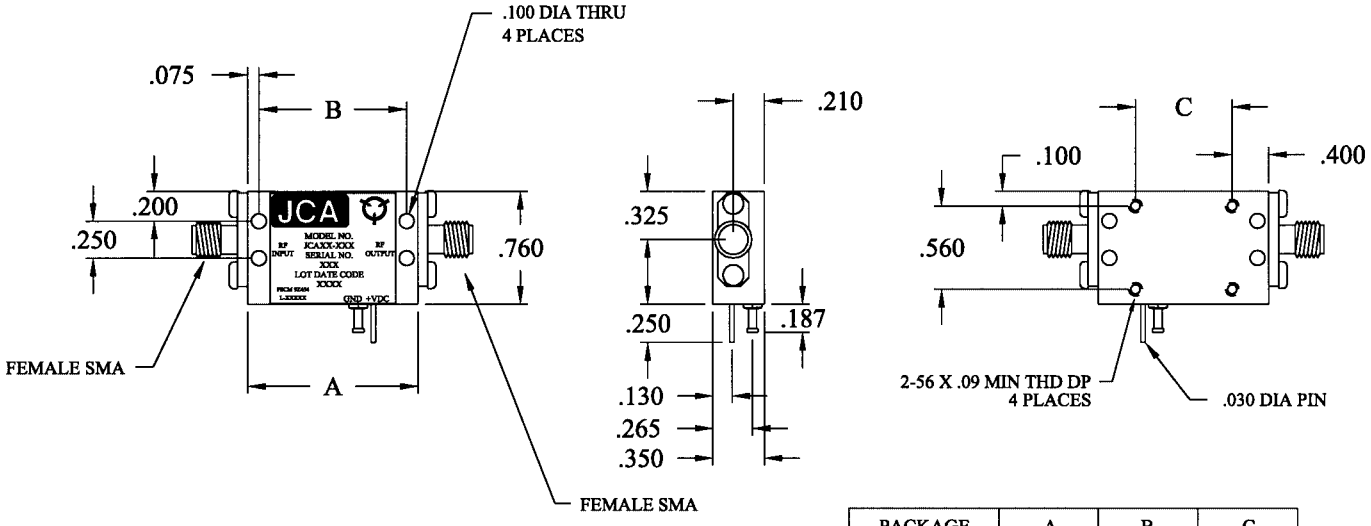


PACKAGE	A	B	C
K2	1.14	0.99	-
K4	1.75	1.60	0.95
K6	2.36	2.21	1.56
K8	2.97	2.82	2.17
K10	3.58	3.43	2.78

Outline drawing for the K series packages

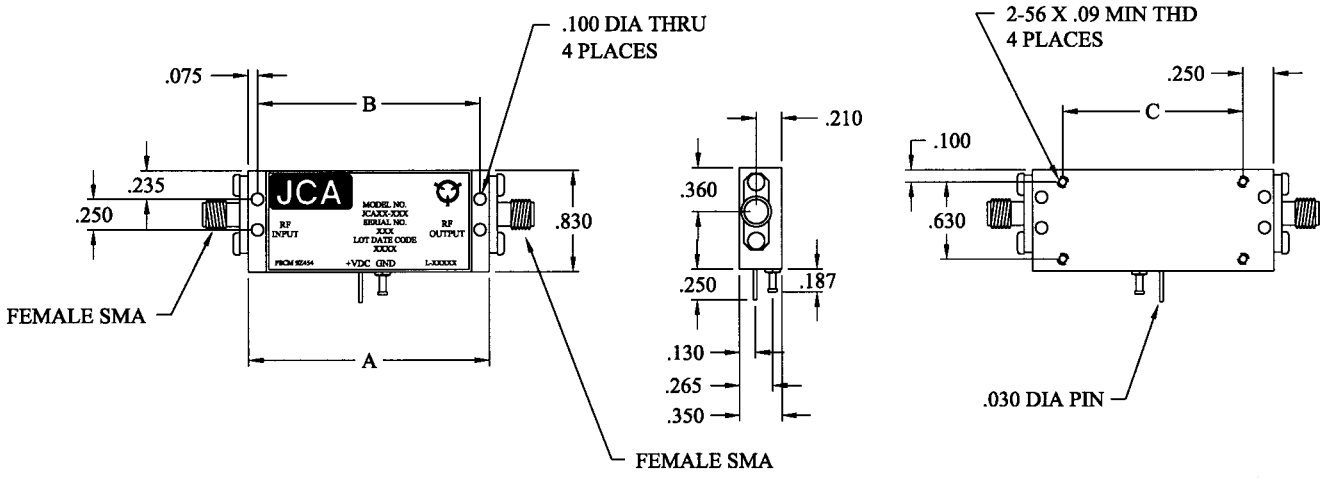

PACKAGE	A	B	C
Q2	1.02	.870	.520
Q4	1.50	1.35	1.00
Q6	1.97	1.82	1.47
Q8	2.44	2.29	1.94


Outline drawing for the Q series packages

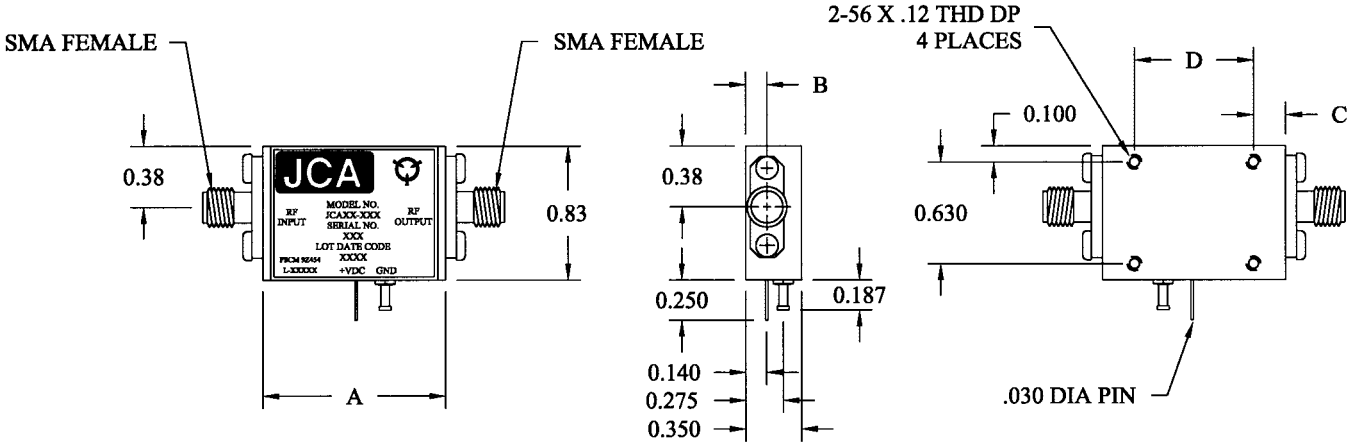

PACKAGE	A	B	C	D
M2	0.67	0.13	0.17	0.50
M4	1.14	0.13	0.20	0.74
M6	1.58	0.15	0.20	1.18
M8	2.04	0.15	0.20	1.64

Outline drawing for the M series packages

Cellular Band Low Noise Amplifiersfor Cyrogenic and Room Temperature Applications

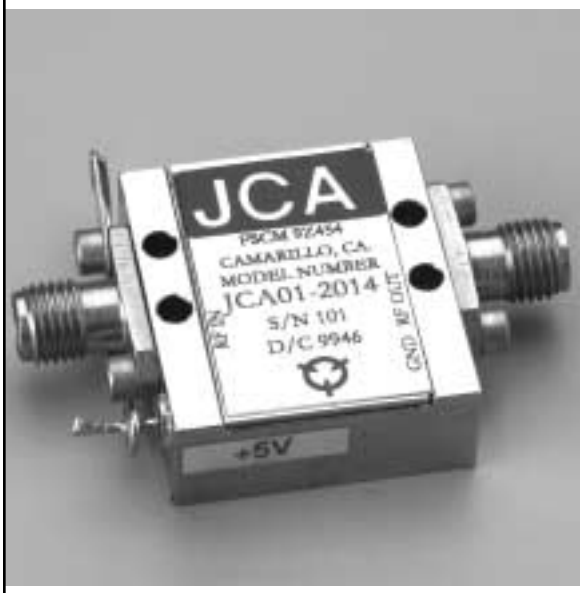

Part Number:

JCA01-2014

Features:

Low Noise
Low Power Consumption
Small Size
Cyrogenic Operation
High MTBF

Options:

Alternate Gain
Supply Voltage from +5.0 to 15 VDC
Alternate Sizes
Higher Dynamic Range
Lower Return Loss

Description:

JCA Technology introduces its line of Low Noise amplifiers for Cellular Band applications. This series is capable for use at cyrogenic temperatures, realizing an improvement in noise figure of 1.0 dB for every 50 degree Kelvin decrease in temperature. These units are unconditionally stable. All of these amplifiers include SMA removable connectors and can be used for drop-in design. The low noise figure and high dynamic range as well as repeatable phase characteristics and high reliability makes this series perfect for all Cellular tower-top and mast-head applications.

Specifications:

Frequency Range:	872 to 917 MHz
Gain (dB):	26 Min, 30 Max
Noise Figure:	1.0 dB Max, 0.8 dB typical @ +23 °C, 0.5 dB typical @ 100 °K
Power Output:	+16 dBm typical @ 1 dB PT
VSWR Input:	1.5:1 Max
VSWR Output:	1.5:1 Max
DC Power:	+5 VDC @ 100 mA typical

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

PCS Low Noise Amplifiers for Cyrogenic and Room Temperature Applications

Part Number:

JCA12-2300



Features:

- Low Noise
- Low Power Consumption
- Small Size
- Cyrogenic Operation
- High MTBF

Options:

- Alternate Gain
- Supply Voltage from +5.0 to + 15 VDC
- Alternate Sizes
- Higher Dynamic Range
- Lower Return Loss

Description:

JCA Technology introduces its line of Low Noise amplifiers for PCS Band applications. This series is capable for use at cyrogenic temperatures, realizing an improvement in noise figure of 0.1 dB for every 50 degree Kelvin decrease in temperature. These units are unconditionally stable. The units include SMA removable connectors and can be used for drop-on design. JCA's PCS amplifiers feature low noise figures with high dynamic, as well as repeatable phase characteristics and high reliability, making this series perfect for all PCS tower-top and mast-head applications.

Specifications:

Frequency Range:	1850 to 1950 MHz
Gain (dB):	26 Min, 30 Max
Noise Figure:	1.0 dB Max, 0.8 dB typical @ 23 °C, 0.5 dB Typical @ 100°K
Power Output:	+14 dBm @ 1 dB PT
VSWR Input:	1.5:1 Max
VSWR Output:	1.5:1 Max
DC Power:	+15 VDC @ 100 mA typical

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

www.jcatech.com e-mail jca@jcatech.com

GPS low noise amplifiers



Part Number:

JCA12-1110L

Features:

Low Noise
High Reliability
Gain-matching and Phase-matching Capability
Input Limiters

Options:

Higher Gain
Lower Noise
Custom Packaging

Description:

This JCA Technology low noise amplifier operates from 1.2 to 1.6 GHz, covering both L1 and L2 GPS frequencies. These units utilize state-of-the-art HEMTs to achieve the lowest noise figure along with the highest reliability. An input limiter is incorporated into this unit to protect against input overload of up to 1 watt CW and 100 watts pulsed at 0.1% duty cycle. The specifications can be customized for lower noise figure, higher output and gain ranges from 20 to 50 dB.

Specifications:

Frequency Range:	1.2-1.6 GHz
Gain (dB):	25 Min
Noise Figure:	1.1 dB Max, 0.9 dB typical
Power Output:	+10 dBm @ 1 dB PT
VSWR In/Out:	2.0:1 Max
DC Power:	+15 VDC @ 100 mA Nom

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

GPS LNA-diplexer

Part Number:

JCA12-5000L



Features:

Low Noise
High reliability
Input limiter protection
Low noise figure
High dynamic range

Options:

Alternate gains
Supply Voltage from +5.0 to +15 VDC
Higher dynamic range
Lower return loss
Gain matching between channels

Description:

This LNA/Diplexer assembly for GPS applications features a 1.8 dB typical noise figure for both the L1 and the L2 channels. Typical gains is 55 dB with +30 dbm ICP3. Other features include an input limiter for protection from signals as high as 400 W pulsed and 1W CW. This unit is competitively priced for commercial and military use.

Specifications:

Frequency Range:	1.2-1.6 GHz
Gain (dB):	55 dB Min, 58 dB Max
Noise Figure:	2.0 dB Max @ room temperature
Power Output:	+18 dBm Min @ 1 dB pt.
3RD Order ICP:	+30 dBm Min
VSWR Input:	2.0:1 Max
VSWR Output:	2.0:1 Max
DC Power:	+15 VDC @ 2.0 A Max

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

www.jcatech.com e-mail jca@jcatech.com

L-band medium power amplifier communications band



Part Number:

JCA12-436

Features:

+35 dBm output
30 dB gain
High reliability
Small size

Options:

Special mechanical configuration
Waveguide inputs
Other frequency bands available

Description:

This L-band amplifier is included in a series of medium power amplifiers designed by JCA Technology for telecommunications bands. This solid state GaAs FET amplifier produces +35 dBm of linear output power. The amplifier utilizes bipolar technology that ensures good 1/f phase noise. A temperature compensation circuit is available should your system require good gain over a broad temperature range.

Specifications:


Frequency Range:	1.2-1.4 GHz
Gain (dB):	30 dB Min
Noise Figure:	4.0 dB Max
Power Output:	+35 dBm Min
VSWR Input:	2.0:1 Max
VSWR Output:	2.0:1 Max
DC Power:	+12 VDC @ 1.2 amps Nom
Temperature Range:	-54°C to +85°C

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

ultra-low noise telemetry band amplifier

Part Number:

RS032100

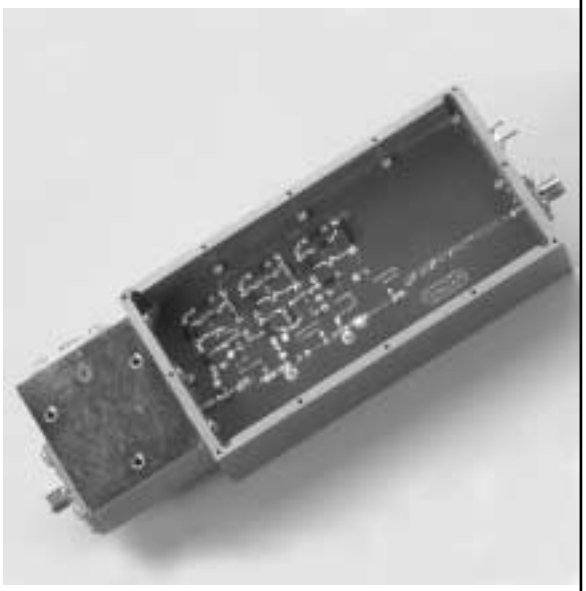

Features:

Ultra low noise
Integral power supply
Military Reliablility/Qualification
Competitively priced

Options:

Higher gain
Lower noise
Custom packages
Integral power supply
Waveguide input

Description:

JCA Technology's Ultra-Low noise telemetry band amplifier is one of the many low noise products developed by JCA. This is one example of a component not practical to thin film technology or components that require special techniques to achieve improved performance that are manufactured by JCA Technology. This Ultra-Low noise amplifier was developed primarily to meet stringent operating requirements of the telemetry band. This unit features various options and configurations, including waveguide input and an integral power supply.

Specifications:

Frequency Range:	2.2-2.3 GHz
Gain (dB):	40 Min
Noise Figure:	35°K Max
Power Output:	+10 dBm Min
VSWR Input:	1.25:1 Max
VSWR Output:	1.5:1 Max
3RD Order ICP:	+22 dBm Typ
DC Power:	+ 15 VDC (options available)
Connector:	SMA "F" Standard (options available)

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

X-band medium power amplifier radar communications bands



Part Number:

JCA910-505

Features:

1 Watt Output
30 dB Gain
High reliability
Small size

Options:

Special mechanical configuration
Waveguide inputs
Other frequency bands available
Input limiter

Description:

This X-band amplifier is included in a series of medium power amplifiers designed by JCA Technology for the radar and communications bands. These solid state GaAs FET amplifier produce 1 Watt of linear output power. The amplifiers are available in any 500 MHz bandwith through 12 GHz. A temperature compensation circuit is available should your system require good gain over a broad temperature range.

Specifications:


Frequency Range:	9.5 - 10.0 GHz
Gain (dB):	30 Min
Noise Figure:	4.0 dB Max
Power Output:	+30 dBm Min
VSWR Input:	2.0:1 Max
VSWR Output:	2.0:1 Max
DC Power:	+15 VDC, 900 mA Max
Temperature Range:	-54°C to +85°C

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

www.jcatech.com e-mail jca@jcatech.com

KU-band low noise amplifier

Part Number: JCA1213-230

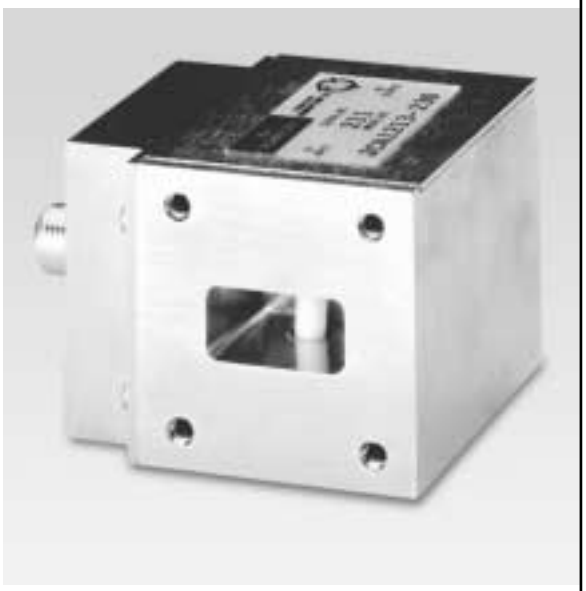

Features:
- Low Noise
- Waveguide Housing (WR-75)
- Outdoor Operation
- Type "F" Power Connector

Options:
- Higher Gain
- Lower Noise
- Custom Packages
- Temperature Compensation
- Integrated Power Supplies
- Limiting Amplifiers
- Other Frequency Bands

Description:

JCA Technology's multiple product line includes this series of low noise amplifiers. These HEMT and GaAs FET amplifiers offers a compact and cost effective solution to most low noise requirements in the microwave bands. Balanced circuitry ensures stable operation with excellent dynamic range and low return losses. This film MIC construction ensures optimum reliability. Specifications are given at +25˚C, yet the amplifiers will operate the full military temperature ranges. Temperature compensations are available.


Specifications:

Frequency Range:	12.7 - 13.2 GHz
Gain (dB):	15 Min
Gain Flatness:	+/- 1 Max
Noise Figure:	2.5 Max
Power Output:	+14 Min (-1 dB pt)
VSWR Input:	2:1 Max
VSWR Output:	2:1 Max
3RD Order ICP:	+24 dBm Typ
DC Power:	+8 to +24 VDC @ 100 mA Max

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

www.jcatech.com e-mail jca@jcatech.com

telecommunications band low-noise amplifier

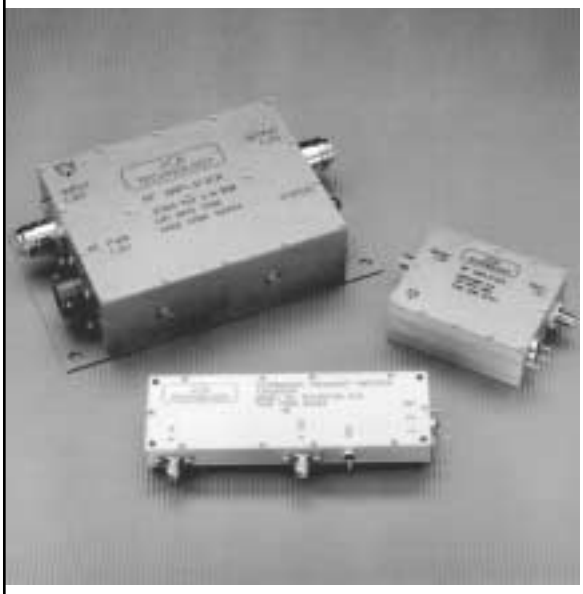

Features:

Low Noise
Waveguide Inputs
High Reliability

Options:

Higher Gain
Lower Noise
Custom Packages
Waveguide Inputs

Description:

These low noise telecommunications band amplifiers are one of the many new products developed at JCA Technology, Inc. These low noise amplifiers were developed primarily to meet the stringent operating requirements of telecommunications systems. These amplifiers are available in various gain options and configurations that include waveguide inputs and integral power supplies.

Specifications:

Model Number	Frequency (GHz)	Gain dB(min)	Noise Figure dB(max)	Gain Flatness ±dB	Output Power P(min)	VSWR In & Out (max)	Current +15 Vdc mA(typ)
DA23-001	2.20-2.30	3.0	0.6	+/-0.5	+10	1.25/1.5	100
DA56-001	5.40-5.90	3.0	1.0	+/-0.5	+10	1.25/1.5	100
DA78-001	7.25-7.75	3.0	1.0	+/-0.5	+10	1.25/1.5	100
DA910-001	9.00-10.00	3.0	1.2	+/-0.5	+10	1.25/1.5	100
DA1112-001	11.70-12.20	3.0	1.2	+/-0.5	+10	1.25/1.5	100

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

milstar frequency down link amplifier

Part Number:

JCA2021-811



Features:

Low Noise
Full MIL-SPEC
Built-In Test Circuit
Temperature Compensation Circuit

Options:

Higher Gain
Lower Noise
Custom Packages
Temperature Compensations

Description:

JCA Technology's multiple line includes this series of low noise amplifiers designed for MILSTAR applications. These HEMT and GaAs FET amplifiers offer a compact and cost effective solution to most low noise requirements in the microwave bands. A temperature compensation circuit is included to maintain gain stability over the full military temperature range. The Built-In Test (BIT) circuit monitors power with TTL output for fault indicators. (Balanced circuitry ensures stable operation with excellent dynamic range and low return losses. Thin film MIC construction ensures optimum reliability).


Specifications:

Frequency Range:	20.2 to 21.2 GHz
Gain (dB):	30+/-1 dB
Noise Figure:	3.0 dB Max
Power Output:	+10 Min @ -1 dB
VSWR Input:	1:5.1 Max
VSWR Output:	1:5.1 Max
3RD Order ICP:	+20 dBm Min
DC Power:	+15 VDC @ 400 mA Max
Temperature Range:	-54°C to +90°C

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

www.jcatech.com e-mail jca@jcatech.com

KA-band low noise and driver amplifier

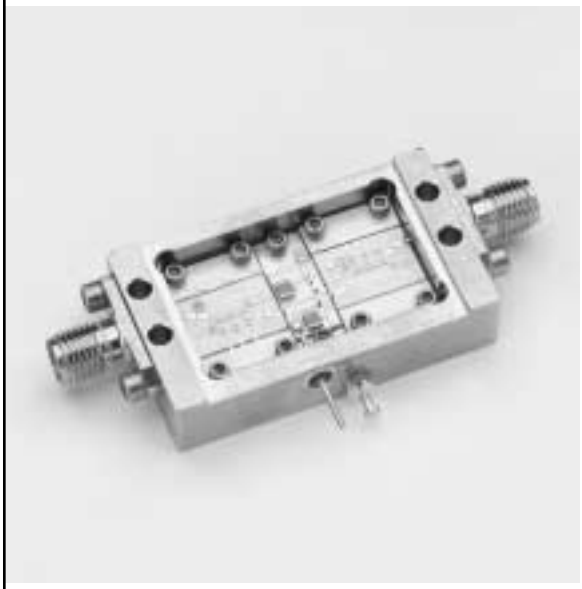

Part Number: JCA2729-501

Features:
- K-Connectors
- Small size
- Low cost & quick delivery
- Hermetically sealed
- High reliability screening
- Unconditionally stable

Options:
- Customized units for your exact frequency, gain or power requirements
- Waveguide Input/Output
- Temperature compensation

Description:

JCA Technology introduces its line of Ka-Band Low Noise and Driver amplifiers for LMDS as well as GSO/FSS, NGSO/FSS, and Mobile Satellite applications. This series features low noise figure, gains from 15 to 50 dB, various output power levels, and operation across the multiple frequency ranges for each specially allocated band.

Specifications:

Frequency Range:	27.5-29 GHz
Gain (dB):	35 Min
Noise Figure:	5.0 dB Max
Power Output:	+10 dBm Min @ 1 dB pt
VSWR Input:	1.5:1 Max
VSWR Output:	1.5:1 Max
3RD Order ICP:	+20 Typ
DC Power:	+15 VDC @ 200 mA Max

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

inquiry report

If your particular requirements are not met with JCA catalog item, please complete the check list below and mail, or fax it to JCA Technology's sales department for a fast and easy quote.

Date:

Company:

Address:

Contact person: **Position:**

Phone: **Fax:** **Email:**

Summary of Requirement

Type of Unit:	**Type of Unit:**
Frequency:	**Frequency:**
Gain:	**Gain:**
Flatness:	**Flatness:**
Noise Figures:	**Noise Figures:**
Power Output:	**Power Output:**
Input VSWR:	**Input VSWR:**
Output VSWR:	**Output VSWR:**
ICP3:	**ICP3:**
DC Power:	**DC Power:**
Size:	**Size:**
Other:	**Other:**
Quantity:	**Quantity:**
Target Price:	**Target Price:**
Required Delivery:	**Required Delivery:**
Temperature range:	**Temperature Range:**
Input Power:	**Input Power:**
Comments/Special Requirements:	**Comments/Special Requirements:**

4000 Via Pescador, Camarillo, CA 93012 **Phone 805-445-9888 Fax 805-987-6990**

www.jcatech.com e-mail jca@jcatech.com

notes