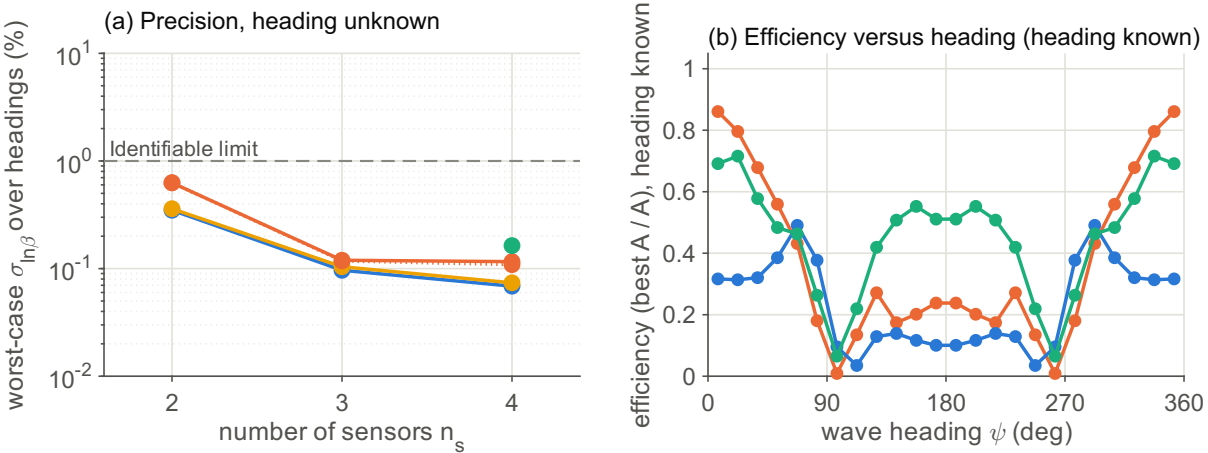

(a) Precision, heading unknown
worst-case $\sigma_{\ln\beta}$ over headings (%)
10^1
10^0
10^{-1}
10^{-2}
Identifiable limit
2
3
4
number of sensors n_s
(b) Efficiency versus heading (heading known)
efficiency (best A / A), heading known
1
0.8
0.6
0.4
0.2
0
0
90
180
270
360
wave heading ψ (deg)
D3a robust optimum (a)
D3a mean-A optimum (a)
D1 optimum (a)
D1 optimum, heading known (a)
Reference configuration (a)
D1 optimum, n_s = 2 (b)
D3a robust, n_s = 2 (b)
Reference configuration (b)