Proceedings of Machine Learning Research vol vvv:1–12, 2027

Goal-derived information constraints for dual control

Wouter M. Kouw W.M.KOUW@TUE.NL
Department of Electrical Engineering, Eindhoven University of Technology, Eindhoven, the Netherlands

Abstract

This paper addresses dual control, i.e., the design of a control system that simultaneously must collect data for system identification and regulate the system towards a target. We treat dual control as a Bayesian inference problem and propose a method that favours identification when standard inputs are predicted to lead to insufficient information. We formulate a Bethe free energy functional over the factor graph of a planning model and impose an information gain constraint between future outputs and the beliefs over unknown parameters and hidden states, given the system inputs. This functional is minimized through message passing, producing a dual controller that does not require separate tuning of a probing weight. Our approach is tested on a quadcopter navigation problem, where the system suffers from unknown compass fault. The constrained Bethe free energy controller performs on par with optimally tuned state-of-the-art dual controllers, without tuning.

Keywords: Dual control, Bethe free energy, factor graphs, message passing, information gain

1. Introduction

Dual control refers to the problem of driving a system with unknown parameters, requiring both learning and control (Feldbaum, 1960). The optimal dual controller stems from dynamic programming, but it is intractable except in special cases (Bar-Shalom and Tse, 1974; Mesbah, 2018). Most explicit dual controllers consist of a model predictive control (MPC) cost with an added excitation or uncertainty term (Mesbah, 2018; Heirung et al., 2017). But this creates the problem of balancing probing and regulation, also known as the exploration versus exploitation trade-off (Levine, 2018). Standard dual controllers tune a weight term to a specific system and task, but that leaves the balance frozen. MPC with integrated experiment design (MPC-X) instead imposes an information requirement, but that also depends tuning (Larsson et al., 2013). We aim to design a dual controller with an information requirement that is re-evaluated online.

Inference on factor graphs offers a structured alternative, because message passing computes posterior beliefs from local operations on the graph of a probabilistic model (Loeliger et al., 2007). Control as inference plans by message passing on a model whose factors encode the costs (Levine, 2018; Hoffmann and Rostalski, 2017). The Bethe free energy is a variational objective over the local beliefs of a factor graph, and belief propagation and variational message passing find its stationary points under different local constraints (Yedidia et al., 2005; Şenöz et al., 2021). Active inference adds an information gain to the goal-seeking objective through the expected free energy, but is largely limited to discrete-state discrete-action planning (van de Laar et al., 2022; Kouw, 2026).

We show that an information constraint on the Bethe free energy brings probing into the control posterior with a weight that the goal determines. The constraint takes its tolerance from the goal prior and its Karush–Kuhn–Tucker (KKT) multiplier vanishes once the parameter-induced spread of the predictions fits within that tolerance. Since the parameter belief stays fixed within the plan, the controller is an explicit dual controller in the sense of Mesbah (2018).

© 2027 W.M. Kouw.

Our contribution is a dual controller whose probing weight follows from the goal. We formulate dual control as constrained Bethe free energy minimisation on a factor graph, with information constraints whose floors come from the need to reach a goal with sufficient certainty (Definition 3). Their KKT multipliers act as probing weights that vanish once the controls are sufficiently informative (Theorem 5, Lemma 6). We test our approach on a quadcopter navigation task with an unknown compass fault, demonstrating competitive performance without probing weight tuning (Section 5).

2. Problem Statement

Consider discrete-time systems with unknown parameters,

$$x_k = f(x_{k-1}, u_k, \theta) + w_k\,, \qquad y_k = g(x_k) + v_k\,, \tag{1}$$

where $x_k \in \mathbb{R}^{n_x}$ is the state, $u_k \in \mathcal{U} = [-1, 1]^{n_u}$ the input with the actuator range scaled to $\mathcal{U}$, $y_k \in \mathbb{R}^{n_y}$ the output, and $\theta \in \mathbb{R}^{n_\theta}$ a vector of parameters. The process noise w_k and the measurement noise v_k are white. The controller knows the model structure, i.e., the functions f and g and the noise families, and a prior distribution over θ, but not θ itself. At time t, the controller has the data $y_{1:t}, u_{1:t}$ and selects the next input u_{t+1}. Its task is to regulate the output to a target $y_* \in \mathbb{R}^{n_y}$ within a tolerance $S_* \succ 0$ but make accurate predictions as well. So we evaluate controllers by their prediction error and their goal cost incurred over a trial from time 1 to T,

$$G = \frac{1}{T}\sum_{k=1}^{T} \frac{1}{2}\|y_k - \mu_k\|^2_{\Sigma_k^{-1}} + \frac{1}{2}\|y_k - y_*\|^2_{S_*^{-1}}\,, \tag{2}$$

where μ_k and Σ_k are the mean and covariance matrix of the predictive distribution. How should a receding-horizon controller gather information about θ such that it minimises G?

3. Probabilistic Models

We frame dual control as a Bayesian inference problem. Let $\tau = (t+1, \ldots, t+K)$ be a finite horizon and $\phi_* = (y_*, S_*)$. A probabilistic state-space model over the planning horizon is:

$$p(y_\tau, x_\tau, u_\tau, \theta, x_t \,|\, \phi_*) = \underbrace{p(x_t)p(\theta)}_{\text{priors}} \prod_{k\in\tau} \underbrace{p(y_k \,|\, x_k)}_{\text{likelihood}} \underbrace{p(x_k \,|\, x_{k-1}, \theta, u_k)}_{\text{state transition}} \underbrace{p(u_k)}_{\text{control prior}} \underbrace{p(y \,|\, \phi_*)}_{\text{goal prior}}\,. \tag{3}$$

With $s = (y_\tau, u_\tau, \theta, x_\tau, x_t)$, the model is a product of factors, $p(s) \propto \prod_{a\in\mathcal{V}} f_a(s_a)$ where every factor f_a of the set $\mathcal{V}$ depends on a subset s_a of the variables. A Forney-style factor graph (FFG) draws every factor as a node and every variable as an edge between at most two nodes, and an equality node joins the edges of a variable with more than two factors (Loeliger et al., 2007). Unlike bipartite factor graphs, FFGs make sequential computations explicit. Fig. 1 shows the FFG of (3) over the horizon. Since future outputs are not measured, "goal prior" factors terminate the output edges and bias the inference towards trajectories, and thereby towards inputs, that realise the goal. We encode the target of Section 2 as the Gaussian goal prior $p(y \,|\, \phi_*) = \mathcal{N}(y \,|\, y_*, S_*)$.

The controller infers the belief of the next input u_{t+1} by message passing, with a forward sweep to the end of the horizon and a backward sweep in return (see Sec. 4.3). The two messages on an edge multiply to its belief, as Fig. 1 shows for u_{t+1}. However, exact inference in (3) does not

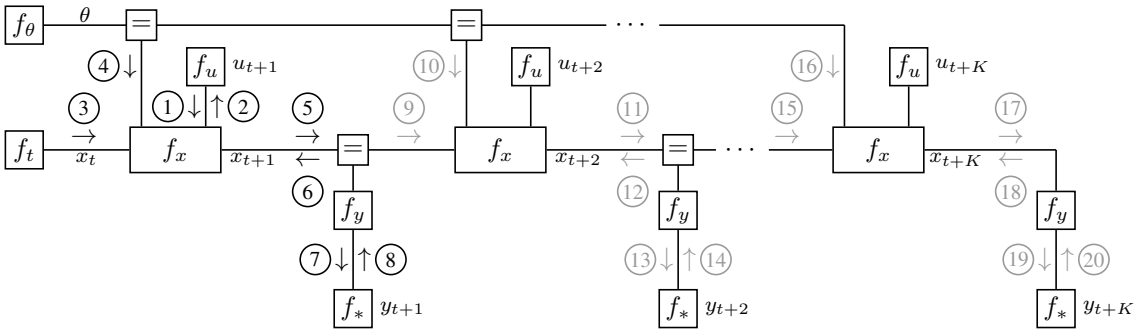


Figure 1: FFG of the planning model (3), whose nodes are $f_t = p(x_t)$, $f_\theta = p(\theta)$, $f_u = p(u_k)$, $f_x = p(x_k \,|\, x_{k-1}, \theta, u_k)$, $f_y = p(y_k \,|\, x_k)$ and $f_* = p(y_k \,|\, \phi_*)$. Equality nodes (=) enforce consistency (Loeliger et al., 2007). On the edge u_{t+1}, the node f_u sends ① $= p(u_{t+1})$, and f_x sends ② $= \nu(u_{t+1})$, computed from messages on its other edges.

yield a dual controller. It treats the goal priors as observations, so it moves the parameter belief towards parameters under which the goal is easy to reach, an issue known as "optimism" in control as inference (Levine, 2018). Moreover, the exact posterior does not reward inputs that reveal θ. Section 4 constrains the inference towards dual control.

4. Inference

4.1. Bethe free energy and constraints

The Bethe free energy distributes a free energy functional into average energy terms associated with nodes and entropy terms associated with edges (Yedidia et al., 2005; Şenöz et al., 2021). For the nodes $\mathcal{V}$, the edges $\mathcal{E}$ between them and a variational model $q(s)$, it reads

$$\mathcal{B}[q] = \sum_{a \in \mathcal{V}} \int q_a(s_a) \ln \frac{q_a(s_a)}{f_a(s_a)} \, \mathrm{d}s_a + \sum_{i \in \mathcal{E}} \mathbb{H}[q_i] \,, \tag{4}$$

where the beliefs q_a and q_i are the distributions of the node a and the edge i. Normalization constraints, $\int q_a(s_a) \, \mathrm{d}s_a = 1$, ensure the beliefs are valid probability distributions. Marginalization constraints, $\int q_a(s_a) \, \mathrm{d}s_{a \setminus i} = q_i(s_i)$ for every node a and every edge i of a, make them consistent (Şenöz et al., 2021). Under these local constraints, the stationary points of $\mathcal{B}$ are the fixed points of belief propagation (Heskes, 2002). Additional constraints yield other message passing algorithms (Yedidia et al., 2005). We employ factorization and form constraints.

Definition 1 (Factorization constraints) *The belief q_a equals the factor f_a times the edge beliefs q_i on its input edges,*

$$q_a(s_a) = f_a(s_a) \prod_{i \in \mathrm{in}(a)} q_i(s_i) \,, \tag{5}$$

where $\mathrm{in}(a)$ is the set of input edges of node a.

Definition 2 (Form constraints) *The belief q_b is pinned to the form of the factor f_b,*

$$q_b(s_b) = f_b(s_b) \quad \textit{for some } b \in \mathcal{V}\,. \tag{6}$$

We assume a separate Bayesian filtering procedure produces posterior distributions for the current state x_t and the parameters θ. In the planning model, the marginal beliefs over these are pinned to the posteriors $q(\theta) = p(\theta \,|\, y_{1:t}, u_{1:t})$ and $q(x_t) = p(x_t \,|\, y_{1:t}, u_{1:t})$, so that the goal priors cannot cause optimism. We assume the transition $f(\cdot)$ and measurement $g(\cdot)$ functions are known so the corresponding beliefs are form constrained as well.

We shall impose information gain constraints as well. Recall that the information gain between the variables a_1 and a_2 given a third variable a_3 under a belief q_a (Cover and Thomas, 1999),

$$\mathbb{I}_a[a_1 : a_2 \,|\, a_3] = \int q_a(a_1, a_2 \,|\, a_3) \ln \frac{q_a(a_1, a_2 \,|\, a_3)}{q(a_1 \,|\, a_3) q(a_2)} \mathrm{d}(a_1, a_2)\,. \tag{7}$$

For the state-space model, we constrain the information $\mathbb{I}_{t+1}[y_{t+1} : x_{t+1}, \theta \,|\, u_{t+1}]$ that the next output carries about the unknown state and parameters, given the next input. It follows from the joint belief of the measurement and transition nodes,

$$q(y_{t+1}, x_{t+1}, \theta \,|\, u_{t+1}) = q(y_{t+1} \,|\, x_{t+1}) \int q(x_{t+1} \,|\, x_t, \theta, u_{t+1})\, q(\theta)\, q(x_t)\, \mathrm{d}x_t\,. \tag{8}$$

Definition 3 (Information gain constraints) *The information gain between two variables in belief q_a given a third, has to exceed a lower bound β:*

$$\mathbb{I}_a[a_1 : a_2 \,|\, a_3] \geq \beta\,. \tag{9}$$

The constraint biases the control posterior $q(u_{t+1})$ towards informative inputs, and its lower bound β, the information floor, sets the strength of this bias. A low floor has no effect, whereas a high floor overrides the goal, so we derive the floor from the goal instead of tuning it. Since the goal tolerates the spread S_* around the target, no information is needed while the predictions stay within this tolerance. Let $\mu(u)$ and $\Sigma(u)$ be the mean and covariance of the predictive distribution $q(y_{t+1} \,|\, u_{t+1} = u)$. The covariance matters only at inputs that reach the goal, so we weight every input by its prior probability and by the goal likelihood of its mean prediction,

$$\tilde{p}_t(u) \propto p(u)\, \mathcal{N}\big(\mu(u) \,|\, y_*, S_*\big)\,, \qquad \bar{\Sigma}_{t+1} = \mathbb{E}_{\tilde{p}_t}\big[\Sigma(u)\big]\,. \tag{10}$$

Information is thus needed when the covariance $\bar{\Sigma}_{t+1}$ of the goal-reaching inputs exceeds the tolerance. Since no input removes the noise on the output, whose covariance R is known or estimated and enters $\bar{\Sigma}_{t+1}$, we add R to the tolerance. The floor is then the excess entropy

$$\beta_t = \mathbb{H}\big[\mathcal{N}(0, \bar{\Sigma}_{t+1})\big] - \mathbb{H}\big[\mathcal{N}(0, R + S_*)\big] = \tfrac{1}{2} \ln \big|\bar{\Sigma}_{t+1}(R + S_*)^{-1}\big|\,. \tag{11}$$

Predictions within tolerance, $\bar{\Sigma}_{t+1} \preceq R + S_*$, give $\beta_t \leq 0$ and leave the constraint inactive, whereas the further the predictions exceed the tolerance, the more information the constraint demands.

4.2. Stationary control posterior

The factorization and form constraints restrict the family of beliefs, so we substitute them into the Bethe free energy before we add multipliers for the remaining constraints (Şenöz et al., 2021).

Lemma 4 (Bethe collapse) *The Bethe free energy* (4) *of the model* (3) *reduces, under normalization, marginalization, factorization and form constraints, to*

$$\mathcal{B}[q] = \sum_{k\in\tau} D_{KL}\big[q(u_k) \,\|\, p(u_k)\big] - \mathbb{E}_{q(y_k)}\big[\ln p(y_k \mid \phi_*)\big]. \tag{12}$$

The proof is in Appendix A. Since (12) agrees with (4) on the constraint set, the two share their constrained stationary points. The form constraints fix $q(x_t)$ and $q(\theta)$, and the node beliefs (5) meet the marginalization at their input edges, because the transition and measurement factors are normalised conditional densities. Only the normalisation of the control beliefs and the marginalization at the outputs of the transition and measurement nodes remain. With multipliers ψ_k, λ_{y_k} and λ_{x_k} for these constraints and $\gamma \geq 0$ for the information gain constraint, the constrained Bethe Lagrangian is

$$\begin{aligned}\mathcal{L}[q] = \mathcal{B}[q] &+ \gamma\Big(\beta_t - \mathbb{I}_{t+1}\big[y_{t+1} : x_{t+1}, \theta \mid u_{t+1}\big]\Big) \\ &+ \sum_{k\in\tau}\Big(\psi_k\big(\int q(u_k)\,\mathrm{d}u_k - 1\big) + \int \lambda_{y_k}(y_k)\big(q(y_k) - \int p(y_k \mid x_k)\, q(x_k)\,\mathrm{d}x_k\big)\mathrm{d}y_k \\ &+ \int \lambda_{x_k}(x_k)\big(q(x_k) - \int p(x_k \mid x_{k-1}, \theta, u_k) q(x_{k-1})\, q(\theta)\, q(u_k)\,\mathrm{d}(x_{k-1}, \theta, u_k)\big)\mathrm{d}x_k\Big).\end{aligned} \tag{13}$$

This Lagrangian is to be minimized with respect to the marginal beliefs of each future action.

Theorem 5 (Control posterior) *At the stationary point of* (13)*, every input u_k has the belief*

$$q^\star(u_k) \propto p(u_k) \exp\Big(\sum_{m=k}^{t+K} \mathbb{E}_{q(y_m \mid u_k)}\big[\ln p(y_m \mid \phi_*)\big] + \gamma_k\, \mathbb{I}_k(u_k)\Big), \tag{14}$$

where $q(y_m \mid u_k)$ is the prediction of y_m that the marginalization constraints propagate from the input value u_k and the beliefs of the other inputs. The information gain $\mathbb{I}_{t+1}(u_{t+1})$ at the input value u_{t+1} has the weight $\gamma_{t+1} = \gamma$, and $\gamma_k = 0$ for later inputs.

The proof is in Appendix A. In words, the approximate posterior is a product of the control prior times a pseudo-likelihood, consisting of the exponentiated cross-entropy between predictions and goals, and the potential information gained on states and parameters from predicted future observations. The cross-entropy term for a Gaussian goal prior and a prediction of y_k with mean μ_k and covariance Σ_k is

$$\mathbb{E}[\ln p(y_k \mid \phi_*)] = -\tfrac{1}{2}\|\mu_k - y_*\|^2_{S_*^{-1}} - \tfrac{1}{2}\mathrm{tr}\big(S_*^{-1}\Sigma_k\big) + \mathrm{const}\,, \tag{15}$$

whose two terms are the tracking and caution terms of dual control (Bar-Shalom and Tse, 1974). The information gain term consists of the information $\mathbb{I}_{t+1}(u_{t+1})$ that the next output carries about the next state and the parameters at the input value u_{t+1}, weighted by the multiplier γ, and it adds probing. For $\gamma = 0$, the mode of $q^\star$ is a cautious controller. A fixed weight on the information gain

of every step gives an explicit dual MPC, and with weight one, outputs that determine the state and point-mass state beliefs, the stationary points coincide with those of EFE minimisation (van de Laar et al., 2022). The KKT conditions of the information gain constraint select the multiplier γ. For the posterior (14), they read

$$\gamma \geq 0\,, \quad \mathbb{I}_{t+1}[q^\star] \geq \beta_t\,, \quad \gamma\big(\beta_t - \mathbb{I}_{t+1}[q^\star]\big) = 0\,, \tag{16}$$

which are dual feasibility, primal feasibility and complementary slackness. The joint belief (8) contains only factors and fixed beliefs, so at the posterior $q^\star(u_{t+1};\gamma)$ for the multiplier γ, the constraint takes the value

$$h(\gamma) = \mathbb{I}_{t+1}[q^\star] = \mathbb{E}_{q^\star(u_{t+1};\gamma)}\big[\mathbb{I}_{t+1}(u_{t+1})\big]\,. \tag{17}$$

A larger multiplier tilts the posterior towards informative inputs, so h grows with γ. However, h cannot exceed the information gain of the most informative inputs that the posterior can select. The posterior contains the prior factor $p(u_{t+1})$ and thus ignores inputs of zero prior probability, so this bound is the essential supremum of the information gain under the prior,

$$\mathbb{I}^{\max} = \operatorname*{ess\,sup}_{u\sim p} \mathbb{I}_{t+1}(u) = \min\Big\{c : \Pr_{u\sim p}\big[\mathbb{I}_{t+1}(u) > c\big] = 0\Big\}\,, \tag{18}$$

the smallest value that the information gain exceeds only with prior probability zero. For a continuous information gain and a prior with support $\mathcal{U}$, it is the maximum of $\mathbb{I}_{t+1}$ over $\mathcal{U}$.

Lemma 6 (Information multiplier) *Fix all beliefs except $q(u_{t+1})$, and let $\mathbb{I}_{t+1}(u)$ be bounded on $\mathcal{U}$ and not constant on any set of inputs with prior probability one. Then h is continuous and strictly increasing, and $h(\gamma) \to \mathbb{I}^{\max}$ as $\gamma \to \infty$. Hence the KKT conditions (16) have the unique solution*

$$\gamma = 0 \quad \textit{if } \beta_t \leq h(0)\,, \qquad \gamma = h^{-1}(\beta_t) \quad \textit{if } h(0) < \beta_t < \mathbb{I}^{\max}\,, \tag{19}$$

and no solution if $\beta_t \geq \mathbb{I}^{\max}$.

The proof is in Appendix A. If the posterior for $\gamma = 0$ already meets the floor, the controller does not probe. Otherwise, the multiplier is the probing weight at which the posterior meets the floor exactly, so a higher floor demands a larger weight. In all examples, the floor lies below $\mathbb{I}^{\max}$, if necessary by capping it just below, so the multiplier is finite.

The planner solves the constraint on the first input of the plan, which it replans for every trial multiplier. Since this information gain is nondecreasing in γ, the planner brackets the smallest multiplier that meets the floor by quadrupling a trial multiplier from one, and then applies regula falsi. The floor averages over 4096 inputs drawn uniformly from $\mathcal{U}$.

4.3. Message passing

Message passing computes the posterior (14) by sweeps over the FFG of Fig. 1, each with a forward pass that predicts the outputs and a backward pass that scores them against the goal. From the form-constrained beliefs ③ $= q(x_t)$ and ④ $= q(\theta)$, every conditional node sends the marginal of its belief (5) forward, such as the predicted state ⑤ and output ⑦, as in the prediction steps of the Kalman filter (Loeliger et al., 2007). The backward pass starts from the goal priors, such

as ⑧ $= p(y_{t+1} \mid \phi_*)$, and every conditional node c sends to its input edge j the exponentiated expectation of the log-messages on its outputs,

$$\nu_{c\to j}(s_j) = \exp\Big(\mathbb{E}_{q_c(s_c \mid s_j)}\Big[\sum_{l\in\mathrm{out}(c)} \ln \nu_{d_l\to l}(s_l)\Big]\Big), \tag{20}$$

where $q_c(s_c \mid s_j)$ is the belief (5) with s_j fixed and d_l is the node that consumes the output l. The equality node of x_{t+1} multiplies the messages from the measurement node and the next transition node into ⑥, from which the transition node computes ②. Averaging log-messages, instead of messages as in belief propagation, gives the backup of control as inference with fixed dynamics, which avoids optimism (Levine, 2018). For linear Gaussian nodes, every backward message carries a quadratic cost-to-go, as in LQ control on factor graphs (Hoffmann and Rostalski, 2017).

Since every slice repeats the nodes of the first, the messages ⑨–⑭ at $t+2$ and ⑮–⑳ at $t+K$, drawn lighter in Fig. 1, have the functional forms of ③–⑧, in order, except that ⑱ lacks a message from a next transition node. The backward pass updates every control belief to the product of the messages on its edge, such as ① and ②, and the constraint adds $e^{\gamma\,\mathbb{I}_{t+1}(u)}$ on the edge of u_{t+1}. For a fixed multiplier, every update minimises $\mathcal{L}$ over one control belief, so the sweeps decrease $\mathcal{L}$ monotonically. The planner linearises the transition nodes at their incoming means and keeps every control belief at its mode. As these coordinate updates converge linearly, the experiments find the same fixed point by quasi-Newton steps (Section S3.3 of the supplementary material).

5. Experiments

We perform experiments with navigating while identifying unknown parameters[1]. To control for model flexibility, all controllers in a comparison share the model and the filter, and the predictive controllers have the same horizon length K. Experiments are repeated over 100 seeds.

Baselines The proposed controller is called *info-CBFE*. Removing its information gain constraint gives the ablation *no-info-CBFE*, which keeps the caution of the trace term in (15) but never probes. As state-of-the-art methods, we compare to *dual MPC*, which minimises $-\ln q^\star(u_k)$ for each $k \in \tau$ with the fixed weight $\gamma_k = \rho/2$. It comprises the goal tracking, caution and probing terms of explicit dual control (Mesbah, 2018; Heirung et al., 2017), and differs from info-CBFE only in how it weighs the information. *MPC-X* minimises a nominal goal tracking cost subject to the experiment-design constraint of Larsson et al. (2013). This constraint demands enough information that, with probability 0.95, the estimation error raises the goal cost by at most $1/\kappa$, so the required information grows with the accuracy κ. We tune ρ and κ on held-out seeds at the nominal sensor noise.

System specification Consider a quadcopter with state $x_k = (p_k, \dot{p}_k, f_k)$, for position, velocity and force, and control space $\mathcal{U} = [-1, 1]^3$ that has to navigate to a target 5 m away and 1 m higher within $S_* = (0.03\ \mathrm{m})^2 I$. The trial is $T = 20$ steps with step size $\Delta = 0.5$ s, and the controllers run a horizon of length $K = 6$. Its equations of motion are (Mahony et al., 2012),

$$\begin{aligned} f_k &= \alpha_k \begin{bmatrix} \Gamma\, n_k^{\mathrm{h}} \\ \eta\, n_k^{\mathrm{v}} \end{bmatrix} + \alpha_k \Pi_k \big(c_k - k\,\dot{p}_{k-1}\big) + w_k\,, \qquad \Gamma = \begin{bmatrix} a & -b \\ b & a \end{bmatrix}, \\ \dot{p}_k &= \dot{p}_{k-1} + \Delta\,(f_k - g e_3)\,, \qquad p_k = p_{k-1} + \Delta\,\dot{p}_{k-1} + \tfrac{1}{2}\Delta^2 (f_k - g e_3)\,, \end{aligned} \tag{21}$$

1. Code: https://github.com/biaslab/L4DC2027-InfoConstraints

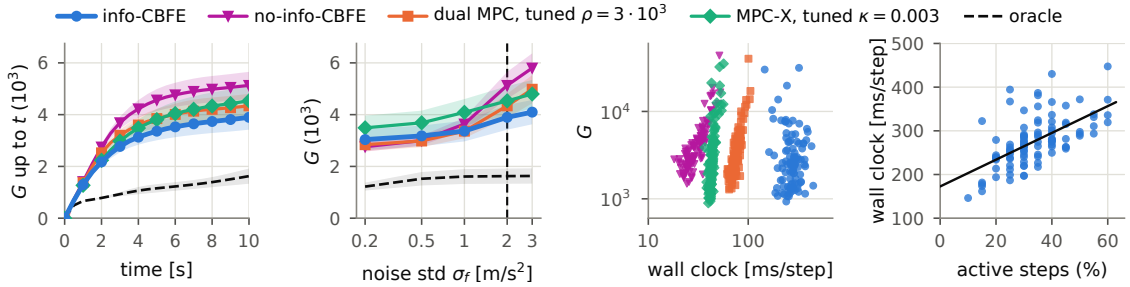


Figure 2: At $\sigma_f = 2$ m/s^2, the untuned info-CBFE costs as little as the dual MPC tuned at this noise and less than no-info-CBFE and MPC-X. Ribbons show one standard error over 100 flights, and the dashed line shows an oracle that knows the wind and the fault. (a) Performance (Eq. 2) accumulated over the flight at $\sigma_f = 2$ m/s^2. (b) Performance against IMU noise (vertical line indicates σ_f for (a) and (c)). (c) Performance against per-step wall-clock time. (d) Per-step wall-clock time of info-CBFE versus the proportion of constraint activations, with a least-squares regression (black).

where $\alpha_k = g\,(1 + u_{k,1}/2)$ is the thrust per mass, $n_k = (\cos\varphi \sin\vartheta, -\sin\varphi, \cos\varphi\cos\vartheta)$ the thrust axis for the roll $\varphi = 0.4\,u_{k,2}$ and the pitch $\vartheta = 0.4\,u_{k,3}$, n_k^{h} and n_k^{v} its horizontal and vertical parts, and $\Pi_k = I - n_k n_k^\top$ the projection onto the rotor plane. A position fix and an IMU measure $y_k = (p_k + v_k^{\mathrm{p}}, f_k + v_k^{\mathrm{f}})$ with $v_k^{\mathrm{p}} \sim \mathcal{N}(0, 0.3^2 I)$ and $v_k^{\mathrm{f}} \sim \mathcal{N}(0, \sigma_f^2 I)$, and $w_k \sim \mathcal{N}(0, 0.2^2 I)$ collects unmodelled forces.

The controller learns the parameters $\theta = (c_k, k, a, b, \eta)$, which all enter (21) linearly. Magnetic interference rotates its heading by an unknown angle $\chi \sim \mathcal{U}[-2.6, 2.6]$ rad so that $(a, b) = (\cos\chi, \sin\chi)$ (Kok and Schön, 2016). Rotor drag grows with the thrust and with the airspeed in the rotor plane (Martin and Salaün, 2010; Kai et al., 2017; Faessler et al., 2017), so k scales the drag of its own velocity and $c_k = k\,\omega_k$ the drag of the wind ω_k, whose Weibull-distributed mean speed (Justus et al., 1978) and direction fluctuate with correlation times of 1 to 10 s. The prior on (a, b) matches the moments of the fault distribution, because only a prior that states the uncertainty lets the floor see it, and an extended Kalman filter tracks x_k and θ and models c_k and the gains as random walks. The constraint and its floor (11) use the position output, on which the goal acts.

Results Info-CBFE accumulates the least cost over the flight and costs less than MPC-X at every IMU noise (Fig. 2(a) and (b)). We score the true position in the goal term of (2), since the position fix is ten times noisier than the tolerance. A logged search on 30 separate seeds proposed the setting, but the test seeds also served to select it (Section S3.5 of the supplementary material). The prediction term of (2) takes μ_k and Σ_k from the one-step prediction of the extended Kalman filter and contributes less than 0.1% of G for all four controllers. At the nominal noise $\sigma_f = 2$ m/s^2, info-CBFE attains $G = 3897$, against 4339 for the dual MPC, 4532 for MPC-X and 5129 for no-info-CBFE, with paired gaps of 442 $[-410, 1427]$, 635 [267, 1046] and 1232 [242, 2387]. Info-CBFE thus matches the tuned dual MPC and cuts the learning cost, the cost above that of an oracle that knows the wind and the fault, by 22% against MPC-X and 35% against no-info-CBFE. Up to $\sigma_f = 1$ m/s^2, the intervals of the differences to no-info-CBFE and the dual MPC include zero, whereas at $\sigma_f = 3$ m/s^2, where the held-out seeds favour $\rho = 10^4$, the dual MPC costs 884 [9,

1953] more. The constraint triggers when no-info-CBFE is over-cautious, and it turns this caution into exploration. While the rotation is unknown, every tilt spreads the predicted position, so the trace term holds the first tilt of no-info-CBFE at 7°, whereas the goal-reaching inputs tilt fully. The constraint is active in the first two steps of every flight and raises the first tilt of info-CBFE to 29°, so that the first measurements reveal the rotation, and it acts again on 26% of the later steps. No-info-CBFE therefore accrues 1092 [453, 1823] of its gap to info-CBFE within the first 4 s (Fig. 2(a)). Pure exploitation is not cautious enough and produces occasional bad flights. The requirement of MPC-X changes the plan on only 0.07% of the test steps, so MPC-X flies its nominal plan, tilts by 31° from the first step and keeps acting on its point estimate while noisy measurements correct it. Its median cost therefore lies only 6% above that of info-CBFE, whereas its worst 10% of flights cost 25% more. These flights keep adding cost after info-CBFE levels off, so the gap of MPC-X grows from 349 [109, 603] at 4 s to 635 at 10 s (Fig. 2(a)). Info-CBFE flies better than MPC-X in 42% of the flights with $|\chi| < 1$ rad and in 78% of those with $|\chi| > 2$ rad. Owing to the multiplier search, the mean time per step of info-CBFE has a median over the flights of 271 ms, against 29 to 75 ms for the other controllers, and it grows by 3 ms per percent of active steps (Fig. 2(c) and (d)). A step with an active constraint takes a median of 0.63 s, longer than the control period of 0.5 s.

6. Discussion

The information (9) has a closed form when the parameters enter the mean linearly with Gaussian noise, whereas nonlinear parameterisations require an approximation. Whether the floor can be attained depends on a parameter-induced covariance that is proportional to the noise covariance.

Constraining only the next node forces the information to come from one measurement, which results in greedy identification plans even though the regulation plans are non-greedy. Constraints on later nodes would spread the probing over the plan, but they require a belief that learns within the plan, as in implicit dual control (Mesbah, 2018). In other words, the belief $q(\theta)$ must not be form constrained, but allowed to change over the course of the plan.

Closed-loop stability remains an open question as well as the consistency of the parameter estimates after the constraint switches off. Future work could combine information gain constraints with chance constraints to plan for avoiding parts of state or control space (van de Laar et al., 2021).

7. Conclusion

We showed that a goal-derived information constraint turns a message passing planner on a factor graph into a dual controller without a probing weight. Variational calculus yields the posterior of the next input as the product of the control prior message and a message that weighs the expected goal log-density against the information gain. The KKT multiplier of the constraint switches probing on while the uncertainty spreads the predictions beyond the goal tolerance and off once it does not. On a quadcopter with an unknown compass fault, the controller turned caution into exploration, matched a dual MPC tuned at the nominal noise and cut the learning cost by 22% against MPC-X and by 35% against a cautious controller. On a light–dark task, the untuned controller matched a tuned MPC-X in a precise light, whereas a dual MPC beat it only at the light noise at which we tuned its probing weight. A noisier light favoured MPC-X, because the floor demands the goal precision from the next measurement alone. Future work therefore concerns constraints on later nodes, which let several measurements share the floor but require a belief that learns within the plan.

Appendix A. Proofs

Proof of Lemma 4 The proof sums the contributions of the nodes of Fig. 1 to (4), which Table S1 of the supplementary material lists. The form constraints pin the beliefs of f_t and f_θ to their factors, so both nodes contribute zero. The factorization constraints cancel the transition and measurement factors in their log-ratios, and integrating out the outputs leaves the negative entropies of the input beliefs. The equality and goal nodes also contribute the negative entropies of their inputs. With every edge oriented from the node that generates its variable to the node that consumes it, every edge enters exactly one node, so these entropies cancel the edge entropies of (4). The divergences of the control beliefs from their priors and the expected goal log-densities remain. Section S1.1 of the supplementary material writes out every step. ■

Proof of Theorem 5 The proof sets the functional derivatives of the Lagrangian (13) to zero. The form constraints fix $q(x_t)$ and $q(\theta)$, so only the beliefs of the outputs, states and inputs vary, and we treat them in the order of the backward pass. An output belief $q(y_k)$ enters only the goal term of (12) and its own marginalization constraint, so its multiplier is the goal log-density, $\lambda_{y_k} = \ln p(y \mid \phi_*)$. A state belief $q(x_k)$ enters its own constraint and the constraints of the measurement and next transition nodes, which consume x_k, so its multiplier collects theirs,

$$\lambda_{x_k}(x_k) = \mathbb{E}_{p(y_k \mid x_k)}\big[\lambda_{y_k}(y_k)\big] + \mathbb{E}_{q_{k+1}(s_{k+1} \mid x_k)}\big[\lambda_{x_{k+1}}(x_{k+1})\big]\,, \tag{22}$$

where $q_{k+1}(s_{k+1} \mid x_k) = p(x_{k+1} \mid x_k, \theta, u_{k+1})\, q(\theta)\, q(u_{k+1})$ is the next transition belief at a fixed x_k, and the second term vanishes for $k = t + K$. With $\nu_{d_l \to l} = \exp(\lambda_l)$, this recursion is the backward pass (20). Unrolling it turns $\lambda_{x_k}(x_k)$ into the summed expected goal log-densities of the outputs $y_k, \ldots, y_{t+K}$ given x_k. Finally, an input belief $q(u_k)$ enters its divergence from the prior, its normalization, the constraint of the state x_k that it drives and, for $k = t + 1$, the information gain, which is linear in $q(u_{t+1})$. Setting its derivative to zero gives the Gibbs form (14) of control as inference (Levine, 2018; Wainwright et al., 2008). Section S1.2 of the supplementary material writes out every derivative. ■

Proof of Lemma 6 With all other beliefs fixed, Theorem 5 gives the posterior $q^\star(u; \gamma) = p(u)\, \nu_0(u)\, e^{\gamma \mathbb{I}_{t+1}(u)} / Z(\gamma)$ of the next input, where the message $\nu_0 > 0$ collects the expected goal log-densities and does not depend on γ, and $Z(\gamma)$ normalises. This posterior is an exponential family with the natural parameter γ and the sufficient statistic $\mathbb{I}_{t+1}$ (Wainwright et al., 2008). The first derivative of its log-normaliser $\ln Z$ is therefore the mean $h(\gamma)$ of the information gain, and the second derivative is the variance $h'(\gamma)$. This variance is positive, because the information gain varies over sets of inputs with positive prior probability, which keep positive probability under the posterior. Hence h is continuous and strictly increasing. As γ grows, the factor $e^{\gamma \mathbb{I}_{t+1}}$ moves the posterior mass to the inputs whose information gain lies close to $\mathbb{I}^{\max}$, so $h(\gamma) \to \mathbb{I}^{\max}$, and strict monotonicity keeps $h(\gamma)$ below this limit.

The cases follow from the KKT conditions (16) with the constraint value (17). If $\beta_t \leq h(0)$, then $\gamma = 0$ meets them, and every $\gamma > 0$ violates complementary slackness, because $h(\gamma) > \beta_t$. Otherwise, $\gamma = 0$ violates the floor, so $\gamma > 0$ and complementary slackness requires $h(\gamma) = \beta_t$. For $\beta_t < \mathbb{I}^{\max}$, the intermediate value theorem and the monotonicity of h give exactly one root, whereas for $\beta_t \geq \mathbb{I}^{\max}$, no root exists, because $h < \mathbb{I}^{\max}$. Section S1.3 of the supplementary material gives the rigorous proof, including the bounds behind the derivatives and the limit. ■

Acknowledgments

Supported by the Sectorplan Engineering of the Ministry of Education, Science and Culture (NL).

Generative Artificial Intelligence Use

Generative Artificial Intelligence (AI) was used to assist with proving theorems, programming experiments and results figures. The output has been checked by the author. AI assisted with initial drafts of paragraphs, but almost all text has been rewritten by the author.

References

Yaakov Bar-Shalom and Edison Tse. Dual effect, certainty equivalence, and separation in stochastic control. *IEEE Transactions on Automatic Control*, 19(5):494–500, 1974.

Thomas M Cover and Joy A Thomas. *Elements of information theory*. John Wiley & Sons, 1999.

Matthias Faessler, Antonio Franchi, and Davide Scaramuzza. Differential flatness of quadrotor dynamics subject to rotor drag for accurate tracking of high-speed trajectories. *IEEE Robotics and Automation Letters*, 3(2):620–626, 2017.

Aleksandr Aronovich Feldbaum. Dual control theory. I. *Avtomatika i Telemekhanika*, 21(9):1240–1249, 1960.

Tor Aksel N Heirung, B Erik Ydstie, and Bjarne Foss. Dual adaptive model predictive control. *Automatica*, 80:340–348, 2017.

Tom Heskes. Stable fixed points of loopy belief propagation are local minima of the Bethe free energy. In *Advances in Neural Information Processing Systems*, volume 15, 2002.

Christian Hoffmann and Philipp Rostalski. Linear optimal control on factor graphs—a message passing perspective—. *IFAC-PapersOnLine*, 50(1):6314–6319, 2017.

CG Justus, WR Hargraves, Amir Mikhail, and Denise Graber. Methods for estimating wind speed frequency distributions. *Journal of Applied Meteorology and Climatology*, 17(3):350–353, 1978.

Jean-Marie Kai, Guillaume Allibert, Minh-Duc Hua, and Tarek Hamel. Nonlinear feedback control of quadrotors exploiting first-order drag effects. *IFAC-PapersOnLine*, 50(1):8189–8195, 2017.

Manon Kok and Thomas B Schön. Magnetometer calibration using inertial sensors. *IEEE Sensors Journal*, 16(14):5679–5689, 2016.

Wouter M Kouw. Expected free energy as an information constraint on the Bethe Lagrangian. In *International Workshop on Active Inference*. Springer, 2026.

Christian A Larsson, Mariette Annergren, Håkan Hjalmarsson, Cristian R Rojas, Xavier Bombois, Ali Mesbah, and Per Erik Modén. Model predictive control with integrated experiment design for output error systems. In *IEEE European Control Conference*, pages 3790–3795, 2013.

Sergey Levine. Reinforcement learning and control as probabilistic inference: Tutorial and review. *arXiv:1805.00909*, 2018.

Hans-Andrea Loeliger, Justin Dauwels, Junli Hu, Sascha Korl, Li Ping, and Frank R Kschischang. The factor graph approach to model-based signal processing. *Proceedings of the IEEE*, 95(6): 1295–1322, 2007.

Robert Mahony, Vijay Kumar, and Peter Corke. Multirotor aerial vehicles: Modeling, estimation, and control of quadrotor. *IEEE Robotics & Automation Magazine*, 19(3):20–32, 2012.

Philippe Martin and Erwan Salaün. The true role of accelerometer feedback in quadrotor control. In *IEEE International Conference on Robotics and Automation*, pages 1623–1629. IEEE, 2010.

Ali Mesbah. Stochastic model predictive control with active uncertainty learning: A survey on dual control. *Annual Reviews in Control*, 45:107–117, 2018.

İsmail Şenöz, Thijs van de Laar, Dmitry Bagaev, and Bert de Vries. Variational message passing and local constraint manipulation in factor graphs. *Entropy*, 23(7), 2021.

Thijs van de Laar, İsmail Şenöz, Ayça Özçelikkale, and Henk Wymeersch. Chance-constrained active inference. *Neural Computation*, 33(10):2710–2735, 2021.

Thijs van de Laar, Magnus Koudahl, Bart van Erp, and Bert de Vries. Active inference and epistemic value in graphical models. *Frontiers in Robotics and AI*, 9, 2022.

Martin J Wainwright, Michael I Jordan, et al. Graphical models, exponential families, and variational inference. *Foundations and Trends® in Machine Learning*, 1(1–2):1–305, 2008.

Jonathan S Yedidia, William T Freeman, and Yair Weiss. Constructing free-energy approximations and generalized belief propagation algorithms. *IEEE Transactions on Information Theory*, 51(7): 2282–2312, 2005.