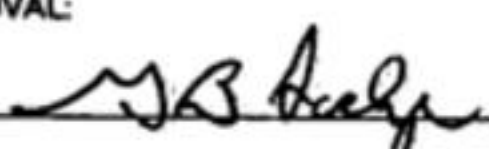



 PHILIP MORRIS U.S.A. JOB PROCEDURE	JP NO:	CFPK45EM052A	PAGE:	1 of 6
	ISSUE DATE:	7/10/92	SUPERSEDES:	
	APPLICABLE TO:	Waste Water/Maintenance		
	UPDATE RESPONSIBILITY:	Area Supervisor		
SUBJECT:				
Lockout Procedure for Secondary Scum Pumps				
REQUIRED PERSONAL PROTECTIVE EQUIPMENT:				
Safety Glasses, Leather Gloves				
REQUIRED SPECIAL TOOLS AND EQUIPMENT:				
Locks, Tags, Lockout Device, Chain				
APPROVAL:	APPROVAL:	LOSS PREVENTION APPROVAL:		
				

BASIC JOB PROCEDURE

KEY POINTS

THIS PROCEDURE COVERS THE FOLLOWING EQUIPMENT:
52-052, 52-053

- I. Potential Hazards
 - A. Low overhead obstructions and/or congested work area could result in lacerations, concussion, and/or contusions.
 - B. Lacerations, contusions, and/or abrasions could result due to striking surrounding structures or equipment.
 - C. Severe crush injury and/or amputation could result from unexpected operation of moving parts of pump.
 - D. Severe lacerations and/or amputation could result from unexpected operation of moving parts of pump.
 - E. Burns, skin/eye irritation, and/or temporary respiratory problems could result from contact with substance discharged through pump.
 - F. Flying objects/debris could result in lacerations, eye injuries, or injuries from embedded objects.
 - G. Slips and falls could result due to wet and/or uneven working surfaces.
 - H. Slips and falls could result from improper housekeeping practices.

2030239433