BIGTREETECH

HDMI7 V1.2

User Manual



Revision Log

Version	Date	Revisions
v1.00	15th August 2022	Initial Version
V2.00	1st November 2023	HDMI7 V1.0 was updated to HDMI V1.2 in November 2023 ・ Move the power interface and HDMI interface inside the screen to solve the problem of unsightly appearance of the wiring harness outside the screen range. ・ 2. Increase the range of QR code ink.
V2.01	September 17, 2025	Fix missing '=' in configuration

CONTENTS

Revision Log 1
Brief Introduction 3
Main Features 3
Product Parameters 3
Indicator Light 3
Product Dimensions 4
Peripheral Interface 5
Interface Diagram 5
Functions 6
Connecting to the Display Output Device 6
Audio Out 6
Screen Brightness Adjustment 7
Display Direction Adjustment 7
Working with Raspberry Pi 8
HDMI Display Output 8
HDMI Audio Output 8

Brief Introduction

BIGTREETECH HDMI7 V1.2 is a universal 7-inch HDMI display screen developed by the 3D printing team of Shenzhen Big Tree Technology Co., Ltd.

Main Features

- HDMI input, can work with Raspberry Pi.
- Connect to a PC, it can be used as a PC monitor.
- Adopt a 7-inch IPS capacitive touch screen with a resolution of 1024x600, support 5-point touch.
- Built-in audio decoding circuit, support 3.5mm headphone jack audio output.
- Support brightness and display direction adjustment.

Product Parameters

- Product Dimension: 100 x 165mm
- Mounting Size: 100 x 165mm, you can read more details here: BTT HDMI7_V1.2_SIZE
- Power Input: DC 5V
- Logic Voltage: DC 3.3V
- Screen Size: 7-inch IPS Display
- Screen Resolution: 1024x600
- Screen Viewing Angle: 160°


Indicator Light

When the motherboard is powered on:

The power indicator, D11(Power) red light, lights up, indicating that the power supply is functioning normally.

The working status indicator, D12(Status) green light, flashes, indicating that the screen is working normally.

Product Dimensions

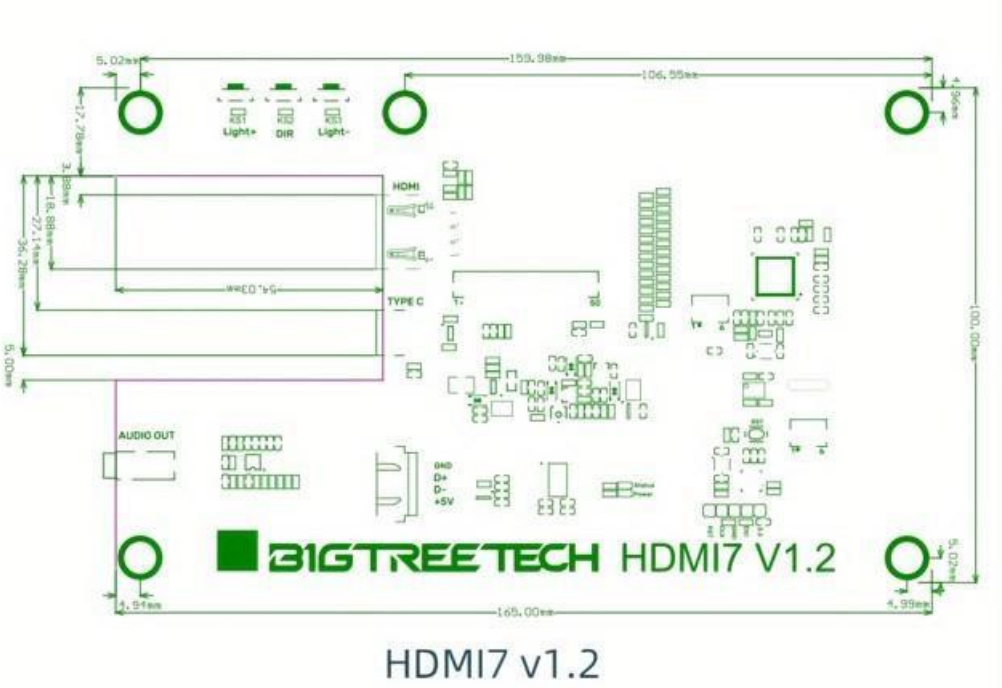


HDMI7 v1.2

*You can read more details here: **BTT HDMI7_V1.2**

Peripheral Interface

Interface Diagram

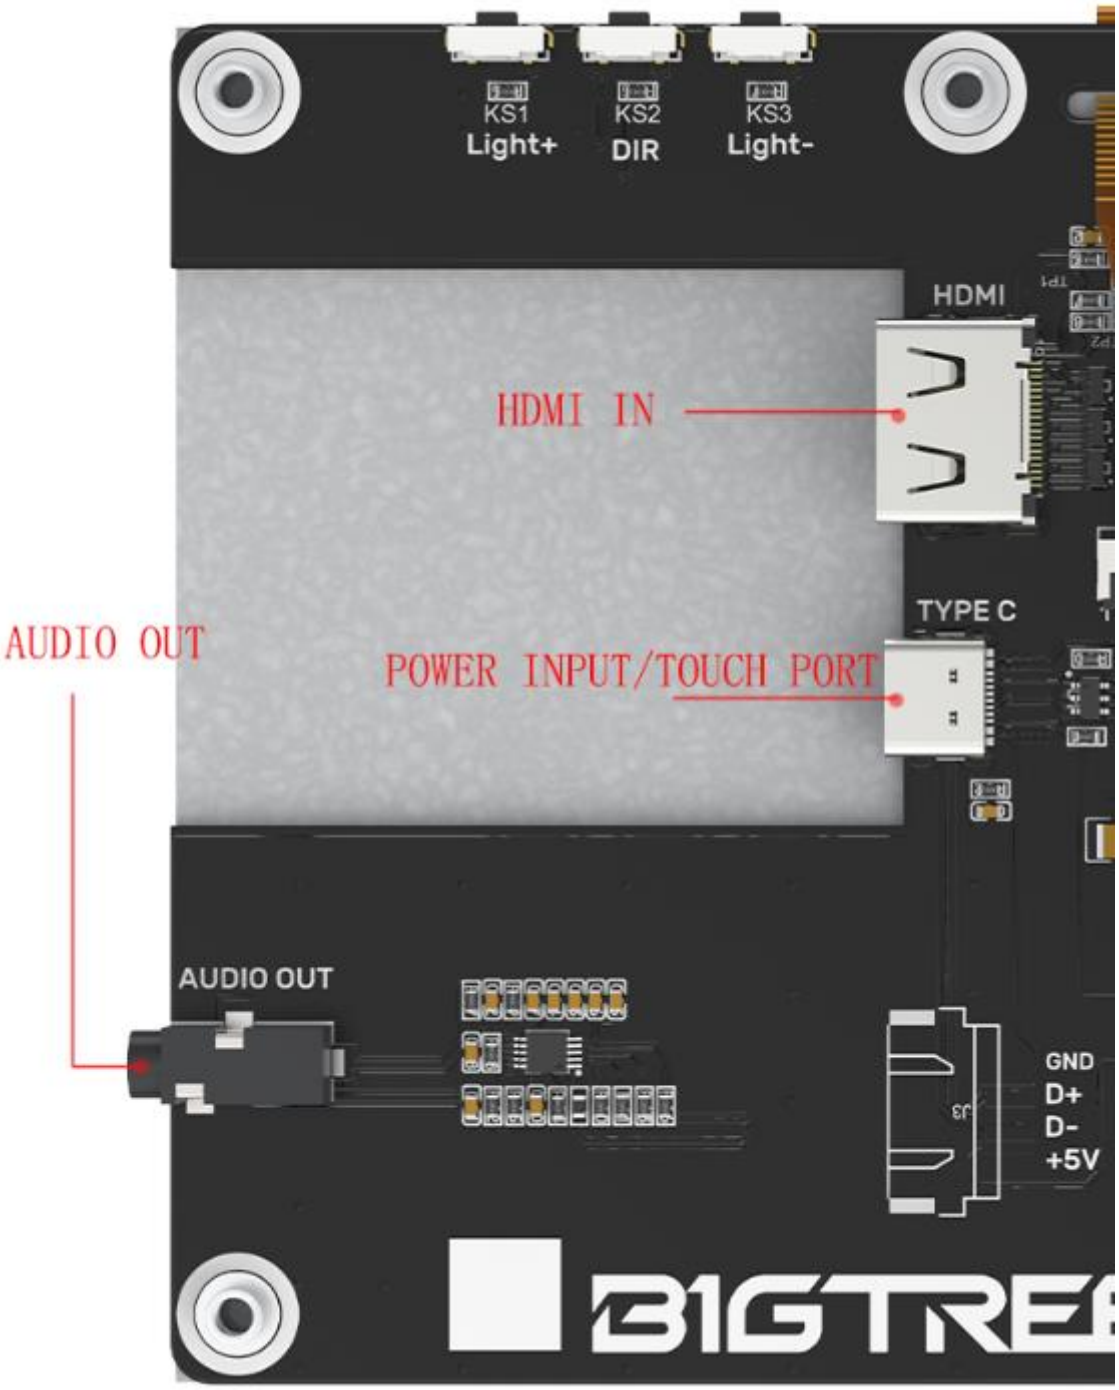


Functions

Connecting to the Display Output Device

1. Use the Type C data cable to connect the HDMI7 to the display output device (compatible with Raspberry Pi/PC/other devices that support HDMI display output). When connecting to the PC, the PC will automatically load the driver under normal circumstances. After the driver is loaded, the touch device can be recognized.
2. Use the HDMI cable to connect HDMI7 to the display output device. Usually, after connecting the HDMI cable, the LCD can be displayed normally within 5 seconds.


Audio Out

Plug the 3.5mm earphone/speaker into the AUDIO interface to realize audio output.

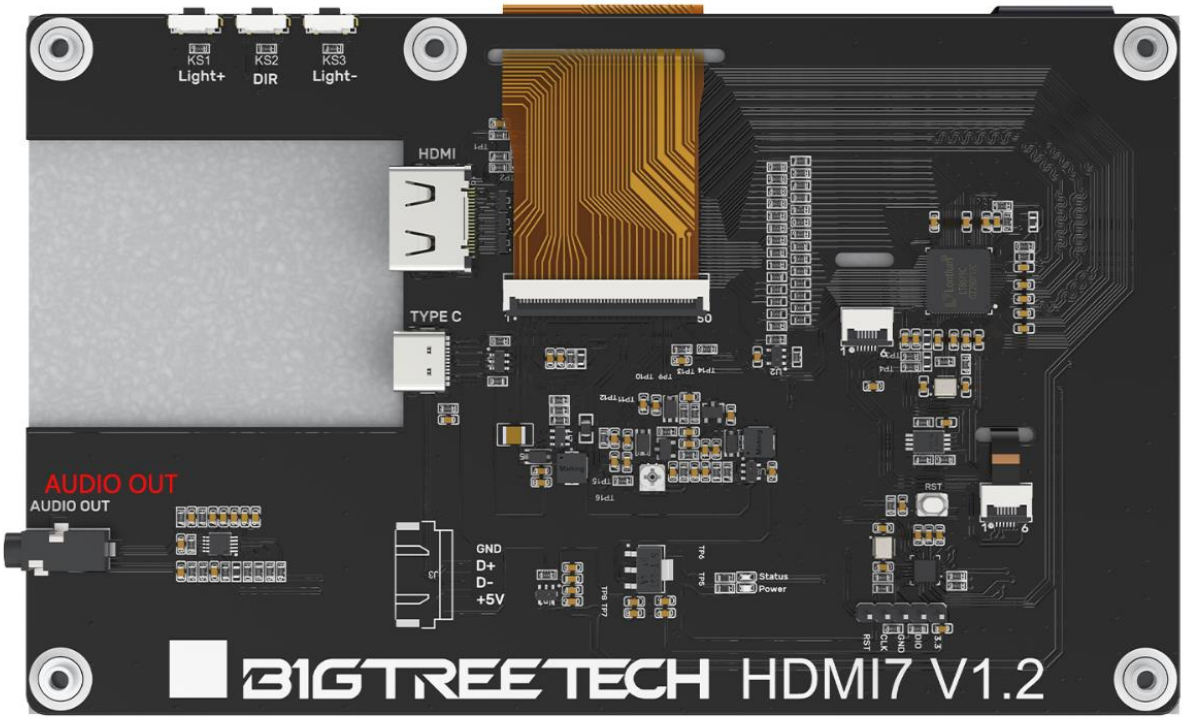


Screen Brightness Adjustment

BIGTREETECH HDMI7 V1.2 supports brightness adjustment, you can increase the brightness via the Ks1 button, and decrease the brightness via the Ks3 button.

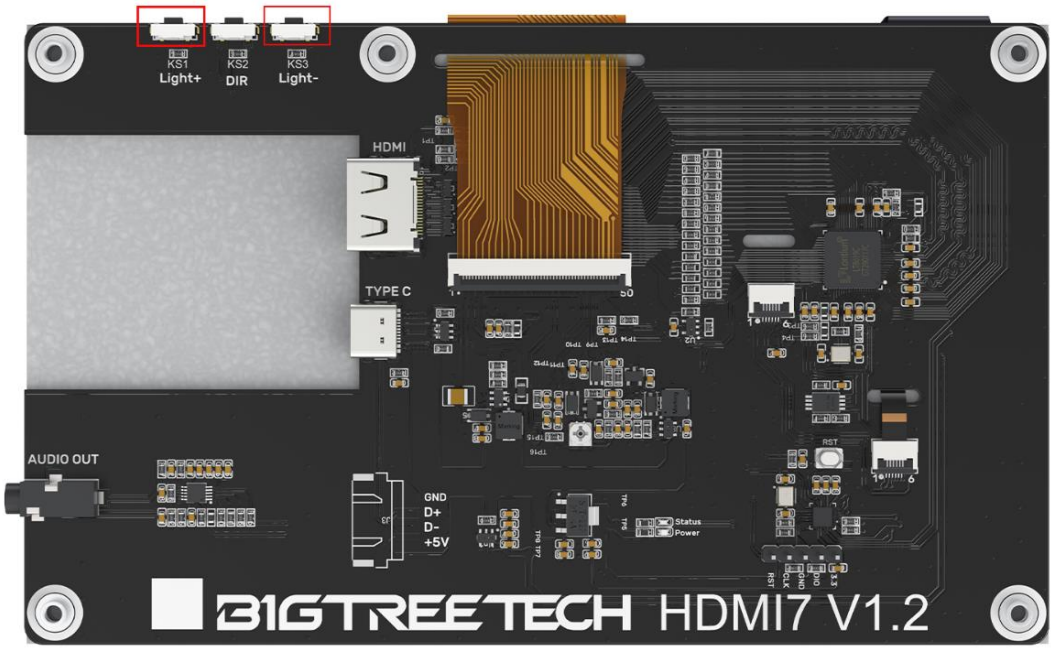

Display Direction Adjustment

BIGTREETECH HDMI7 V1.2 supports horizontal display direction adjustment via the Ks2 button.

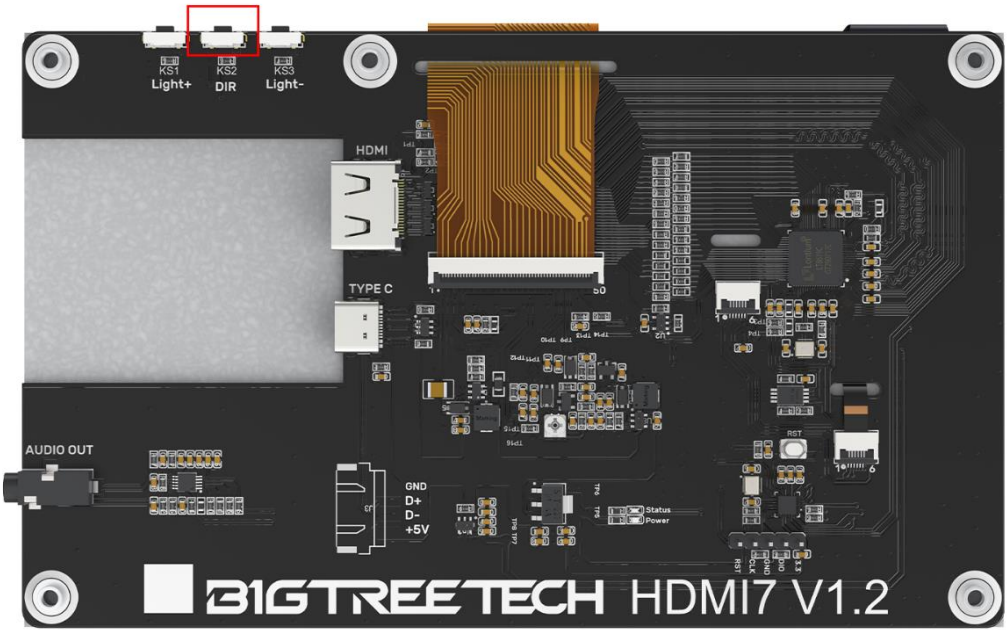

Working with Raspberry Pi

HDMI Display Output

1. Download at Raspberry Pi official website:
   Raspberry Pi OS with desktop
   Release date: April 4th 2022
   System: 32-bit
   Kernel version: 5.15
   Debian version: 11 (bullseye)


2. Write the image to the TF card, then modify the following configuration in config.txt:

```
# uncomment to force a specific HDMI mode (this will force VGA)
hdmi_group=2
hdmi_mode=87
hdmi_cvt=1024 600 60 6 0 0 0
# uncomment to force a HDMI mode rather than DVI. This can make audio work in
# DMT (computer monitor) modes
hdmi_drive=1
```

HDMI Audio Output

1. Raspberry Pi system version:
   Raspberry Pi OS with desktop
   Release date: April 4th 2022
   System: 32-bit
   Kernel version: 5.15
   Debian version: 11 (bullseye)

2. After entering the system desktop, right-click the audio source icon in the upper right corner, and select HDMI.

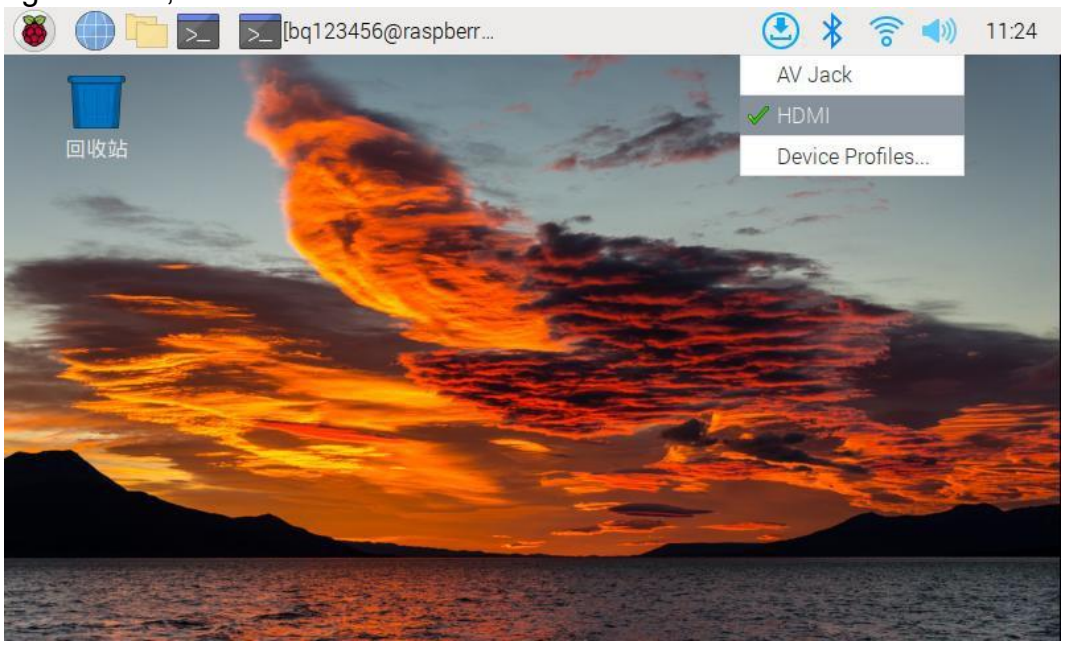

If you need further resources for this product, you can find them at [GitHub](https://github.com/bigtreetech/). If you cannot find what you need, you may contact our after-sales support(service005@biqu3d.com).

If you encounter any other problems during use or have suggestions or feedback, please contact us. Thank you for choosing BIGTREETECH products.