


BIGTREE TECH

Rodent V1.0

User Manual

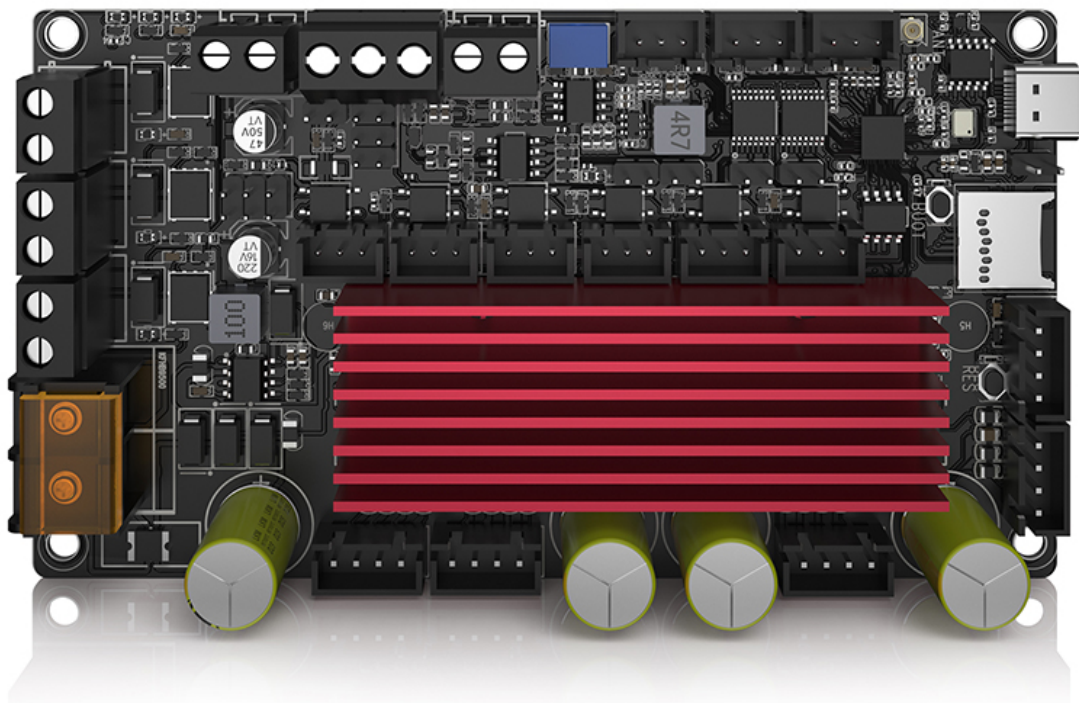

Revision Log

Version	Date	Revisions
v1.00	May 29th, 2024	Initial Version

Table of Contents

- 1. Product Profile 4
 - 1.1. Feature Highlights 4
 - 1.2. Dimensions 5
- 2. Peripheral Interface 6
 - 2.2. Pin Description 6
- 3. Interface Details 7
 - 3.1. Endstop Switch 7
 - 3.2. VProbe Switch 7
 - 3.3. Spindle 8
 - 3.4. V-MOS Output Ports 8
 - 3.5. OLED Display Interface 9
 - 3.6. Wi-Fi Antenna Interface 9
 - 3.7. LED 9
- 4. Software Setup 10
 - 4.1. Firmware Installation 10
 - 4.2. Wi-Fi Configuration Steps 10
 - 4.3. Configuring the Machine 12


1. Product Profile

The BIGTREETECH Rodent V1.0 is our very first control board designed specifically in collaboration with RatRig for CNC machines. It supports USB and RS-485 communication, greatly simplifying the wiring process and providing smooth operation.

1.1. Feature Highlights


- MCU: ESP32-D0WD-V3.
- Wi-Fi Capability: Supports 802.11 b/g/n, 802.11 n (2.4 GHz) with maximum speeds of 150 Mbps.
- Integrated Motor Drivers: Onboard four TMC2160 drivers, capable of handling high voltage and current, making them ideal for more powerful motors.
- Power Input Range: DC24V to DC56V at 10A.
- V-MOS Power Input: Accepts DC12V to DC36V with three externally controllable voltage output ports, supporting up to 5A; output voltage depends on the V-MOS input.
- 5 Endstop Switch Interfaces: Support voltage selection of 5V, 12V, and VIN, featuring optocoupler isolation to improve motherboard stability and reduce interference.
- VProbe Control Switch Interface: Support voltage selection of 5V, 12V, and VIN, featuring optocoupler isolation to improve motherboard stability and reduce interference.
- Spindle control interface.
- One PWM output interface (3-10V).
- One TF card interface.
- Firmware Management: Features TYPE-C automatic firmware burning and onboard CH340 for easy updates without external tools. Includes BOOT and RESET buttons for entering DFU mode via USB.
- RS485 Support: Includes a built-in 130R terminal resistor for RS485 communications.
- Expansion Interfaces: Reserved connections for an OLED display (I²C) and Wi-Fi antenna, and supports 3-channel RGB LEDs for customization.

1.2. Dimensions

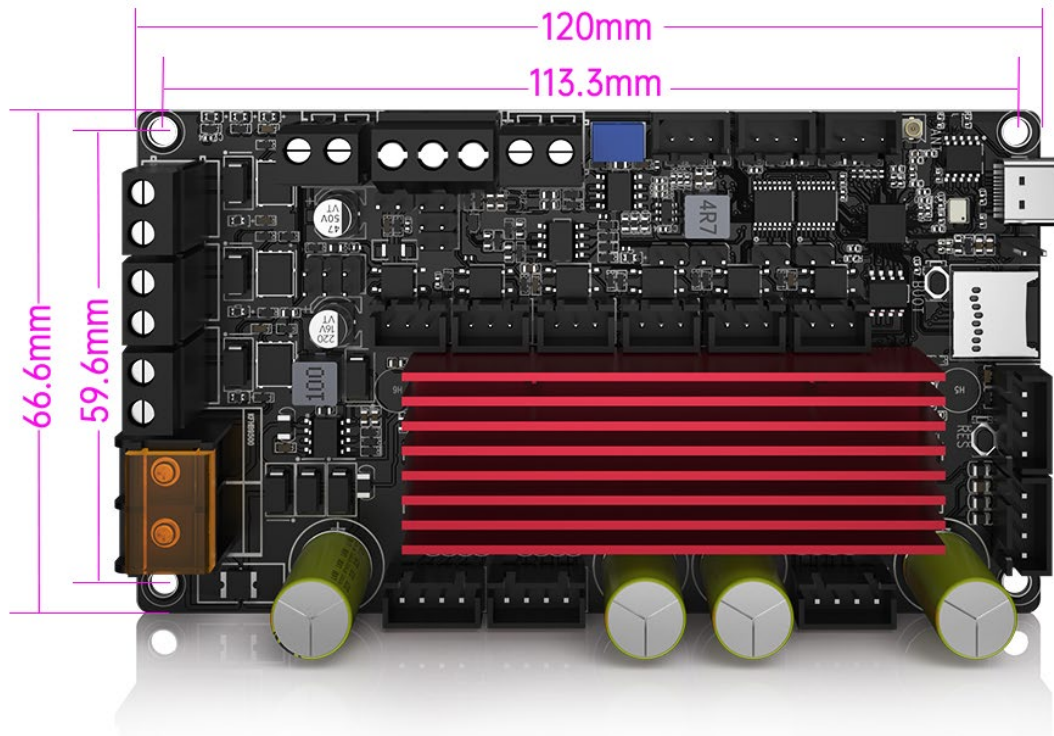


2. Peripheral Interface

2.2. Pin Description

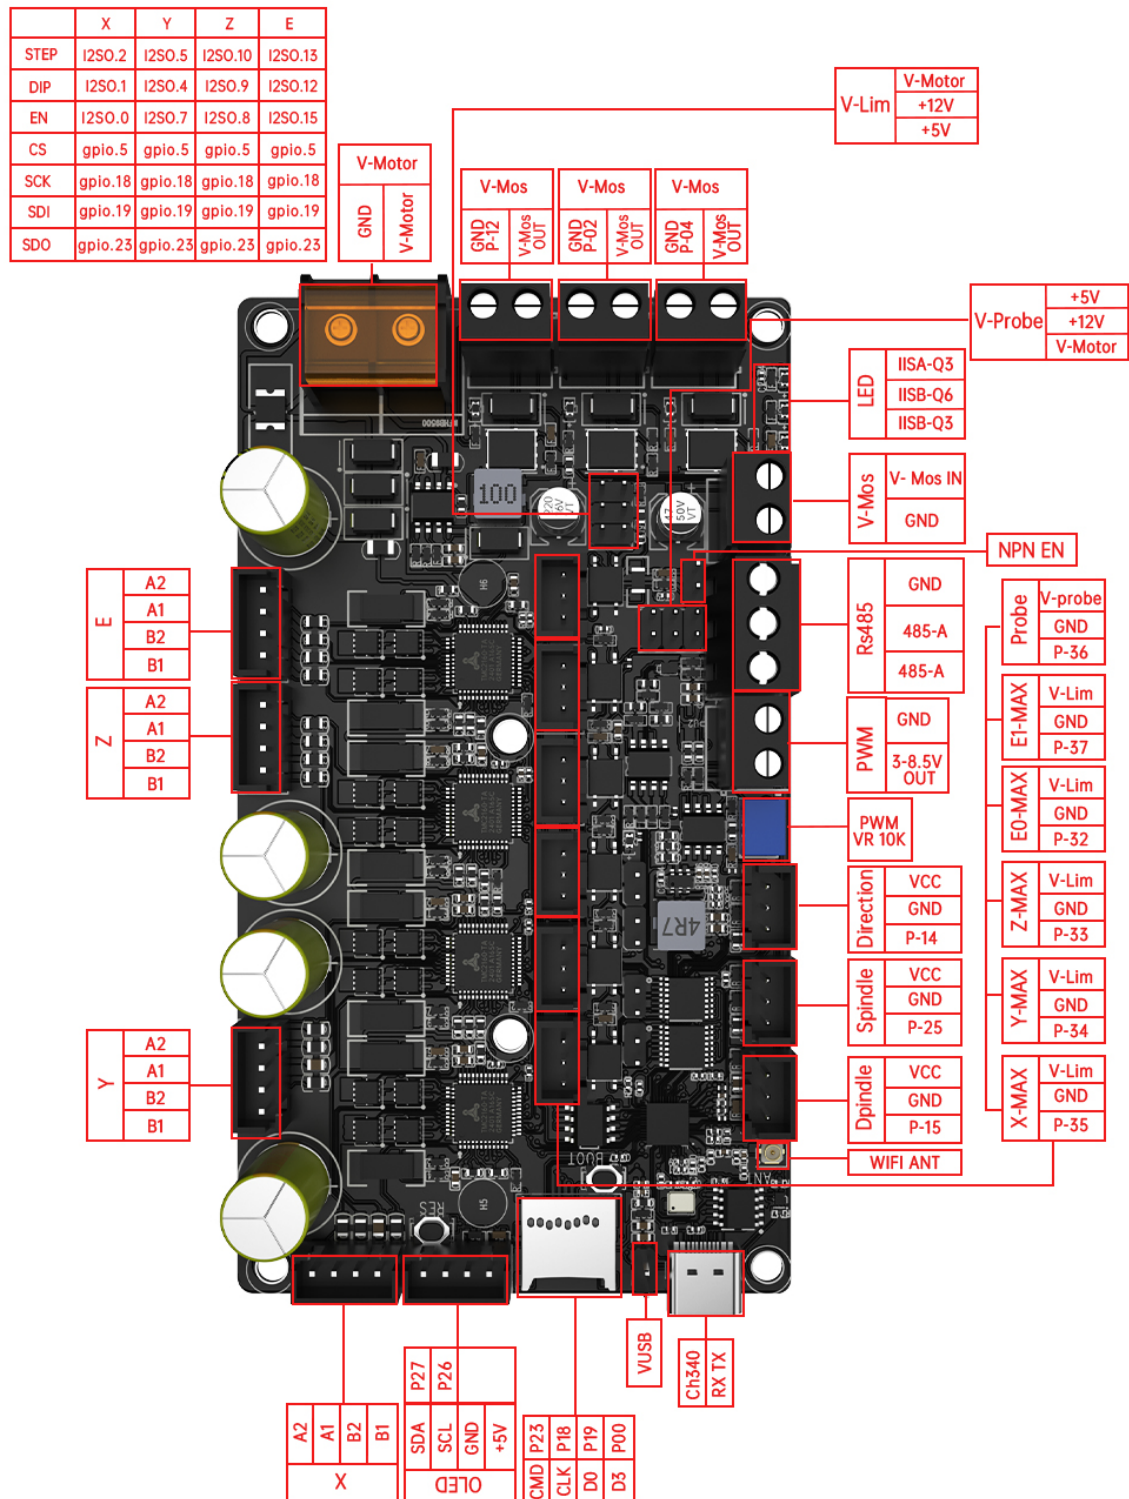


3. Interface Details


3.1. Endstop Switch

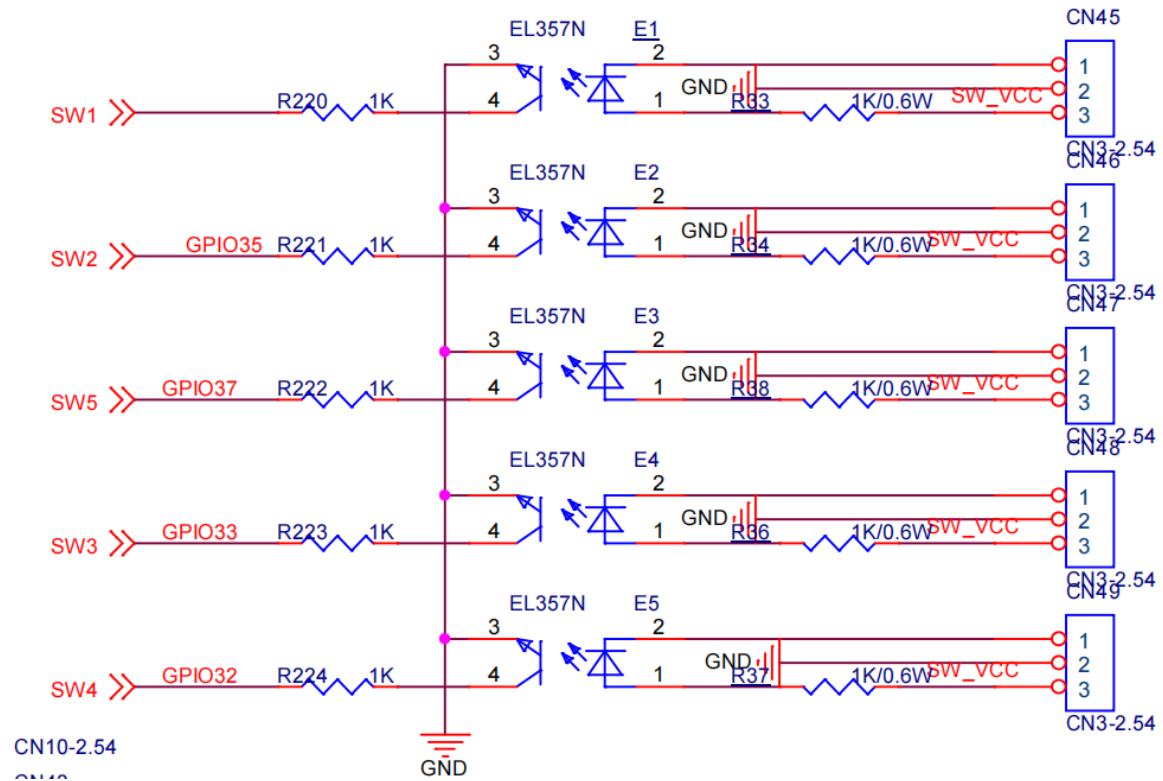


3.2. VProbe Switch

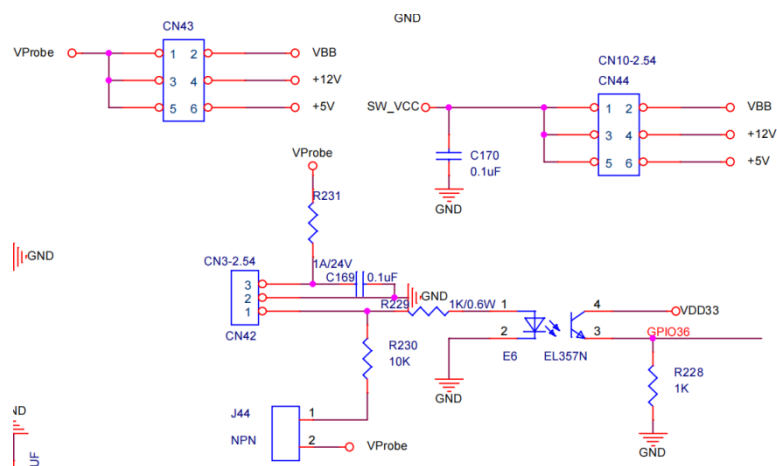

3.3. Spindle

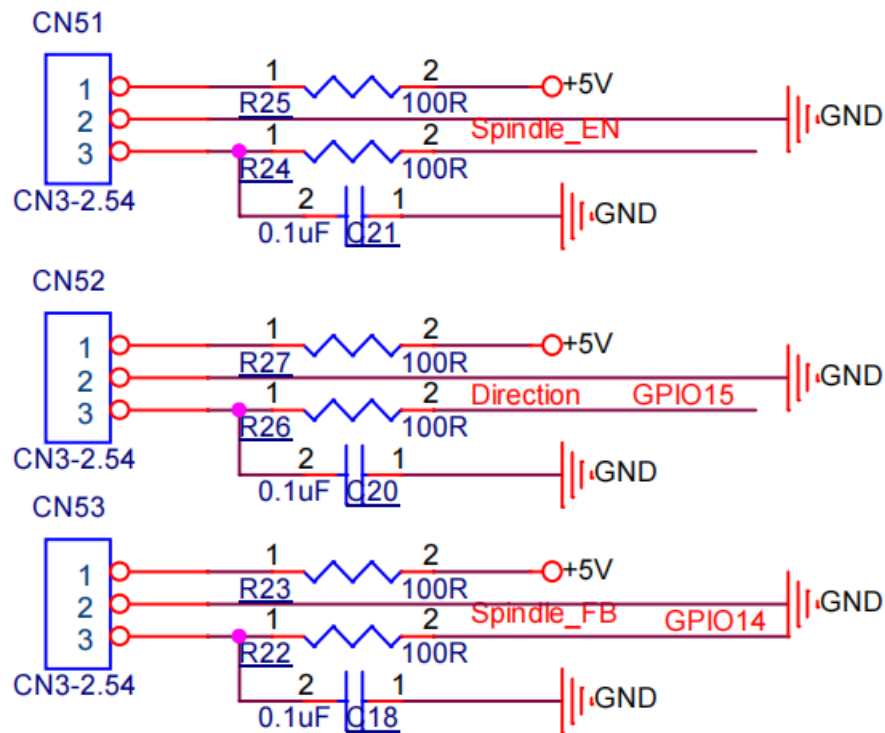

3.4. V-MOS Output Ports

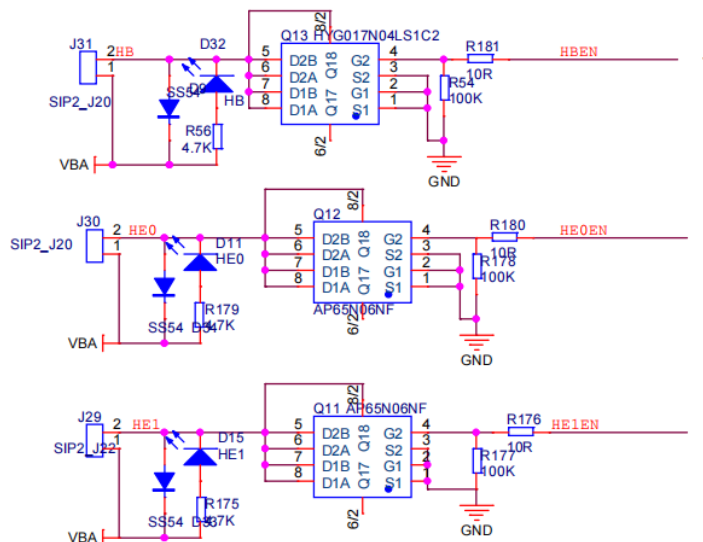

4. Software Setup

4.1. Firmware Installation


Firmware available at: <https://github.com/bdring/FluidNC>

4.2. Wi-Fi Configuration Steps

1. Connect to the FluidNC hotspot to access the configuration interface.




2. Navigate to the FluidNC configuration interface.

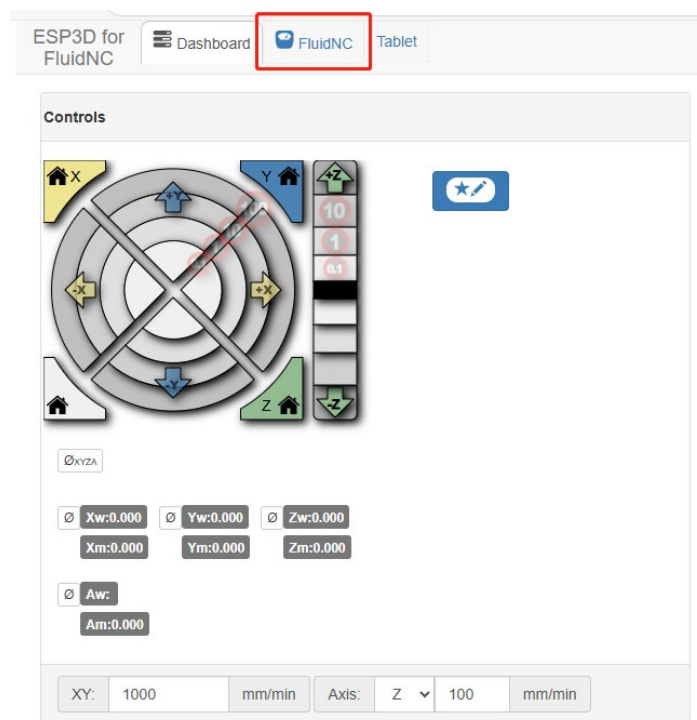

3. Modify Sta/SSID (Wi-Fi name) and Sta/Password (Wi-Fi password), then click "Set" to apply changes.


Sta/Password	Set
Sta/MinSecurity	WPA2-PSK	Set
WiFi/FastScan	OFF	Set
Sta/IPMode	DHCP	Set
Sta/IP	0.0.0.0	Set
Sta/Gateway	0.0.0.0	Set
Sta/Netmask	0.0.0.0	Set
AP/Country	01	Set
AP/SSID	FluidNC	Set
AP/Password	Set
AP/IP	192.168.0.1	Set
AP/Channel	1	Set
Hostname	fluidnc	Set
Sta/SSID		Set

4. Restart the FluidNC system to finalize the setup.

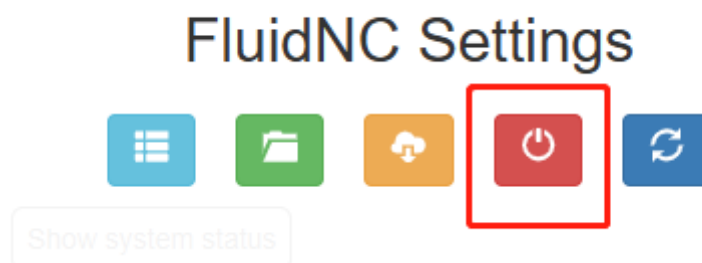

4.3. Configuring the Machine


1. Download rodent.yaml from the file icon.

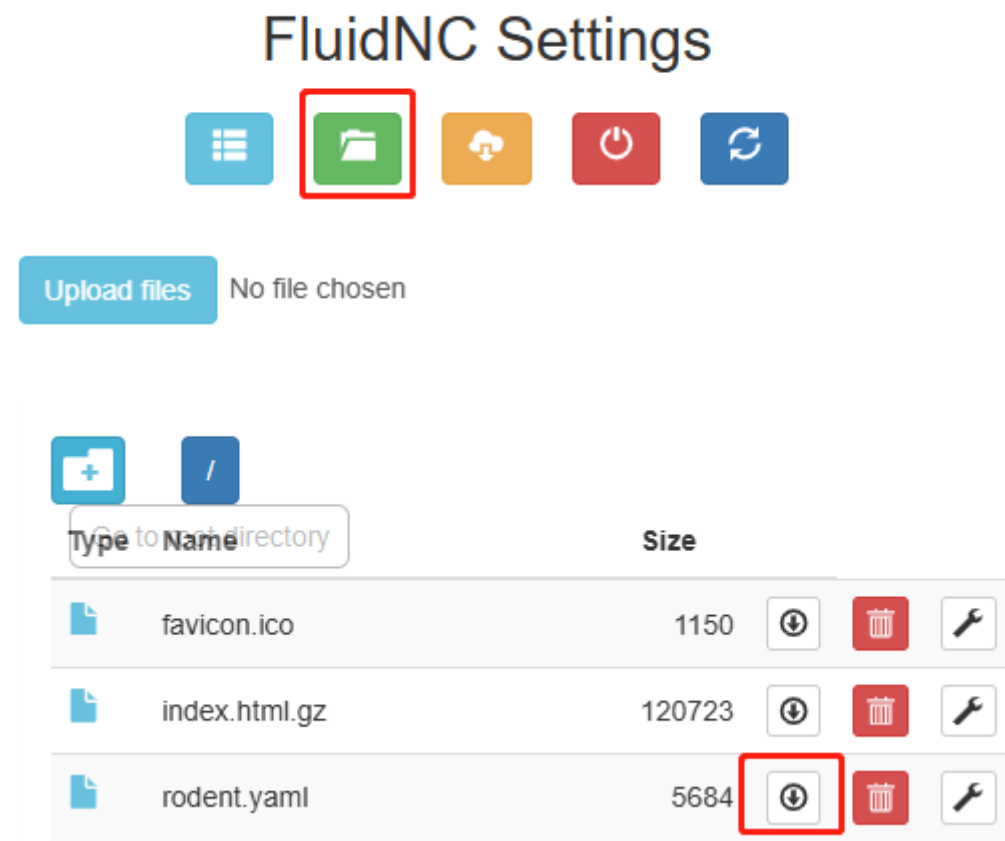


2. Customize your settings by referencing the FluidNC Wiki:

<http://wiki.fluidnc.com/>

3. Click the "Delete icon".

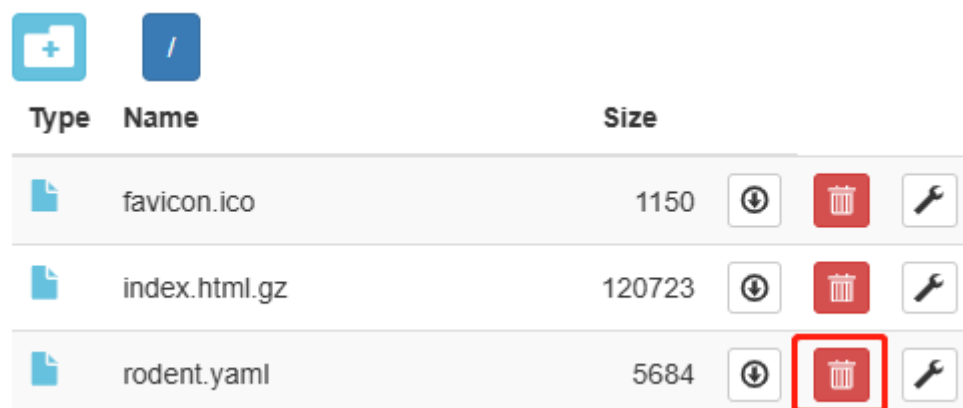

4. Click "Upload files" to upload rodent.yaml.

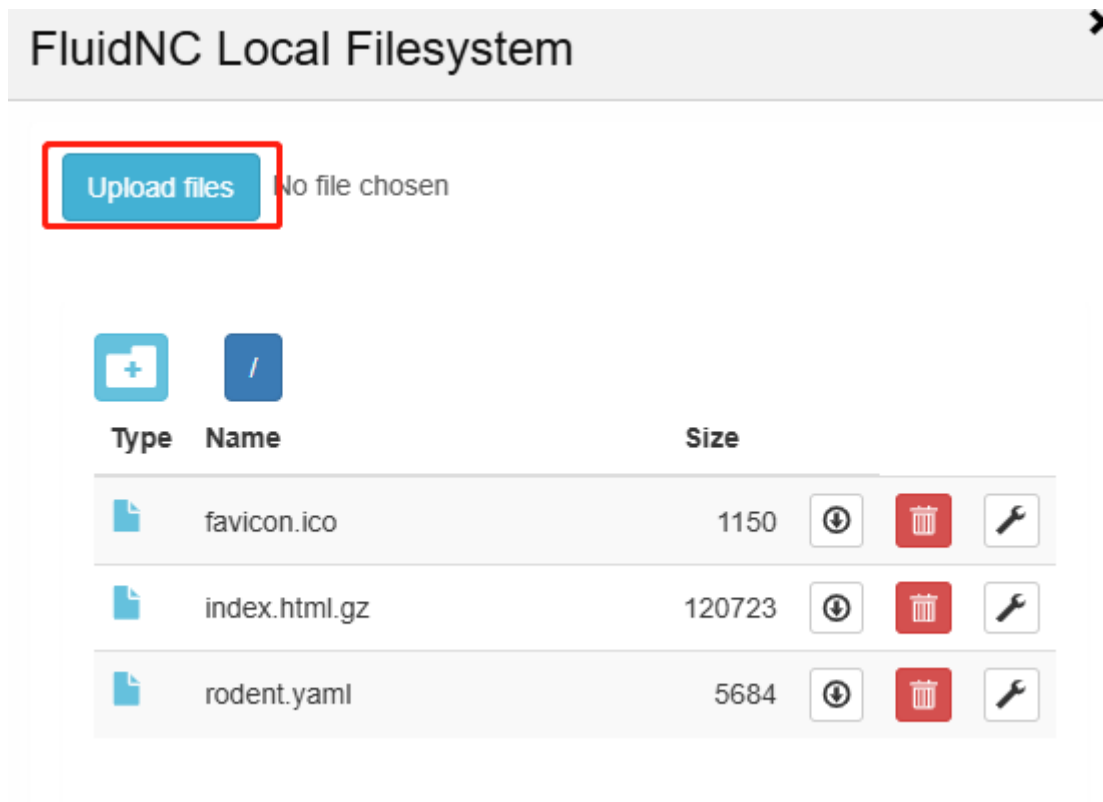

5. Click "Restart Rodent".

If you need further resources for this product, you can find them at [GitHub](<https://github.com/bigtreotech/>). If you cannot find what you need, you may contact our after-sales support(service005@biqu3d.com).

If you encounter any other problems during use or have suggestions or feedback, please contact us. Thank you for choosing BIGTREETECH products.