
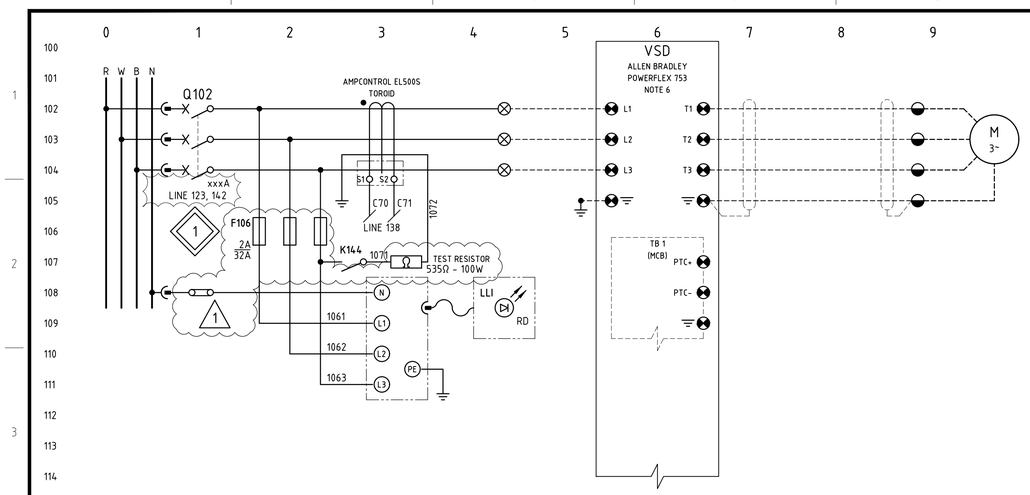


F72-PP-712
CONCENTRATE
BELT FILTER 1
FLOCCULANT DOSING PUMP (FUTURE)
2.2 kW

VSD
CONTROL TERMINALS

AUX POWER	AP+	F72PP712-1230	1
	AP-	F72PP712-0VDC	2
MAIN CONTROL BOARD I/O CARD	⏚		
	TB1-PTC+		
	TB1-PTC-		
	TB1-DiC	F72PP712-0VDC	4
	TB1-Di1	F72PP712-1242	3
	TB1-Di2		
	TB2-RoNO		
	TB2-RoC		
	TB2-RoNC		
SAFE TORQUE-OFF CARD	SP+	F72PP712-1272	5
	SE+	F72PP712-1282	7
	SP-	F72PP712-0VDC	6
	SE-	F72PP712-0VDC	8

FUTURE
NON-EQUIPPED MODULE
1

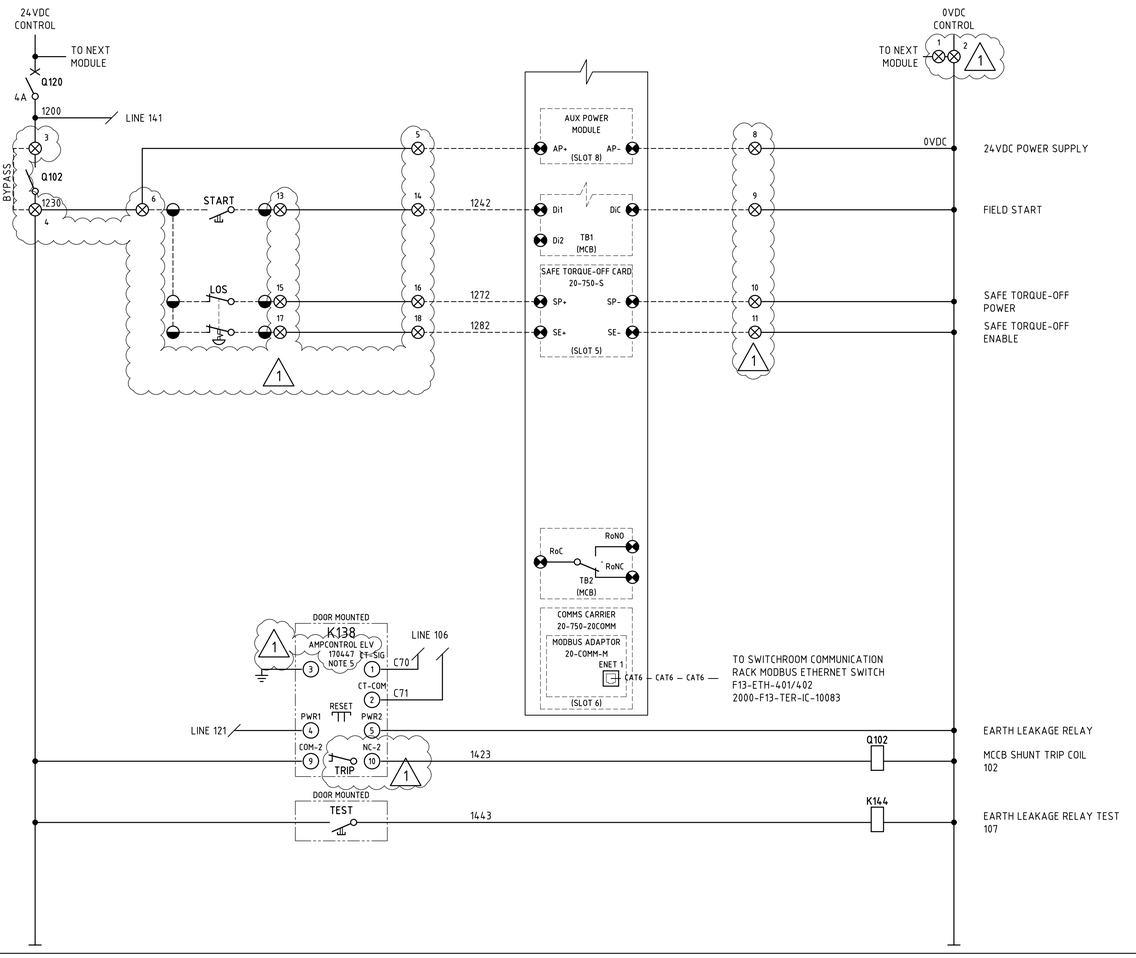

24VDC POWER SUPPLY
FIELD START
SAFE TORQUE-OFF POWER
SAFE TORQUE-OFF ENABLE
EARTH LEAKAGE RELAY
MCCB SHUNT TRIP COIL 102
EARTH LEAKAGE RELAY TEST 107

TO SWITCHROOM COMMUNICATION RACK MODBUS ETHERNET SWITCH
F13-ETH-401/402
2000-F13-TER-IC-10083

CABLE ZONE
24VDC TERMINALS
24VDC LOOPED POWER
NEXT MODULE PREV MODULE


Q120	4A	F13SW020-2xxx	
1		F13SW020-2xxx	
2		F13SW020-2xxx	
3		F72PP712-1200	
4		F72PP712-1230	1
5		F72PP712-1230	1
6		F72PP712-1230	
7		F72PP712-1230	
8		F72PP712-0VDC	2
9		F72PP712-0VDC	4
10		F72PP712-0VDC	6
11		F72PP712-0VDC	8
12		F72PP712-0VDC	
13		F72PP712-1242	2
14		F72PP712-1242	3
15		F72PP712-1272	3
16		F72PP712-1272	5
17		F72PP712-1282	4
18		F72PP712-1282	7
19		SPARE	9
20		SPARE	10
21			
22			
23			
24			
25			
26	⏚	EARTH	GNYE
27	⏚	EARTH	GNYE

COMMISSIONING BYPASS
NOTE 2

F72PP712VS-C1
1.5 mm² 10C+E

F72PP712LCS-C1
1.5 mm² 4C+E

F72PP712-LCS
LOCAL CONTROL STATION



NOTES

1. TERMINALS ON TERMINAL STRIPS ABOVE 50VAC SHALL HAVE A SEPARATE PERSPEX SHROUD AND SHALL BE LABELLED "DANGER xxxVAC".
2. 1 WIRE NUMBER FERRULES ON TERMINAL STRIP SHALL BE PREFIXED WITH EQUIPMENT NUMBER e.g. F72PP712-1200, UNLESS OTHERWISE NOTED.
3. EACH WIRE SHALL BE IDENTIFIED AT BOTH ENDS WITH FERRULES.
4. THE ELV RELAY REQUIRES A SEPARATELY PURCHASED EL500S TOROID FOR MEASUREMENT OF THE EARTH LEAKAGE CURRENT. EL500S TOROIDS ARE AVAILABLE IN THE FOLLOWING WINDOW SIZES: 25mm, 60mm & 112mm.
5. 1 EARTH LEAKAGE RELAY (ELV) USER INTERFACE TO BE MOUNTED ON MCC MODULE DOOR. RELAY ENERGISED (NORMALLY CLOSED CONTACT OPEN) IN NORMAL OPERATION.
6. VSD SHALL BE SIZE FRAME 2 AND ABOVE.

LEGEND

00/01/00	DCS DIGITAL INPUT
00/02/00	DCS DIGITAL OUTPUT
⊗	MCC TERMINAL
◓	VSD TERMINAL
◒	FIELD TERMINAL
◑	DCS OR I/O TERMINAL
◧	MARSHALLING TERMINAL
⊗ x	DEVICE TERMINAL
⊗ cc	INDICATION LAMP cc = COLOUR

HOLDS

1. DETAILS TO TBC.

TERMINATION LEGEND

Q120	4A	F13SW020-2xxx	
1		F13SW020-2xxx	
2		F13SW020-2xxx	
3		F72PP712-1096	RD
4		F72PP712-1106	BK
5		F72PP712-1116	GNYE
6	⏚	EARTH	

CORE COLOUR/ IDENTIFIER
BARRIER
FERRULE
JUMPER/DISCONNECT/ FUSE/EARTH
TERMINAL No.
DESTINATION

2000-F72-SCM-EL-10714_Rev1

F13-SW-020 - F72-PP-712 conc belt filter 1 flocculant dosing pu - schematic and termination diagram

D:\CAD PROJECTS\235 NORTHERN STAR RESOURCES LTD\23517 KCGM GROWTH PROJECT\03 DELIVERABLES\ELV\F72 - REAGENTS MIXING & STORAGE\2000-F72-SCM-EL-10714.DWG 30MAY25 10:57AM SANDRA CULL