



Docusign Envelope ID: 1C123F4F-48ED-425D-A3F4-754BD8FC0FD6

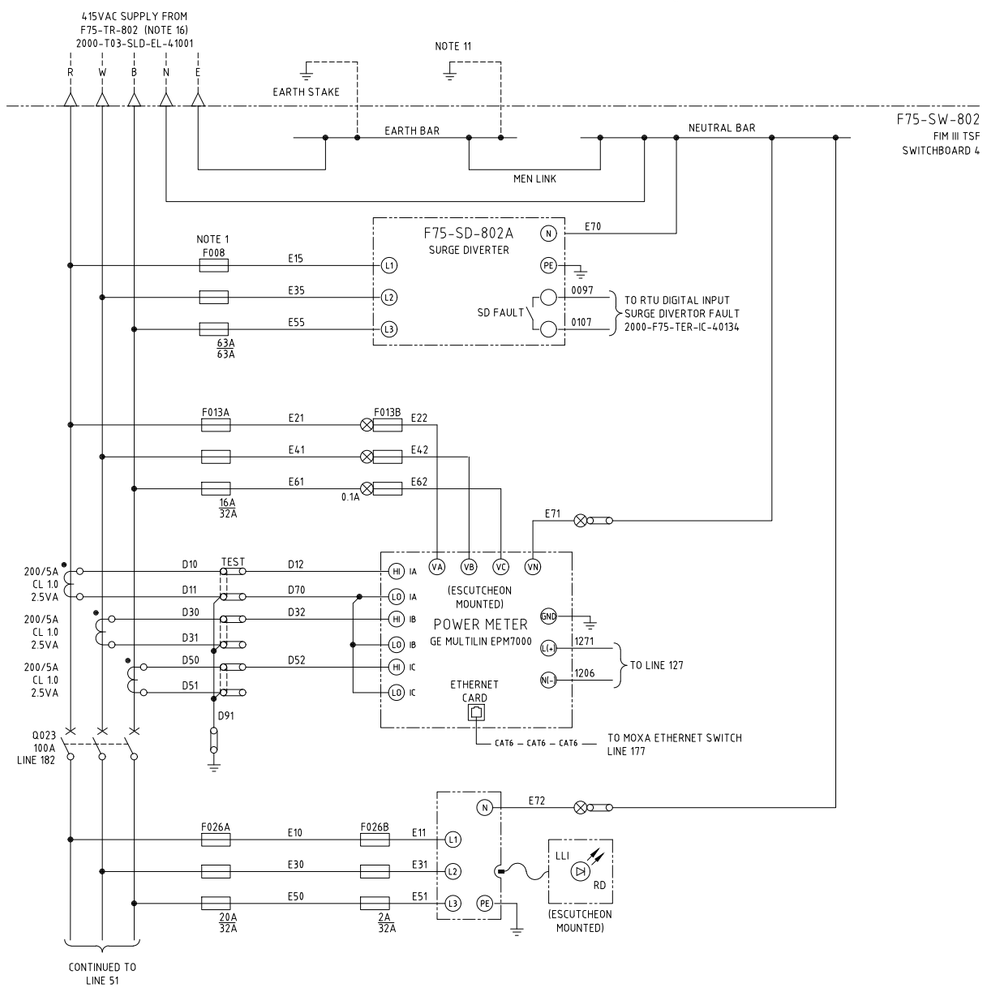

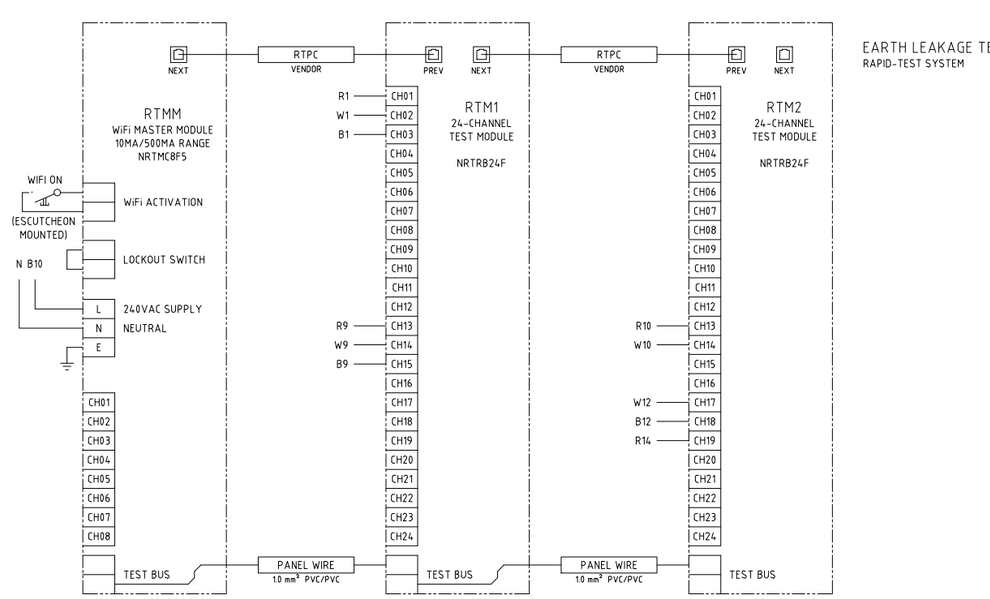

EARTH LEAKAGE TEST
RAPID-TEST SYSTEM

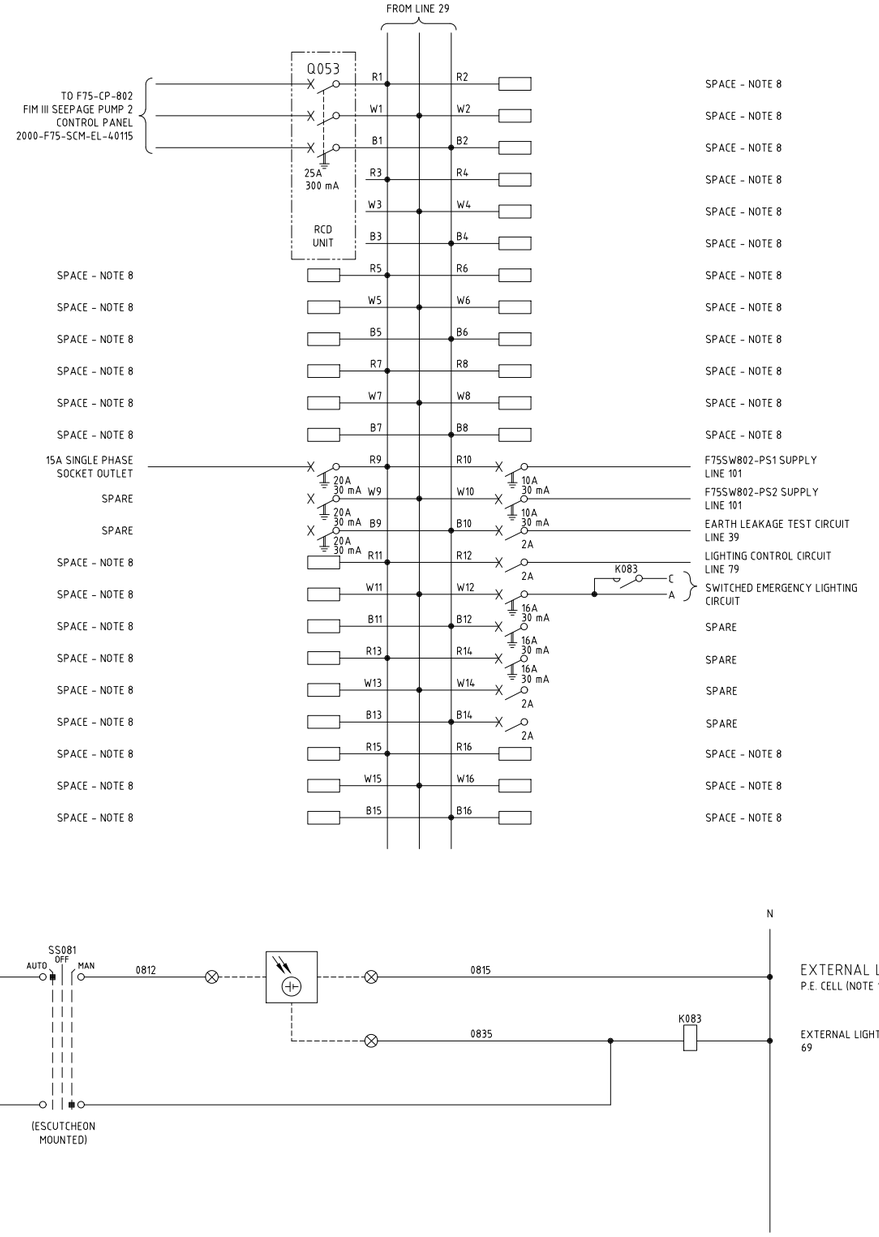

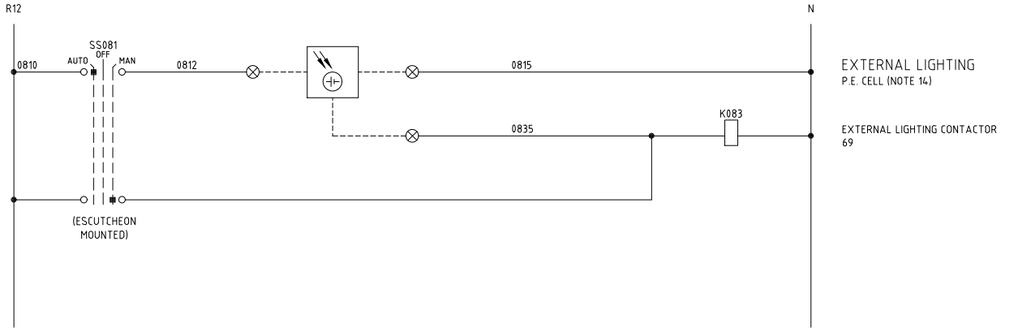

NOTES

1. SURGE DIVERTER FUSES SHALL BE SIZED BY VENDOR TO SUIT DUTY.
2. MINIATURE CIRCUIT BREAKERS SHALL BE SIZED AND RATED TO SUIT INCOMER REQUIREMENTS.
3. ALL TERMINATIONS ABOVE 50VAC SHALL BE TO IP2x OR ABOVE, IF NOT, TO HAVE A SEPARATE PERSPEX SHROUD FITTED AND SHALL BE LABELLED "DANGER xxxVAC".
4. WIRE NUMBER FERRULES ON TERMINAL STRIP SHALL BE PREFIXED WITH EQUIPMENT NUMBER e.g. F75SW802-XXXX, UNLESS NOTED OTHERWISE.
5. EACH WIRE SHALL BE IDENTIFIED AT BOTH ENDS WITH FERRULES.
6. THREE PHASE CIRCUITS SHALL ALWAYS BE PLACED ACROSS CIRCUIT RWB - i.e. R7, W7, B7 - NEVER ACROSS MIXED CIRCUITS i.e. B5, R7, W7.
7. CIRCUIT BREAKERS SHALL BE PAD-LOCKABLE IN THE 'OFF' POSITION ONLY, VIA LOCK-DOGS OR SIMILAR, LOCKING TO ESCUTCHEON SHALL NOT BE ACCEPTABLE.
8. ALL SPARE SPACE SHALL BE FILLED WITH DUMMY CIRCUIT BREAKERS, ESCUTCHEON POLE FILLERS SHALL NOT BE ACCEPTABLE.
9. ESCUTCHEON SHALL BE KEYED TO MAIN ISOLATOR HANDLE SUCH THAT ESCUTCHEON CANNOT BE REMOVED WHILE BOARD IS LIVE.
10. NEUTRAL CIRCUITS FED FROM RCDs MUST BE WIRED BACK TO THE NEUTRAL OF THE RCD, NOT THE NEUTRAL BAR.
11. EQUIPOTENTIAL BONDING CONDUCTOR SHALL BE INSTALLED FROM SWITCHBOARD EARTH BAR TO EQUIPMENT OUTLINED IN ELCTRICAL INSTALLATION SPEC 2000-F00-STS-EL-10012 VIA 35mm² Cu GNYE/PVC.
12. 6kA MINIATURE CIRCUIT BREAKERS SHALL ONLY BE USED WITH ENGINEERING APPROVAL.
13. AS-BUILT CIRCUIT SCHEDULE SHALL BE KEPT INTERNAL TO SWITCHBOARD AT ALL TIMES.
14. P.E. CELL SHALL BE INSTALLED OUT OF DIRECT LINE OF ANY LIGHTING.
15. EARTH-NEUTRAL LINK SHALL BE INSTALLED IN SWITCHBOARD. SIGNAGE SHALL BE PLACED ON SWITCHBOARD AND ON TRANSFORMER TO THAT EFFECT. LINK SHALL BE IDENTIFIED C/W LABEL STATING "M.E.N. LINK - DO NOT REMOVE".
16. SWITCHBOARD SUPPLY TO BE CONNECTED TO POLE MOUNTED FUSE SWITCH ON LV SIDE OF TRANSFORMER (SUPPLIED BY OTHERS).

LEGEND

- MxDIxx — RTU DIGITAL INPUT
- MxDOxx — RTU DIGITAL OUTPUT
- PE CELL
- SWITCHBOARD TERMINAL
- VSD TERMINAL
- FIELD TERMINAL
- DCS OR I/O TERMINAL
- RTU TERMINAL
- DEVICE TERMINAL
- INDICATION LAMP (cc = COLOUR)

APPROVED FOR CONSTRUCTION

REFERENCES	DWG No	REV	DATE	REVISION
F75-SW-802 FIM III TSF SWITCHBOARD 4 GENERAL ARRANGEMENT SHEET 1	2000-F75-DRG-EL-40117			
F75-SW-802 FIM III TSF SWITCHBOARD 4 SCHEMATIC DIAGRAM SHEET 2	2000-F75-SCM-EL-40125			
GENERAL NOTES AND STANDARD DRAWINGS INDEX	2000-F00-STD-EL-10001	O	29.MAY.25	APPROVED FOR CONSTRUCTION

Initial: DRN TF; CHK KVN; TECH APP KVN; DS PROJ APP TH

NORTHERN STAR RESOURCES LIMITED

DRA PACIFIC (PTY) LIMITED

DRAWN	Signed by: JTORRALBA	15.MAY.2025
CHECKED	Signed by: JCYWEE	15.MAY.2025
DESIGNED	Signed by: JTORRALBA	15.MAY.2025
TECH APP	Signed by: KVAN NAMEN	27.MAY.2025
PROJ APP	Signed by: THARFORD	29.MAY.2025
CLIENT APP	E8201606A17B4A9...	

PROJECT: KCGM
FIM TSF PROJECT

TITLE: FIM III TAILINGS DAM
F75-SW-802 FIM III TSF SWITCHBOARD 4
SCHEMATIC DIAGRAM SHEET 1

A1 | SCALE NTS | DRG No. 2000-F75-SCM-EL-40124 | REV O