

GyroCare Pro

USER MANUAL

Built by a pilot, for pilots.

Covers the 13 official how-to videos, step by step.

gyrocarepro.app

Contents

INTRODUCTION Welcome to GyroCare Pro 3

CHAPTER 1 Dashboard Tour 4

CHAPTER 2 Finding a Due Task 6

CHAPTER 3 Logging a Completed Task 8

CHAPTER 4 Task Details: How-To, Full Procedure & Manual 9

CHAPTER 5 Adding a Custom Task 13

CHAPTER 6 History Tour 14

CHAPTER 7 Editing & Deleting a History Entry 17

CHAPTER 8 Preflight Weather Check 19

CHAPTER 9 Aircraft Setup 24

CHAPTER 10 Adding a Flight 26

CHAPTER 11 Editing & Deleting a Flight 28

CHAPTER 12 Exports & Imports 30

CHAPTER 13 Service Bulletins 33

INTRO

Welcome to GyroCare Pro

What the app is, what this manual covers, and subscription terms.

1

What GyroCare Pro is

GyroCare Pro is the iOS companion app for gyroplane pilots. It keeps four things in one place: **maintenance tracking** driven by your tachometer hours, **GPS flight tracking** with logbook, **preflight weather** (METAR winds, density altitude, forecasts), and your **aircraft's setup** — so the maintenance schedule always matches your exact model and engine.

2

What this manual covers

This manual mirrors the 13 official how-to videos, one chapter per video: Dashboard, finding and logging maintenance tasks, task details and manual deep-links, custom tasks, the history log, preflight weather, aircraft setup, the logbook, exports and imports, and service bulletins. Follow the steps in order and you'll know the whole app.

3

Subscription terms

GyroCare Pro is a **free download** with **30 days of full access** from first launch. After that, a subscription is required: **$2.99/month** or **$29.99/year**.

CHAPTER 1

1 Dashboard Tour

Your tach hours, what needs attention, and where everything stands.

1 Enter your tachometer hours

Open the app to the **DASH** tab. Tap the **Tachometer Hours** field and type your current tach reading (for example 1250). The maintenance schedule recalculates instantly — the notification strip, Upcoming Maintenance, and all summary cards update to match your aircraft's real position in its schedule.

2 Use the ⋯ menu

Tap ⋯ (top right) for app-level actions: **Save Backup** and **Open Backup** protect your data, and **Print/PDF** produces a printable report of your maintenance state.

3 Read the status strips

The gold notification strip flags what needs attention right now (for example, “25-hour initial inspection (one-time) — 25 hrs to go”). **Upcoming Maintenance** lists the next items coming due. The **Maintenance Summary** cards show Overdue, Due Soon, OK, Info, Next Due and your Tach Hrs at a glance; the **Logbook Summary** shows total flights, total hours, this year's hours, and your last flight.


GYROCARE PRO
Fly - Track - Log - Maintain
MTOSPORT 2010 ROTAX 914 UL
NOTIFICATIONS
NORMAL
1our initial inspection (one-time) — 25 hrs to go
Turbocharger & wastegate check —
TACHOMETER HOURS
0 HRS
0%
0
500
1000
1500
2000
0
Today
10/14/2026
UPCOMING MAINTENANCE
All items in compliance ✓
MAINTENANCE SUMMARY
OVERDUE
0
past due
DUE SOON
0
near tolerance
OK
21
in compliance
INFO
5
as required
NEXT DUE
25
at hrs
TACH HRS
0
2500 hrs to rotor MLL
LOGBOOK SUMMARY
TOTAL FLIGHTS
3
TOTAL HOURS
3:30
THIS YEAR
3
LAST FLIGHT
11 Oct 2026

2

CHAPTER 2

Finding a Due Task

Filter the maintenance list to exactly the tasks you need.

1

Open the maintenance tab

Tap **MNT**. The Hours Timeline at the top shows where your current tach reading sits in the 0–2000-hour window, and every task below is timed against it.

2

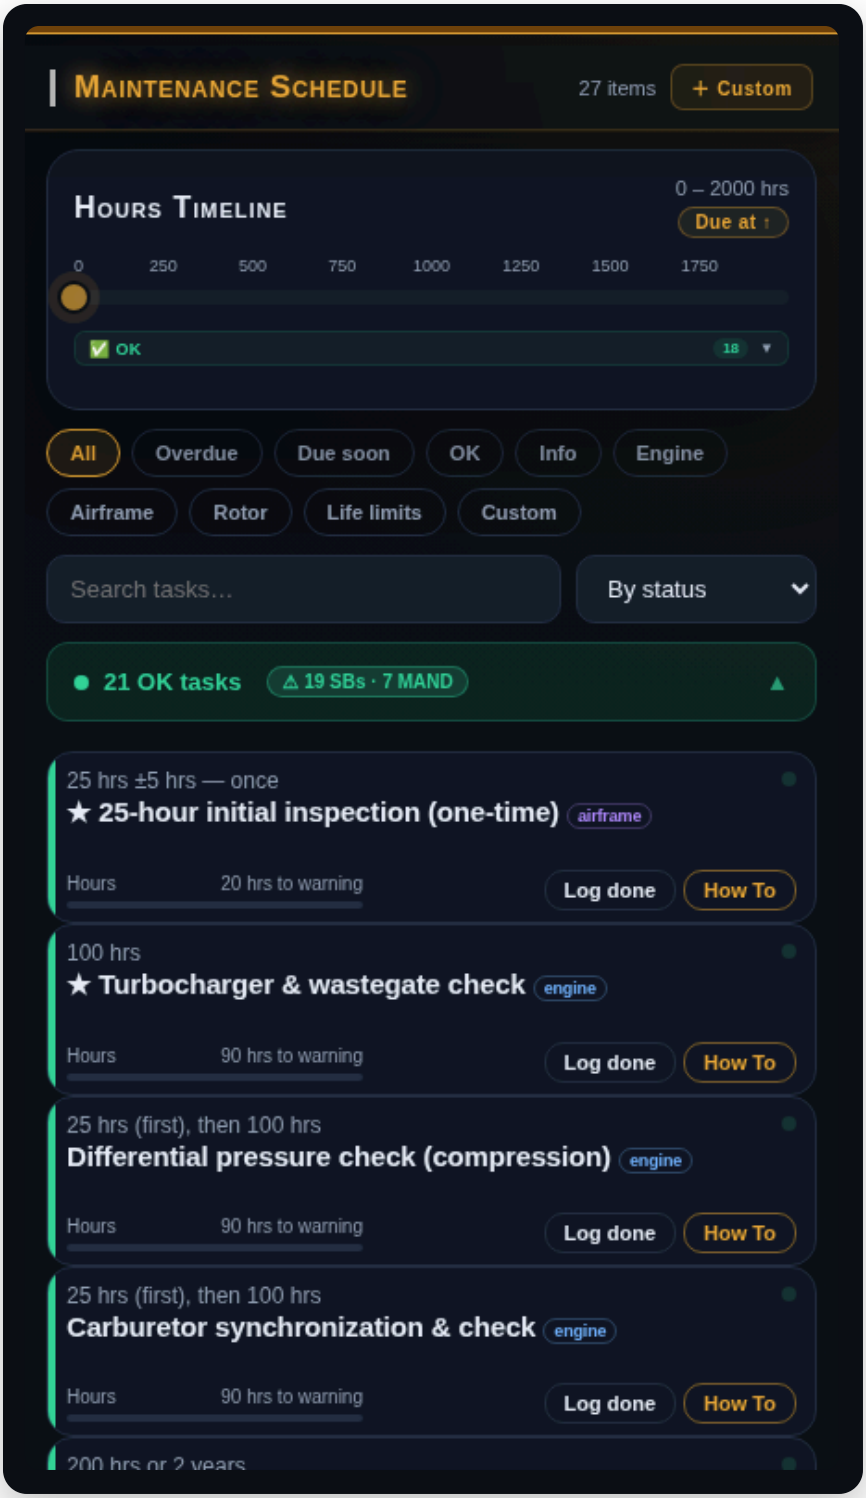
Filter by status or category

Use the filter chips: **All**, **Overdue**, **Due soon**, **OK**, **Info** — and category chips **Engine**, **Airframe**, **Rotor**, **Life limits**, **Custom**. For example, tapping **Due soon** narrows the list to only tasks approaching their warning window; **OK** shows everything currently compliant. Tapping the same chip again clears it.

3

Search or sort

Type in the **Search tasks…** field to find a task by name, or change the sort with the **By status** selector. Each task row shows its interval, how far away it is, and the **Log done** and **How To** buttons.


Maintenance Schedule
27 items
+ Custom
Hours Timeline
0 – 2000 hrs
Due at ↑
0
250
500
750
1000
1250
1500
1750
✅ OK
18
All
Overdue
Due soon
OK
Info
Engine
Airframe
Rotor
Life limits
Custom
Search tasks…
By status
21 OK tasks
⚠ 19 SBs · 7 MAND
25 hrs ±5 hrs — once
★ 25-hour initial inspection (one-time)
airframe
Hours
20 hrs to warning
Log done
How To
100 hrs
★ Turbocharger & wastegate check
engine
Hours
90 hrs to warning
Log done
How To
25 hrs (first), then 100 hrs
Differential pressure check (compression)
engine
Hours
90 hrs to warning
Log done
How To
25 hrs (first), then 100 hrs
Carburetor synchronization & check
engine
Hours
90 hrs to warning
Log done
How To
200 hrs or 2 years

CHAPTER 3

3 Logging a Completed Task

Record finished work so the schedule and history stay current.

1 Tap “Log done” on the task

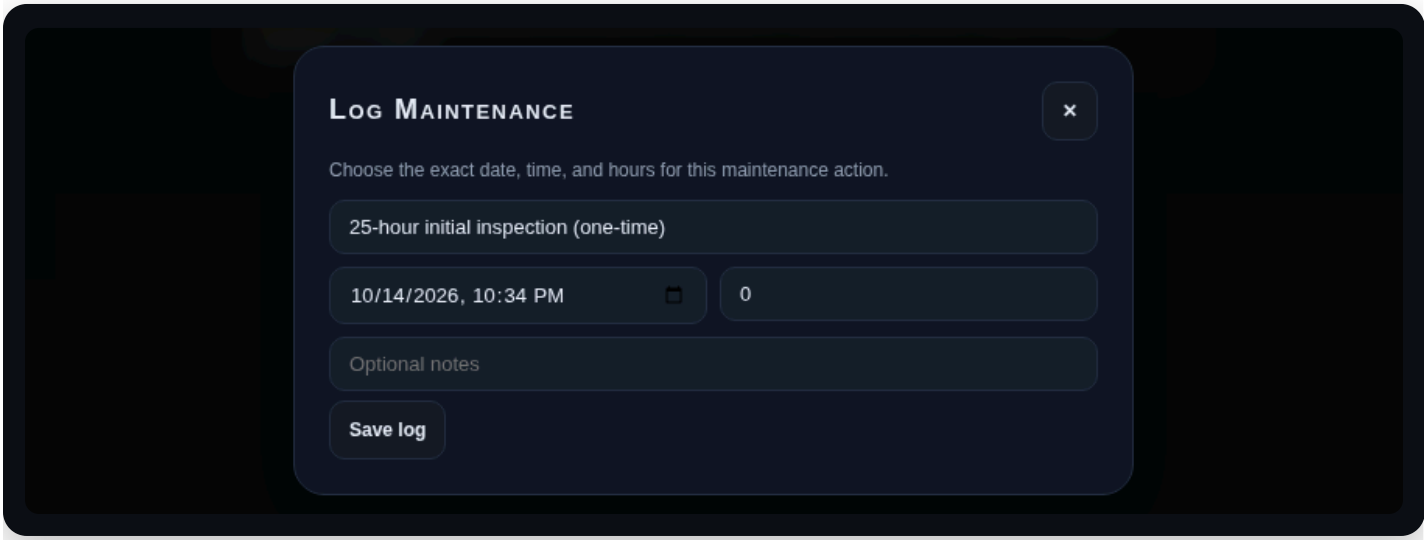
On the **MNT** tab, find the task you just completed and tap its **Log done** button.

2 Fill in the Log Maintenance dialog

The dialog shows the task name. Confirm the **date and time** the work was done (defaults to now), enter the **tachometer hours** at completion, and add any **notes** you want kept with the record — for example who performed the work or parts used.

3 Save and verify

Tap **Save log**. The entry is written to your **History** log, the task's next due point moves forward, and the Dashboard summaries update immediately.



4

CHAPTER 4

Task Details: How-To, Full Procedure & Manual

Every task carries its procedure — and a deep link into the real manufacturer manual.

1

Open the How-To sheet

On any maintenance task, tap **How To**. A sheet slides up describing the task — for example “Spark plug inspect and re-gap”: remove plugs by cylinder, inspect the electrode gap, check the face colour for engine-condition clues, and reinstall with silicone compound torqued to 20 Nm cold.

2

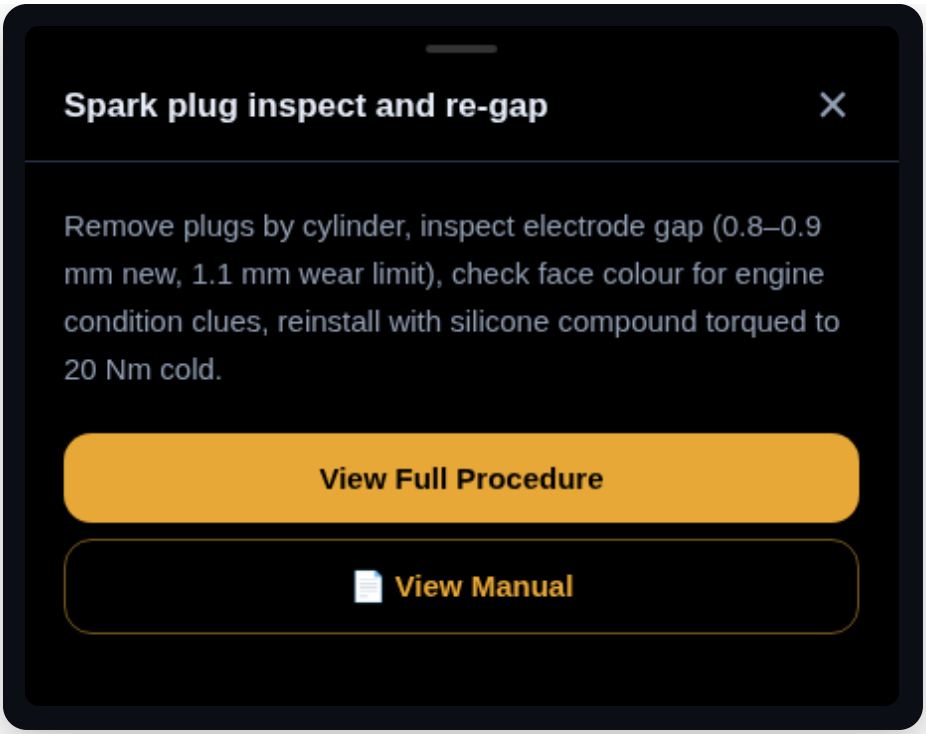
Tap “View Full Procedure”

Tap the gold **View Full Procedure** button. You get the complete procedure for that task: the **required tools and parts** up top (spark plug socket, feeler gauge, silicone heat compound), then the **numbered step-by-step instructions** — the 6-step spark-plug sequence, from removing and labelling plugs by cylinder through gap checks, face-colour diagnosis, and reinstallation. Follow it top to bottom while you work.

3

Tap “View Manual” for the official page

Back on the How-To sheet, tap 📄 **View Manual**. The app opens the **actual manufacturer's manual** at the exact section for the task — the BRP-Rotax 914 Maintenance Manual, section **12-20-00**, with the real diagrams and pictures (like the spark-plug Figure 7.35). No searching through PDFs: you're on the right page instantly.


Spark plug inspect and re-gap
Remove plugs by cylinder, inspect electrode gap (0.8–0.9 mm new, 1.1 mm wear limit), check face colour for engine condition clues, reinstall with silicone compound torqued to 20 Nm cold.
View Full Procedure
View Manual

TOOLS & MATERIALS

- Spark plug socket
- Feeler gauge
- Silicone heat compound

⚠ Always replace both spark plugs of a cylinder — never interchange plugs between cylinders.

⚠ Do not apply silicone compound to the first three threads.

PROCEDURE

1. Remove all spark plugs and store them labelled by cylinder and position (upper/lower).
2. Inspect all spark plugs for mechanical damage.
3. Check electrode gap on all plugs including new ones before installation. New gap: 0.8–0.9 mm. Wear limit: 1.1 mm. No adjustment permissible — replace if at or beyond wear limit.
4. *NOTE: Spark plug face colour diagnosis: light tan = correct; velvet black = mixture too rich or clogged filter; oily/glossy = damaged valve stem seal or worn rings; white with melt beads = mixture too lean or leaking valves.*
5. Before installation, clean spark plug thread and seat at cylinder head to remove residue of silicone heat compound.
6. Apply small amount of silicone heat compound to spark plug thread. Do not apply to the first three threads.

INSTALLATION OF SPARK PLUG

Overview

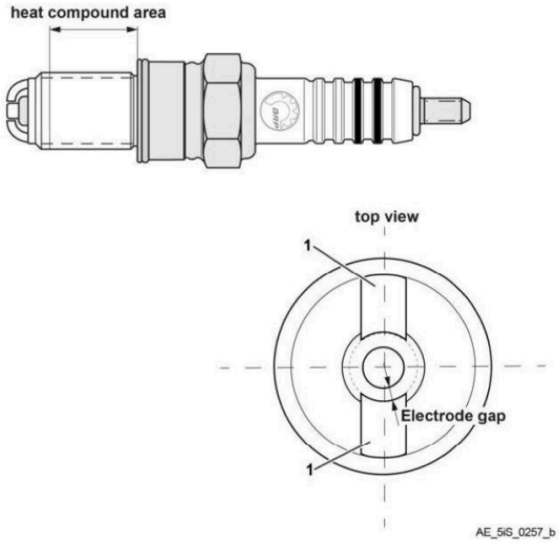


Figure 7.35: Spark plugs

1 Ground electrode

Cleaning

⚠ WARNING
Eyes and skin irritation! Rinse off with water in the case of contact with eyes or skin. May be harmful if swallowed.

Step	Procedure
1	Before every installation, the spark plug thread and the spark plug seat at the cylinder head should be cleaned (e.g. to remove residue of silicone heat compound).

5

CHAPTER 5

Adding a Custom Task

Track your own maintenance items alongside the factory schedule.

1

Tap “＋ Custom”

On the **MNT** tab, tap ＋ **Custom** next to the search field.

2

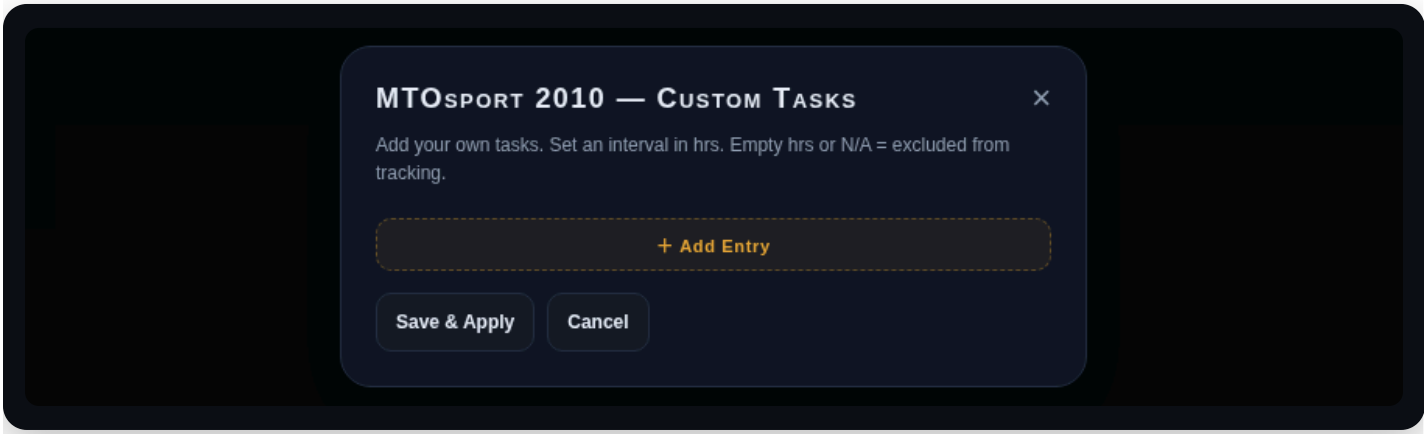
Describe your task

In the “Custom Tasks” dialog, type the **task name** (for example “Check door seals”), set the **interval in hours**, and set the **start hours** — hours before the first due point. Tap **+ Add Entry** to add more rows in one go.

3

Save and apply

Tap **Save & Apply**. Your custom task joins the maintenance list with the same tracking, warnings, and logging as every factory task.



CHAPTER 6

6 History Tour

Your complete maintenance record, searchable and exportable.

1 Open the History tab

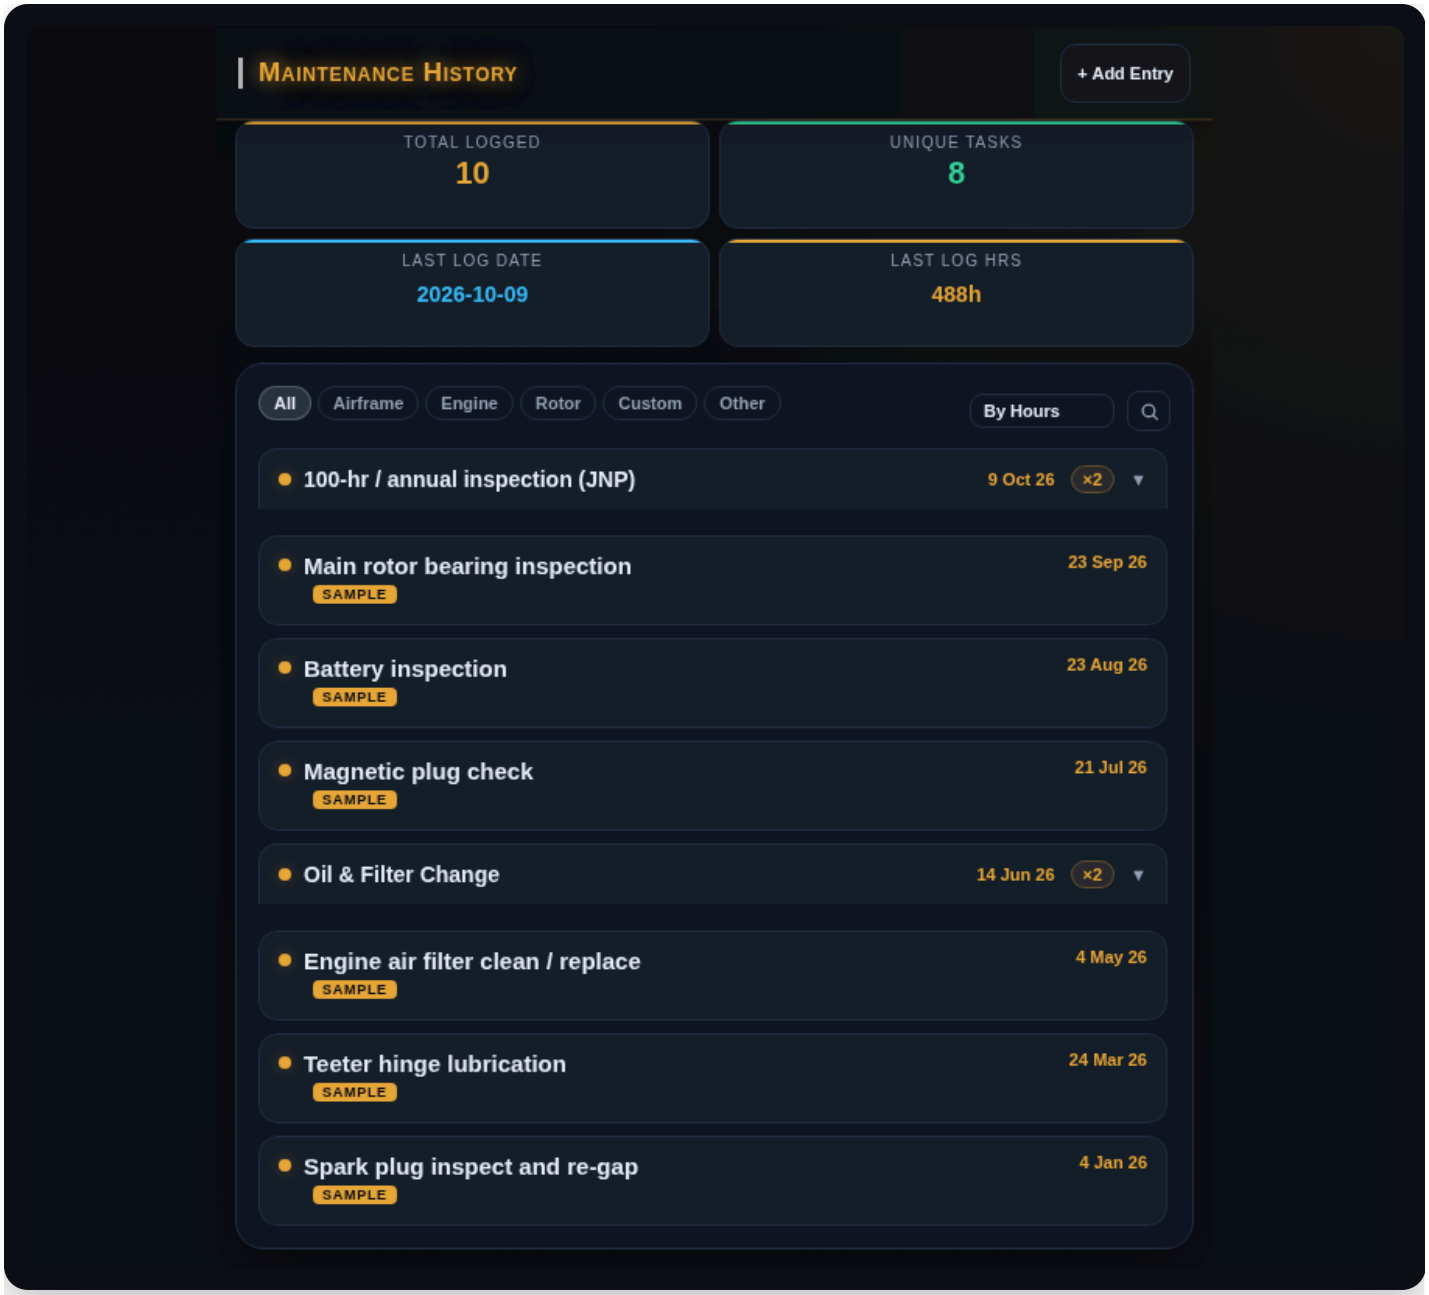
Tap **HISTORY**. The stat cards at the top summarize your record: **Total Logged** entries, **Unique Tasks** performed, **Last Log Date**, and **Last Log Hrs**.

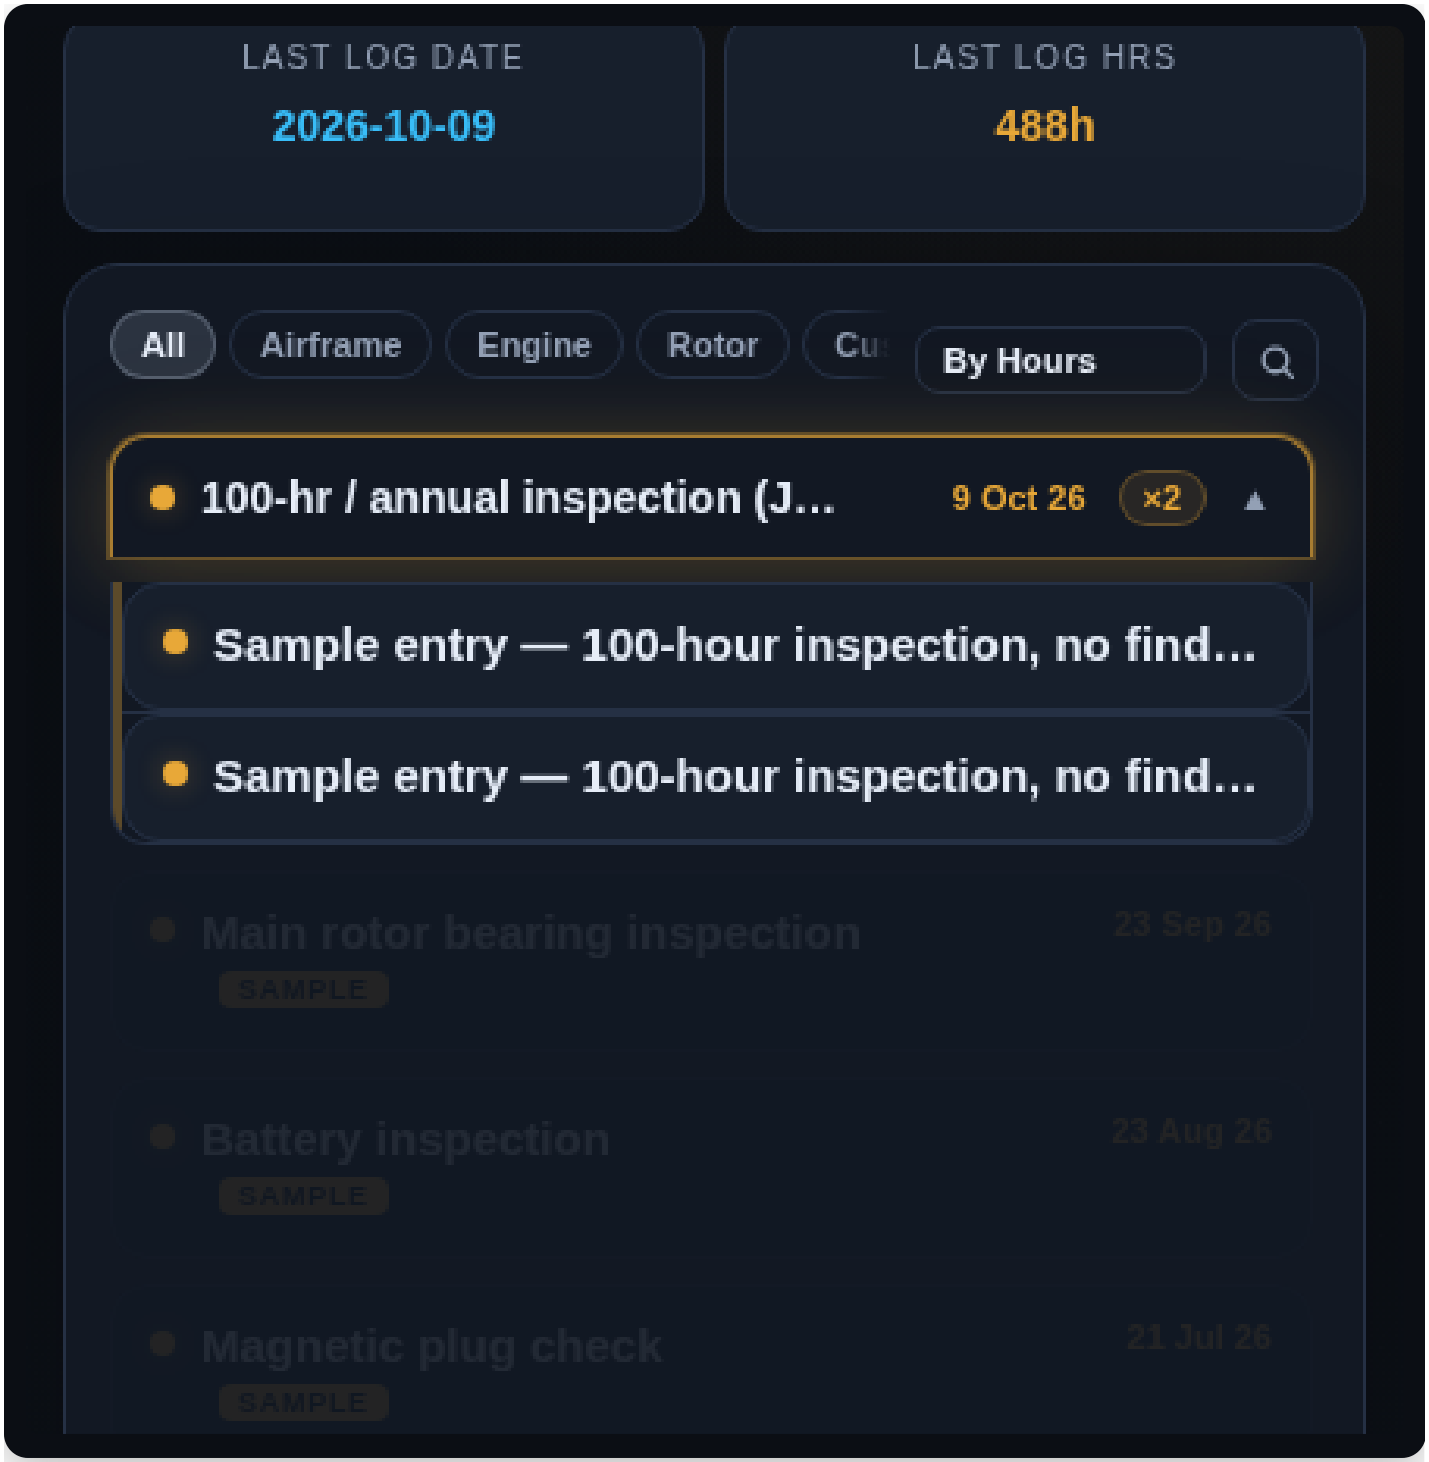
2 Filter and search

Narrow the list with the category chips (**All**, **Airframe**, **Engine**, **Rotor**), change the order with the **By Hours** selector, or type in the **Search…** field. Tapping an entry expands it to show the full detail.

3 Add a manual entry

Missed logging something at the time? Tap **+ Add Entry**. In the **Add Manual Entry** dialog, pick the **task**, set the **date/time** and **tach hours**, add notes, and tap **Add entry** — back-dated records slot into history correctly.


Maintenance History
+ Add Entry
TOTAL LOGGED
10
UNIQUE TASKS
8
LAST LOG DATE
2026-10-09
LAST LOG HRS
488h
All
Airframe
Engine
Rotor
Custom
Other
By Hours
100-hr / annual inspection (JNP)
9 Oct 26
×2
Main rotor bearing inspection
SAMPLE
23 Sep 26
Battery inspection
SAMPLE
23 Aug 26
Magnetic plug check
SAMPLE
21 Jul 26
Oil & Filter Change
14 Jun 26
×2
Engine air filter clean / replace
SAMPLE
4 May 26
Teeter hinge lubrication
SAMPLE
24 Mar 26
Spark plug inspect and re-gap
SAMPLE
4 Jan 26


LAST LOG DATE
2026-10-09
LAST LOG HRS
488h
All
Airframe
Engine
Rotor
Cu
By Hours
100-hr / annual inspection (J…
9 Oct 26
×2
Sample entry — 100-hour inspection, no find…
Sample entry — 100-hour inspection, no find…
Main rotor bearing inspection
23 Sep 26
SAMPLE
Battery inspection
23 Aug 26
SAMPLE
Magnetic plug check
21 Jul 26
SAMPLE

7

CHAPTER 7

Editing & Deleting a History Entry

Fix mistakes in seconds — including swipe-to-delete.

1

Edit an entry

On the **HISTORY** tab, tap an entry to expand it, then tap **Edit**. The **Edit History Entry** dialog lets you change the task, date/time, tach hours, and notes. Tap **Save changes** when done.

2

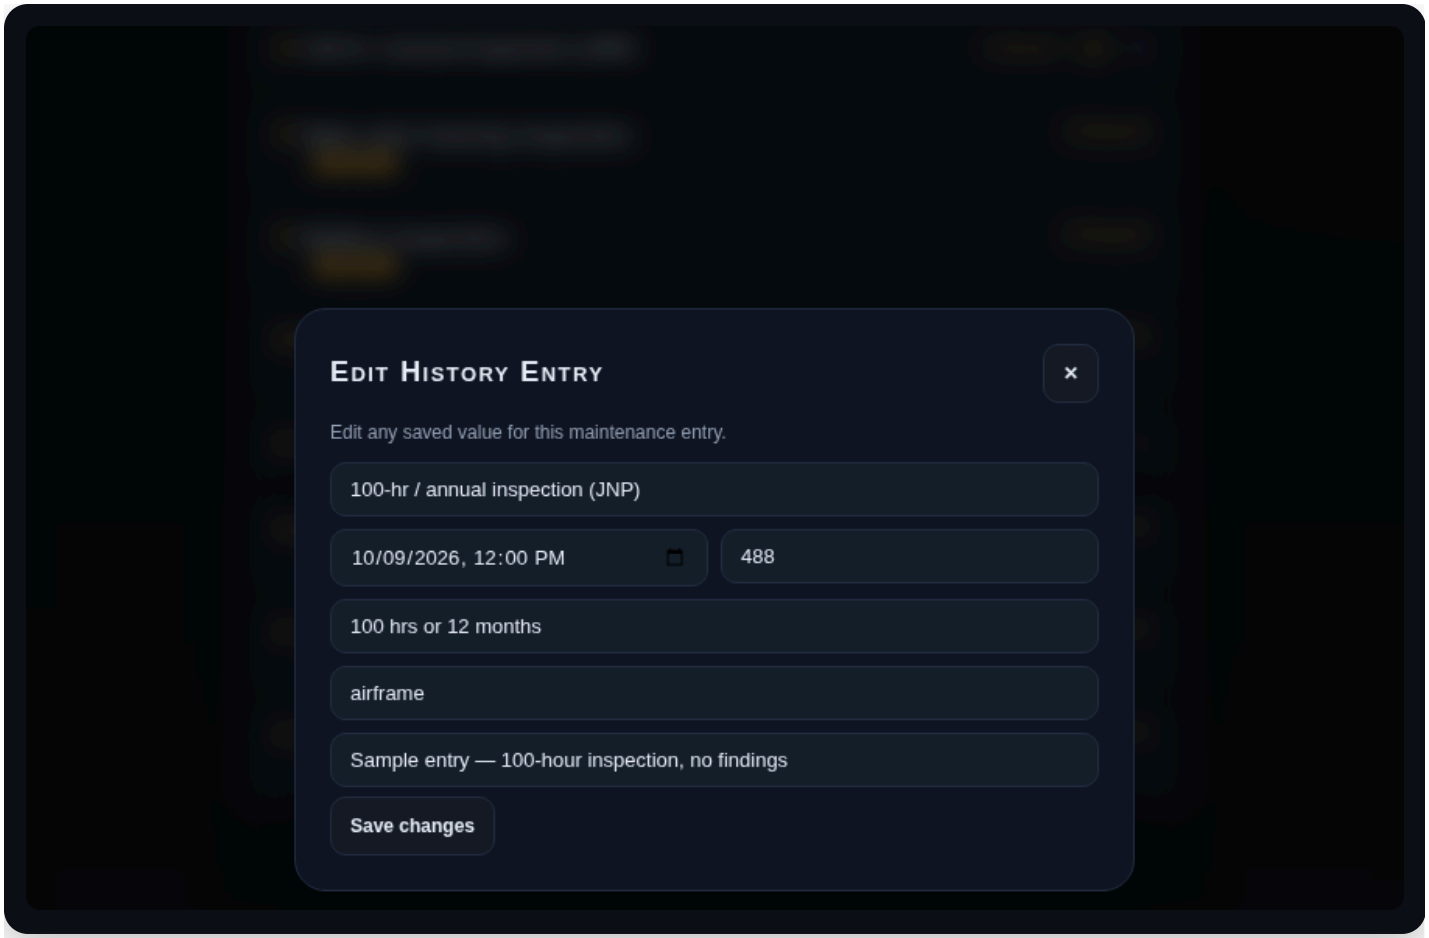
Delete an entry

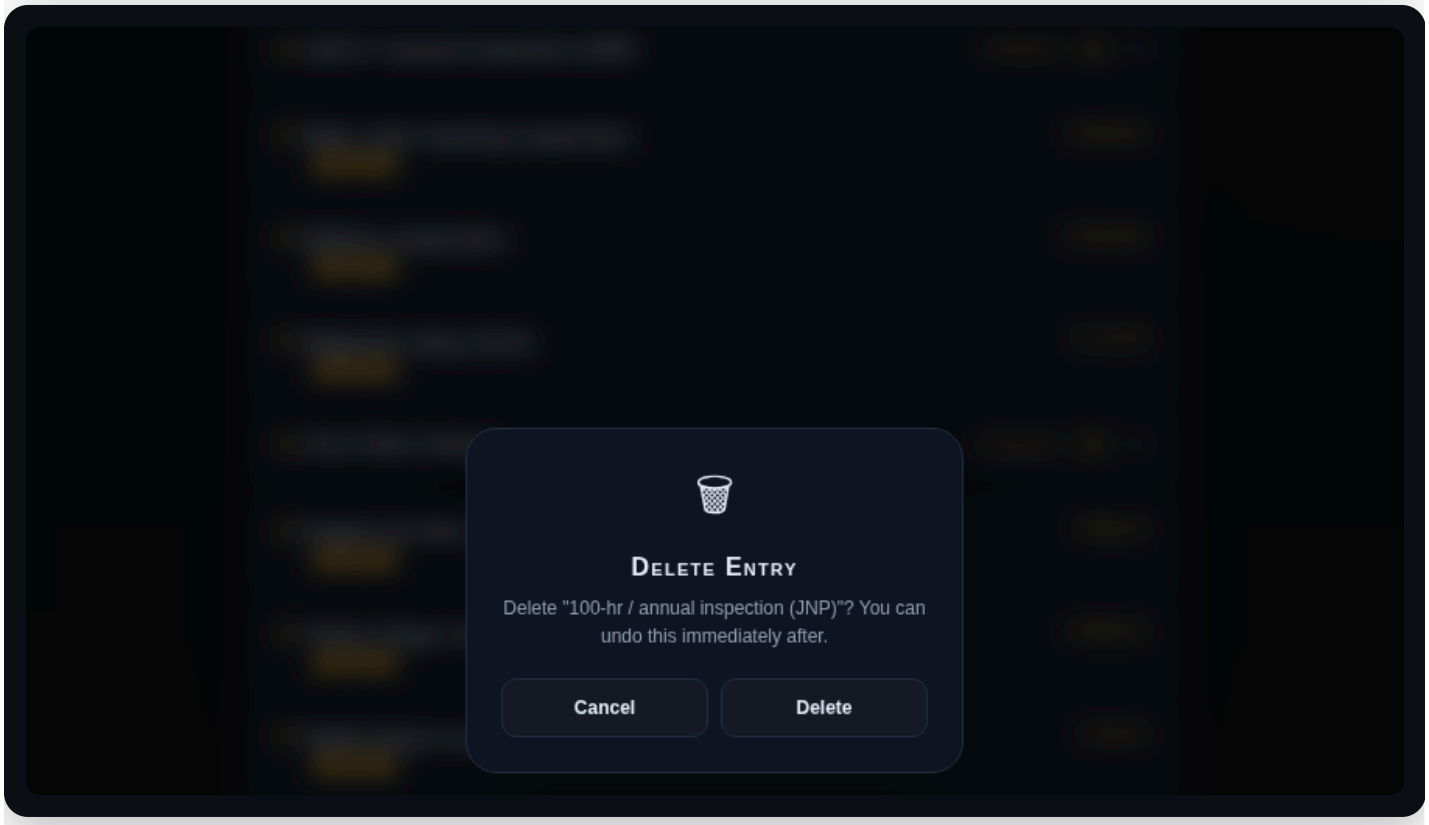
In the expanded entry, tap **Delete** and confirm. The entry is removed — and a brief **UNDO** toast appears at the bottom, so an accidental delete is one tap away from being reversed.

3

Swipe to delete

For speed, **swipe any history row to the left** to reveal the delete action directly, without opening the entry first.


Edit History Entry
×
Edit any saved value for this maintenance entry.
100-hr / annual inspection (JNP)
10/09/2026, 12:00 PM
488
100 hrs or 12 months
airframe
Sample entry — 100-hour inspection, no findings
Save changes


Delete Entry
Delete "100-hr / annual inspection (JNP)"? You can undo this immediately after.
Cancel
Delete

CHAPTER 8

8 Preflight Weather Check

Live winds, density altitude, forecasts, and your checklist — before you fly.

1

Open the weather tab

Tap **WEATHER** for the Pre-Flight view. The **Wind Compass** card shows live conditions at your location (for example Waco: 14 mph from the SW, gusts to 20), the **Density Alt** card shows temperature, pressure, and density altitude — the number that decides your takeoff performance — and the **Wind Trend** card shows how the wind has been behaving.

2

Go full-screen on the wind

Tap the **expand icon** on the wind card for the full-screen compass: a big live dial driven by your device's heading, the **reset heading** button, the city row (tap the **edit icon** to search any city or ZIP), your GPS coordinates, the **5-DAY** forecast button, the METAR station selector (for example KACT), and **TRACK FLIGHT** to start recording — tap it again to cancel the countdown.

3

Check density altitude

Tap the **Density Alt** card for the full breakdown: the big density-altitude number, the performance zone bar (NORMAL / CAUTION / DANGER), and every input that feeds it — temperature, pressure, pressure altitude, and the temperature correction.

4

Check the wind trend

Tap the **Wind Trend** card for the session graph: the wind-speed sparkline, the directional trail, and your session stats (average, max gust, dominant direction).

5

Check the 10-day forecast

Back on the main weather screen, scroll to the **10-Day Wind Forecast**: each day shows wind speed, gusts, direction, and rain chance, so you can plan the week's flying at a glance.

6

Run the preflight checklist

Work the **Preflight Checklist**: Fuel checked, Oil level, Rotor clear, Controls free, Tires & brakes, Walk-around complete. Tap each item as you do it — the progress counter (“0/6 COMPLETED”) tracks you. **MARK ALL** checks everything at once and shows PREFLIGHT COMPLETE; **RESET** clears it for the next flight.


✈ You are viewing sample data — explore, then clear it to start fresh.
Clear sample data
PRE-FLIGHT
WIND COMPASS
N
E
W
S
WIND
14
mph
SW
GUSTS
20
mph
Waco
DENSITY ALT
1,458 ft
NORMAL
84°
°F temp
30.10
inHg
WIND TREND
14 mph
10-DAY WIND FORECAST
Waco
NOW
14 mph
G21
SW
Fri
11 mph
G17
SSW
20%
Sat
9 mph
G13
S
Sun
16 mph
G24
WSW
30%
Mon
12 mph
G18
SW
15%
PREFLIGHT CHECKLIST
RESET
MARK ALL
FUEL CHECKED
Fuel quantity / contamination / shutoff
OIL LEVEL
Engine oil checked before flight
ROTOR CLEAR
Blades, teeter area, visible freedom / no issues
CONTROLS FREE
DASH
MNT
5
HISTORY
WEATHER
AIRCRAFT
LOGBOOK
SETUP


✈ You are viewing sample data — explore, then clear it to start fresh.
Clear sample data
Waco
31.5493, -97.1467
3
6
N
E
33
12
NW
NE
SE
30
15
SW
W
S
24
21
5-DAY
TRACK FLIGHT
Wind
Gusts
14
SW
20
mph
mph
Updated 5:00:43 PM
KACT 7mi
12
mph
KACT
5:00 PM
19
mph
Current Conditions


✈ You are viewing sample data — explore, then clear it to start fresh.
Clear sample data
PRE-FLIGHT
WIND COMPASS
N
E
W
S
WIND
14
mph
SW
GUSTS
20
mph
Waco
DENSITY ALT
1,450
84°
30.10
NORMAL
WIND TREND
14 mphSTEADY
10-DAY WIND FORECAST
Waco
Density Altitude
Waco
NORMAL PERF
1,473 ft
NORMAL <2,000
MODERATE
>5,000 HIGH
CALCULATION BREAKDOWN
Temperature
Current ambient
84 °F
28.9 °C
Barometric Pressure
Station pressure
30.09 inHg
1019 hPa
Pressure Altitude
ISA correction
-157 ft
Temp Correction
120ft per °C above ISA
+1,629 ft
Density Altitude
Pressure Alt + Temp Correction
1,473 ft


✈ You are viewing sample data — explore, then clear it to start fresh.
Clear sample data
PRE-FLIGHT
10-DAY WIND FORECAST
Waco
NOW
14 mph G21
SW
Fri
11 mph G17
SSW
20%
Sat
9 mph G13
S
Sun
16 mph G24
WSW
30%
Mon
12 mph G18
SW
15%
PREFLIGHT CHECKLIST
RESET
MARK ALL
FUEL CHECKED
Fuel quantity / contamination / shutoff
OIL LEVEL
Engine oil checked before flight
ROTOR CLEAR
Blades, teeter area, visible freedom / no issues
CONTROLS FREE
Stick, rudder, trim / no binding
TIRES & BRAKES
Pressure / attachment / obvious leaks
WALK-AROUND COMPLETE
General condition, prop, mast, frame
6 / 6 COMPLETED
✓ PREFLIGHT COMPLETE
DASH
MNT
5
HISTORY
WEATHER
AIRCRAFT
LOGBOOK
SETUP

CHAPTER 9

9 Aircraft Setup

Tell the app your aircraft — the maintenance schedule adapts to it.

1 Configure your aircraft

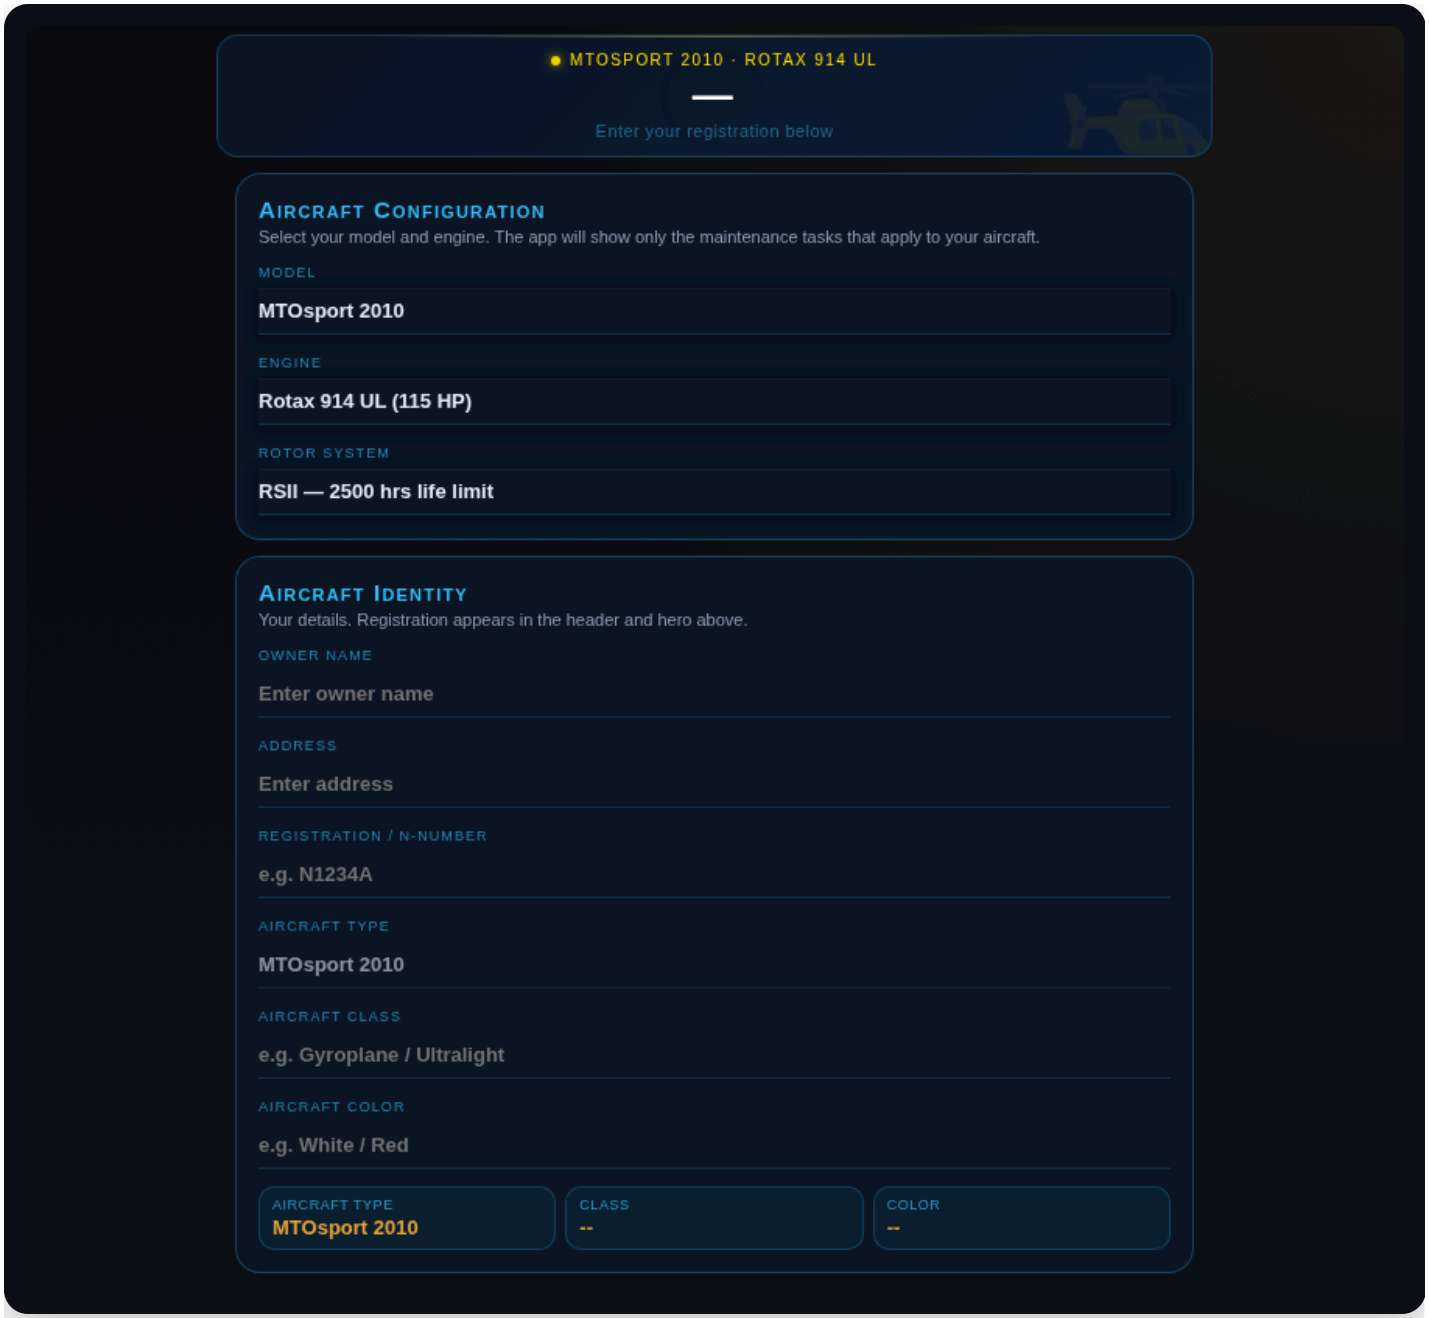
Tap **AIRCRAFT**. Under **Aircraft Configuration**, set your **model** (for example MTOsport 2010), **engine** (for example Rotax 914 UL, 115 HP), and **rotor system**. The maintenance list shows only the tasks that apply to your configuration.

2 Enter the aircraft identity

Under **Aircraft Identity**, fill in the **owner name** and address, the **registration** (for example N12345), and the **aircraft type and class**.

3 Save

Tap **Save**. Your setup is stored on the device and used across maintenance, logbook, and exports.


MTOSPORT 2010 · ROTAX 914 UL
Enter your registration below
AIRCRAFT CONFIGURATION
Select your model and engine. The app will show only the maintenance tasks that apply to your aircraft.
MODEL
MTOsport 2010
ENGINE
Rotax 914 UL (115 HP)
ROTOR SYSTEM
RSII — 2500 hrs life limit
AIRCRAFT IDENTITY
Your details. Registration appears in the header and hero above.
OWNER NAME
Enter owner name
ADDRESS
Enter address
REGISTRATION / N-NUMBER
e.g. N1234A
AIRCRAFT TYPE
MTOsport 2010
AIRCRAFT CLASS
e.g. Gyroplane / Ultralight
AIRCRAFT COLOR
e.g. White / Red
AIRCRAFT TYPE
MTOsport 2010
CLASS
--
COLOR
--

10

CHAPTER 10

Adding a Flight

Log each flight — the logbook totals update themselves.

1

Tap “＋ Add Flight”

On the **LOGBOOK** tab, tap ＋ **Add Flight**.

2

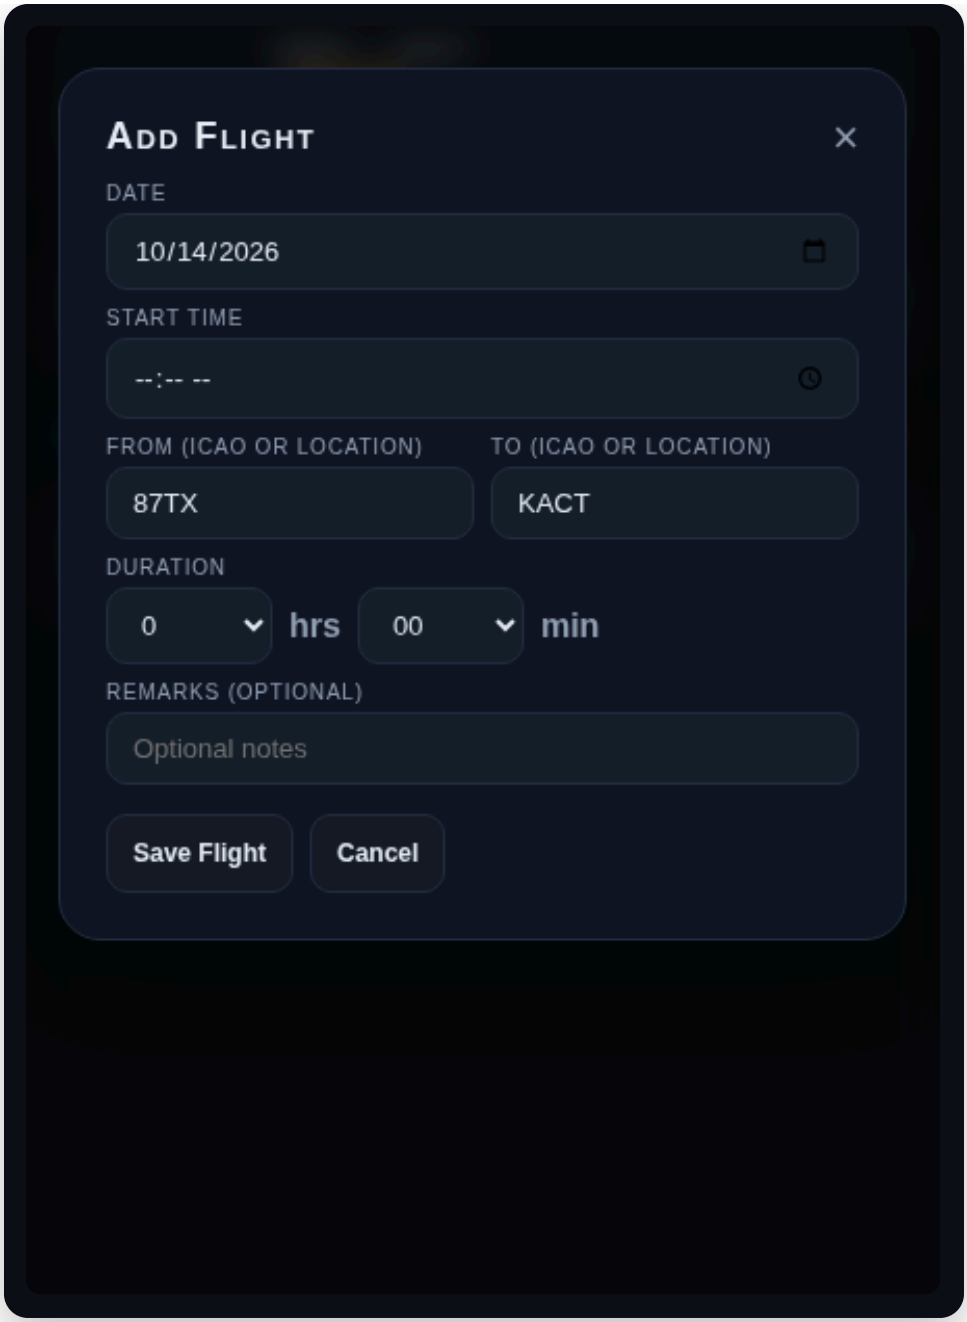
Enter the flight details

In the **Add Flight** dialog: the **date** (defaults to today), the **start time**, the **From** and **To** locations (ICAO codes or plain names — for example 87TX to KACT), the **duration** in hours and minutes, and any **remarks**.

3

Save and confirm

Tap **Save Flight** and confirm **Add Flight Hours**. The flight joins your logbook and the totals — flights, hours, this year — update immediately.


Add Flight
DATE
10/14/2026
START TIME
--:-- --
FROM (ICAO OR LOCATION)
87TX
TO (ICAO OR LOCATION)
KACT
DURATION
0
hrs
00
min
REMARKS (OPTIONAL)
Optional notes
Save Flight
Cancel

11

CHAPTER 11

Editing & Deleting a Flight

Correct logbook entries — with swipe-to-delete, like History.

1

Edit a flight

On the **LOGBOOK** tab, tap a flight to expand it, then tap the pencil **Edit**. The **Edit Flight** dialog lets you change the date, start time, route, duration, and remarks. Tap **Save Flight**.

2

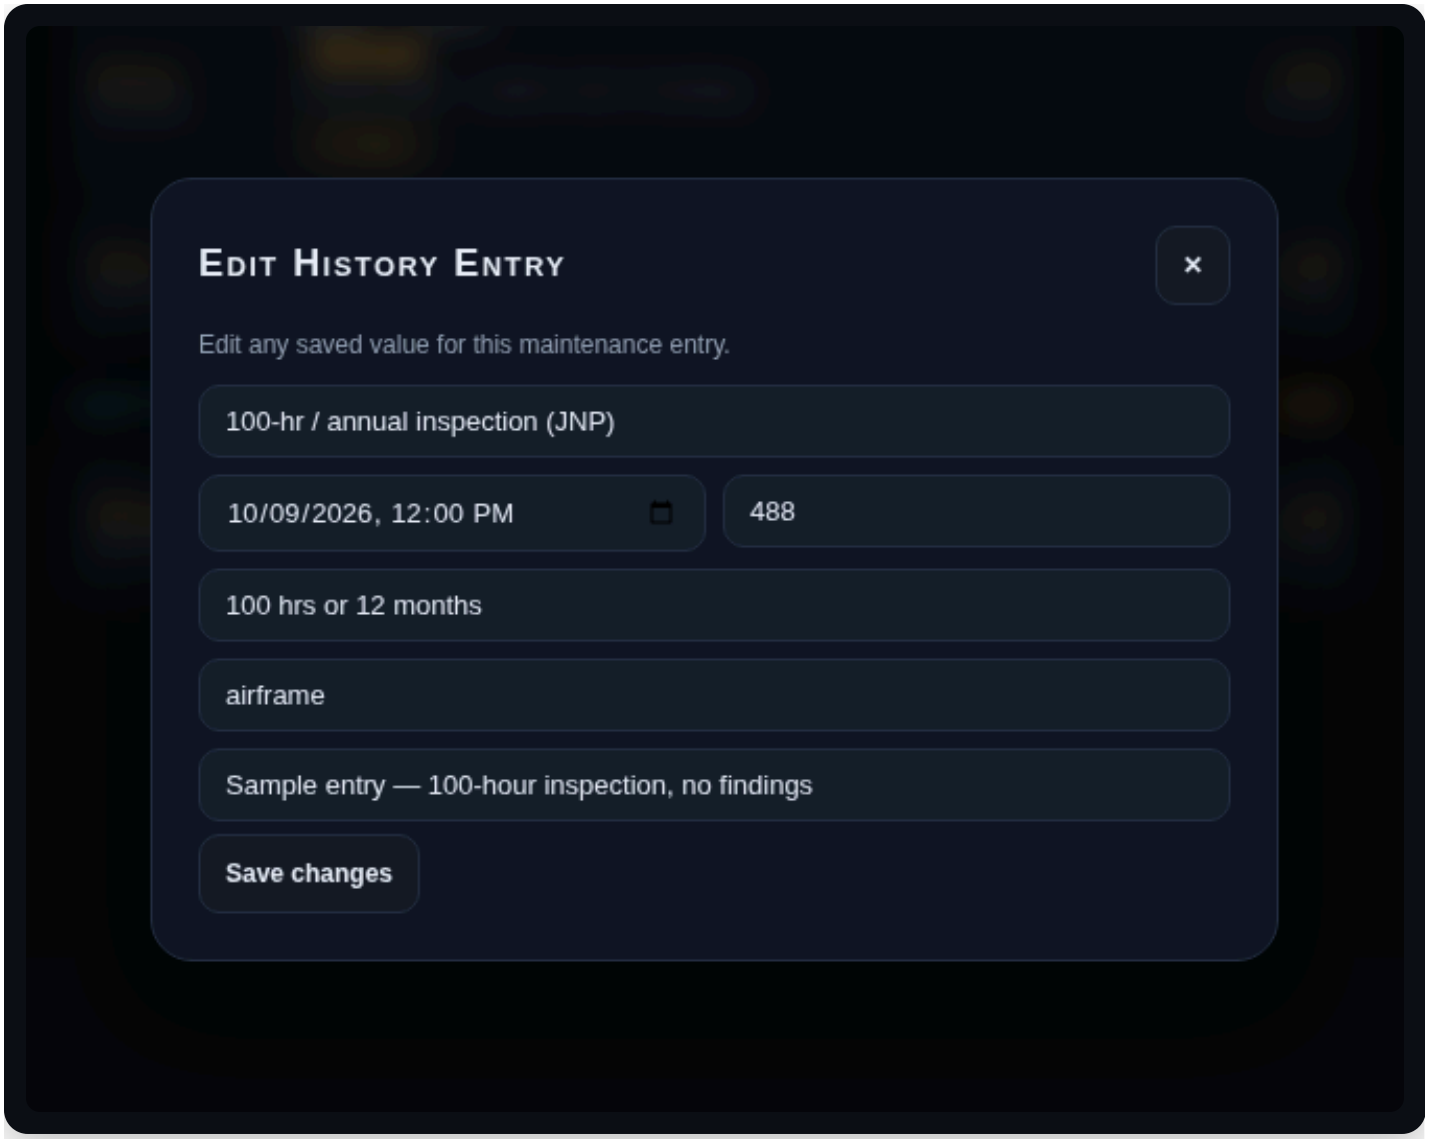
Delete a flight

In the expanded flight, tap the trash **Delete** and confirm. The flight is removed and a brief **UNDO** toast appears, so a mistaken tap is instantly reversible.

3

Swipe to delete

Or **swipe any logbook row to the left** to reveal the delete action without opening the entry.


Edit History Entry
×
Edit any saved value for this maintenance entry.
100-hr / annual inspection (JNP)
10/09/2026, 12:00 PM
488
100 hrs or 12 months
airframe
Sample entry — 100-hour inspection, no findings
Save changes

CHAPTER 12

12 Exports & Imports

Get your data out — CSV, PDF, and KML for Google Earth.

1

Export the logbook

On the **LOGBOOK** tab, use the export buttons: **CSV** for a spreadsheet of your flights, **PDF** for a printable logbook report, and **Export Paths** for your recorded flight tracks.

2

Import data

Import Logbook brings flights in from a file; **Import Paths** brings in previously exported flight tracks.

3

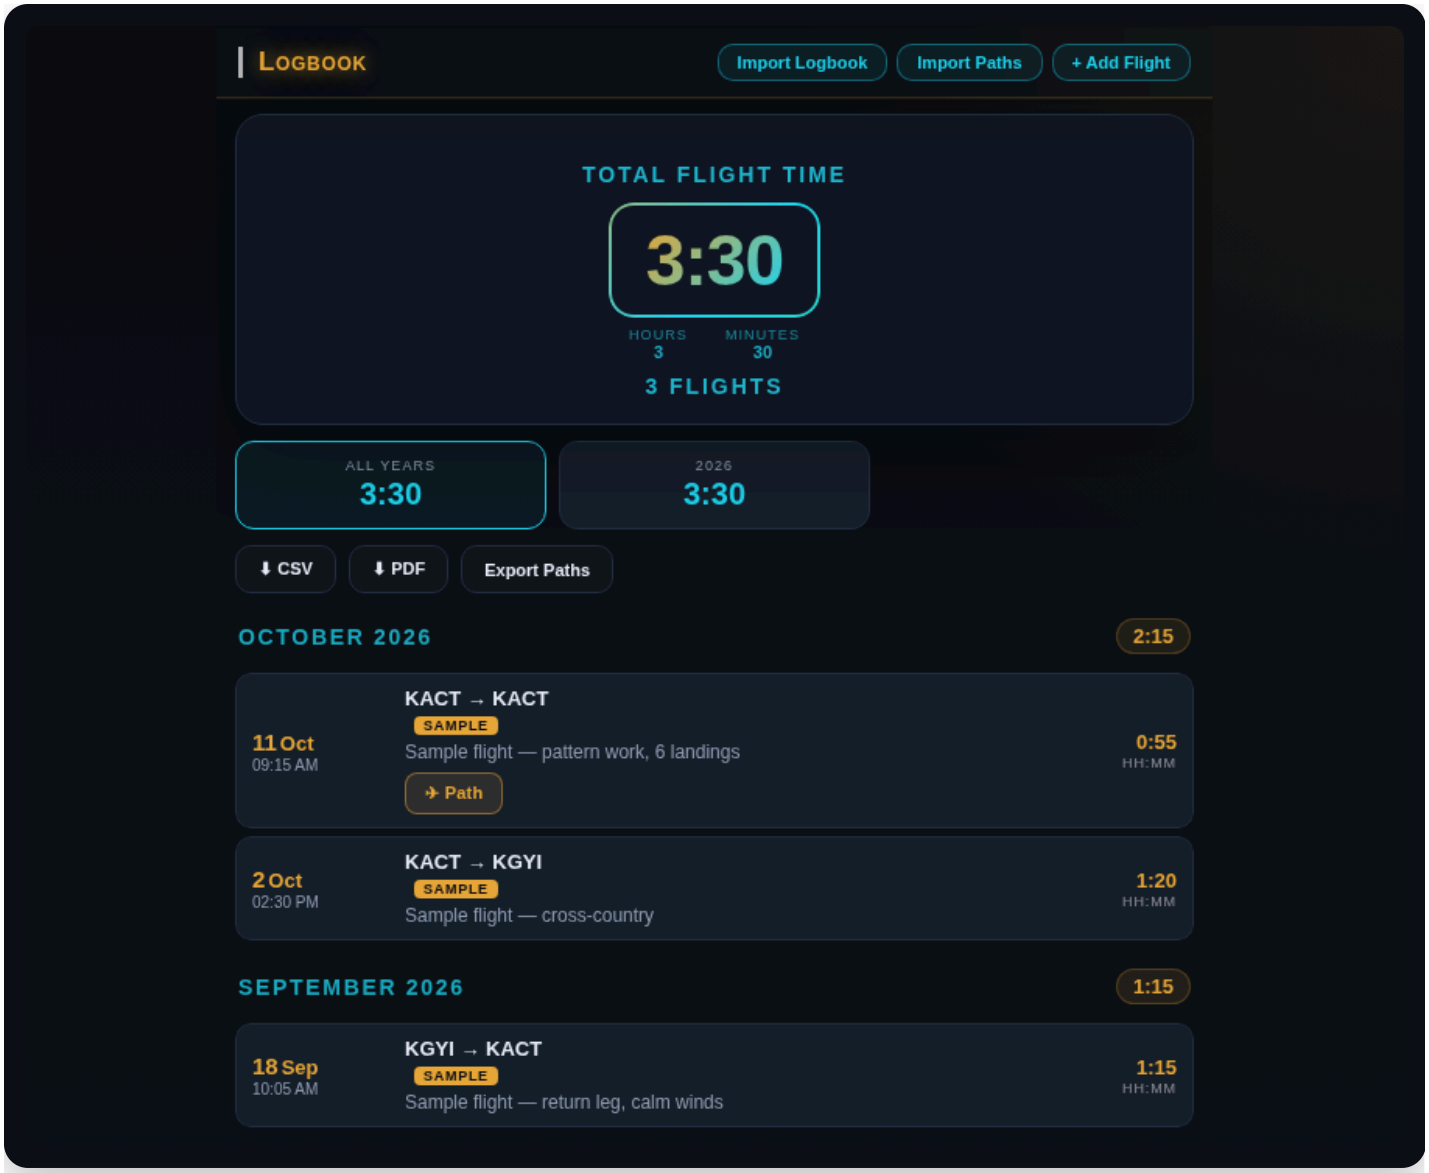
Export a flight path to KML

Tap ✈ **Path** on any tracked flight to open its Path view: the route on the map with **distance**, **avg and max speed**, **duration**, and **GPS points**. Tap **Export KML** to save the track in KML format.

4

Open it in Google Earth

Open the exported KML in Google Earth: your flight is draped over real terrain. The example on the next page is a real GyroCare Pro track — a flight around Lake Whitney, Texas.


Logbook
Import Logbook
Import Paths
+ Add Flight
TOTAL FLIGHT TIME
3:30
HOURS
3
MINUTES
30
3 FLIGHTS
ALL YEARS
3:30
2026
3:30
⬇ CSV
⬇ PDF
Export Paths
OCTOBER 2026
2:15
11 Oct
09:15 AM
KACT → KACT
SAMPLE
Sample flight — pattern work, 6 landings
✈ Path
0:55
HH:MM
2 Oct
02:30 PM
KACT → KGYI
SAMPLE
Sample flight — cross-country
1:20
HH:MM
SEPTEMBER 2026
1:15
18 Sep
10:05 AM
KGYI → KACT
SAMPLE
Sample flight — return leg, calm winds
1:15
HH:MM

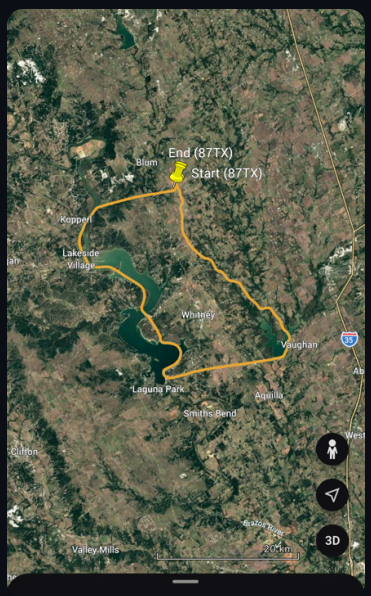
IN THE APP



Tap the path to inspect a point

59.6 mi	72 mph	102 mph
DISTANCE	AVG SPEED	MAX SPEED

IN GOOGLE EARTH — THE SAME FLIGHT



Your flight, in the app and in Google Earth

The same real flight — 87TX to 87TX, looping Lake Whitney, Texas — as seen in GyroCare Pro's Path view and after exporting its KML to Google Earth. Export any tracked flight from the Path view and open it the same way.

CHAPTER 13

13 Service Bulletins

Manufacturer bulletins surface inside the tasks they affect — plus manual update checks.

1 Spot the SB badge

On the **MNT** tab, any task affected by a service bulletin carries a gold ⚠ **SB×2** badge (the number counts its bulletins) — for example the “Fuel filter replacement” task.

2 Open the bulletins

Tap the task to expand it, then tap the bulletin row (for example “Fuel Tank Holding Belt Loosening”). Each bulletin shows its identifier and severity — **MANDATORY**, recommended, or informational.

3 Read the full bulletin detail

The detail view gives you everything: **Background**, **Risk of Neglect**, **Applicability**, the numbered **Procedure**, the **Labour Estimate**, and the **Compliance** requirement (for example “Mandatory. Before next flight / at next preflight check.”). Tap **View Full PDF on AutoGyro.com** to open the official bulletin document, or **Mark as completed** once the work is done and logged.

4 Check for new bulletins manually

The app checks AutoGyro's site for new bulletins automatically every 24 hours. To check right now, go to the **SETUP** tab → **Service Bulletin Updates** and tap **Check Now**.

‹ List

Fuel filter replacement (MLL)

CI-01-2010 MANDATORY

Effective: 2010

Fuel Tank Holding Belt Loosening — MTOsport and MT-03 all years

BACKGROUND

During maintenance it has occurred that the edges of some fuel tanks show deformation, especially on top of the fuel tank where it connects to the airframe. The reason for deformation is over-tight holding belts.

> **RISK OF NEGLECT**
> Security relevant component.

APPLICABILITY

MTOsport all years. MT-03 all years.

> ⚠ Proceed with this work only in a non-smoking area and not close to sparks or open flames. Switch off ignition and secure gyroplane against unintentional operation. Disconnect negative terminal of aircraft battery.

PROCEDURE

1. Lift rear seat and locate in position.
2. Loosen the buckle and adjust the correct tension.
3. Fuel tank must be fixed tightly. It should be possible to move it by hand within the locking bars, but it must never move by itself due to gyroplane vibration.
4. Conduct a test run and check fuel system for leakage.
5. Record in aircraft log.

LABOUR ESTIMATE

Approximately 0.1 h.

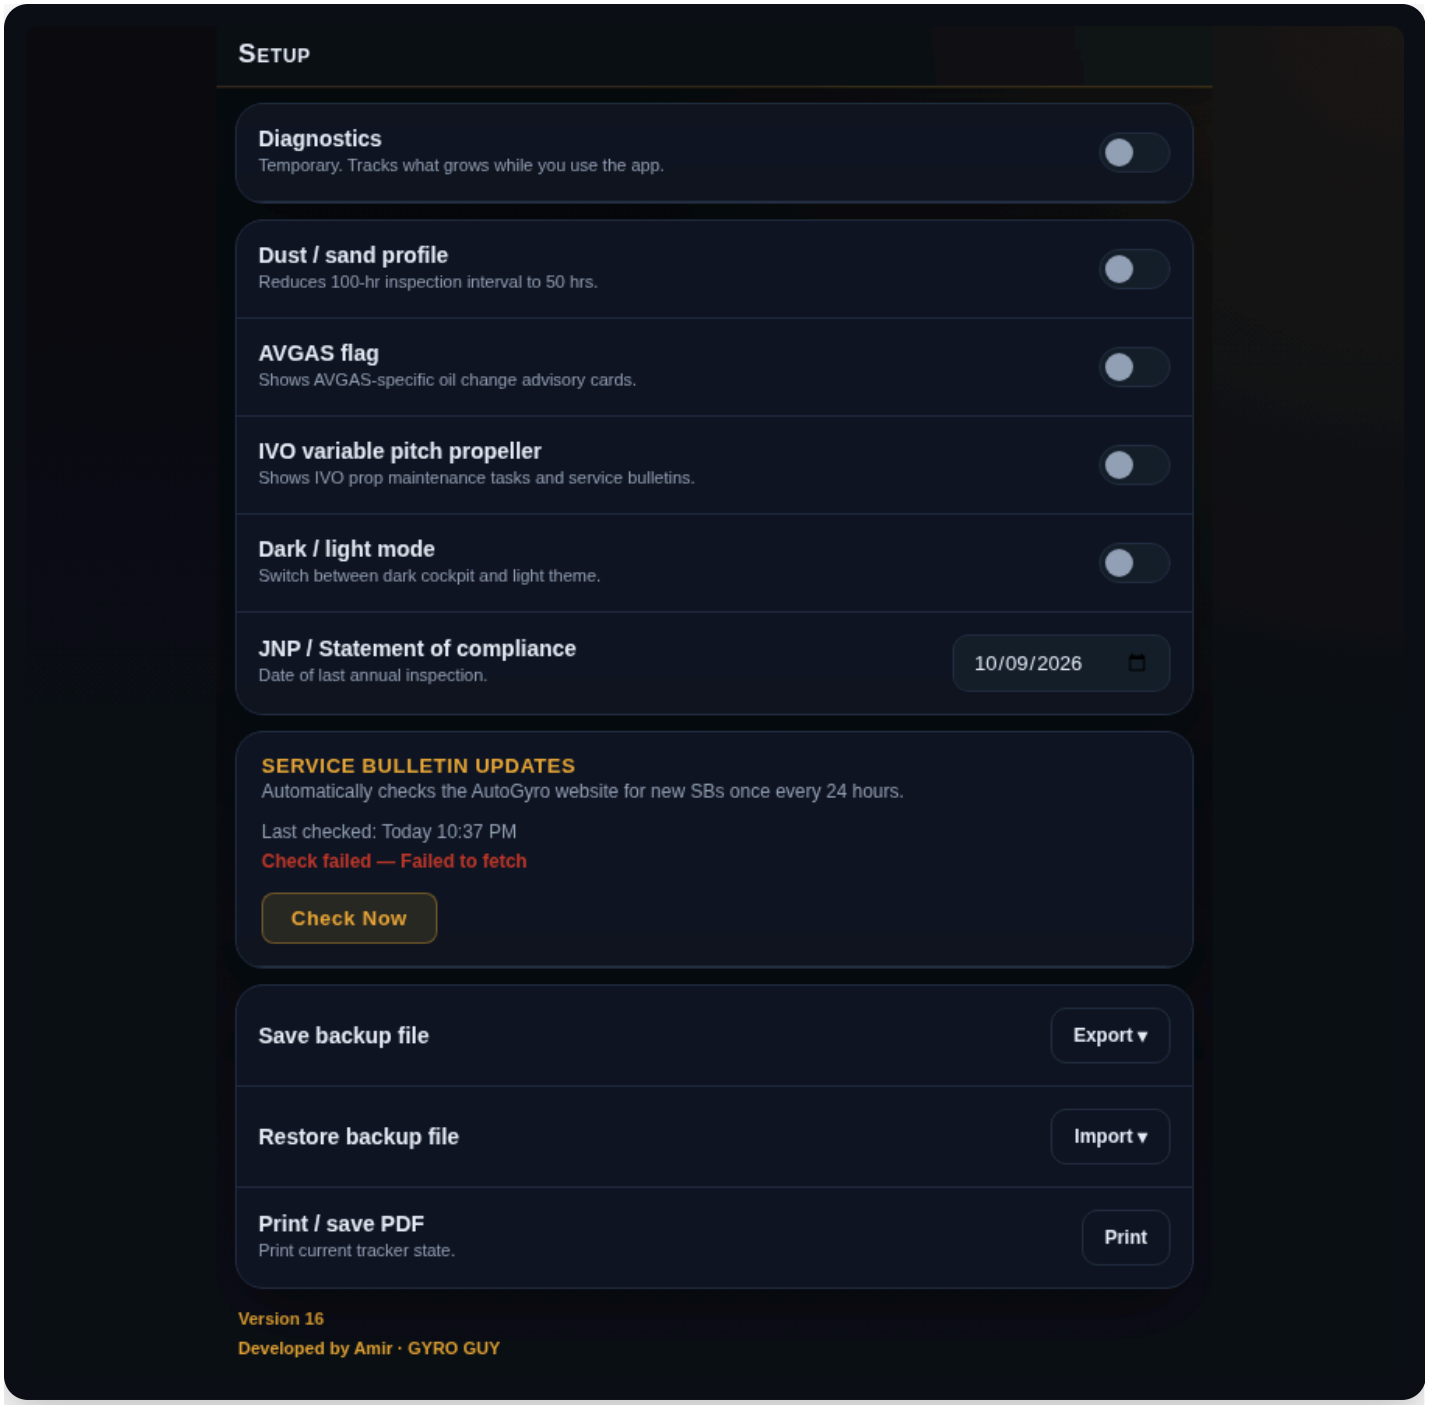
COMPLIANCE

Mandatory. Before next flight / at next preflight check.

Contact: airworthiness@auto-gyro.com

View Full PDF on AutoGyro.com ↗

☐ **Mark as completed**
Tap to mark this SB as actioned on your aircraft


Setup
Diagnostics
Temporary. Tracks what grows while you use the app.
Dust / sand profile
Reduces 100-hr inspection interval to 50 hrs.
AVGAS flag
Shows AVGAS-specific oil change advisory cards.
IVO variable pitch propeller
Shows IVO prop maintenance tasks and service bulletins.
Dark / light mode
Switch between dark cockpit and light theme.
JNP / Statement of compliance
Date of last annual inspection.
10/09/2026
SERVICE BULLETIN UPDATES
Automatically checks the AutoGyro website for new SBs once every 24 hours.
Last checked: Today 10:37 PM
Check failed — Failed to fetch
Check Now
Save backup file
Export ▾
Restore backup file
Import ▾
Print / save PDF
Print current tracker state.
Print
Version 16
Developed by Amir · GYRO GUY

GyroCare Pro

Built by a pilot, for pilots.
gyrocarepro.app