




	DIRECT ON-LINE MOTOR STARTER GENERIC - NOTE 4, 5
	DIRECT ON-LINE MOTOR STARTER REVERSING - NOTE 4, 5
	ELECTRONIC OVERLOAD UNIT NOTE 4, 5
	THERMAL OVERLOAD UNIT NOTE 8
	VARIABLE SPEED DRIVE NOTE 4, 5
	EARTH LEAKAGE RELAY NOTE 4, 5
	FIELD-MOUNTED DECONTACTOR
	JUNCTION BOX
	MOTOR THERMISTOR (ONLY REQ. FOR MOTORS >37kW - 250kW)
	MOTOR RTD (ONLY REQ. FOR MOTORS >250kW)
	MOTOR HEATERS (ONLY REQ. FOR MOTORS >90kW)
	TRANSFORMER PROTECTIVE DEVICES (REFER ANSI STANDARDS FOR DESCRIPTIONS)
	CIRCUIT BREAKER (NOTE 11)
	ST TRIP SET POINT CB SIZE
	ARC FLASH DETECTION
	EARTH CONTINUITY RELAY
	SWITCHROOM EMERGENCY SHUTDOWN
	63A 3 PHASE SOCKET OUTLET

1. EARTH-NEUTRAL LINK SHALL BE INSTALLED IN INCOMER TIER. SIGNAGE SHALL BE PLACED ON MCC AND ON TRANSFORMER READING "M.E.N. LINK LOCATED IN F72-SW-072 INCOMER TIER". CABLE SHALL BE IDENTIFIED C/W LABEL STATING "M.E.N. LINK - DO NOT REMOVE".
2. SWITCHBOARD SHALL BE EXTENSIBLE AND BE PROVIDED WITH THE FACILITY TO EXTEND THE MAIN BUSBAR AND APPEND ADDITIONAL TIERS AT ONE END WITHOUT MAJOR STRUCTURAL DISASSEMBLY.
3. UPSTREAM TRANSFORMER FEEDER SHALL BE TRIPPED ON ACTIVATION OF SWITCHROOM EMERGENCY PUSHBUTTON, DETECTION OF EARTH FAULT OR ARC FAULT DETECTION.
4. SWITCHBOARD VENDOR SHALL SELECT SWITCHGEAR TO PROVIDE TYPE-2 CO-ORDINATION SUITABLE FOR HIGH EFFICIENCY MOTORS.
5. ALL DRIVE I/O VIA COMMS NETWORK TO DCS. FOR COMMUNICATIONS BLOCK DIAGRAM REFER 2000-F72-BLK-(C-10001).
6. SURGE DIVERTERS SHALL PROVIDE FEEDBACK TO DCS VIA VOLT-FREE CONTACTS. SURGE DIVERTER FUSES SHALL BE SIZED BY VENDOR TO SUIT DUTY.
7. MINATURE CIRCUIT BREAKERS SHALL BE SIZED AND RATED TO SUIT ACB AND INCOMER REQUIREMENTS.
8. THERMAL OVERLOAD UNITS MAY BE SUBSTITUTED WITH ELECTRONIC (MAGNETIC) OVERLOAD UNITS TO SUIT DUTY.
9. TOLs TO BE MOUNTED IN PURPOSE-BUILT ENCLOSURE BENEATH VSD. TOLs MAY BE INCLUDED IN MCC MODULE WITH ENGINEERING APPROVAL.
10. ANY DRIVE RTDs SHALL BE WIRED TO DEDICATED REMOTE I/O CARDS IN THE FIELD. RTD RELAYS MAY BE INCLUDED IN THE MCC MODULE WITH ENGINEERING APPROVAL.
11. CIRCUIT BREAKER TO BE SUBSTITUTED FOR FUSED-SWITCH WHERE REQUIRED BY EQUIPMENT MANUFACTURERS GUIDELINES.
12. EMERGENCY SHUTDOWN (E-SHUT) PUSH BUTTON WIRED TO SHUNT TRIP NOMINATED CIRCUIT BREAKERS.

	DIRECT ON-LINE MOTOR STARTER GENERIC - NOTE 4, 5
	DIRECT ON-LINE MOTOR STARTER REVERSING - NOTE 4, 5
	ELECTRONIC OVERLOAD UNIT NOTE 4, 5
	THERMAL OVERLOAD UNIT NOTE 8
	VARIABLE SPEED DRIVE NOTE 4, 5
	EARTH LEAKAGE RELAY NOTE 4, 5
	FIELD-MOUNTED DECONTACTOR
	JUNCTION BOX
	MOTOR THERMISTOR (ONLY REQ. FOR MOTORS >37kW - 250kW)
	MOTOR RTD (ONLY REQ. FOR MOTORS >250kW)
	MOTOR HEATERS (ONLY REQ. FOR MOTORS >90kW)
	TRANSFORMER PROTECTIVE DEVICES (REFER ANSI STANDARDS FOR DESCRIPTIONS)
	CIRCUIT BREAKER (NOTE 11)
	ST TRIP SET POINT CB SIZE
	ARC FLASH DETECTION
	EARTH CONTINUITY RELAY
	SWITCHROOM EMERGENCY SHUTDOWN
	63A 3 PHASE SOCKET OUTLET

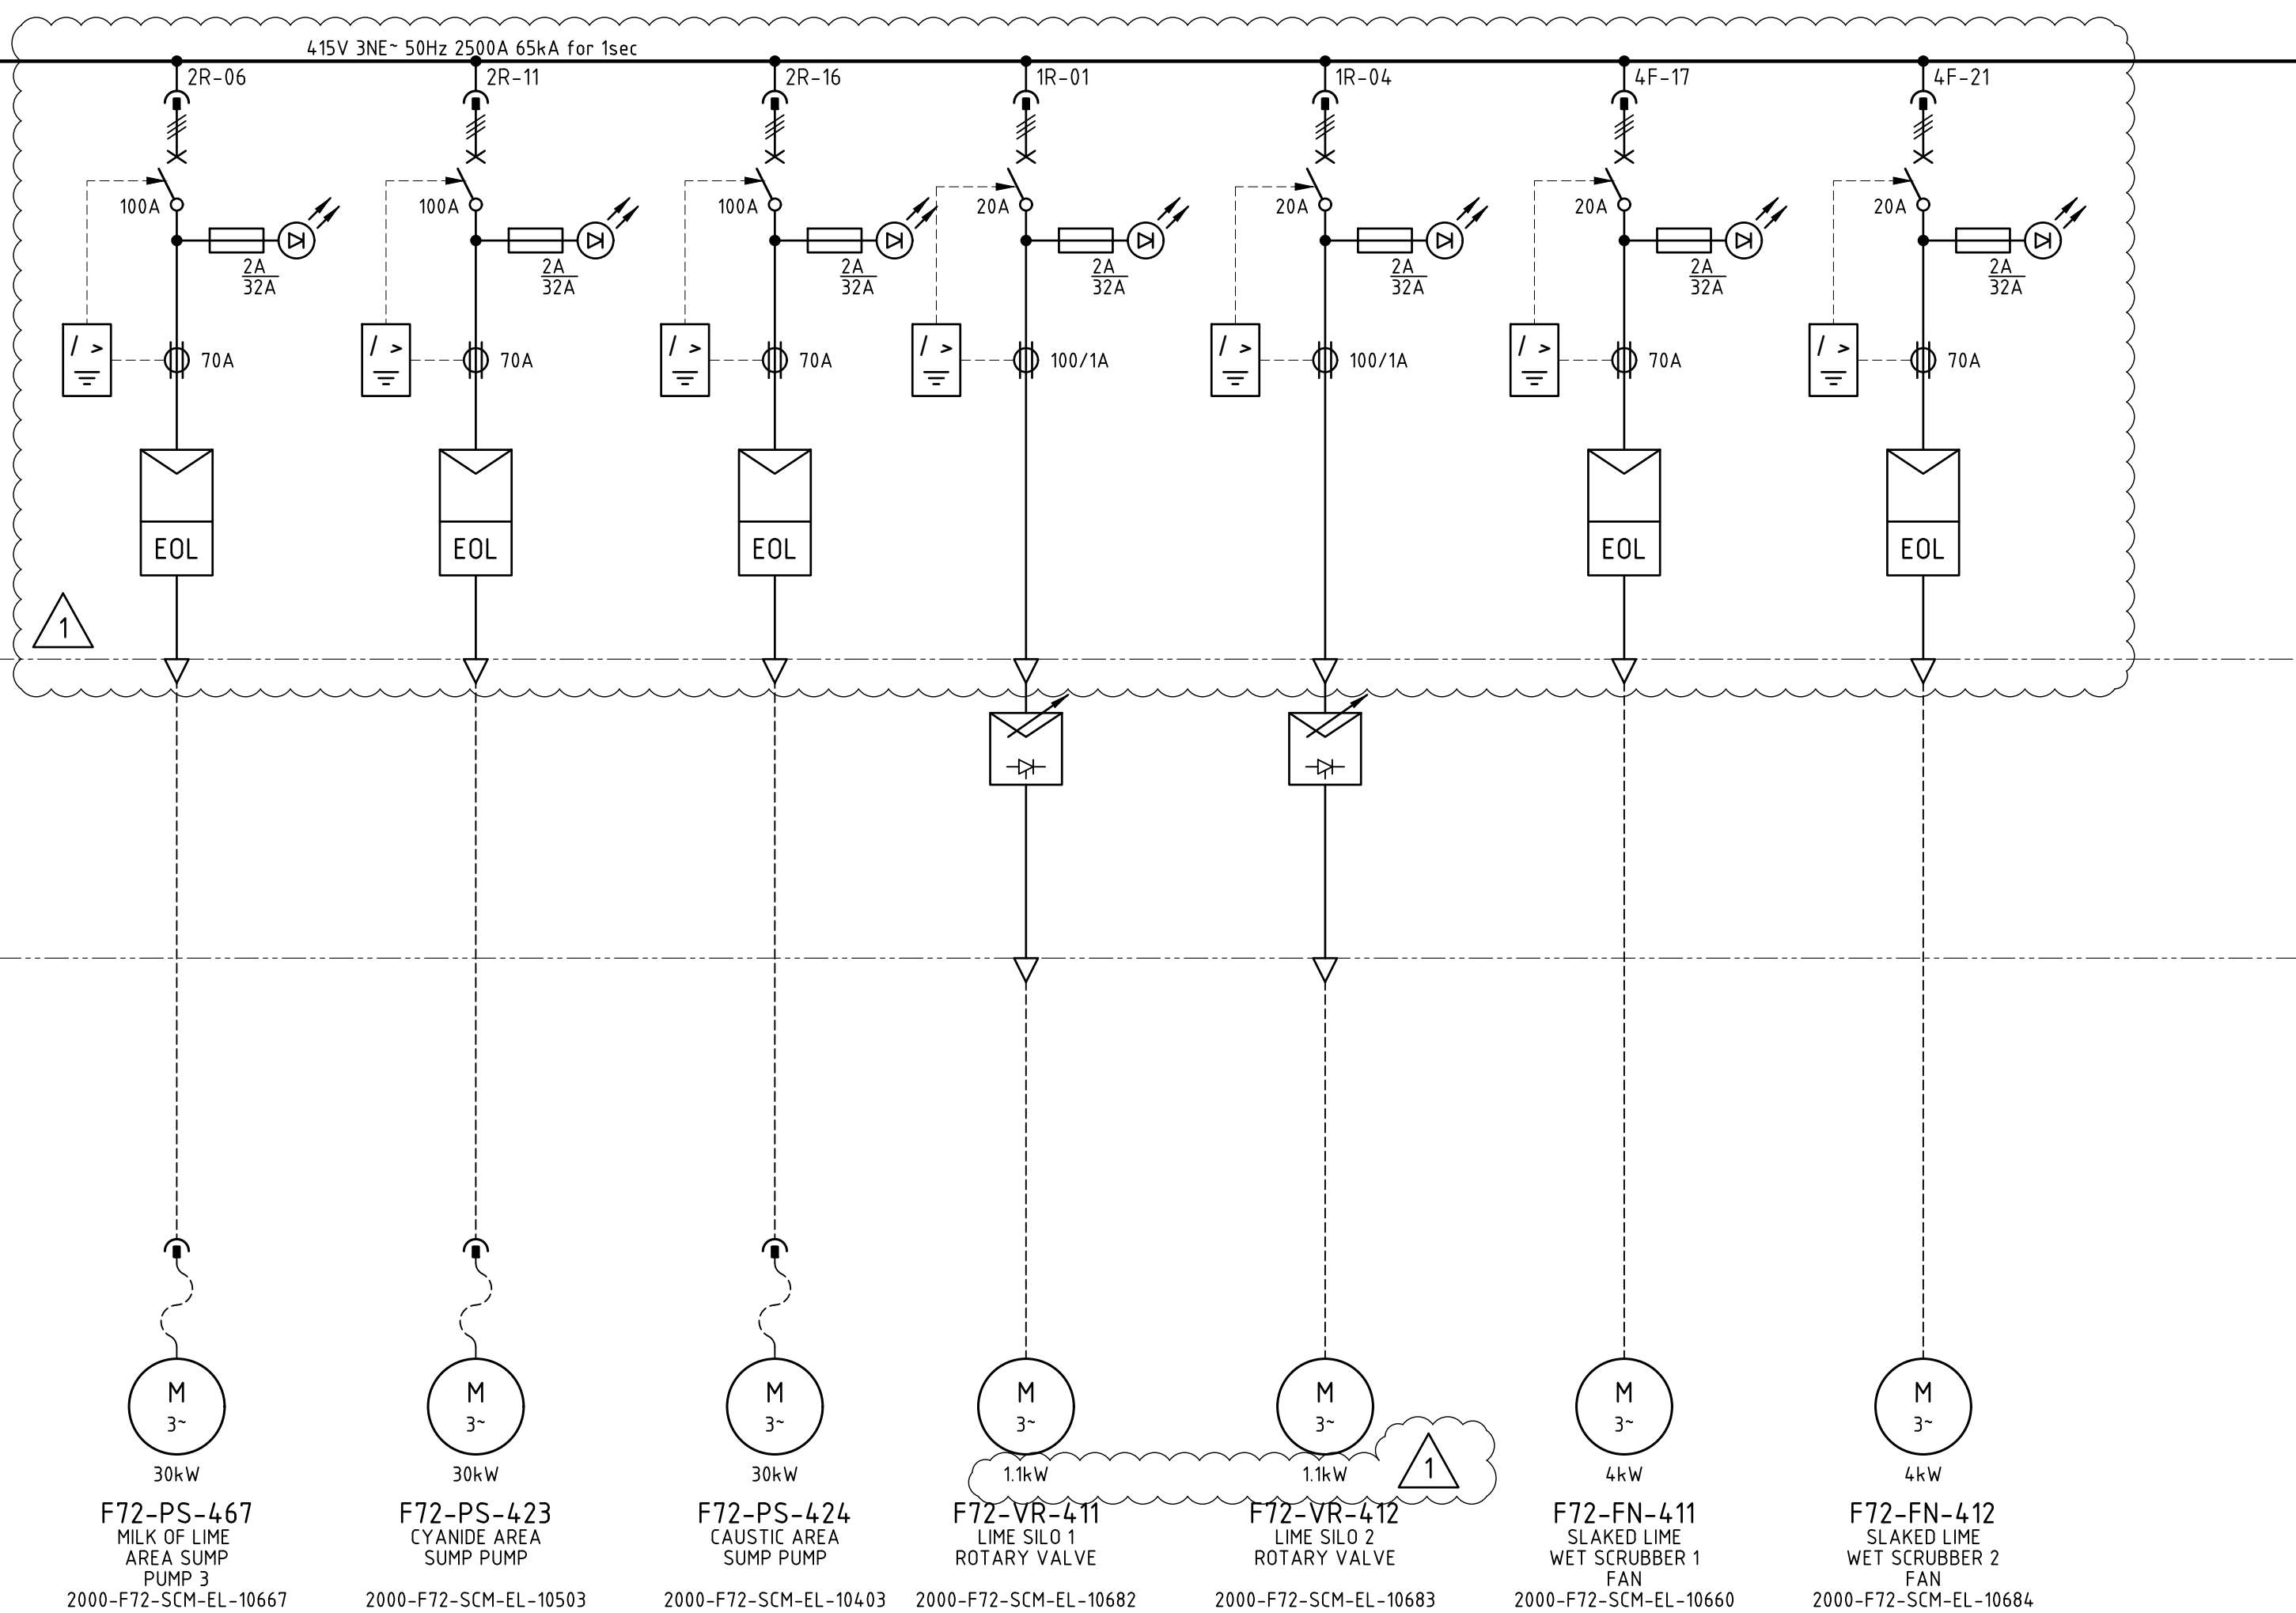

NORTHERN STAR
RESOURCES LIMITED

INFORMATION AND REPRESENTATIONS ON THIS DRAWING ARE THE INTELLECTUAL PROPERTY OF PRIMERO UNLESS SPECIFICALLY IDENTIFIED OTHERWISE. ALL RIGHTS INCLUDING USE RESERVED.

SHEET	SCALE	DRG No.	REVISION
A1	NONE	2000-F72-SLD-EL-10204	1