

END-OF-STUDY PROJECT REPORT

Submitted in Partial Fulfillment of the Requirements for the
BACHELOR DEGREE IN COMPUTER SCIENCE


Field of Study : Software Engineering and Information Systems

Design and Implementation of an AI-Based Network Intrusion Detection System

By

AMIRA BOUAFIF & HAJER JEMAA

Conducted within ITXTREE



Publicly defended on June 6, 2026 in front of the jury members:

Chairman:	Name SURNAME, University Relations Leader, IBM
Reporter:	Name SURNAME, Teacher, ISTIC
Examiner:	Name SURNAME, Teacher, ISTIC
Professional Supervisor:	Firas ABBESSI, Engineer, ITXTREE
Academic Supervisor:	Wassim ABBESSI, Teacher, ISTIC

Academic Year: 2025-2026

END-OF-STUDY PROJECT REPORT

Submitted in Partial Fulfillment of the Requirements for the
BACHELOR DEGREE IN COMPUTER SCIENCE


Field of Study : Software Engineering and Information Systems

Design and Implementation of an AI-Based Network Intrusion Detection System

By

AMIRA BOUAFIF & HAJER JEMAA

Conducted within ITXTREE



Authorization of graduation project report submission:

Professional Supervisor:

Academic Supervisor:

Issued on :

Issued on :

Signature:

Signature:

Dedications

I dedicate this End-of-Study project

To my dear parents

Who have supported and encouraged me every step of the way. This is for you, in honor of all the sacrifices you have made for me. I hope to have made you both proud and happy.

To my dear sisters and brothers

Who have been a great support and a source of joy in my life. I am grateful for your love and encouragement throughout this journey.

To all my family and friends

Thank you all for your support and encouragement throughout all this time. I am truly blessed to have you in my life.

Amira BOUAFIF

Dedications

I dedicate this End-of-Study project

To my dear parents

To my dear sisters

To all my family and friends

Hajer JEMAA

Acknowledgments

We would like to extend our sincere gratitude to all those who have supported us throughout the course of this End-of-Study project. Their guidance, encouragement, and support have been invaluable throughout this journey.

First and foremost, we would like to thank our academic supervisor, Professor Wassim ABBESSI, for his guidance and insights, which have been a great help in the successful completion of this project.

Our gratitude also go to ITXTREE and, in particular, our professional supervisor, Mr. Firas ABBESSI, for providing us with the opportunity to work on this project and for their professional mentorship.

We also extend our deep appreciation to the professors at the Higher Institute of Information and Communication Technologies for their invaluable support and teachings, which have greatly contributed to our academic journey.

Finally, we thank everyone who has, in one way or another, helped in making this project a success.

Contents

Dedications	i
Dedications	ii
Acknowledgments	iii
General Introduction	1
1 Project Context	2
1.1 Introduction	2
1.2 Presentation of the company	2
1.3 Study of the existing	2
1.4 Criticism of the existing	3
1.5 Proposed solution	3
1.6 Project Pipeline	3
1.7 Methodologies	4
1.7.1 CRISP-DM	4
1.7.2 UML	5
1.8 Conclusion	5
2 Requirements Specification	6
2.1 Introduction	6
2.2 Functional Requirements	6
2.3 Non-Functional Requirements	6
2.4 Actors Identification	7
2.5 Use Case Diagram	8
2.6 Conclusion	8

3	Conceptual Design	9
3.1	Introduction	9
3.2	Sequence Diagrams	9
3.3	Class Diagram	9
3.4	Deployment Diagram	9
3.5	Conclusion	9
4	Data Collection and Preparation	10
4.1	Introduction	10
4.2	Data Collection	10
4.2.1	Dataset comparative	11
4.2.2	Dataset overview	12
4.3	Data Understanding	12
4.3.1	Initial Exploration	12
4.3.2	Data Description	12
4.3.3	Data Exploration	18
4.3.4	Data quality	23
4.4	Data preparatation	28
4.4.1	Data cleaning	28
4.4.2	Feature engineering	30
4.4.3	Label encoding	32
4.4.4	Train/ Test split	33
4.5	Conclusion	33
5	Modeling	34
5.1	Introduction	34
5.2	State of the Art	34
5.3	Adopted Approach	34
5.4	Training and Hyperparameter Optimization	34
5.5	Conclusion	34
6	Realization	35
6.1	Introduction	35
6.2	Development Tools and Technologies	35

6.3	Performance Analysis and Evaluation Metrics	35
6.4	User Interfaces	35
6.5	Integration	35
6.6	Conclusion	35
General Conclusion		36

List of Figures

1.1	Project Pipeline	4
1.2	CRISP-DM Methodology	5
2.1	Actors	7
2.2	Use Case Diagram	8
4.1	Label Corruption	13
4.2	BENIGN vs Attack Ratio	19
4.3	Benign vs Attack Ratio per file	19
4.4	Class distribution per file	20
4.5	Attack distribution	20
4.6	Correlation Heatmap	22
4.7	Inf and NaN attack class distribution	25
4.8	Ordering Artifact Class Distribution	26
4.9	Exact duplicates attack class distribution	27
4.10	Contradictory duplicates attack class distribution	27

List of Tables

2.1	Roles of Actors	7
4.1	Comparison of network intrusion detection datasets	11
4.2	Dataset Files	12
4.3	Feature Groups	13
4.4	Feature Statistics	15
4.5	Attack Classes	15
4.6	Class Distribution	18
4.7	Perfectly Correlated Feature pairs	21

General Introduction

Chapter 1


Project Context

1.1 Introduction

This chapter serves as an introduction to the project. We begin with a presentation of the company hosting the internship, a study of existing network intrusion detection systems. Then, we present the problem and the proposed solution. Finally, we end the chapter with a conclusion.

1.2 Presentation of the company

ITXTREE is an early-stage technology startup based in Sidi Rzig, Tunisia, focused on building a solid foundation for future digital solutions it is built on the core values of integrity, quality, curiosity and adaptability.



1.3 Study of the existing

Cybersecurity is a highly sensitive domain where the ability to react quickly can determine the impact of an attack. The earlier a threat is identified, the more effectively its consequences can be limited.

For this reason, Network Intrusion Detection Systems (NIDS) play a central role in monitoring and analyzing network traffic. The most widely used approach relies on:

- **Signature-based:** These systems analyze network traffic, often through deep packet inspection and compares it against a signature database. When a match is found an alert is triggered. Well-known tools such as Snort [1] and Suricata [2] are representative of this approach.
- **Anomaly-based:** Anomaly detection is learning normal behavior of the network through statistical analysis of traffic parameters. If there is a sudden increase of traffic on a port outside of normal thresholds, it might be an indication of a brand-new threat [1].

1.4 Criticism of the existing

Despite their widespread use, signature-based NIDS present several limitations:

- **High Maintenance and Reactivity:** Their effectiveness is essentially tied to the completeness and accuracy of their signature rule sets. As attack techniques continuously evolve, these systems require frequent updates to remain effective. This maintenance process is both time-consuming and reactive since new signatures can only be created after an attack has already been identified and analyzed.
- **Performance:** As the number of rules increases, the system must process a larger set of comparisons for each packet, which can lead to slower detection. In a context where reaction time is critical, this degradation directly affects the system's ability to respond effectively.
- **Rigidity and Evasion Vulnerability:** Attackers can exploit the rigidity of signature-based detection systems by introducing slight variations in attack patterns, allowing them to evade existing signatures while preserving the same malicious intent. Since many signature rules are publicly available or widely shared with the security community, attackers may analyze them to identify gaps and design variants that bypass detection mechanisms.

Overall, these systems rely on exact matching and predefined logics which limits their adaptability in the face of evolving and increasingly sophisticated threats.

1.5 Proposed solution

With the growing integration of Artificial Intelligence (AI) in security systems, new approaches aim to overcome the limits of traditional methods. To address these challenges, we propose an AI-driven NIDS capable of learning patterns from network traffic and classifying different types of network activity instead of relying solely on predefined rules.

1.6 Project Pipeline

A project pipeline is a structured sequence of stages that outlines the workflow and processes involved in the development and deployment of a project. It serves as a roadmap, guiding the team through various phases, from initial planning to final delivery.

Figure 1.1 illustrates the project pipeline for our network intrusion detection system.

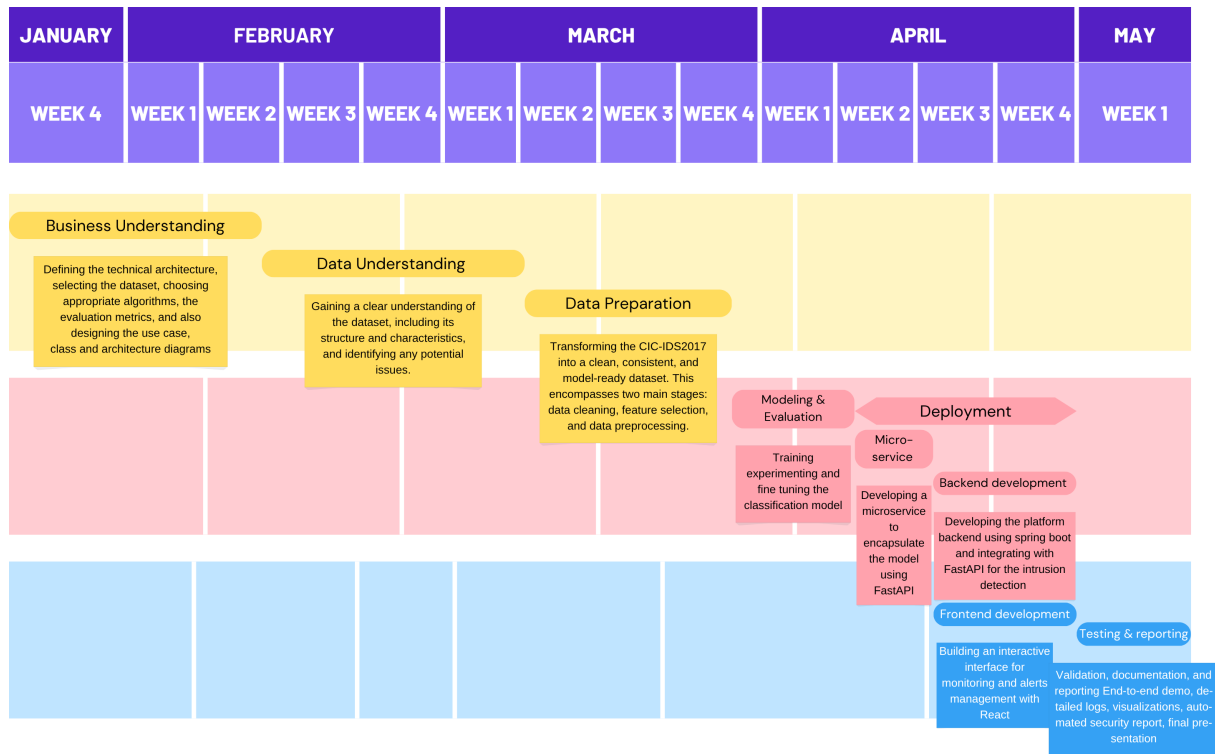


FIGURE 1.1 – Project Pipeline

1.7 Methodologies

In this section, we present the methodologies that we use in this project, including the machine learning methodology CRISP-DM and the software development methodology UML.

1.7.1 CRISP-DM

The CRISP-DM (Cross-Industry Standard Process for Data Mining) methodology is a widely used framework for structuring machine learning projects. It consists of six phases:

- **Business Understanding:** Defining project objectives and requirements and gaining a clear understanding of the business problem.
- **Data Understanding:** Collecting and exploring the data to gain insights and assess its quality by identifying data quality issues.
- **Data Preparation:** Cleaning and preparing the data for modeling by selecting relevant features, handling missing values and splitting the dataset.
- **Modeling:** Selecting and applying appropriate modeling techniques, building, testing and tuning models to optimize their performance.

- **Evaluation:** Evaluating the model's performance and determining if it meets the business objectives.
- **Deployment:** Deploying the model into production, monitoring and maintaining the model's performance.

Figure 1.2 illustrates these phases and their relationships.

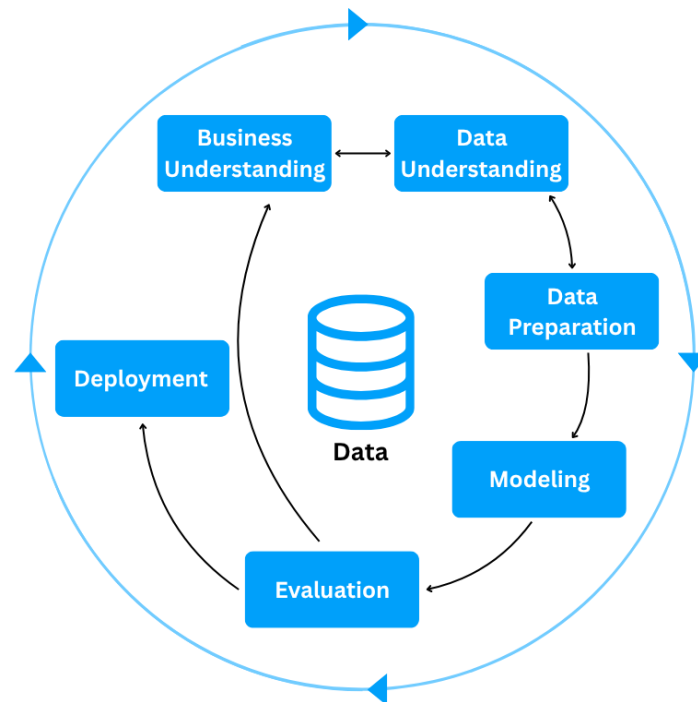


FIGURE 1.2 – CRISP-DM Methodology

1.7.2 UML

For the modeling of the software system, we use UML (Unified Modeling Language), a standardized modeling language used to specify, visualize, construct, and document the artifacts of software systems through diagrams such as use case, class, and sequence diagrams. There are two types of UML diagrams:

- **Behavioral Diagrams:** State machine, activity, use case, sequence, communication and interaction overview diagrams.
- **Structural Diagrams:** Class, object, component, deployment and package diagrams.

UML makes complex systems easier to design and communicate, it provides a common language for developers, architects, and stakeholders [3].

1.8 Conclusion

In this chapter, we introduce the host company ITXTREE, study existing network intrusion detection systems, discuss their shortcomings and finally present a solution. In the next chapter we specify the system requirements.

Chapter 2

Requirements Specification

2.1 Introduction

Throughout this chapter, we specify both the functional and non-functional requirements, identify the system actors, and present the use case diagram. By defining these elements, we aim to establish a clear and shared understanding of the system's expected behavior and constraints, providing a solid foundation for the subsequent design and implementation phases.

2.2 Functional Requirements

Functional requirements define *what* the system should perform. The main functionalities of our system are as follows:

- Authenticate;
- View Dashboard;
- View Statistics summary;
- Trigger Network Analysis;
- View Alerts List;
- View Reports;

2.3 Non-Functional Requirements

Non-functional requirements define *how* the system should perform its functions. They describe the quality attributes and constraints of the system:

- **Performance:** The system must process network traffic and generate analysis results with minimal latency, ensuring fast detection of potential intrusions.

- **Security:** The system must ensure secure authentication and enforce role-based access control, preventing unauthorized actions and protecting system integrity, while supporting non-repudiation to guarantee accountability and traceability of all operations.
- **Maintainability:** The system should be easy to maintain, allowing for efficient debugging, updates, and modifications to existing components.
- **Usability:** The system should provide an intuitive interface, enabling users to efficiently navigate and interact with its functionalities.

2.4 Actors Identification

Actors are external entities, users, organizations, or external systems that interact with the system to achieve one or more functional requirements, with each actor representing a specific role.

In the context of our project, we identify two primary actors, as illustrated in Figure 2.1

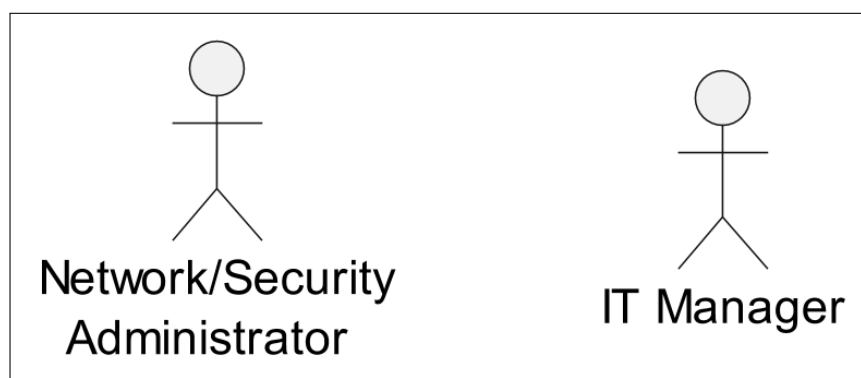


FIGURE 2.1 – Actors

Table 2.1 presents the roles of each actor in our system.

TABLE 2.1 – Roles of Actors

Actor	Role
Network/Security Administrator	- Authenticate - View Dashboard - View Statistics Summary - Trigger Network Analysis - View Alerts List
It Manager	- Authenticate - View Dashboard - View Statistics Summary - View Reports

2.5 Use Case Diagram

A use case diagram is a visual representation of *how* users interact with the system and *what* a system does through different use cases. Figure 2.2 illustrates that diagram.

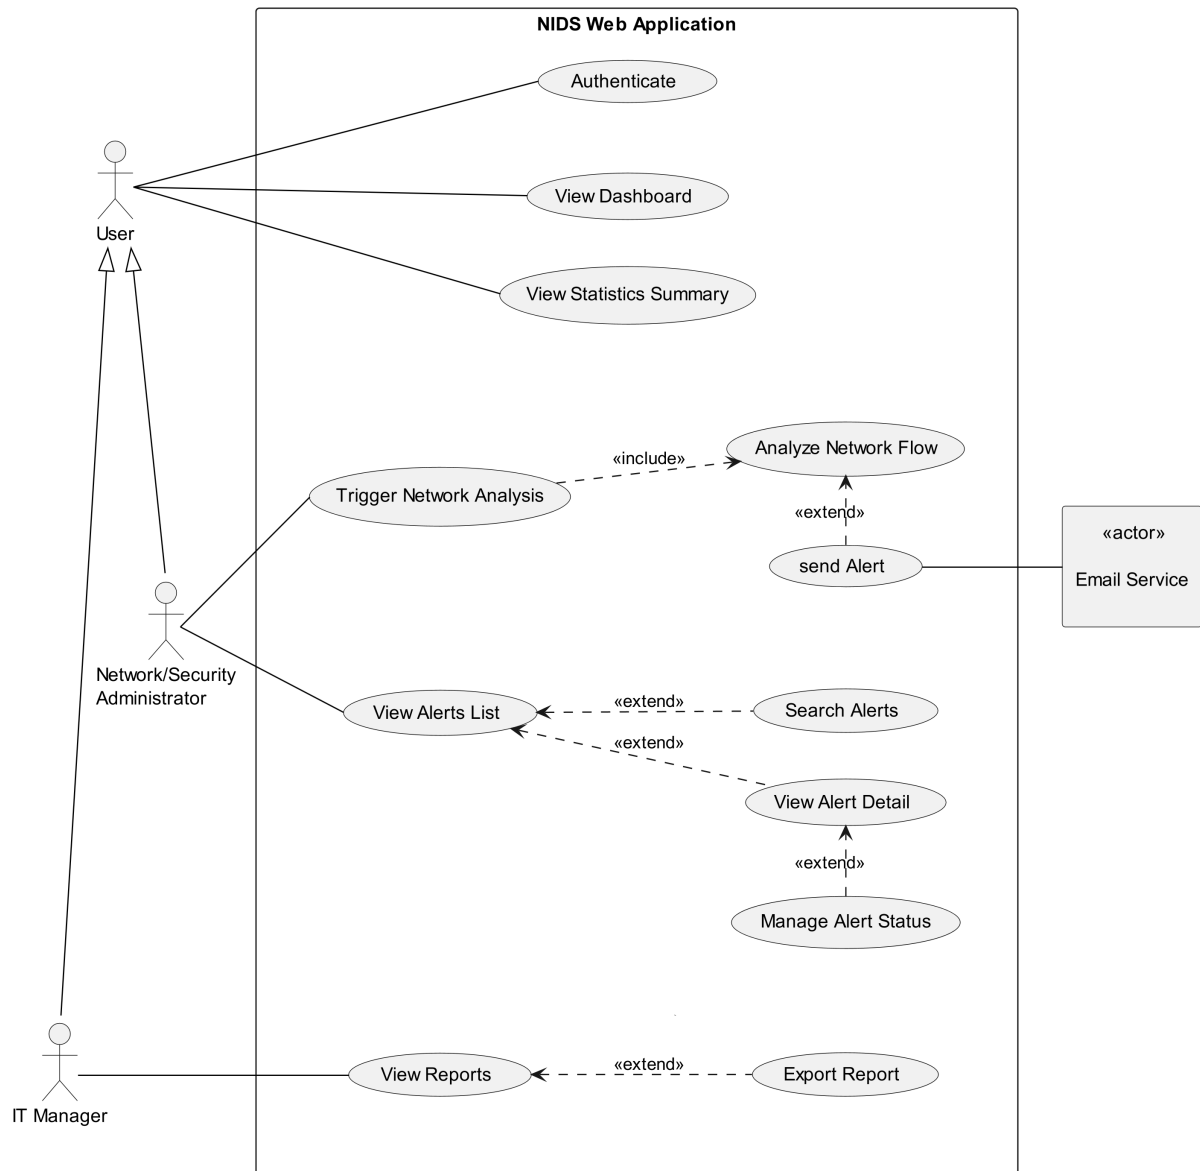


FIGURE 2.2 – Use Case Diagram

2.6 Conclusion

In this chapter, we outline the functional and non-functional requirements of our system, identify the primary actors, and represent the way they interact with the system and the system's functionality via a use case diagram. In the next chapter, we present the conceptual design of the platform.

Chapter 3

Conceptual Design

3.1 Introduction

3.2 Sequence Diagrams

3.3 Class Diagram

3.4 Deployment Diagram

3.5 Conclusion

Chapter 4

Data Collection and Preparation

4.1 Introduction

Data constitutes the foundation of any AI system; the quality of all subsequent stages, including model training and performance, is directly dependent on it. For this reason, it requires particular attention.

This chapter presents the complete data workflow adopted in this project. It begins with data collection, followed by an in-depth exploration phase aimed at understanding the structure, characteristics, and underlying patterns of the dataset. Based on the insights obtained during this stage, we then proceed to data preprocessing, where appropriate transformations and refinements are applied to ensure the dataset is properly structured and suitable for model training.

4.2 Data Collection

This section introduces the process of acquiring the data used in this project. In general, this phase may involve either constructing a dataset from scratch or relying on existing sources. In our case, the decision to use a public dataset is mainly dictated by the nature of the cybersecurity domain.

Unlike other fields, network intrusion data cannot be collected on demand, as it depends on the occurrence of unpredictable and potentially harmful attacks. In addition, data collection in real operational environments is often constrained due to privacy concerns, security risks, and limited access to organizational traffic. Furthermore, even when such data is available, obtaining reliable ground truth labels is difficult and typically requires extensive manual analysis.

For these reasons, constructing a proprietary dataset is impractical, particularly in the absence of real network traffic provided by the host organization. Consequently, the use of a public dataset becomes a necessary and coherent choice, as such datasets are generated in controlled environments and include labeled instances based on expert-defined attack scenarios.

4.2.1 Dataset comparative

We narrowed it down to these three datasets. Below is a comparative table 4.1 using our primary selection criteria.

TABLE 4.1 – Comparison of network intrusion detection datasets

Dataset	Source	Size	Data Generation Approach	Attack Diversity and Temporal Relevance	Usability
NSL-KDD [4]	Canadian Institute for Cybersecurity at the University of New Brunswick (UNB)	Small ($\approx 148k$ records)	Derived from the KDD '99 dataset, its traffic was generated in a military-style network environment with predefined automated attack scripts.	Low; 4 attack families: DoS, Probe, R2L, U2R with several specific attacks in each family.	High; legacy benchmark widely used in academic studies, mainly for baseline comparison and educational purposes.
UNSW-NB15 [2]	Australian Centre for Cyber Security (ACCS), UNSW Canberra	Medium ($\approx 2.5M$ records)	Synthetic traffic generated with IXIA PerfectStorm tool.	Medium; 9 attack types: Fuzzers, Analysis, Backdoor, DoS, Exploits, Generic, Reconnaissance, Shellcode, Worms.	High; widely used modern benchmark for machine learning-based intrusion detection research.
CIC-IDS-2017 [3]	Canadian Institute for Cybersecurity at the University of New Brunswick (UNB)	Medium ($\approx 2.8M$ records)	Traffic generated in an enterprise-like network environment composed of attacker and victim machines, using real attack tools.	High; 14 attack types: Includes the most common attacks based on the 2016 McAfee report, such as Web based, Brute force, DoS, DDoS, Infiltration, Heart-bleed, Bot and Scan.	Very High; one of the most widely adopted and current standard datasets in intrusion detection research.

The comparative analysis of the three datasets reveal that each has its own limitations. NSL-KDD, although still relevant, exhibits limitations in size and temporal relevance, as it is relatively old and does not reflect recent network behavior and modern attacks types. UNSW-NB15 is larger and offers a more recent alternative, but it remains limited in terms

of attack type coverage, and its traffic is fully synthetically generated. This makes CIC-IDS2017 the most suitable dataset, as it provides a more realistic experimental setting, a wider range of the most common attack types, and it is also widely adopted in recent research studies.

4.2.2 Dataset overview

CIC-IDS2017 was created by the Canadian Institute for Cybersecurity (CIC) at the University of New Brunswick (UNB), within a controlled environment, where the network traffic was captured in packet capture (PCAP) format.

The transformation of raw PCAP files was done using a feature extraction tool, CFlowMeter. Therefore a row in this dataset doesn't represent a packet, it represents an overview of the session behaviour between two endpoints through statistical summary.

4.3 Data Understanding

The Data Understanding phase of the CRISP-DM methodology focuses on loading, describing, and analyzing the dataset to build a solid foundation for the rest of the project. This section dives into the four tasks of this phase: **Initial Exploration**, **Data Description**, **Data Exploration**, and **Data Quality**, with each task targeting an aspect of the data, from its structure and content to its quality.

4.3.1 Initial Exploration

The CIC-IDS2017 dataset is captured over five days, it is distributed across 8 files split by day and session: **Monday**, **Tuesday**, and **Wednesday** each corresponding to a single file, while **Thursday** and **Friday** are split into AM and PM sessions. The **Friday PM** session is further divided into two files to isolate the two attacks, **DDoS** and **PortScan**.

4.3.2 Data Description

As mentioned in the previous subsection, the dataset is split into 8 files as shown in Table 4.2.

TABLE 4.2 – Dataset Files

File	Number of Rows	Number of Columns
Monday	529,918	79
Tuesday	445,909	79
Wednesday	692,703	79
Thursday AM	170,366	79
Thursday PM	288,602	79
Friday AM	191,033	79
Friday PM (DDoS)	225,745	79
Friday PM (PortScan)	286,467	79
Total	2,830,743	—

The dataset contains a total of 2,830,743 rows across the 8 files. All files have consistent columns, which is expected as they are generated by the same CICFlowMeter pipeline. This consistency allows for seamless concatenation of the files into a single DataFrame for the subsequent analysis.

- **Whitespace Issue:** Leading white spaces is found in columns names and are stripped across all files as they can raise `KeyError` exceptions when accessing columns by name.
- **Corrupted Labels:** Corrupted labels are discovered in the Thursday AM file, where three labels contain mojibake character instead of an em-dash (–) caused by an encoding issue as shown in Figure 4.1 and are therefore corrected.

```
[Thursday-AM] 'Web Attack ⬮ Brute Force'
[Thursday-AM] 'Web Attack ⬮ XSS'
[Thursday-AM] 'Web Attack ⬮ Sql Injection'
```

FIGURE 4.1 – Label Corruption

- **Feature Description:** The dataset contains 79 columns, of them 78 are numeric level-flow features and the last one is the target Label. These features can be grouped into 12 categories as shown in Table 4.3.

TABLE 4.3 – Feature Groups

Group	Features	Description
Flow Metadata	Destination Port, Flow Duration	Total duration of the flow and the destination port
Packet/Byte Count	Total Fwd Packets, Total Backward Packets, Total Length of Fwd Packets, Total Length of Bwd Packets, act_data_pkt_fwd	Number of packets and packet bytes in both forward (from source to destination) and backward directions (from destination to source), and packets having actual data in the forward direction.
Packet/Segment Length Statistics	Fwd Packet Length Max/Min/Mean/Std, Bwd Packet Length Max/Min/Mean/Std, Max/Min Packet Length, Packet Length Mean/Std/Variance, Average Packet Size, Avg Fwd Segment Size, Avg Bwd Segment Size	Packets and segments length statistics (e.g. max, min, mean, std etc...).
Flow Rate	Flow Bytes/s, Flow Packets/s, Fwd Packets/s, Bwd Packets/s, Down/Up Ratio	Flow throughput, forward and backward packet rates, flow asymmetry ratio (backward packets (download) to forward packets (upload)).

Inter-Arrival Time	Flow IAT Max/Min/Mean/Std, Fwd IAT Max/Min/Mean/Std/Total, Bwd IAT Max/Min/Mean/Std/Total	Time between consecutive packets in the flow, forward, and backward directions.
TCP Flag Count	FIN Flag Count, SYN Flag Count, RST Flag Count, PSH Flag Count, ACK Flag Count, URG Flag Count, CWE Flag Count, ECE Flag Count, Fwd PSH Flags, Bwd PSH Flags, Fwd URG Flags, Bwd URG Flags	TCP flags counts for the entire flow, forward and backward directions.
Header Length	Fwd Header Length, Bwd Header Length, Fwd Header Length.1	Backward and forward header lengths.
Bulk Transfer Statistics	Fwd Avg Bytes/Bulk, Fwd Avg Packets/Bulk, Fwd Avg Bulk Rate, Bwd Avg Bytes/Bulk, Bwd Avg Packets/Bulk, Bwd Avg Bulk Rate	Average forward and backward bulk (a sequence of consecutive packets in the same direction) transfer statistics.
Subflow Packet/Byte Count	Subflow Fwd Packets, Subflow Fwd Bytes, Subflow Bwd Packets, Subflow Bwd Bytes	Number of packets and packet bytes in both directions in a subflow.
Window/Segment Size	Init_Win_bytes_forward, Init_Win_bytes_backward, min_seg_size_forward	Window sizes in both the forward and backward directions and the minimal segment size in the forward direction.
Active/Idle Time	Active Max/Min/Mean/Std, Idle Max/Min/Mean/Std	Duration of active and idle periods within a flow.
Target	Label	The target label indicating the class the flow belongs to.

- **Duplicate Column:** The column `Fwd Header Length.1` is identified as a duplicate of `Fwd Header Length`, confirmed by the fact that both contain the same values.
- **Packet Length Mean and Average Packet Size** both measure the average packet size, yet the two are equal only when zero. This inequality is caused by a bug in the denominator of **Packet Length Mean**, as it uses the internal `flowLengthStats` accumulator to get its value and the first packet is added twice to it, inflating its packet count by one, while **Average Packet Size** divides by the correctly computed total packet count [4].

All 54 features are of type `int64`, 24 features are of type `float64`, with the last feature, the target *Label*, being of type `object`.

Table 4.4 presents the statistics of some of the features.

TABLE 4.4 – Feature Statistics

Feature	Min	Max	Mean	Std
Flow Duration	-13	119,999,998	14,785,663.92	33,653,744.09
Total Backward Packets	0	121,922	10.39	997.39
act_data_pkt fwd	0	213,557	5.42	636.43
Min Packet Length	0	1,448	16.43	25.24
Flow Bytes/s	-241,000,000	inf	inf	nan
Flow IAT Max	-13	120,000,000	9,182,475.32	24,459,539.25
Bwd PSH Flags	0	0	0	0
Fwd Header Length	-322,212,234,632	4,644,908	-25,997.39	21,052,857.87
Bwd Avg Bulk Rate	0	0	0	0

Some of the feature has negative, inf and constant statistic of zero. Those features are further investigated in the data quality section.

Table 4.5 provides a description of the 14 attack classes of the dataset.

TABLE 4.5 – Attack Classes

Class	Description
FTP-Patator (File Transfer Protocol Patator)	A brute force attack using the Patator tool targeting FTP servers, an old unencrypted protocol that transmits data and credentials in plain text, using trial and error to guess credentials in order to gain unauthorized access.
SSH-Patator (Secure Shell Patator)	A brute force attack using the Patator tool targeting SSH servers, a secure encrypted protocol that encrypts the entire session including the login, using trial and error to gain unauthorized access to individual accounts.
DoS Hulk	A Denial-of-Service attack using the HULK tool, which is used to overwhelm web servers by generating a large number of unique randomized requests at irregular intervals.
DoS GoldenEye	A Denial-of-Service attack using the GoldenEye tool, which dynamically generates multiple parallel connections (multi-threaded) to a target URL while keeping them alive to exhaust the available connection slots, simultaneously forcing the server to bypass caching mechanisms and fully process every request.

DoS slowloris	A Denial-of-Service attack using the Slowloris tool, which enables a single machine to overwhelm a web server by opening multiple connections and keeping them open by sending partial requests (only headers) periodically, while requiring very low bandwidth, hence its name, as it operates in a low and slow manner.
DoS Slowhttptest	A Denial-of-Service attack using the SlowHTTPTest tool, which creates very slow connections by sending seemingly legitimate requests using low bandwidth and intentionally delaying their completion, thereby consuming the limited number of concurrent connections the server can handle.
DDoS	An attack used to overwhelm the target system with a flood of traffic from multiple sources, making it unable to respond to legitimate requests, potentially leading to a complete shutdown of the system.
Bot	An attack carried out using the ARES botnet, a malware-based network of compromised computers built on a RAT (Remote Access Trojan) and botnet framework, which allows the attacker to take control of infected machines and coordinate them for malicious purposes. It first infects victim machines using phishing emails or malicious downloads, after which the infected machines connect back to the attacker's Command and Control (C&C) server. Finally, the attacker issues commands to all bots, that is, all infected machines, simultaneously.
Heartbleed	An attack in which the attacker exploits the Heartbleed bug in the OpenSSL cryptographic library to read sensitive memory contents by sending malformed heartbeat requests demanding more memory than the actual payload from the server running the vulnerable version of OpenSSL, after which the server allocates the requested memory without any verification and returns it, exposing whatever sensitive data happened to be stored in that memory chunk at that moment. It is used to steal private encryption keys, usernames and passwords, and to intercept session tokens, permitting session hijacking by providing the stolen token to the server so that the attacker is treated as a legitimate logged-in user, as well as to decrypt previously captured encrypted traffic that the attacker had intercepted beforehand.

Infiltration	A multi-stage attack to gain unauthorized access to systems, in which the attacker first deploys a malicious file disguised as a legitimate one, such as a document or a downloadable link, containing a backdoor. The victim executes the file unknowingly, after which the backdoor establishes a reverse connection back to the attacker's machine, granting the attacker remote control over the compromised system. Once inside, the attacker scans the victim's internal network using tools (e.g. Nmap) to discover live hosts (any active and reachable device on the network), as well as open ports and running services. This allows the attacker to map the internal network and identify potential targets for further infiltration. The attacker then moves laterally by infiltrating another machine, spreading the attack further across the network. Finally, an attempt is made to exfiltrate sensitive data (transferring confidential information out of the network), and to escalate privileges on the compromised systems in order to gain access to even more restricted and sensitive resources.
PortScan	An attack used to discover open ports and whether they are receiving or sending data, in addition to potential vulnerabilities that could be exploited.
Web Attack - Brute Force	An attack that uses a forceful approach to steal credentials to gain unauthorized access to systems. It can be carried out in many ways, from trying common credential combinations manually, to using dictionary attacks, or a combination of both.
Web Attack - XSS	An attack in which malicious scripts are injected into trusted websites, by exploiting their input validation vulnerability, and executed by other end users' browsers, which have no way to distinguish it from legitimate content.
Web Attack - Sql Injection	An attack in which the attacker interferes with the queries that an application makes to its database enabling him to view data that he is not supposed to have access to, including data belonging to other users and any other data that the platform has access to, as well as modify or delete it. It is carried out by injecting malicious SQL queries into an input field, which the vulnerable application passes directly to the database as a query instead of treating it as plain data. The database then executes it, allowing the attacker to manipulate the database in unintended ways.

4.3.3 Data Exploration

Table 4.6 provides a comprehensive overview of the classes' distribution across the dataset.

TABLE 4.6 – Class Distribution

Class	file	Count	Percentage
BENIGN	Monday	529,918	18.72%
	Tuesday	432,074	15.26%
	Wednesday	440,031	15.54%
	Thursday AM	168,186	5.94%
	Thursday PM	288,566	10.19%
	Friday AM	189,067	6.68%
	Friday PM (DDoS)	97,718	3.45%
	Friday PM (PortScan)	127,537	4.51%
	Total	2,273,097	80.3%
DoS Hulk	Wednesday	231,073	8.163%
PortScan	Friday PM (PortScan)	158,930	5.614%
DDoS	Friday PM (DDoS)	128,027	4.523%
DoS GoldenEye	Wednesday	10,293	0.364%
FTP-Patator	Tuesday	7,938	0.280%
SSH-Patator	Tuesday	5,897	0.208%
DoS slowloris	Wednesday	5,796	0.205%
DoS Slowhttptest	Wednesday	5,499	0.194%
Bot	Friday AM	1,966	0.069%
Web Attack - Brute Force	Thursday AM	1,507	0.053%
Web Attack - XSS	Thursday AM	652	0.023%
Infiltration	Thursday PM	36	0.0013%
Web Attack - Sql Injection	Thursday AM	21	0.0007%
Heartbleed	Wednesday	11	0.0004%
Total		2,830,743	100%

Figure 4.2 visualizes the BENIGN vs Attack ratio. The BENIGN class is the dominant class in the dataset, accounting for 80.3%, while the remaining 15 attack classes collectively amount to only 19.7%.

Figure 4.3 shows the BENIGN vs Attack ratio per file. The BENIGN class dominates across all files, with the only exceptions being the two Friday PM files, where attack traffic exceeds BENIGN, with attack ratios of 56.7% and 55.5% in the Friday PM DDoS and Friday PM PortScan respectively. The BENIGN ratio ranges from 100% in the Monday file down to 43.3% in the Friday PM DDoS file. Several files show very low attack ratios, such as Thursday AM at 1.3% and Friday AM at 1%, while the Thursday PM file has an attack ratio so low at 0.012% that it is invisible in the figure. Figure 4.4 visualizes the one file, with each file containing between 0 and 5 attack classes, most files containing only one. The two brute force attacks, FTP-Patator and SSH-Patator are both present in the Tuesday file. The DoS attacks and Heartbleed are grouped in the Wednesday file, and the web attacks are present in the Thursday AM file. The remaining classes each appear exclusively in one of the other files.

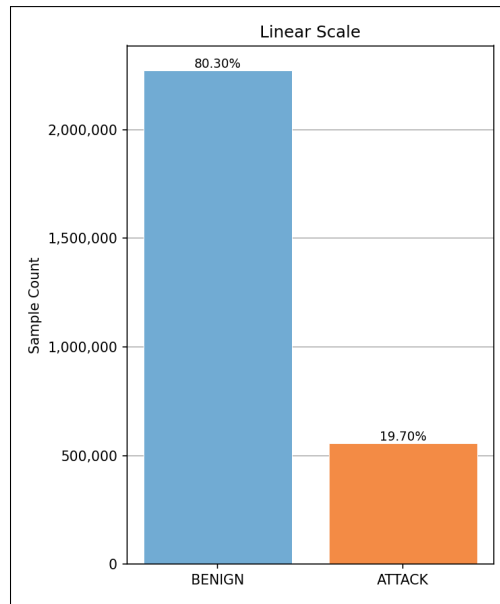


FIGURE 4.2 – BENIGN vs Attack Ratio

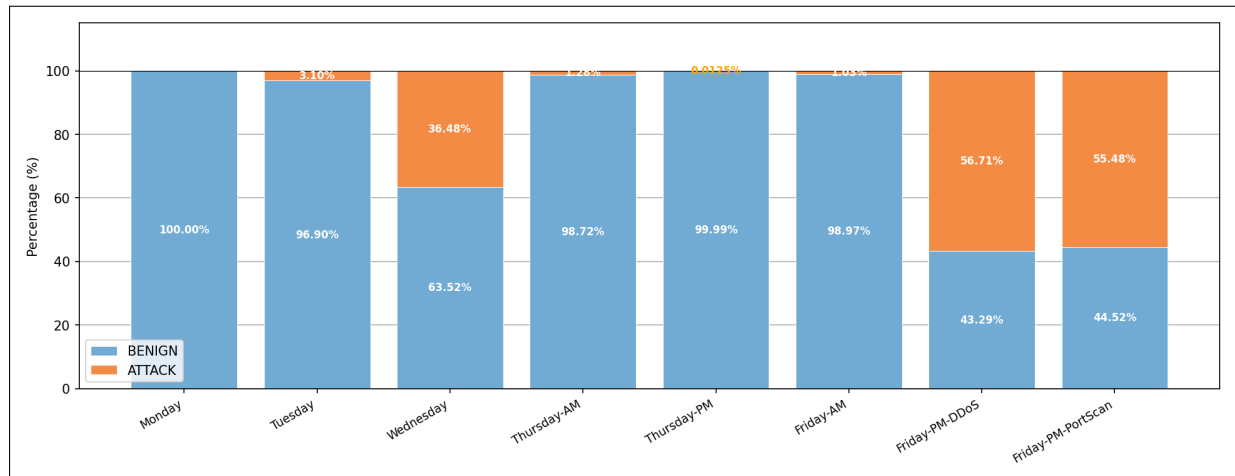


FIGURE 4.3 – Benign vs Attack Ratio per file

Figure 4.5 visualizes the global attack distribution. It varies significantly, ranging from DoS Hulk at 8.16% down to Heartbleed at 0.0004%, with the three rarest classes, Infiltration, Web Attack - Sql Injection, and Heartbleed, collectively accounting for only 0.0024%.

This distribution is intentional, as the dataset was generated to imitate real-world network traffic, where the vast majority of traffic is normal and only a small fraction are attacks. However, this introduces a severe class imbalance that can bias the model towards the majority class, leading it to treat BENIGN as the default outcome. As a result, the model may perform poorly on the attack classes and potentially fail to learn their distinguishing patterns altogether.

The class imbalance extends beyond the BENIGN class and is also present among the attack classes themselves. DoS Hulk, PortScan, DDoS and DoS GoldenEye each exceed 10,000 samples, providing the model with sufficient examples to reliably learn their patterns. FTP-Patator, SSH-Patator, DoS slowloris, DoS Slowhttptest, Bot and

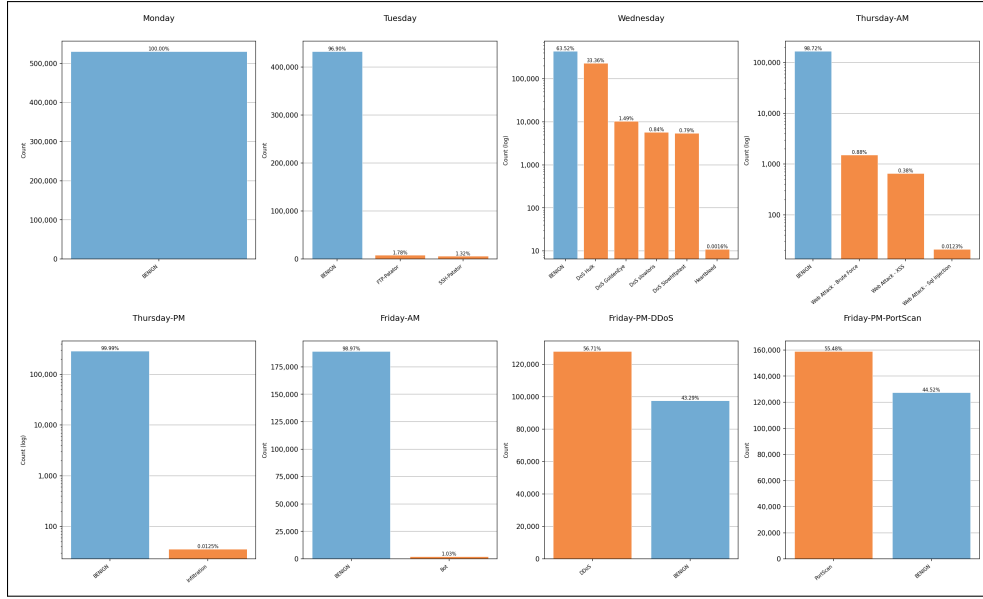


FIGURE 4.4 – Class distribution per file

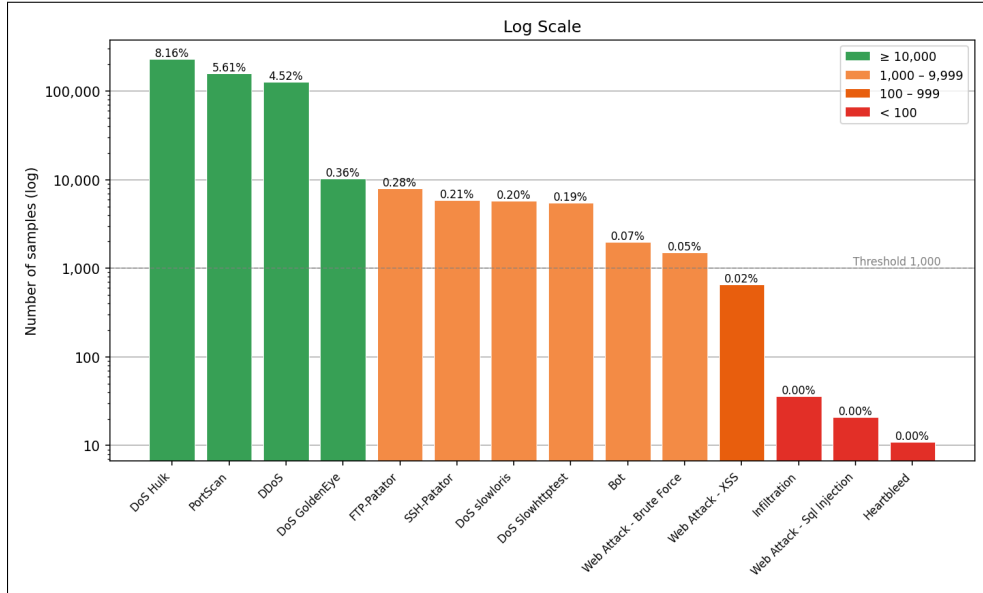


FIGURE 4.5 – Attack distribution

Web Attack - Brute Force fall in a moderate range, each with over 1,000 samples, which while on the lower end, should still allow the model to capture their general patterns. Web Attack - XSS class, with only 652 samples sits in a more concerning range where learning becomes unreliable.

The three remaining classes represent the most critical imbalance: Infiltration with 36 samples, Web Attack - Sql Injection with 21 samples, and Heartbleed with only 11 samples. At this scale, the model is unlikely to learn their patterns meaningfully, and even in cases where it does, generalization to unseen data is very unlikely, leading to poor performance on new data.

After exploring the class distribution, we turn to the feature space by computing the correlation matrix for the 78 features of the dataset. It is a square matrix where each

element represents the linear association between two features, with values ranging from -1 to 1 . Positive values indicate that both features increase together, while negative values indicate that one increases as the other decreases. In both cases the strength of the correlation increases as the value approaches 1 or -1 , while a value of zero indicates no correlation. The diagonal is always 1 as every feature is perfectly correlated with itself.

The correlation matrix is computed using the Pearson Correlation Coefficient (PCC), also known as Pearson's r :

$$r_{xy} = \frac{\sum_{i=1}^n (x_i - \bar{x})(y_i - \bar{y})}{\sqrt{\sum_{i=1}^n (x_i - \bar{x})^2} \sqrt{\sum_{i=1}^n (y_i - \bar{y})^2}} \quad (4.1)$$

where x and y are the two features being compared, $\bar{x}$ and $\bar{y}$ are their respective means, and n is the number of samples.

The absolute value of the correlation matrix was taken to focus on the strength of the correlation regardless of its direction. A threshold of 0.95 was used to identify highly correlated feature pairs, where any pair with a correlation coefficient of 0.95 or higher is considered redundant, meaning both features essentially carry the same information, providing no additional information to the model.

39 highly correlated pairs are identified Figure 4.6 visualizes their correlation matrix.

8 pairs have a perfect correlation of 1 , meaning they are perfectly linearly correlated. Table 4.7 lists these perfectly correlated pairs.

TABLE 4.7 – Perfectly Correlated Feature pairs

No.	Feature 1	Feature 2
1	Bwd Packet Length Mean	Avg Bwd Segment Size
2	Fwd Packet Length Mean	Avg Fwd Segment Size
3	Total Fwd Packets	Subflow Fwd Packets
4	Total Backward Packets	Subflow Bwd Packets
5	Total Length of Bwd Packets	Subflow Bwd Bytes
6	Fwd PSH Flags	SYN Flag Count
7	Fwd URG Flags	CWE Flag Count
8	Fwd Header Length	Fwd Header Length.1

- **First and second pairs:** Bwd Packet Length Mean and Avg Bwd Segment Size, Fwd Packet Length Mean and Avg Fwd Segment Size going by name the two calculates the average size of two different layers of the OSI model, the former belonging to the network layer it is composed of Network Header (IP header) + Segment, while the latter belongs to the transport layer and is composed of Transport Header (TCP/UDP Header) + Payload, but in the CICFlowMeter they are both calculated as the average size (bytes) of the payload in the backward/forward direction, which means there is no difference between a segment and a packet making the two features a duplicate of each other.
- **Third, fourth and fifth pairs (with an additional pair):** Total Fwd Packets and Subflow Fwd Packets, Total Backward Packets and Subflow Bwd Packets,

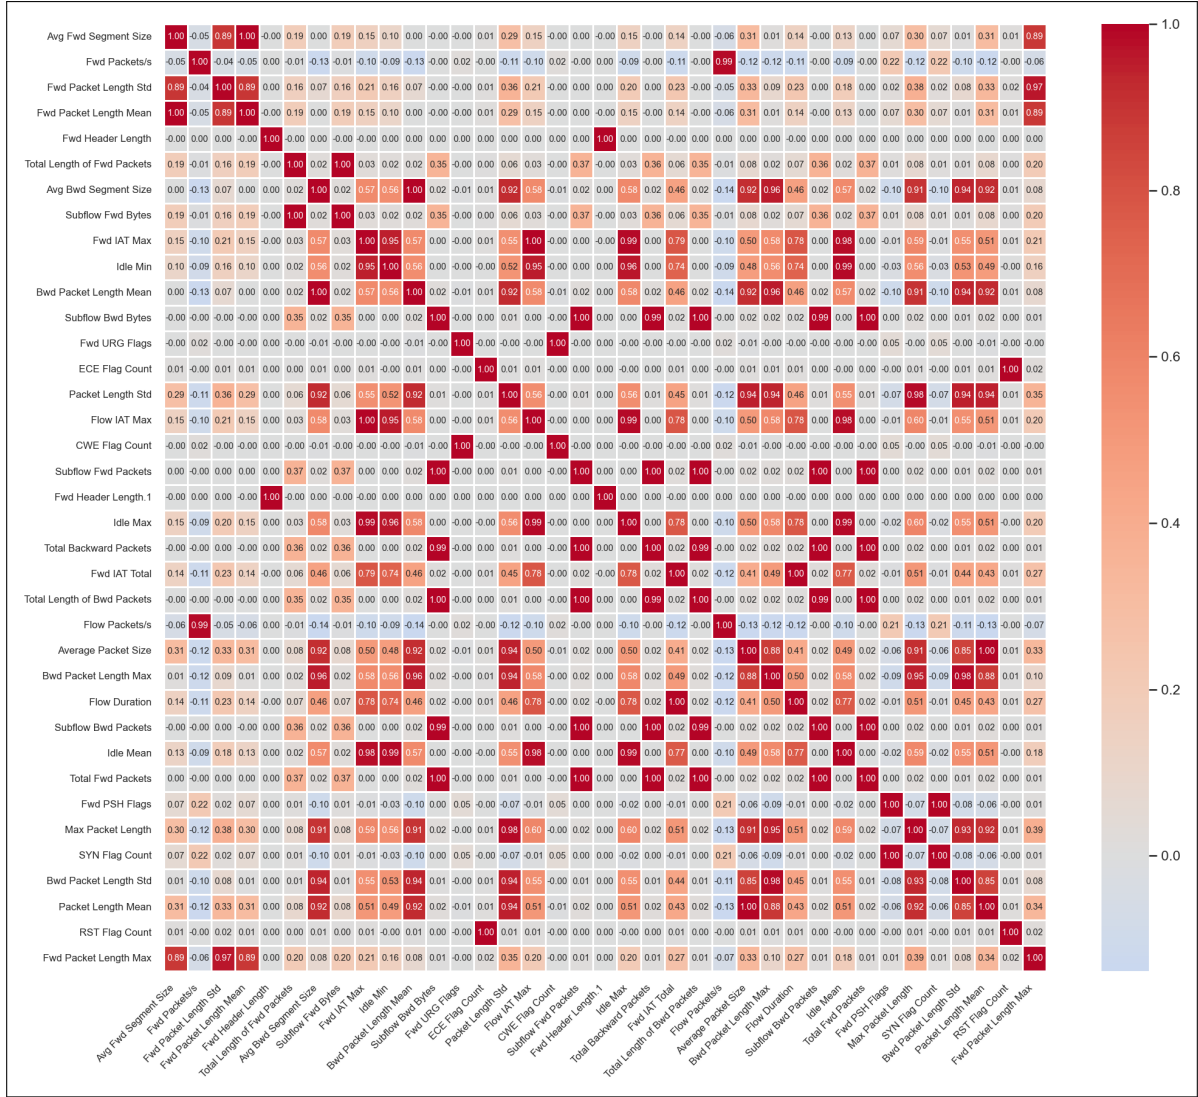


FIGURE 4.6 – Correlation Heatmap

Total Length of Fwd Packets and Subflow Fwd Bytes, and Total Length of Bwd Packets and Subflow Bwd Bytes (near perfect correlation of 0.99999) nominally represent two different levels of aggregation, with the first being for the entire flow and the second being for a subflow. A subflow is detected when the inter-arrival time (IAT) between two consecutive packets exceeds 1 second, with the subflow features computed by dividing the flow totals by the number of detected subflows (`sfCount`). The assumption that all subflows contain the same number of packets or bytes is already a conceptual limitation, but the way `sfCount` is calculated is a bug in itself.

Due to a misplaced parenthesis in the source code, the condition that is supposed to check whether the gap between two packets exceeds 1 second fires on the first inter-packet gap that does so and never again, making `sfCount` equal to 1 for virtually every flow in the dataset. As a result, all four subflow features reduce to dividing the flow total by 1, making them equal to their corresponding totals.

The packet-count pairs hold this equality perfectly throughout the entire dataset since integer division by 1 is exact. The byte pairs behave the same way for the

vast majority of flows, with rare divergence explained not by `sfCount` but by a type mismatch: `Total Length of Fwd/Bwd Packets` is output as a `double`, while `Subflow Fwd/Bwd Bytes` is output as a `long`. For flows with very large byte totals, floating-point precision loss in the `double` path produces a value that differs slightly from the exact `long`, which is the only source of divergence observed.

All four pairs are therefore redundant, carrying no additional information beyond their corresponding flow-level totals, a consequence of a single bug.

- **Sixth pair:** `Fwd PSH Flags` and `SYN Flag Count` are nominally designed to capture different aspects of TCP behavior, with the first counting forward packets with the PSH flag set and the second counting all packets with the SYN flag set across the flow. However, they are perfectly correlated throughout the dataset, with exactly 2,699,265 flows where both equal 0 and 131,478 flows where both equal 1, a result of two compounding causes.

The first is a bug in the generation-time version of `CICFlowMeter` where flags are only updated on the first packet, reducing both features to binary indicators of whether that single packet had the respective flag set. This means the SYN-ACK from the server is never counted, contradicting what the feature name implies.

The second is a traffic capture artifact. Flows where both equal 1 belong exclusively to attacks that establish real TCP connections (`FTP-Patator`, `SSH-Patator`, `DoS slowloris`, `DoS Slowhttptest`, `Infiltration`) and benign traffic, while flows where both equal 0 include attacks that bypass the handshake (`DDoS`, `DoS Hulk`, `DoS GoldenEye`, `PortScan`, `Bot`, `Web Attacks`) and mid-stream captures. In this dataset, any flow starting with a SYN packet consistently has PSH set on that same first packet, making both features identical binary indicators of whether the flow was captured from the beginning of a TCP connection, and therefore entirely redundant.

- **Seventh pair:** `Fwd URG Flags` and `CWR Flag Count` are perfectly correlated throughout the dataset, with 2,830,428 flows where both equal 0 and only 315 flows where both equal 1, all belonging exclusively to benign traffic. As with the previous pair, the flag-counting bug reduces both features to binary indicators of the first packet only. The co-occurrence of URG and CWR on the same first packet is consistent with legitimate TCP congestion control behavior, which explains their absence in attack traffic, making both features redundant with each other.
- **Eighth pair:** `Fwd Header Length` and `Fwd Header Length.1` these two features are duplicates of each other as mentioned previously in the Data Description subsection 4.3.2, which makes sense for them to be perfectly correlated.

4.3.4 Data quality

The quality of a model's output is directly tied to its input. In this section we evaluate the dataset for any quality issues that could disrupt model training such as missing values (NaN - Not a number), infinite values (inf), negative values, duplicates rows, constant and near-constant features. For each issue, the analysis investigates the root cause, assesses

its global impact on the dataset, across classes and whether it endangers any minority classes.

NaN and Infinite Values: Scanning the dataset for undefined values revealed that NaN values appear exclusively in **Flow Bytes/s**, while infinite values appear in both **Flow Bytes/s** and **Flow Packets/s**. To understand the origin, the CICFlowMeter source code was inspected directly. The relevant formulas are:

$$\text{Flow Bytes/s} = \frac{\text{forwardBytes} + \text{backwardBytes}}{\text{flowDuration}/1,000,000}$$

$$\text{Flow Packets/s} = \frac{\text{packetCount (fwd + bwd)}}{\text{flowDuration}/1,000,000}$$

Both features divide by **Flow Duration**. When **Flow Duration** = 0, any nonzero numerator yields Inf, and a zero numerator yields NaN 0/0. This distinction maps directly onto two observable row types in the dataset:

- Rows with 2 forward packets, 0 backward, and nonzero byte count:
Flow Duration = 0 with bytes > 0, producing **Flow Bytes/s** = Inf.
- Rows with 1 forward packet, 1 backward packet, and zero byte count:
Flow Duration = 0 with zero bytes, producing **Flow Packets/s** = NaN.

The zero byte count in the second case, despite existing packets, is because CICFlowMeter computes **Total Length of Fwd/Bwd Packets** from the packet payload only. Packets carrying no data content only TCP headers (ACK, SYN) produce zero payload length. The true anomaly in both cases is **Flow Duration** = 0.

Flow Duration is computed as the timestamp difference between the last and first packet in a flow. It evaluates to zero when two packets arrive within the same timestamp resolution window as the tool lacks the granularity to distinguish arrivals that are nanoseconds apart. Every affected row contains exactly two packets total, either two forward or one forward and one backward, which is consistent with this explanation: with only two packets, a single resolution failure collapses the entire duration to zero. This collapse propagates to every other feature that depends on the timestamp value, like **Flow IAT Mean**, **Flow IAT Max**, **Flow IAT Min**, and all rate-based features reduce to zero as well.

These rows impact is as follows. Globally, 353 unique row carry at least one NaN value making it 0.01% of the dataset, and 1,564 unique row carry at least one Inf value making it 0.05% of the dataset. At class level, Inf impact BENIGN with 1,427 unique row making it 0.06% of the class samples and only four attack classes are affected. NaN infects only BENIGN with 350 making it less then 0.01% of the class samples along with Dos Hulk. Rare classes such as Heartbleed, Infiltration, and Web Attack – SQL Injection are not affected. The attack class-level distribution is shown in the 4.7 Figure.

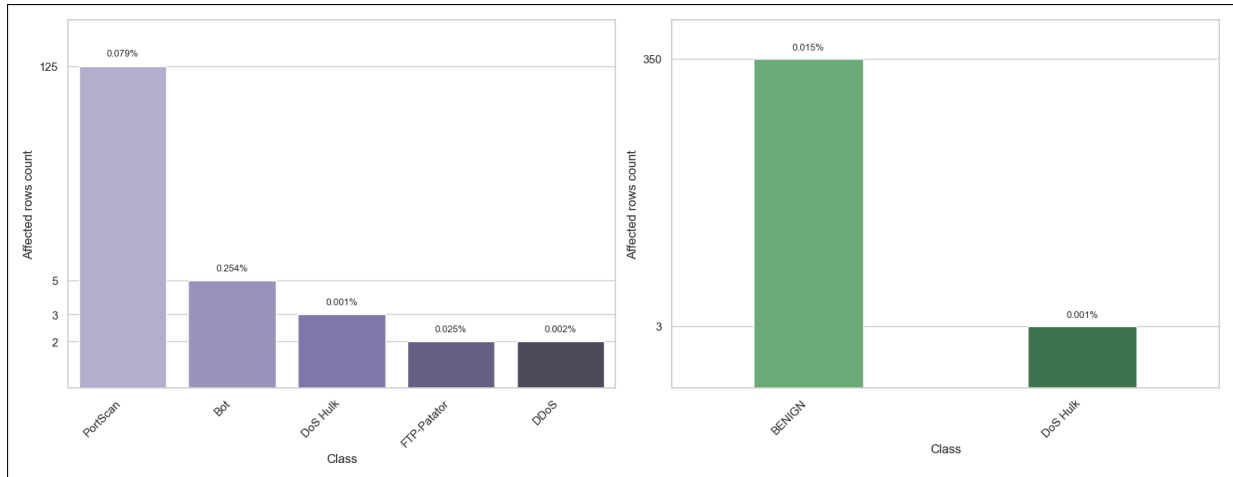


FIGURE 4.7 – Inf and NaN attack class distribution

Negative Values: Given the nature of the dataset feature, their logical value should never be negative yet Negative values were found across several feature groups, each with a distinct cause.

- **Sentinel encoding:** `Init_Win_bytes_forward` and `Init_Win_bytes_backward`.

These two features carry negative values at scale: 1,001,189 rows (35.4%) and 1,441,552 rows (50.9%) respectively hold the value -1. This is not a measurement error. CICFlowMeter uses -1 as a sentinel to signal that the TCP initial window size could not be captured, either because the SYN packet was absent from the capture, or because the flow is UDP-based and has no TCP handshake. It is a deliberate encoding choice by the tool, not a data corruption.

- **Packet ordering artifacts:** `Flow Duration`, `Flow IAT Mean`, `Flow IAT Max`, `Flow IAT Min`, `Fwd IAT Min`, `Flow Bytes/s`, and `Flow Packets/s`.

A total of 115 rows carry negative values in `Flow Duration` ranging from -13 to -1, with the same negative values propagating identically into `Flow IAT Mean`, `Flow IAT Max`, and `Flow IAT Min`.

This is a cascade, since each of these rows has exactly one packet forward and one backward, there is only one inter-arrival interval in the flow, so mean, max, and min all equal `Flow Duration` exactly.

Division by a small negative duration scaled by 1,000,000 then causes `Flow Bytes/s` and `Flow Packets/s` to carry large negative values.

For example, with `Flow Duration` = -1 and 12 bytes of payload:

$$\text{Flow Bytes/s} = \frac{12}{-1/1,000,000} = -12,000,000$$

This is likely to be a packet ordering artifact when processing the packets; additionally, CICFlowMeter performs no guard against negative duration, so the error propagates unchecked. The affected rows are exclusively BENIGN traffic and represent less than 0.0001% of the dataset.

After excluding these 115 rows, an additional 2,776 rows exhibit negative Flow IAT Min values and 17 rows exhibit a negative Fwd IAT Min. Here the ordering artifact affects only a single packet pair within a longer multi-packet flow, dragging the minimum IAT negative while all other temporal features remain valid. The attack class-level distribution is shown in the 4.8 Figure.

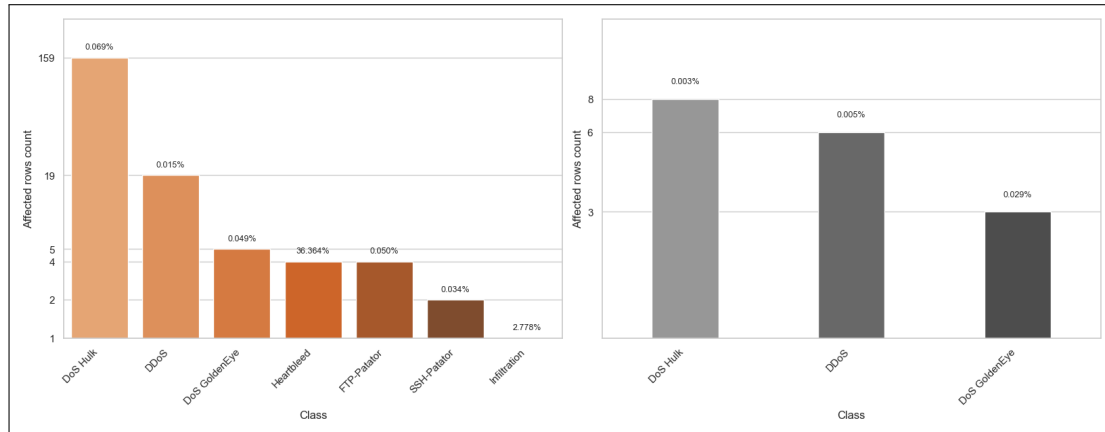


FIGURE 4.8 – Ordering Artifact Class Distribution

- **UDP parsing bug:** Fwd Header Length, Fwd Header Length.1, Bwd Header Length, min_seg_size_forward.

These features exhibit values in the range of -32,212,234,632 to -1,073,741,320, far outside any legitimate segment size and a TCP header size, which is bounded between 20 and 60 bytes.

The root cause is a bug in CICFlowMeter: when processing UDP packets, the tool reads the header size from a TCP-specific field that simply does not apply to UDP, producing meaningless values that corrupt these features.

The bug is confirmed by the data: all 35 affected rows are UDP flows, as indicated by `Init_Win_bytes_forward = Init_Win_bytes_backward = -1`.

The impact is narrow, 35 rows in Fwd Header Length, Fwd Header Length.1, and min_seg_size_forward, and 22 rows in Bwd Header Length, all exclusively BENIGN traffic, collectively under 0.0001% of the dataset.

Exact duplicates: Duplicate rows are common in network datasets since a row in the dataset does not represent a packet but a session behaviour summarised through statistical aggregation. Many flows share identical statistical profiles, thus the presence of duplicates does not necessarily indicate a data error.

Globally, duplicate rows represent 308,381 out of 2,830,743 rows (10.89%). Their distribution by attack class is as show in the 4.9 figure and no minority class is affected.

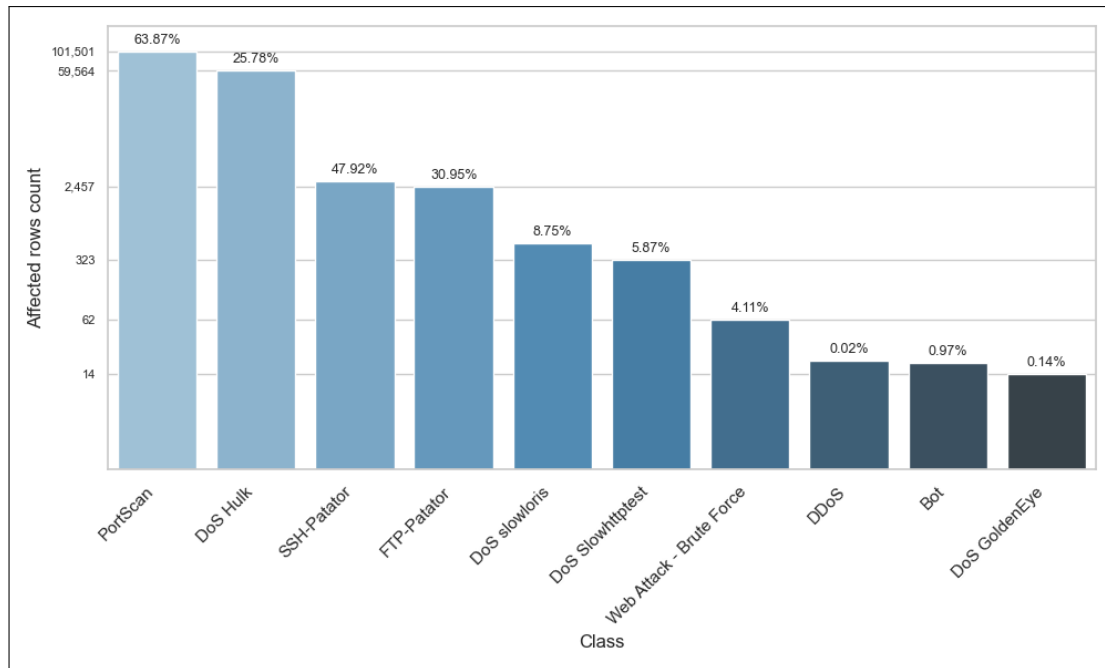


FIGURE 4.9 – Exact duplicates attack class distribution

Contradictory duplicates: These rows share the exact same feature values except for the target column, their labels differ. CICFlowMeter aggregates raw packet-level captures into flow statistics. Two flows from different sessions, one BENIGN and one malicious, can produce statistically identical feature vectors if their traffic patterns are indistinguishable at the flow-aggregation level. This is a fundamental limitation of statistical flow-based features rather than a labelling error.

Globally, 7,020 rows are affected. BENIGN traffic is the dominant participant in contradictory groups, as expected, BENIGN flows vastly outnumber attack flows, so the probability of a BENIGN flow sharing a feature vector with an attack flow is higher than inter-attack collisions. Contradictions involve only well-represented classes: DoS Hulk, DDoS, DoS slowloris, and PortScan. The 4.10 figure illustrates their distribution.

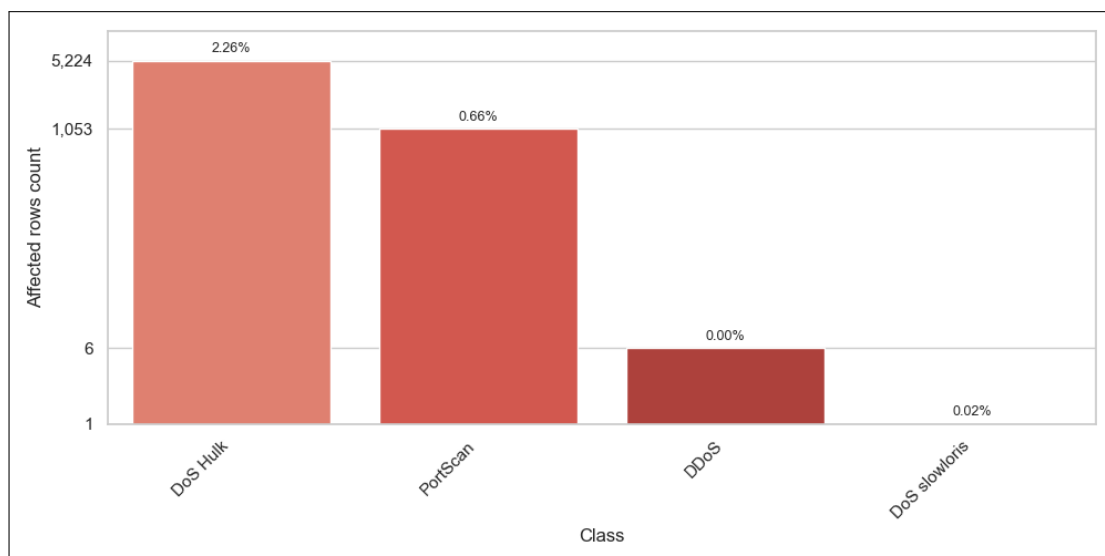


FIGURE 4.10 – Contradictory duplicates attack class distribution

Constant features: Constant features are those with a single unique value across the entire dataset, in this case, always zero. To understand this behaviour, each feature was traced back to its computation logic in the CICFlowMeter source code. The root cause divides them into two groups.

- **Bulk transfer features:** Fwd Avg Bytes/Bulk, Fwd Avg Packets/Bulk, Fwd Avg Bulk Rate, Bwd Avg Bytes/Bulk, Bwd Avg Packets/Bulk, Bwd Avg Bulk Rate.

Bulk transfer refers to sending a large number of packets consecutively in one direction, with very little time between them.

These features are derived from CICFlowMeter’s bulk detection logic, which only activates when at least four consecutive packets carrying actual data are observed in close succession.

If that condition is never met, either because flows in this dataset rarely involve this kind of continuous data sending, or because many packets carry no payload, the counters stay at zero and all six features are exported as zeros.

This is exactly what is observed. These features are constant not by error, but because the bulk detection logic simply never triggers on this dataset.

- **Backward flag counters:** Bwd PSH Flags and Bwd URG Flags

These are constant zero due to a bug in CICFlowMeter’s implementation. The features Bwd PSH Flags and Bwd URG Flags are meant to count how many times the PSH and URG flags appear in packets traveling in the backward direction.

However, these counters are only incremented inside the method that processes the first packet. Since the first packet by definition can only be forward, CICFlowMeter assigns the source IP from that first packet and compares subsequent packets against it to determine direction. The method that handles the following packets never updates these counters, so both features remain zero for every flow, regardless of the actual traffic.

Near-constant features: Fwd URG Flags, CWE Flag Count, RST Flag Count, and ECE Flag Count.

Each feature hold exactly two unique values across the entire dataset. These are rare-event TCP control flags that are virtually absent in normal traffic. Combined, their non-zero occurrences account for only 315 rows (0.0139%), all within BENIGN traffic. Therefore, they carry no discriminative signal for any attack class.

4.4 Data preparation

This section translates the findings from the data understanding phase into concrete preprocessing actions.

4.4.1 Data cleaning

The integrity of data is a prerequisite for any reliable model. Thus, we leverage data correctness over sample retention, as long as data volume and class balance are not meaningfully affected.

NaN and Inf Values: Rows carrying NaN or Inf values in `Flow Bytes/s` and `Flow Packets/s` are removed. As established, these arise from division by a zero `Flow Duration`, due to the lack of time granularity. Beyond the invalid rate features, these rows are also dominated by zeros which do not reflect the true nature of the flow, but are simply an artifact of insufficient measurement precision. Such a row cannot serve as a valid representation of a network session, as its defining characteristics were lost in the granularity gap.

The scale reinforces the decision. Globally, fewer than 0.11% of rows are affected. Additionally, the unique affected rows per attack class amount to 5 for Bot, 125 for PortScan, 2 for DDoS, and 3 for DoS Hulk, representing less than 0.00% of any single class, all of which carry sufficient clean samples to generalise from. No minority class is affected.

Negative Values: Negative values across the dataset fall into four distinct categories, each handled differently.

- **Sentinel encoding:** `Init_Win_bytes_forward` and `Init_Win_bytes_backward`.

These are retained without modification. As noted, -1 is a deliberate sentinel used by CICFlowMeter to encode the absence of a TCP handshake, it is semantically valid and carries information about the flow type. Replacing it would discard a meaningful signal.

- **Packet ordering artifacts:** This anomaly originates during packet processing, since these sessions consist of a single packet exchange, the flow has no other packets to establish a valid duration or inter-arrival times. `Flow Duration` was rendered negative, and all rate-based features, `Flow IAT Mean`, `Flow IAT Max`, and `Flow IAT Min` collapsed to that same negative value, leaving no part of the flow intact.

Beyond the specific features where the corruption is visible, there is a deeper concern. This is a bug introduced during dataset construction, and its effects are not fully observable from the CSV alone.

Negative values in `Flow Duration` make the anomaly detectable, but there is no guarantee that the ordering artifact confined its damage only to features that produce obviously invalid numbers.

The same error may have silently distorted other features into values that appear plausible but are incorrect, damage that is invisible precisely because it does not manifest as negatives or zeros, but as ordinary-looking numbers that simply do not reflect the true flow.

In order to preserve data integrity and given the rows effect is negligible, only 115 rows belonging to BENIGN traffic, we decide to drop these rows.

`Flow IAT Min` and `Fwd IAT Min` share the same root cause, a packet ordering artifact, but the outcome is fundamentally different. Here the affected flows span multiple packets, so the ordering error disturbed only a single packet pair within an otherwise well-measured session.

The negative value appears only in the minimum IAT statistic, while `Flow Duration`

remains positive and all other features are valid.

Inter-arrival time cannot be negative by definition, so clipping both features to zero restores the value to the physical boundary it should never have crossed, without fabricating anything.

This targeted correction is justified precisely because the flow itself was captured correctly, unlike the single-packet cases above, where the corruption was total and removal was the only option.

This treatment also preserves the 4 Heartbleed rows that would otherwise be discarded, a meaningful consideration given the class contains only 11 samples in total.

- **UDP parsing bug:** `Fwd Header Length`, `Bwd Header Length`, `Fwd Header Length.1`, and `min_seg_size_forward`.

These rows are removed. As established, they are caused by a parsing bug rendering these feature values meaningless and irrecoverable. The fact that all affected rows belong exclusively to BENIGN traffic and represent under 0.002% of the dataset confirms that removal incurs no meaningful cost to class balance or dataset integrity.

Exact duplicates: Exact duplicate rows are dropped. Retaining them risks data leakage, a row could appear in both the training and test sets simultaneously, moreover it risks overfitting by biasing the model toward a single flow pattern. Since no minority classes are affected, the removal carries no risk to rare attack samples.

Contradictory duplicates: These rows present a serious risk to model training. An identical feature vector mapped to more than one target is unresolvable, retaining such rows forces the model to fit contradictory labels from the same input. All rows belonging to contradictory groups are therefore dropped entirely, regardless of their label. Since rare classes are unaffected, this carries no risk of losing minority attack samples.

4.4.2 Feature engineering

The correlation matrix is recomputed on the cleaned data as the composition of the dataset has changed. 13 new pairs emerge and 3 pairs no longer appear, making a total of 49 pairs of highly correlated features, all of which provide no additional information to the model, some of which even have bugs in their computation causing the correlation.

The absence of the 3 pairs is explained by the cleaning process: `Fwd URG Flags` and `CWE Flag Count`, `RST Flag Count` and `ECE Flag Count` are near-constant features, and `Fwd Header Length` and `Fwd Header Length.1` are duplicate columns. As these features are no longer present in the dataset, the correlated pairs they formed no longer appear in the recomputed correlation analysis.

For the 13 new pairs, each pair contains at least one of the following features: `Fwd Header Length`, `Bwd Header Length`. These two features have their UDP parsing-corrupted rows dropped during cleaning. As a result, the true underlying correlation between these features and others becomes visible, previously masked by the corrupted values.

One feature from each pair is dropped. The choice is made based on Mutual Information (MI) score, which measures the feature-target association to determine which feature is more informative to distinguish between classes. For pairs with similar MI scores, the decision is made based on the domain knowledge.

Mutual Information measures how much knowing the value of a feature reduces uncertainty about the target class. Unlike the Pearson correlation, it captures both linear and non-linear relationships and works with categorical and continuous features. An MI score of 0 means it provides no useful information for target prediction, while a higher score indicates a stronger association with the target class. The MI score measures the association between a single feature and the target independently of other features:

$$MI(X; Y) = \sum_{x \in X} \sum_{y \in Y} p(x, y) \log \frac{p(x, y)}{p(x)p(y)} \quad (4.2)$$

Where X is the feature, Y is the target, $p(x, y)$ is the joint probability distribution of X and Y , and $p(x)$ and $p(y)$ are the marginal probability of X and Y independently.

For 37 pairs of the 49 highly correlated pairs, the feature with the higher MI score is retained. However, these decisions may be overridden by the Knowledge-based decision.

For the remaining 12 pairs is made by examining what each feature represents in terms of network behavior rather than its statistical properties. The decision is made as follows for these pairs:

- **Packet and Segment length mean pairs:** Fwd Packet Length Mean and Avg Fwd Segment Size, Bwd Packet Length Mean and Avg Bwd Segment Size
- **Packet and Segment length mean pairs:** Fwd Packet Length Mean and Avg Fwd Segment Size, Bwd Packet Length Mean and Avg Bwd Segment Size, the packets features are kept over the segments one, as they use standard network traffic analysis terminology, are immediately interpretable, and are consistent with the other packet length features already present in the dataset.
- **Totals and Subflows pairs:** Total Fwd Packets and Subflow Fwd Packets, Total Backward Packets and Subflow Bwd Packets, Total Length of Fwd Packets and Subflow Fwd Bytes, and Total Length of Bwd Packets and Subflow Bwd Bytes, as established before, the subflows are equal to the totals throughout the dataset due to a bug in their computation. The totals are kept as they are both correctly computed and more fundamental, representing the actual flow-level counts and byte totals directly. The subflow features are dropped as they provide no additional information beyond what the totals already capture.
- **Flags pair:** Fwd PSH Flags and SYN Flag Count, Although they are both only counted on the first packet, they still provide information about whether the flow was captured from the beginning of a TCP connection. SYN Flag Count is kept as it represents the synchronization packets counts used to initiate TCP connections making it more useful for that purpose, while the Fwd PSH Flags represents the count of how many forward packets had the push (PSH) flag set signaling the sender to push buffered data immediately.

- **Flags pair:** **Fwd PSH Flags** and **SYN Flag Count**, although both are only counted on the first packet due to the flag-counting bug, they still provide information about whether the flow was captured from the beginning of a TCP connection. **SYN Flag Count** is kept as it captures this condition more directly, reflecting whether a connection-initiating SYN packet was observed, which is more meaningful for distinguishing attack types than **Fwd PSH Flags**, which only indicates whether the first packet had the PSH flag set and carries no additional interpretable information beyond what **SYN Flag Count** already provides.
- **Duration and IAT pair:** **Flow Duration** and **Fwd IAT Total**, are highly correlated as both grow with the length of the connection, but they measure different quantities. **Flow Duration** captures the total elapsed time of the entire flow across both directions and is retained as it is a direct, universally understood measure of connection length. **Fwd IAT Total** measures the cumulative inter-arrival time between consecutive forward packets only, making it a direction-specific partial measure whose information is already partially represented by **Flow Duration** in combination with the other IAT features, and is therefore dropped.
- **Idle multicollinearity pairs:** **idle mean** and **idle max**, **idle mean** and **idle min**, **idle max** and **idle min**, the latter pair's features are both dropped in favor of **Idle Mean**, the two represent the extremes of the idle time distribution and are jointly collinear with it. **Idle Max** is susceptible to inflation by a single unusually long pause without reflecting the overall idle behavior of the flow, while **Idle Min** is easily influenced by noise from brief transient gaps. **Idle Mean** is retained as it is more representative of the typical idle behavior across the flow and less sensitive to individual outlier values.

In conclusion, of the 33 features involved in the highly correlated pairs, 19 are dropped:

- | | | |
|------------------------|-------------------------|-------------------------|
| • Subflow Bwd Bytes | Max | • Fwd Packet Length Std |
| • Subflow Bwd Packets | • Bwd Packet Length Std | • Fwd Packets/s |
| • Subflow Fwd Bytes | • Flow IAT Max | • Idle Max |
| • Subflow Fwd Packets | • Fwd Header Length | • Idle Min |
| • Avg Fwd Segment Size | • Fwd IAT Total | • Max Packet Length |
| • Bwd Header Length | • Fwd PSH Flags | • Packet Length Mean |
| • Bwd Packet Length | | |

4.4.3 Label encoding

The selected model, XGBoost, requires numerical input for both features and the target variable. While all features are already numerical, the target column **Label** is categorical and stored as an object type. Hence, Label Encoding was performed using Label encoder

from `sklearn.preprocessing`. The encoder was fitted and applied to the target column in a single step using `fit_transform()`. To preserve interpretability of the model's predicted outputs, the resulting integer-to-class mapping was exported as a `label_mapping.json` file derived from `le.classes_`, allowing any predicted label to be traced back to its original class name.

4.4.4 Train/ Test split

Several factors make us approach this step with caution, when assessing the train/test split strategies.

A per-file split is not an option, as the files are divided per attack type, each attack class appears in exactly one file, so splitting by file would result in classes entirely absent from either the training or test set.

A standard random 80/20 split presents its own issues. The CIC-IDS2017 dataset is heavily imbalanced, the BENIGN to attack ratio is 80/20. Additionally, rare classes present less than 0.001% of the full dataset, so this strategy offers no guarantee of a fair class distribution and gives no assurance that rare classes will be adequately represented in both sets, which is particularly concerning given their scarcity.

For these reasons, a stratified train/test split is selected. It ensures all classes are present in both the training and test sets, each maintaining their original proportions, so the class distribution in each split mirrors that of the full dataset.

However, this strategy doesn't solve the class imbalance. This issue will be addressed and treated more during the model training.

4.5 Conclusion

This chapter presented the full data workflow adopted for this project, from selecting an appropriate public intrusion detection dataset to preparing it for model training. We compared candidate datasets and justified the choice of CIC-IDS2017, then analyzed data quality issues such as NaN/Inf values, negative artifacts, duplicates, and constant features, linking each issue to its root cause in traffic generation or feature extraction. Finally, we applied cleaning and preparation steps that preserve class coverage and prevent leakage, and we defined an encoding and stratified splitting strategy to support reliable evaluation in the subsequent modeling chapter.

Chapter 5

Modeling

5.1 Introduction

5.2 State of the Art

5.3 Adopted Approach

5.4 Training and Hyperparameter Optimization

5.5 Conclusion

Chapter 6

Realization

6.1 Introduction

6.2 Development Tools and Technologies

6.3 Performance Analysis and Evaluation Metrics

6.4 User Interfaces

6.5 Integration

6.6 Conclusion

General Conclusion

Webography

- [1] <https://www.snort.org/>. Accessed on: April 6, 2026.
- [2] <https://suricata.io/>. Accessed on: April 6, 2026.
- [3] <https://www.geeksforgeeks.org/system-design/unified-modeling-language-uml-introduction/>. Accessed on: April 2, 2026.
- [4] <https://github.com/ahlashkari/CICFlowMeter>. Accessed on: April 23, 2026.

Bibliography

- [1] Chris Jackson. *Network Security Auditing*. 800 East 96th Street, Indianapolis, IN 46240 USA: Cisco Press, 2010. ISBN: 978-1-58705-352-8.
- [2] Nour Moustafa and Jill Slay. “UNSW-NB15: a comprehensive data set for network intrusion detection systems (UNSW-NB15 network data set)”. In: *Military Communications and Information Systems Conference (MilCIS)*. IEEE, 2015. DOI: 10.1109/MilCIS.2015.7348942.
- [3] Iman Sharafaldin, Arash Habibi Lashkari, and Ali A Ghorbani. “Toward Generating a New Intrusion Detection Dataset and Intrusion Traffic Characterization”. In: *ICISSP* (2018), pp. 108–116. DOI: 10.5220/0006639801080116.
- [4] Mahbod Tavallae et al. “A Detailed Analysis of the KDD CUP 99 Data Set”. In: *2009 IEEE Symposium on Computational Intelligence for Security and Defense Applications (CISDA)*. 2009, pp. 1–6. DOI: 10.1109/CISDA.2009.5356528.