


MTK Recommend
W/EDGE:SKY77590 SP8T(6TRX)
W/GPRS:SKY77584 SP6T(4TRX)





SKY77590 Control Logic Table

	VctA	VctB	VctC	Enable
	BS2	BS1	Mode	TxEN
TRX1	L	L	H	L
TRX2	L	H	H	L
TRX3	H	L	H	L
TRX4	H	H	H	L
TRX5	L	H	L	L
TRX6	H	L	L	L
EDGETX_L	H	L	H	H
EDGETX_H	H	H	H	H
GMSKTX_L	H	L	L	H
GMSKTX_H	H	H	L	H
STANDBY	L	L	L	L

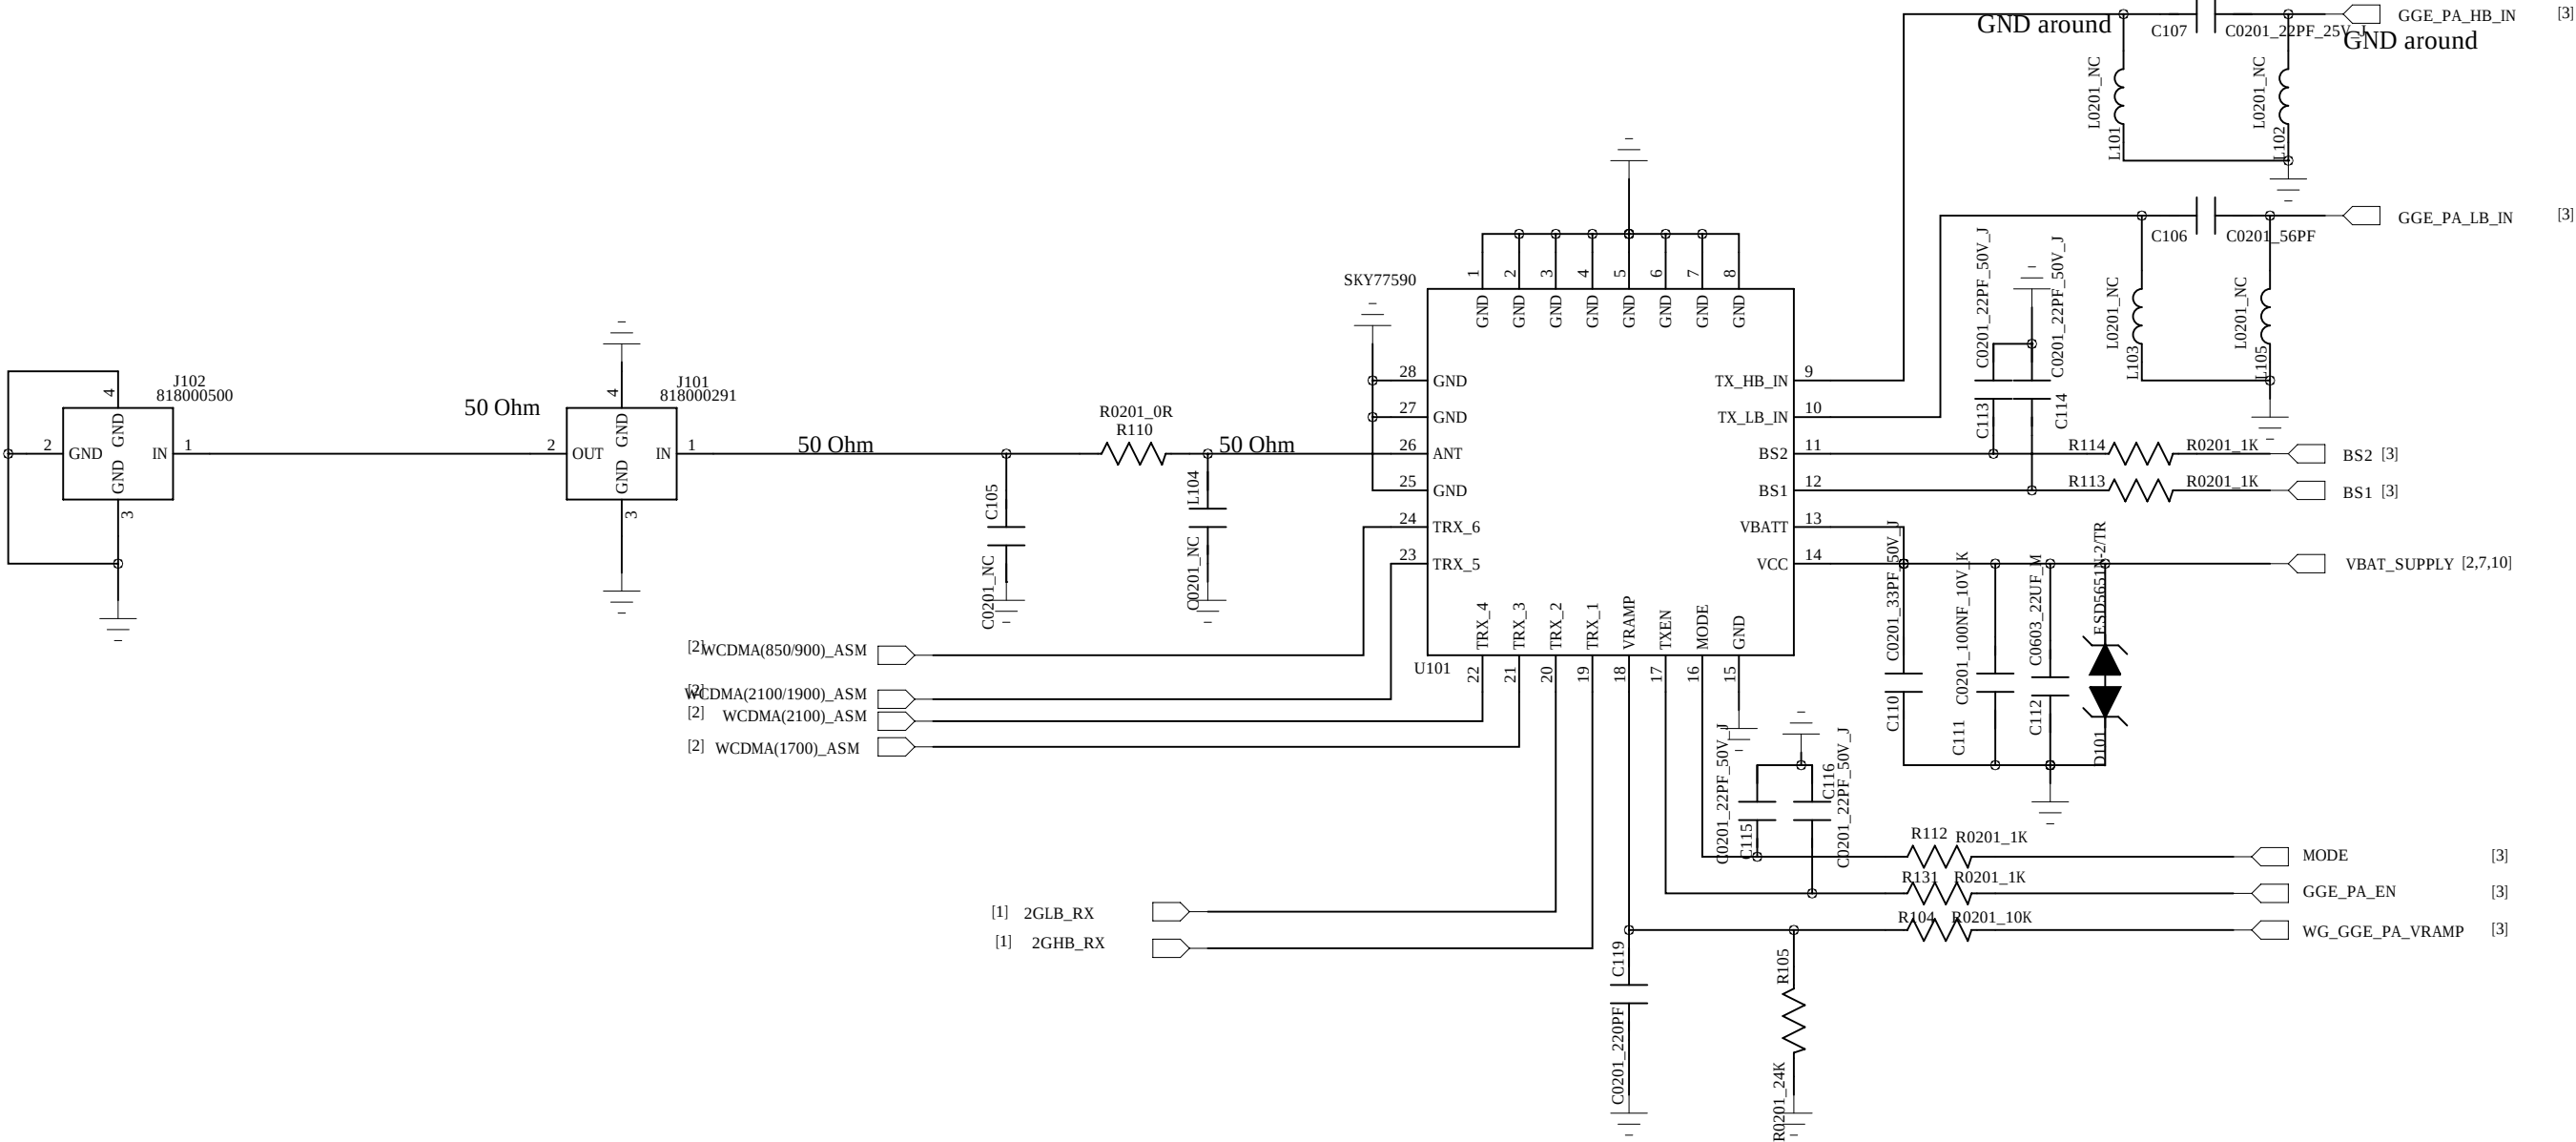

Power MODE	VEN_LB	VEN_HB	VMODE
Shutdown	0	0	0
B1/2 HM	0	1	0
B1/2 LM	0	1	1
B5/8 HM	1	0	0
B5/8 LM	1	0	1

WCDMA Band1/2//5/8

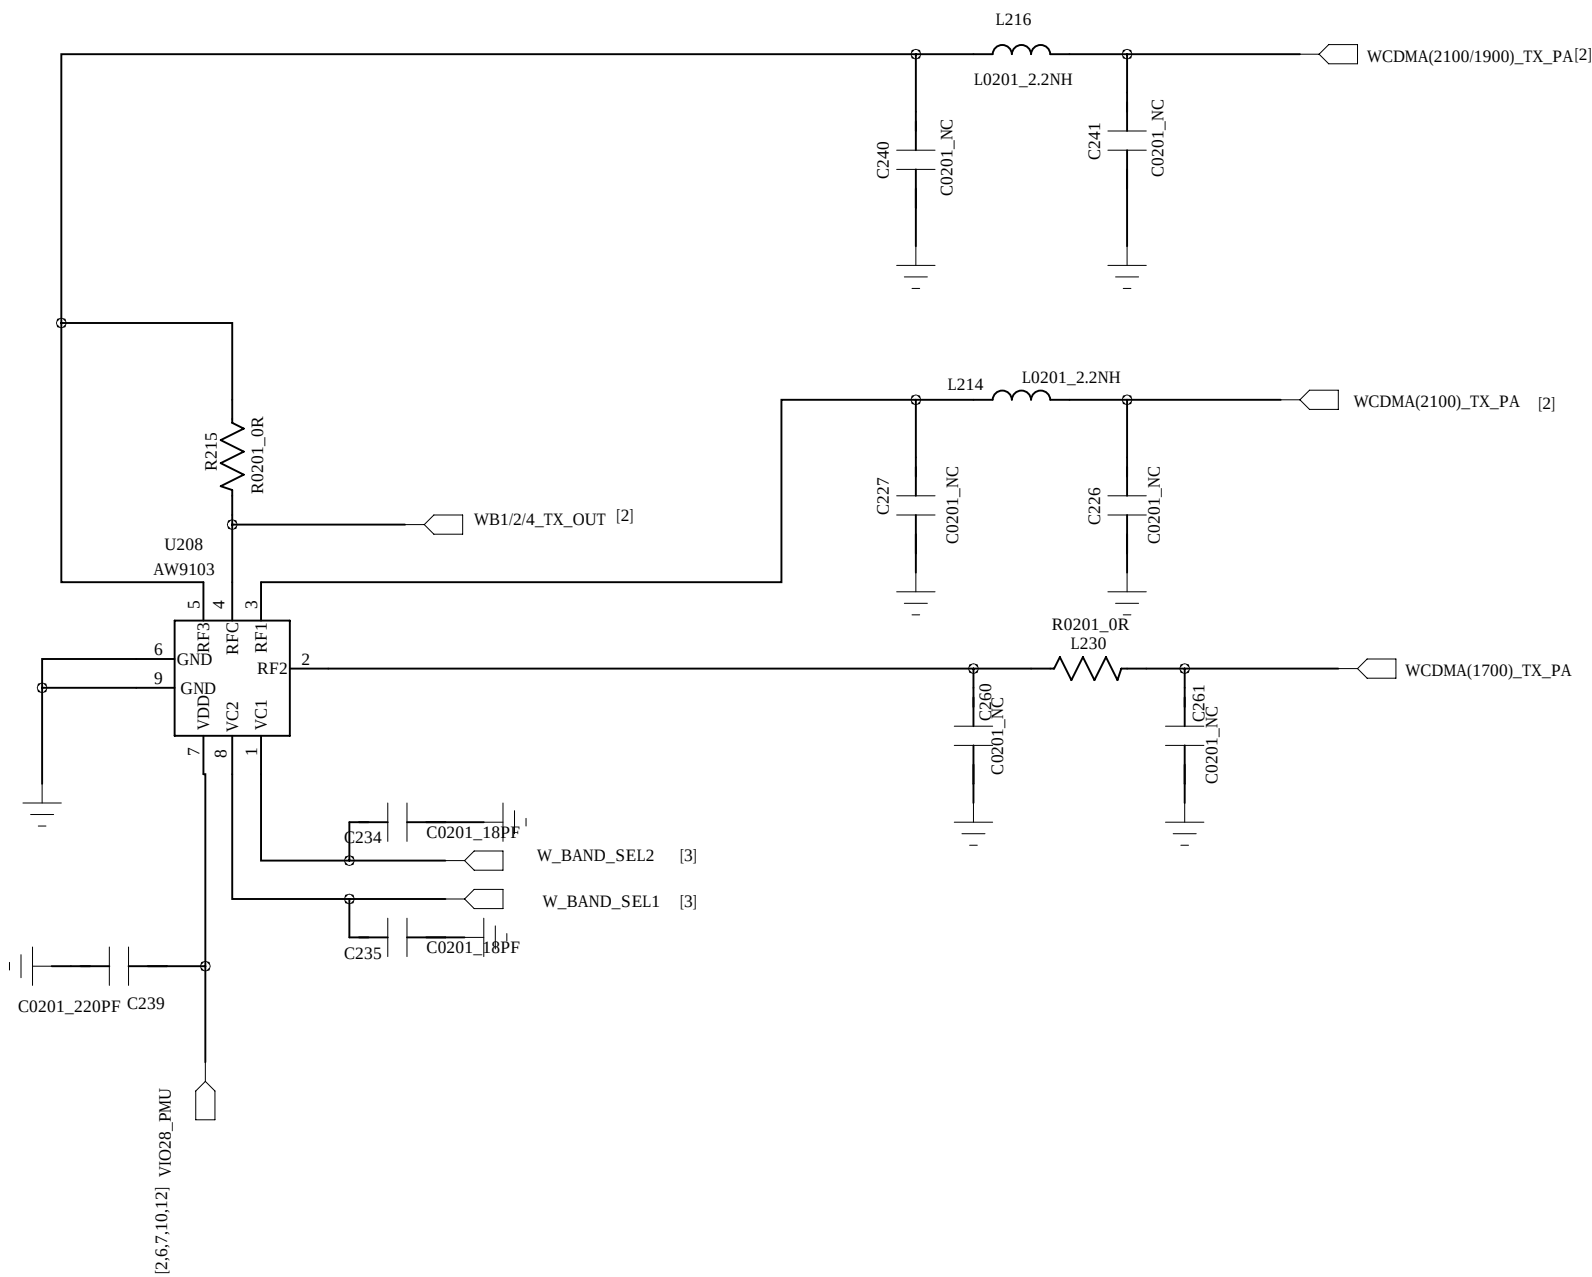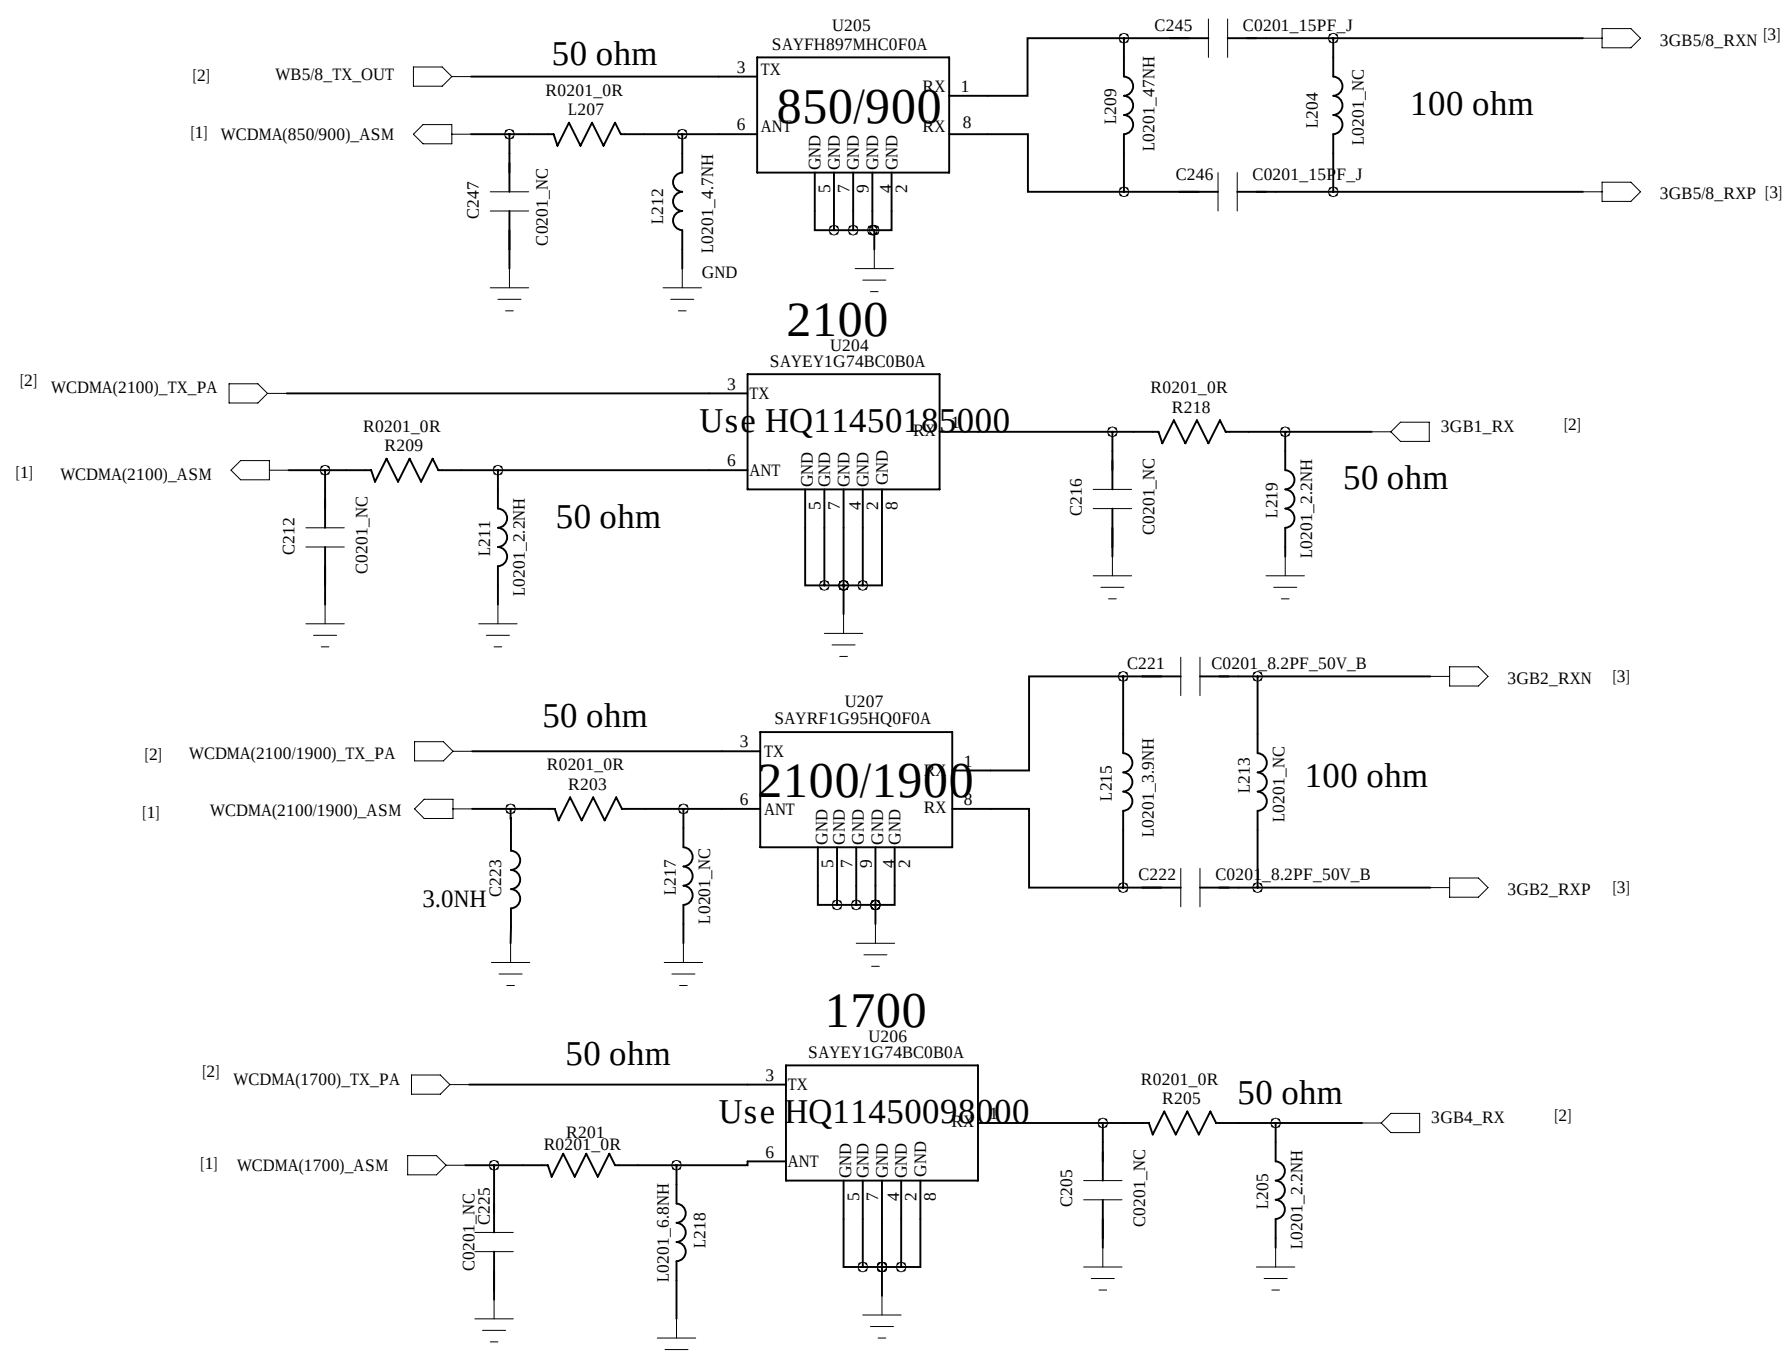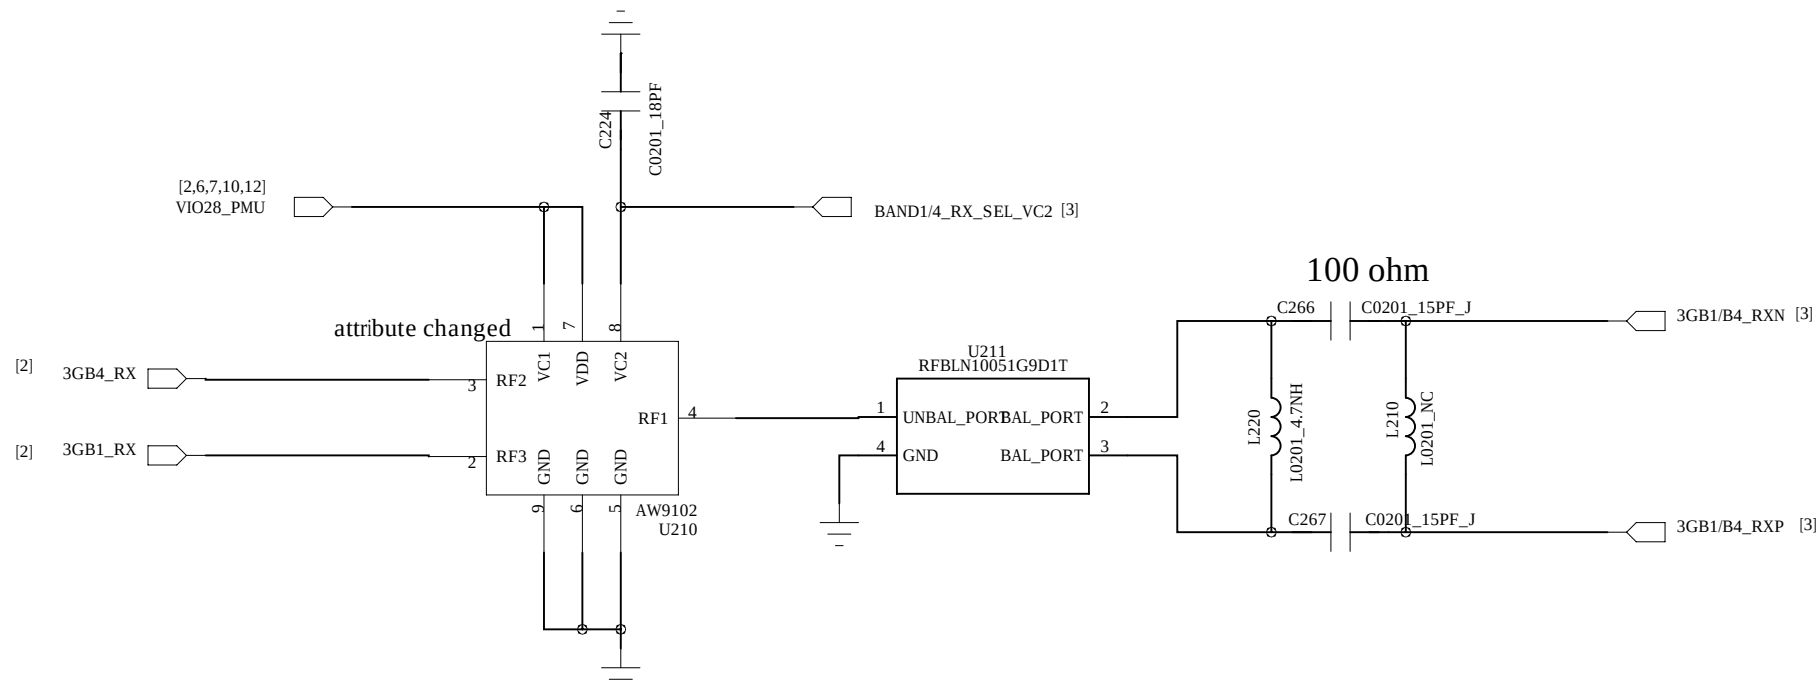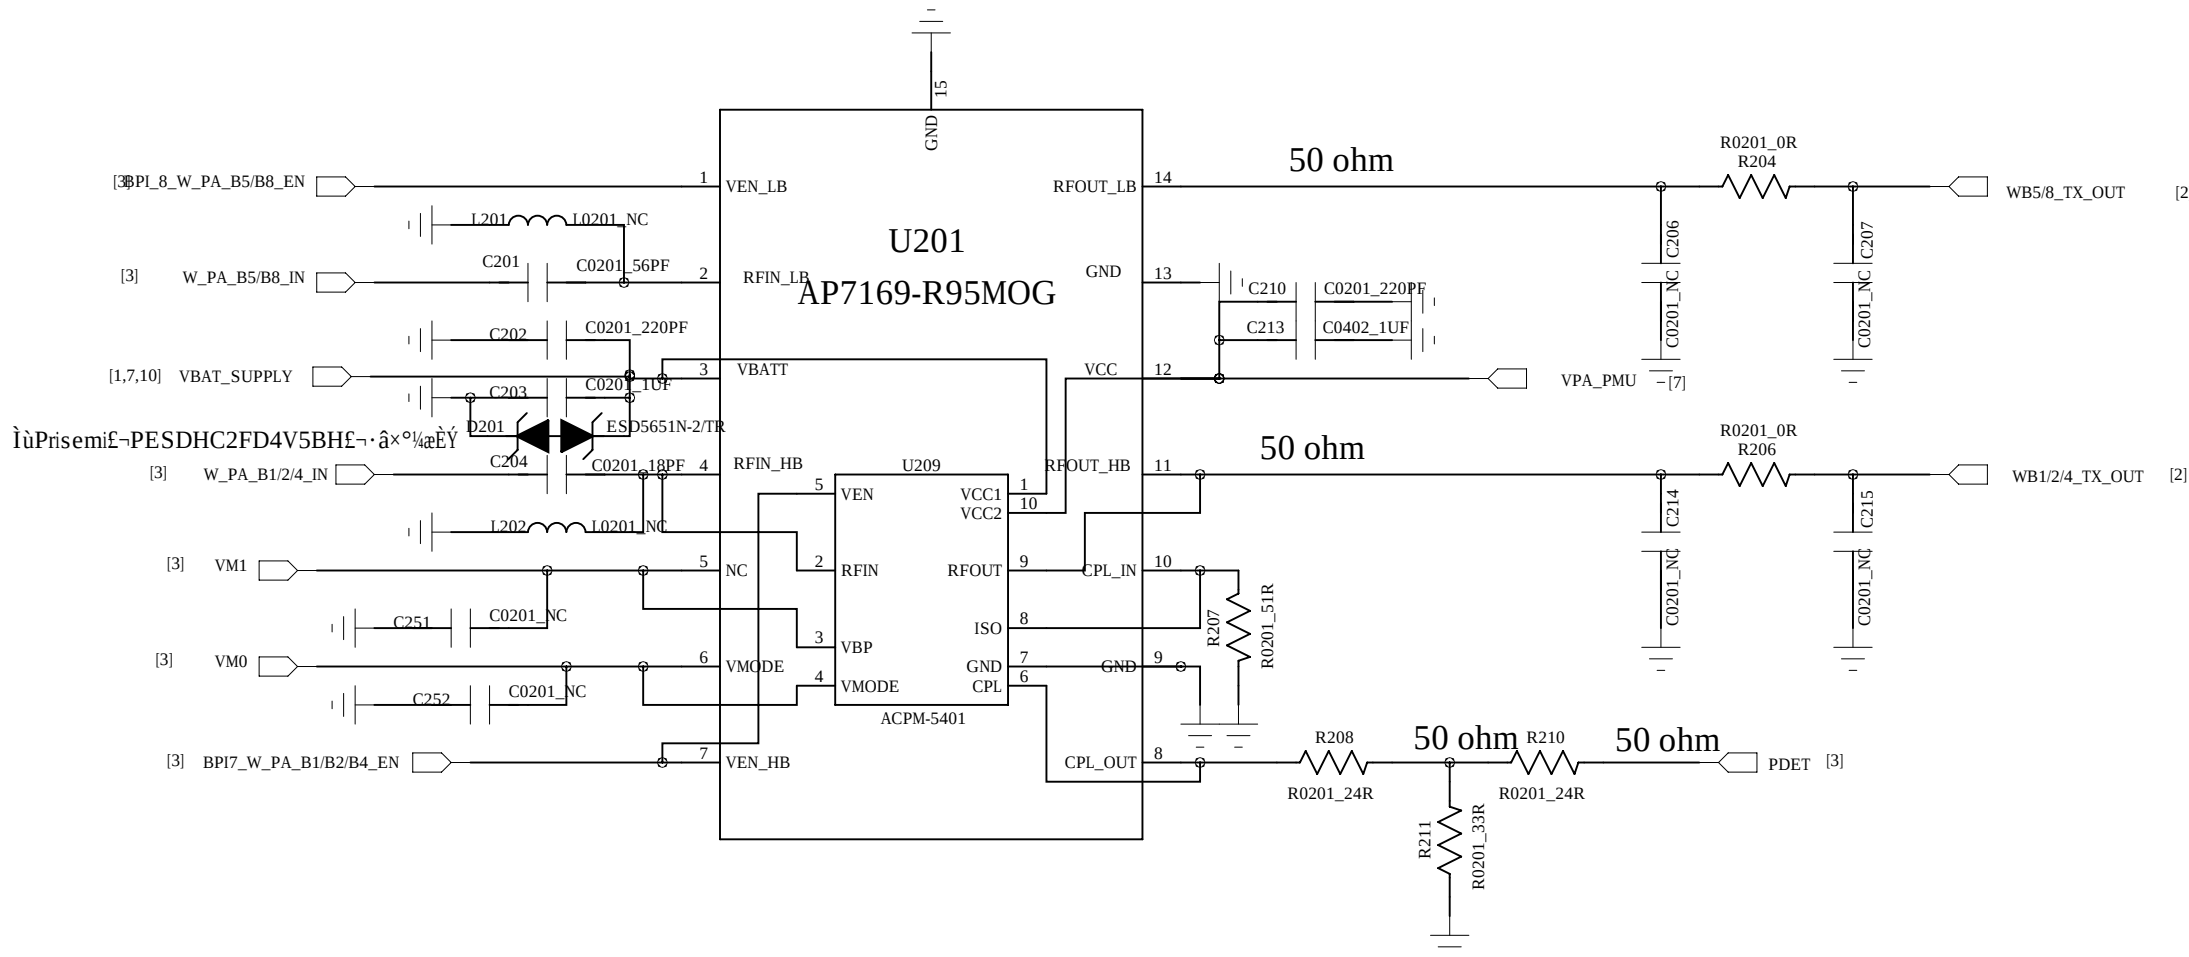

Shutdown	—	0	1
ANT_RF1	0	1	1
ANT_RF2	1	1	1

HUAQIN

MODEL: AW878

DRAWING NO.:

DRAWN

DATED

TITLE:

VERSION:



SHEET: 2

CHECKED


DATED

- 1.Route AUXADC_REF_RF/THERM_SENSE with4mil trace width
2.Route AUXADC_REF_RF/THERM_SENSE as differential trace with well GND shielding
3.Route AUXADC_GND with 24mil trace width under THERM_SENSE/AUXADC_REF trace to provide return current path

Connect TSX/XTAL GND to AVSS28_AUXADC first than connect to main GND

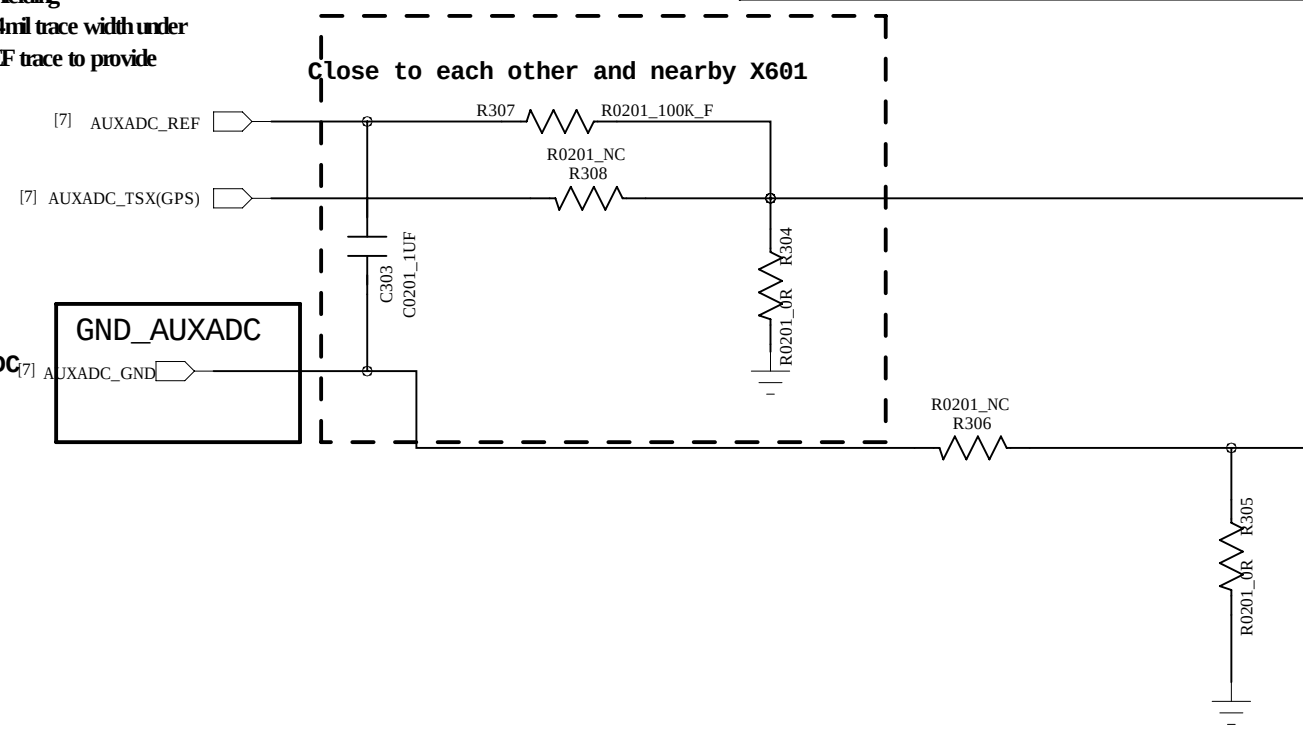

MODE	Logic	DCX0_32K_EN	XMODE	VXODIG
VCTCXO		0(GND)	0(GND)	1(VI018)
DCX0 + 32K X0		0(GND)	1(VI018)	1(VI018)
DCX0 + 32K-Less		1(VTXC028)	1(VTXC028)	1(VTXC028)

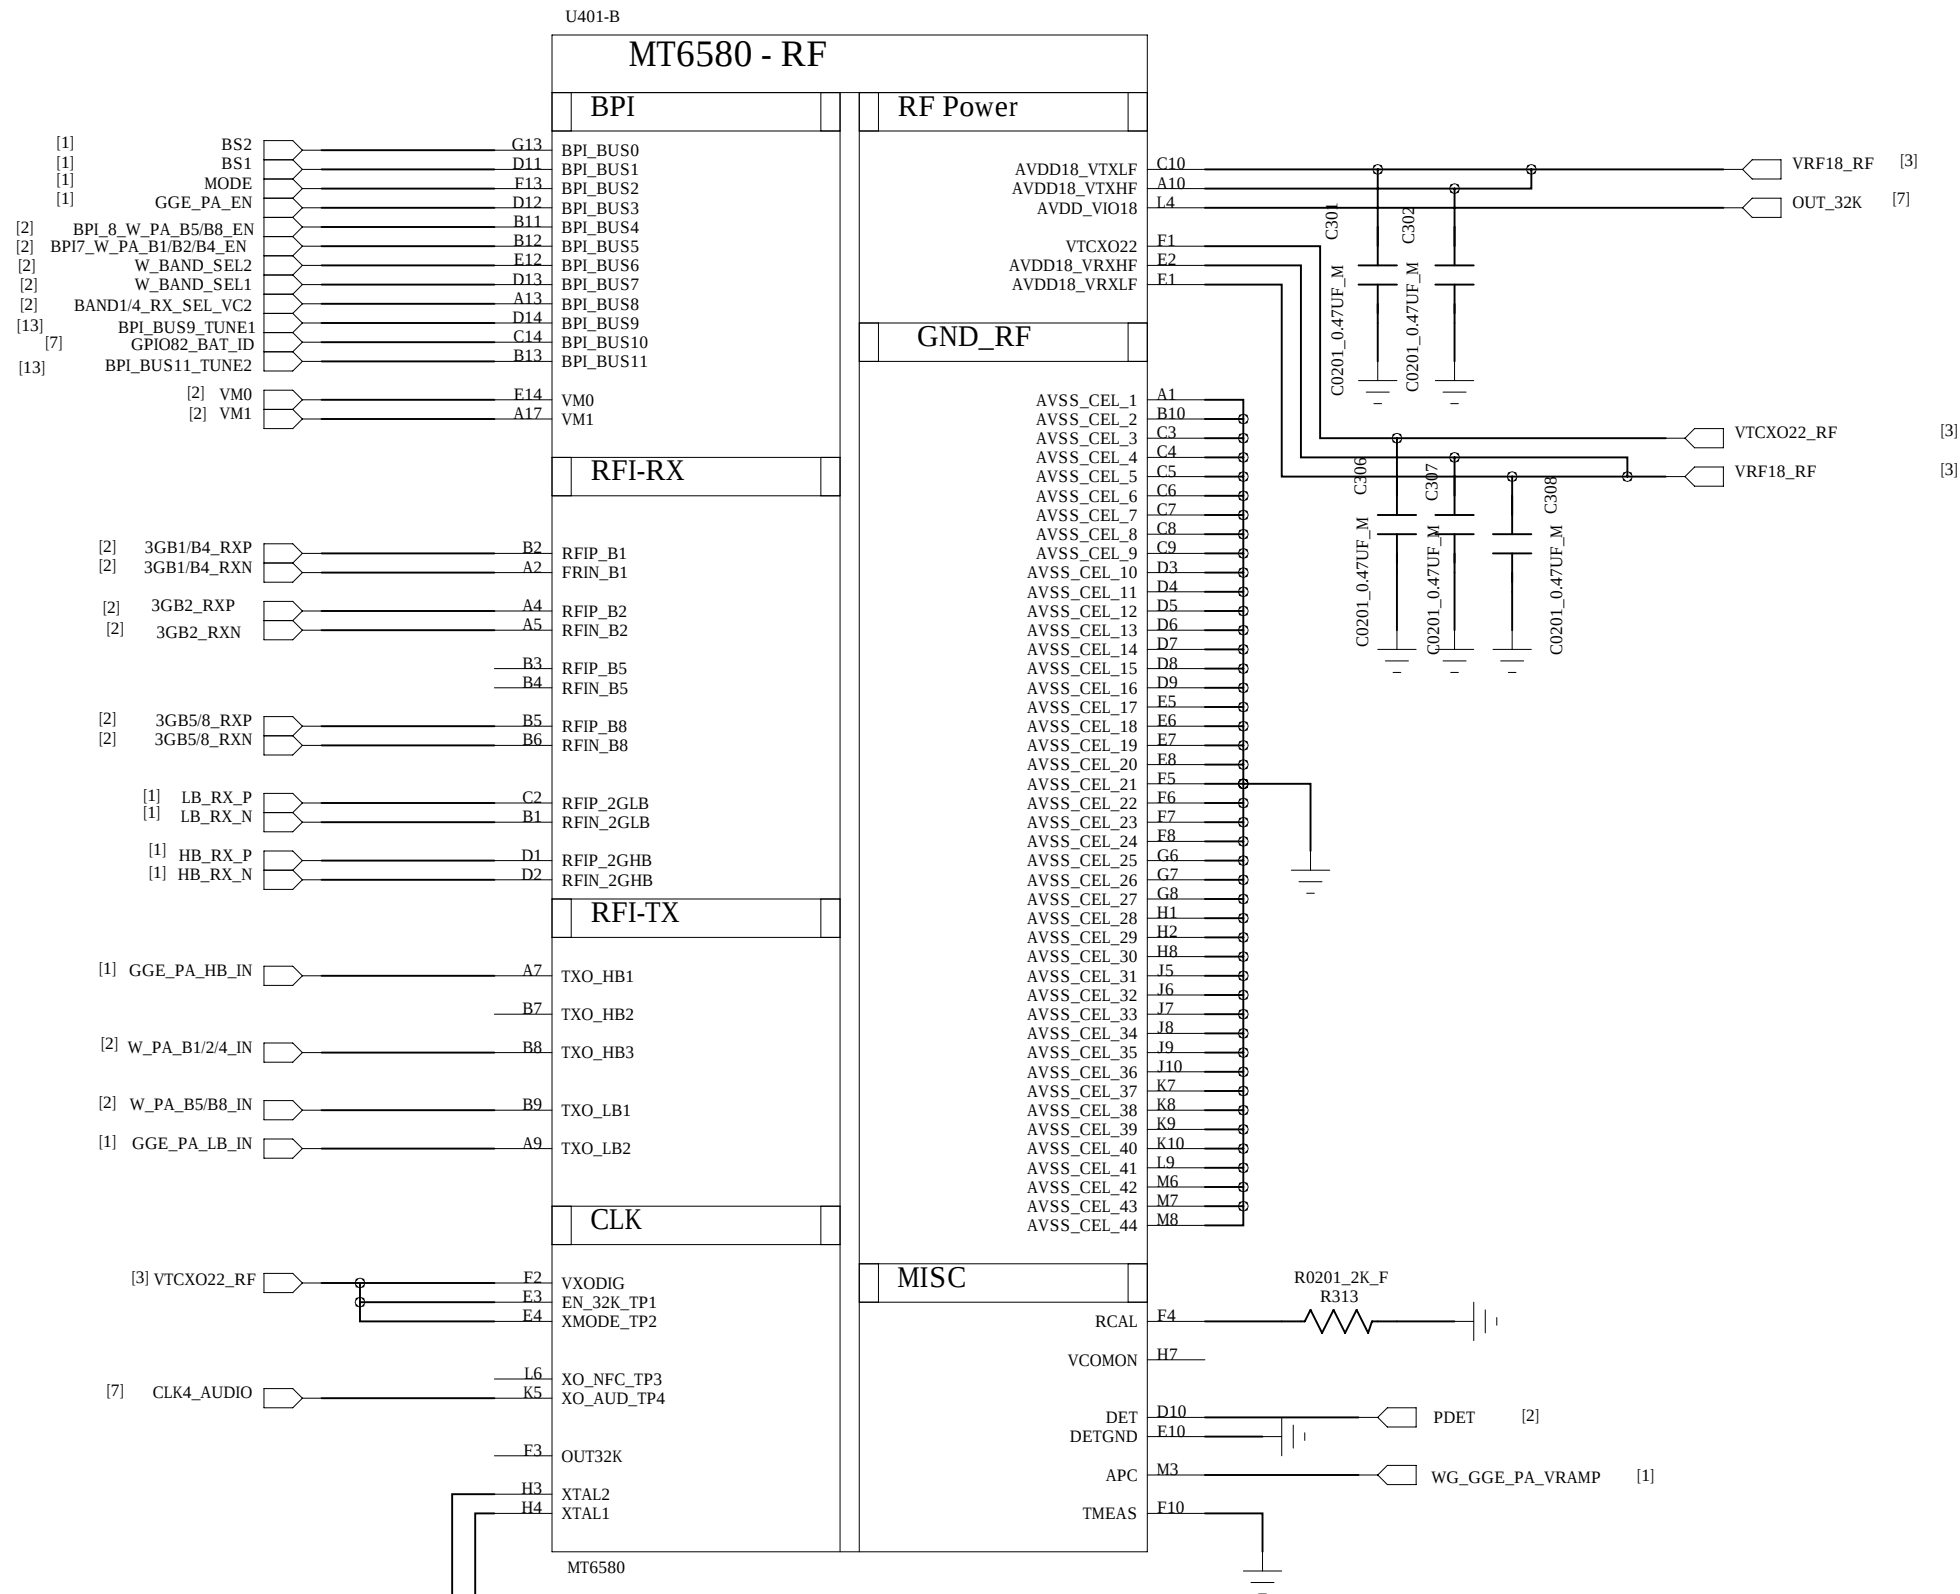

HUAQIN

MODEL: AW878

DRAWING NO.:

DRAWN

DATED





TITLE:


VERSION:

SHEET: 3

CHECKED

DATED

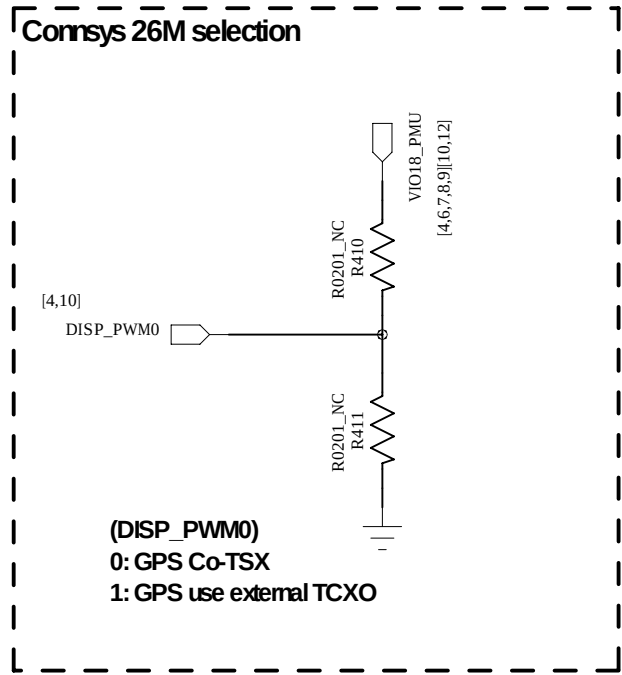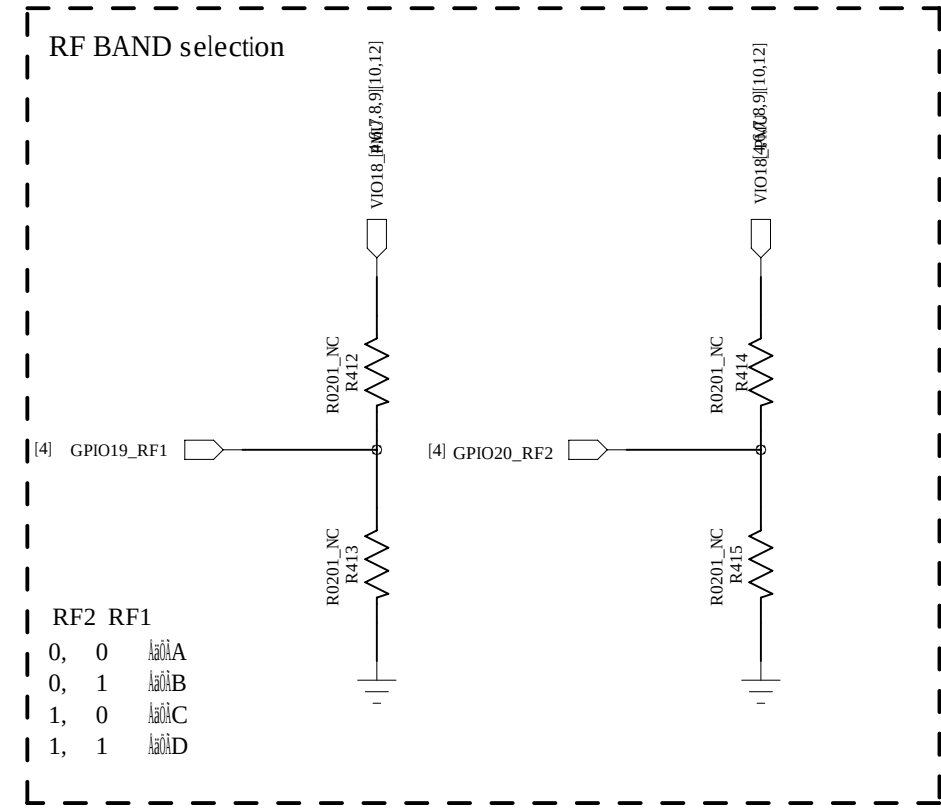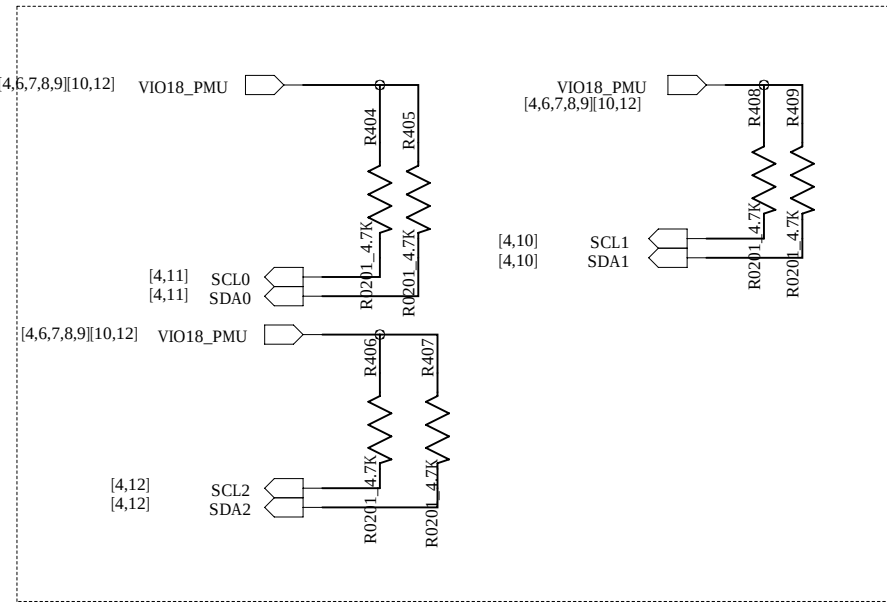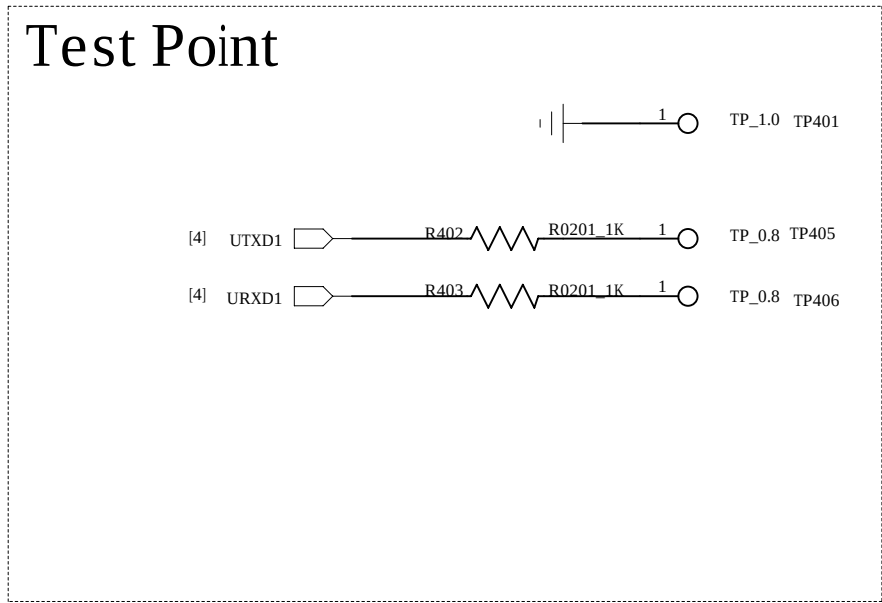

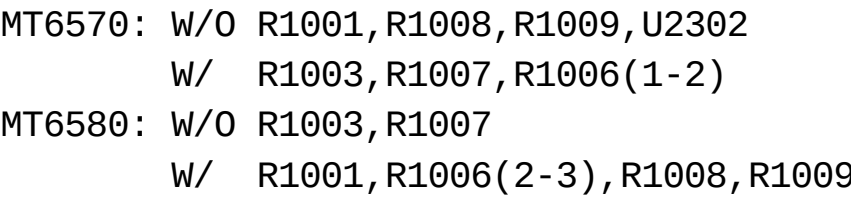

DRAWING NO.:


DATED

DATED

VERSION:


SHEET: 5

390K_F/0402 HQ11612101001


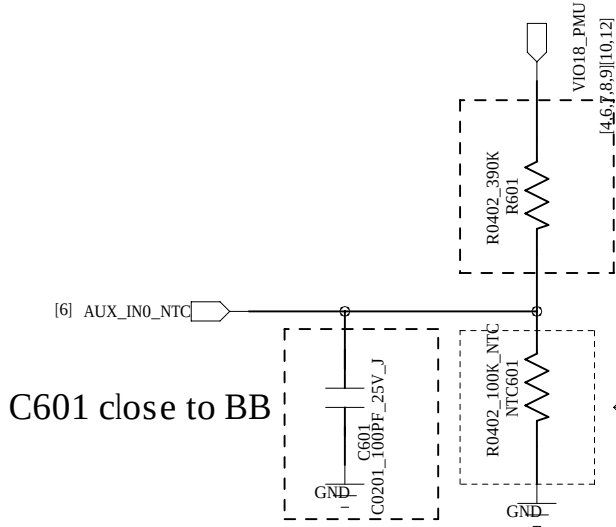


100K NTC -----AP


NTC601 should be far from other heat source and keep 5-7mm to BB located in the same layer with BB

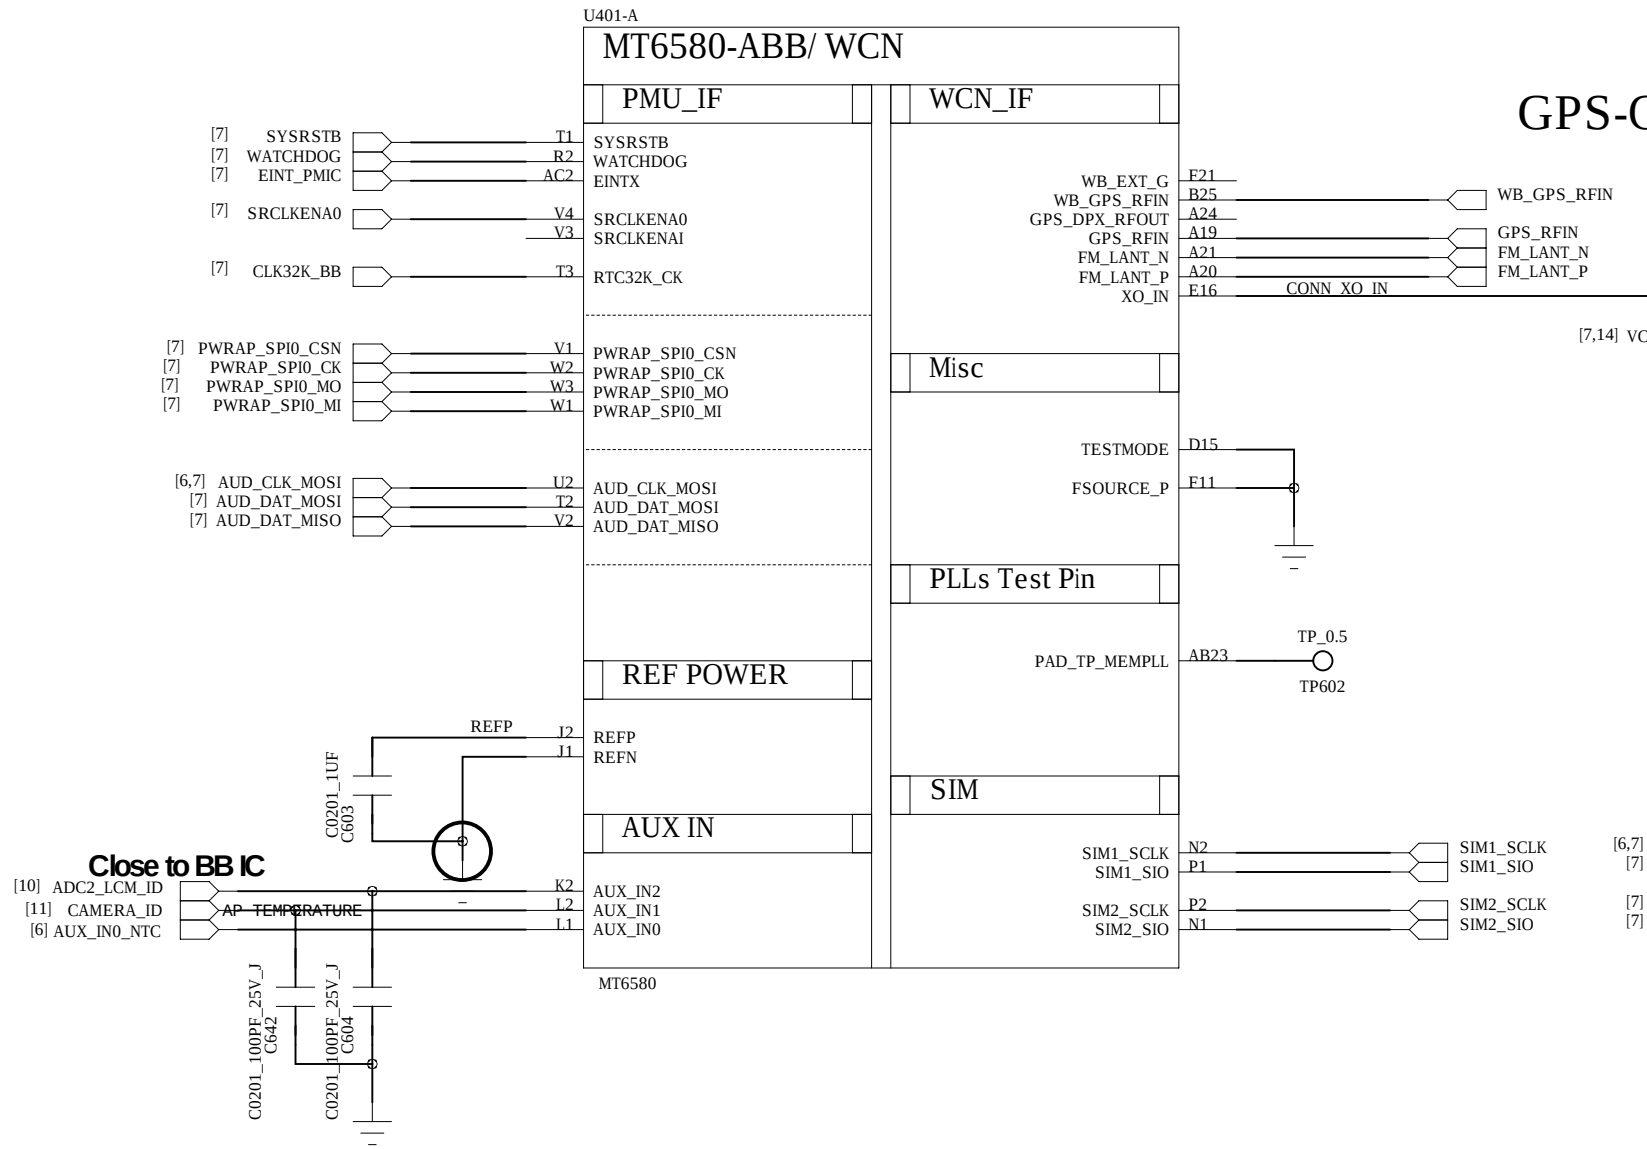

GPS-COCLOCK

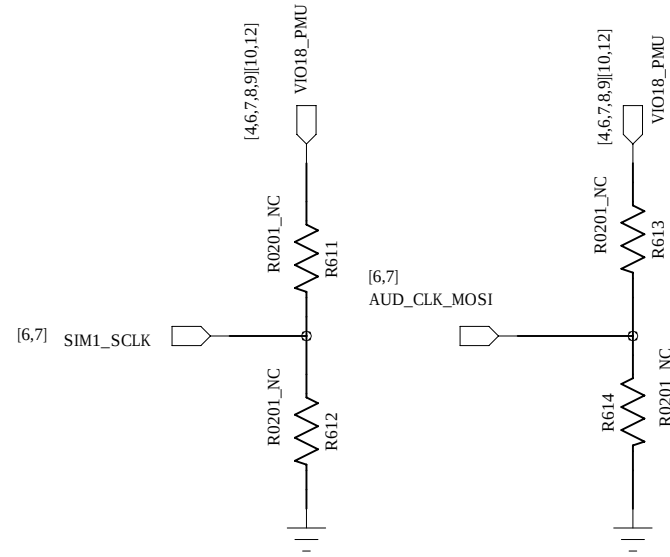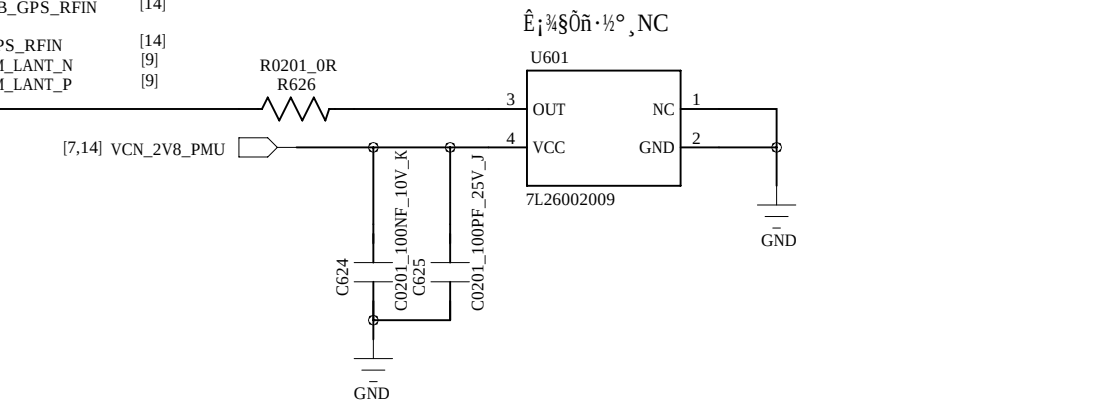

AVDD28_DAC change power source by "VA_PMU".

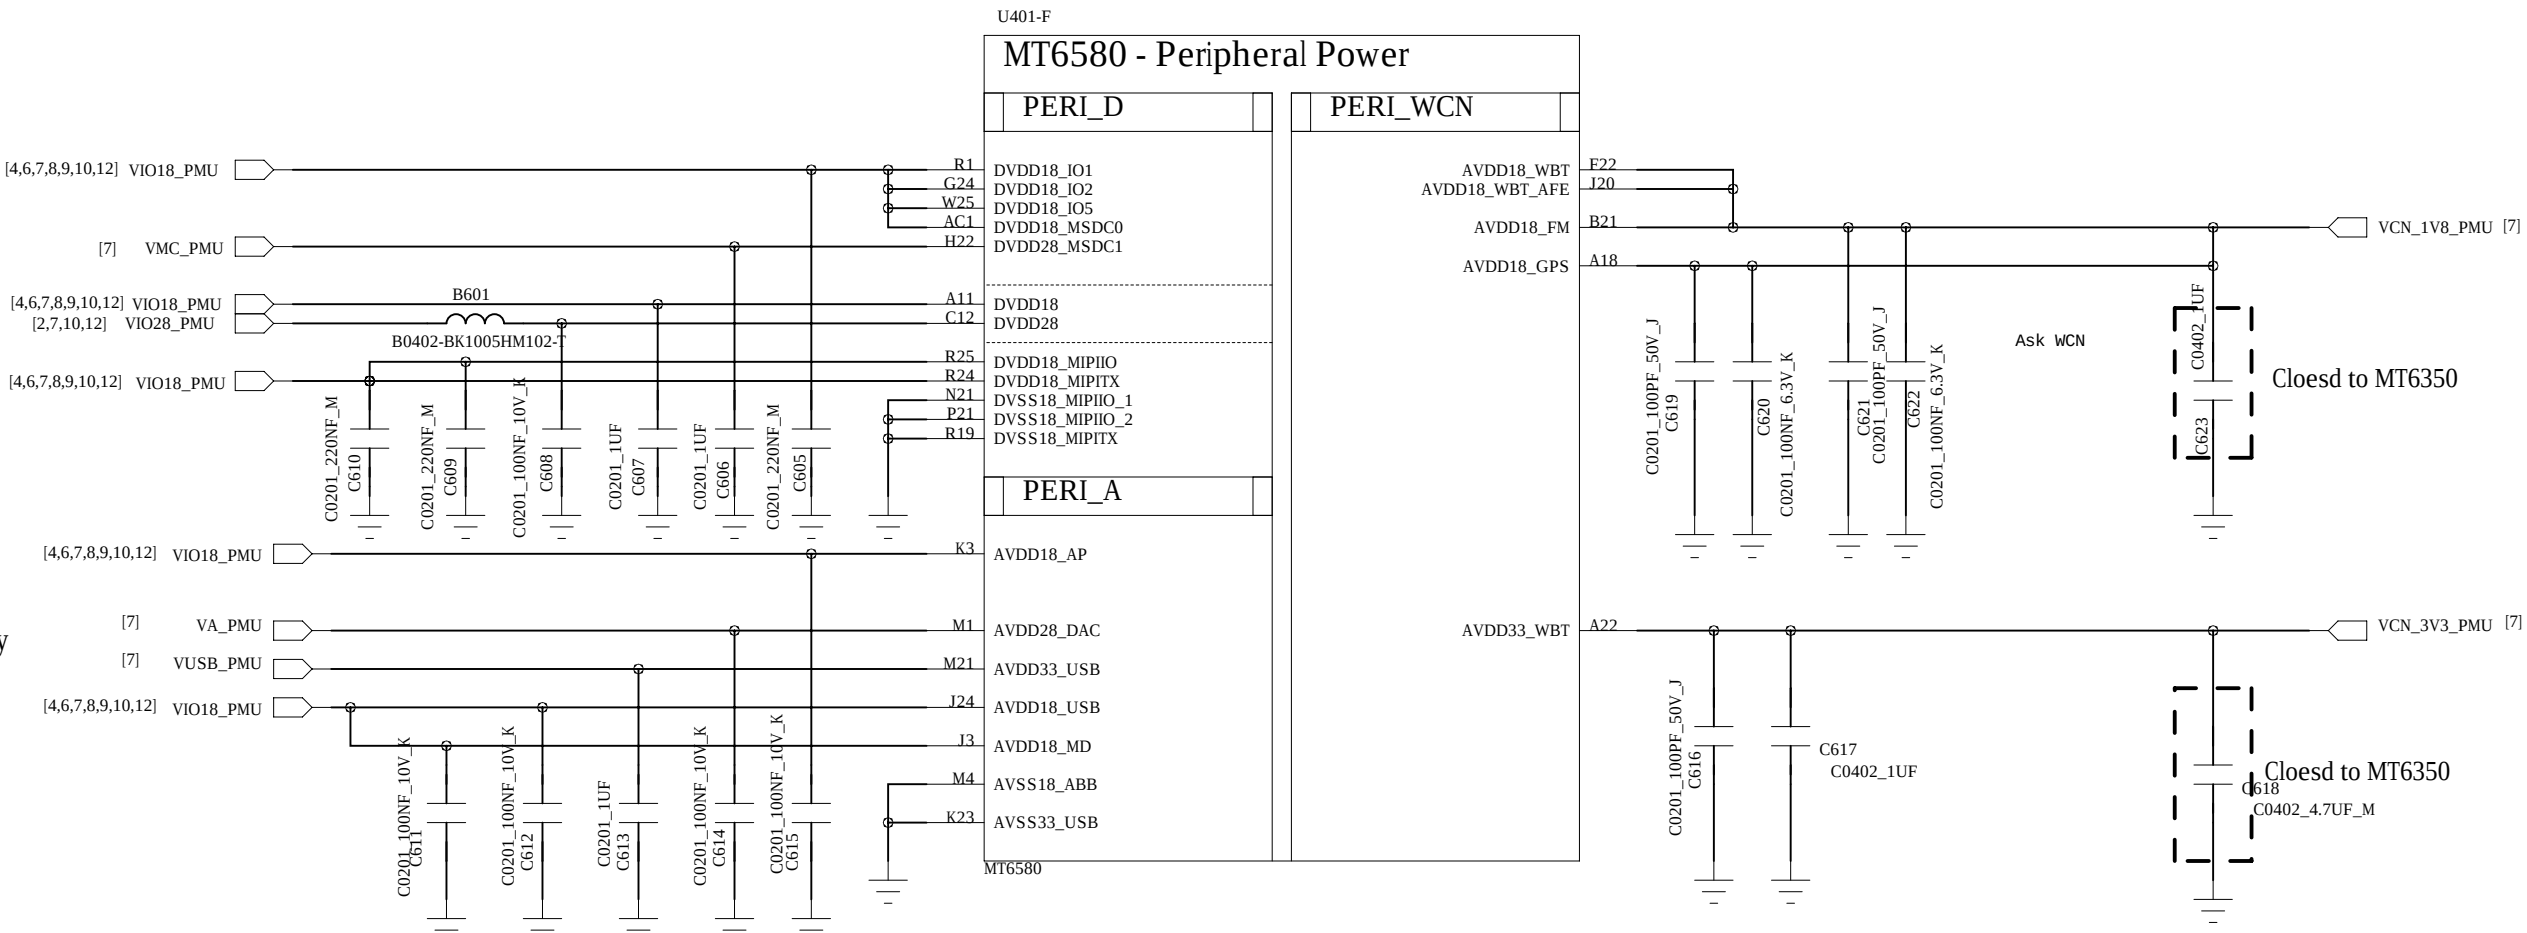

HUAQIN

MODEL: AW878

DRAWING NO.:

DRAWN

DATED

TITLE:


VERSION:

SHEET: 6


CHECKED

DATED

PMIC

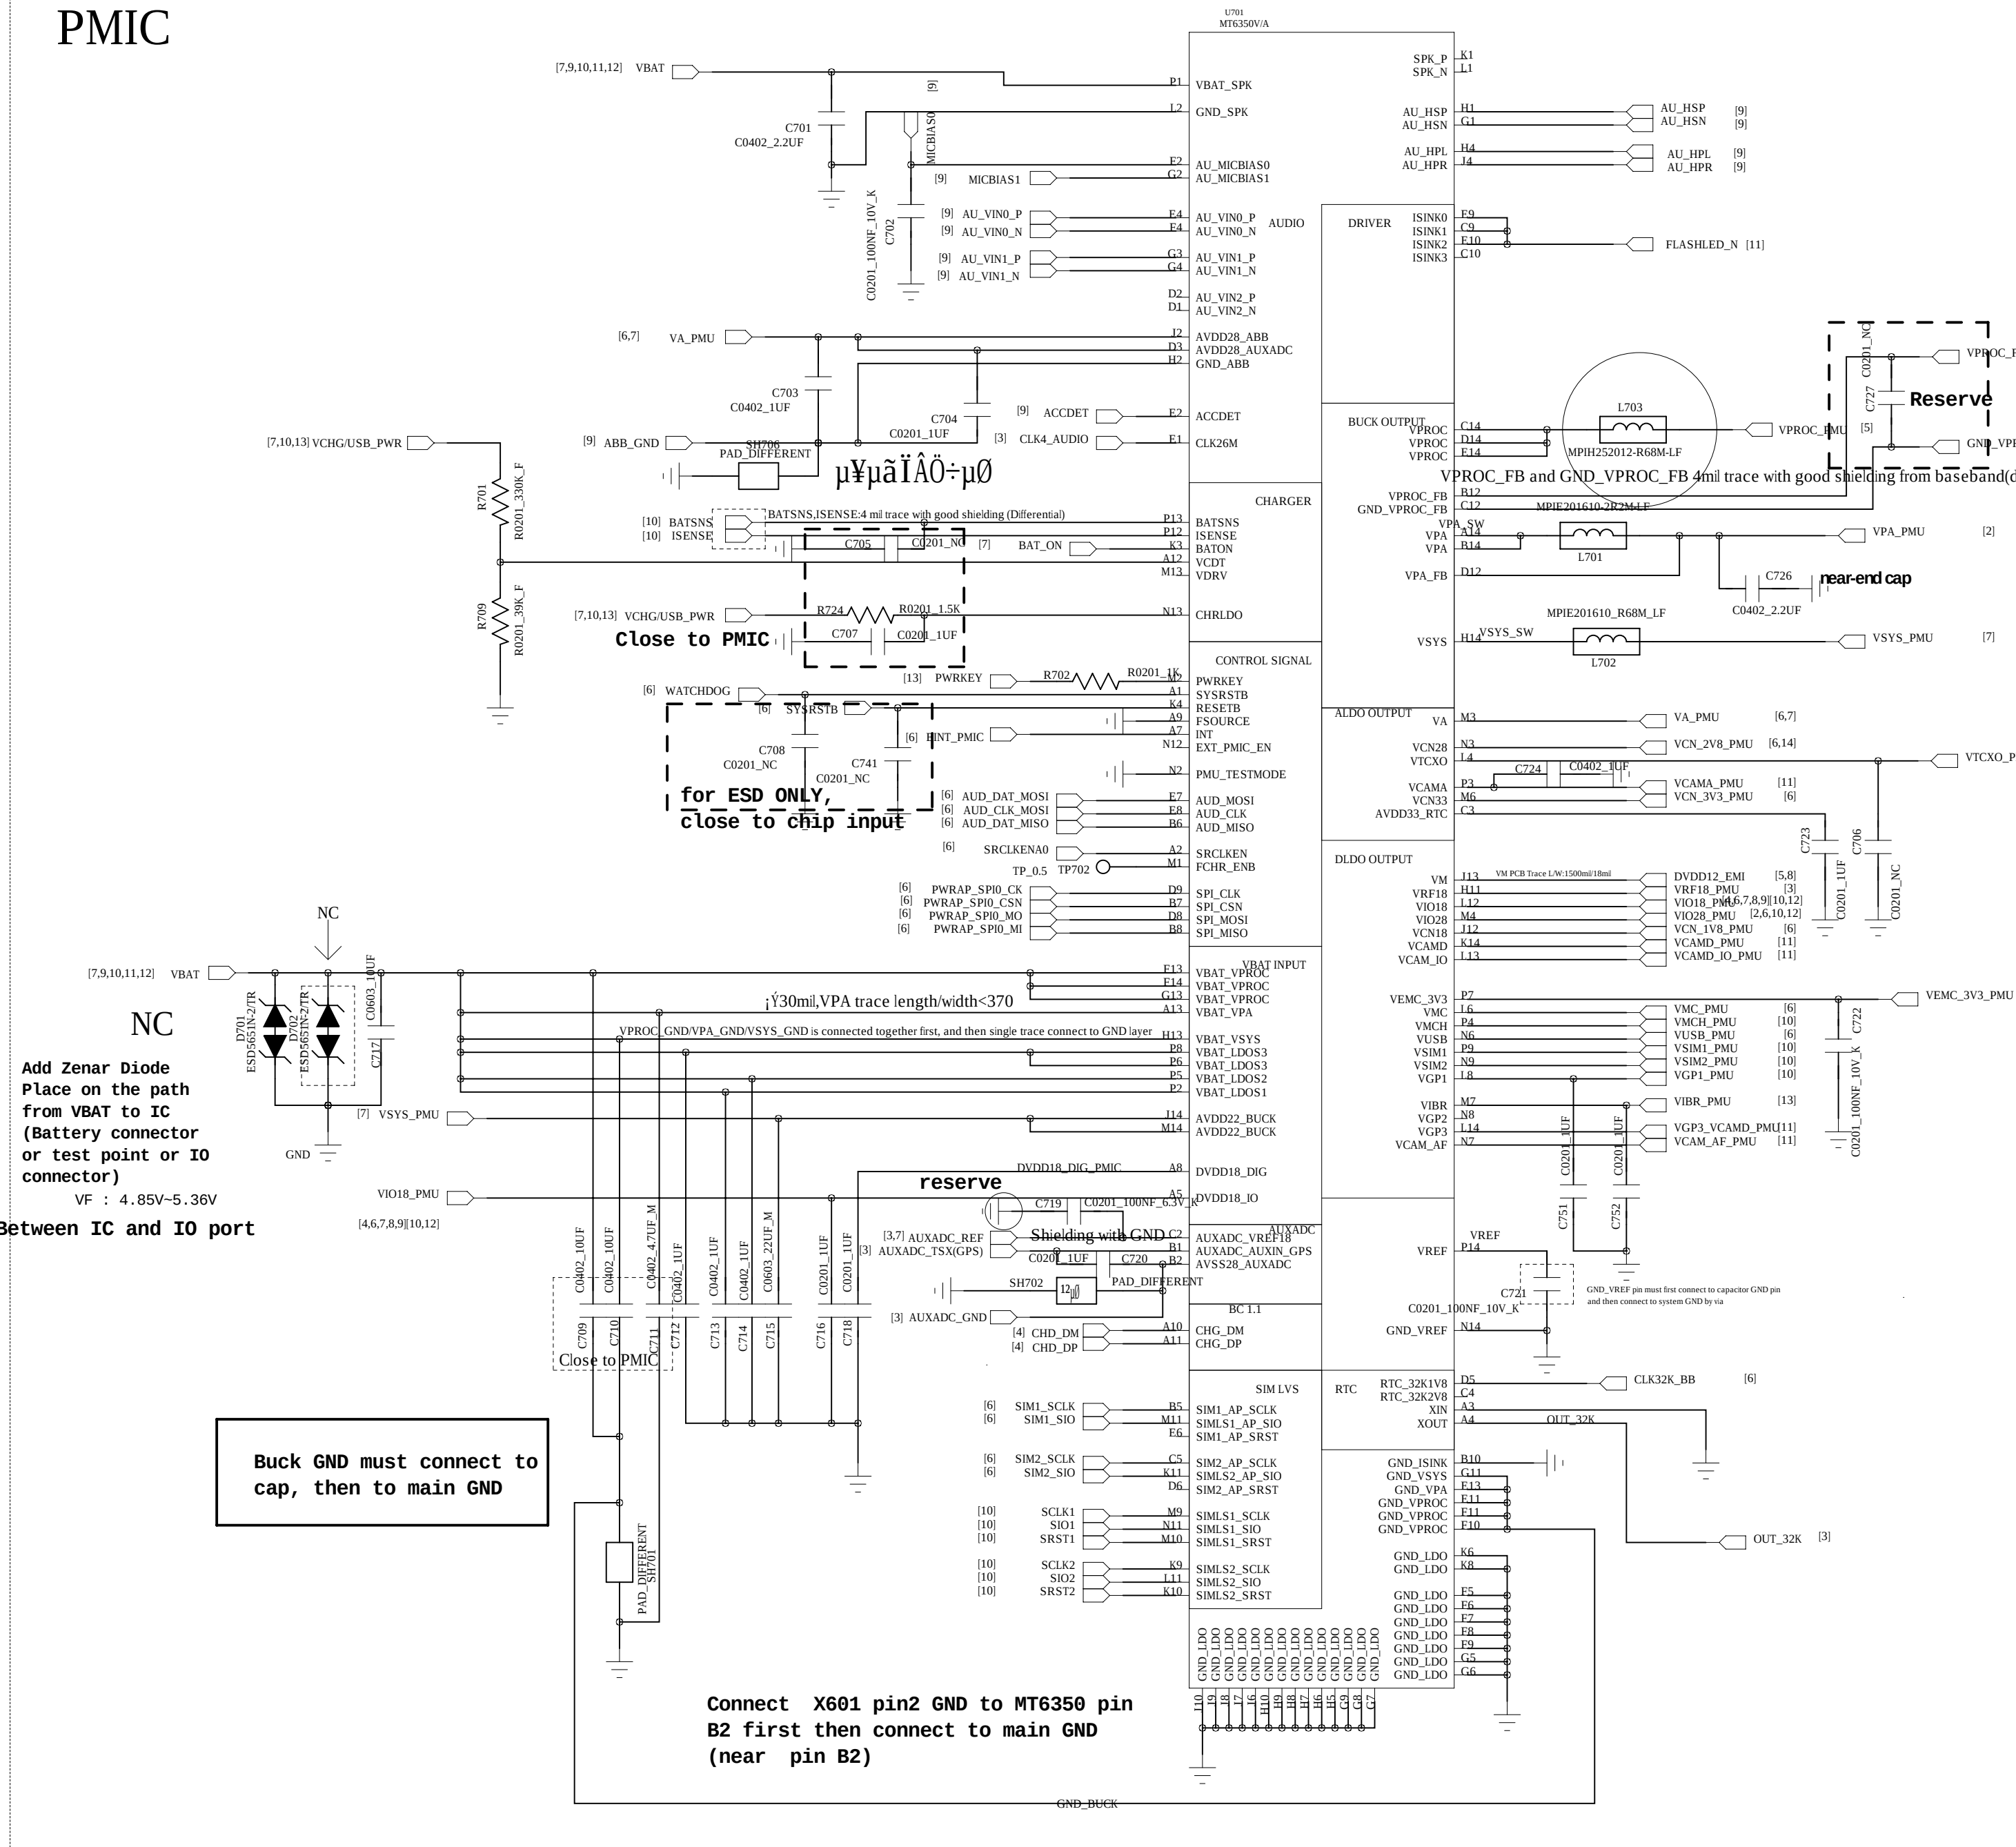

BATTERY CONNECTOR

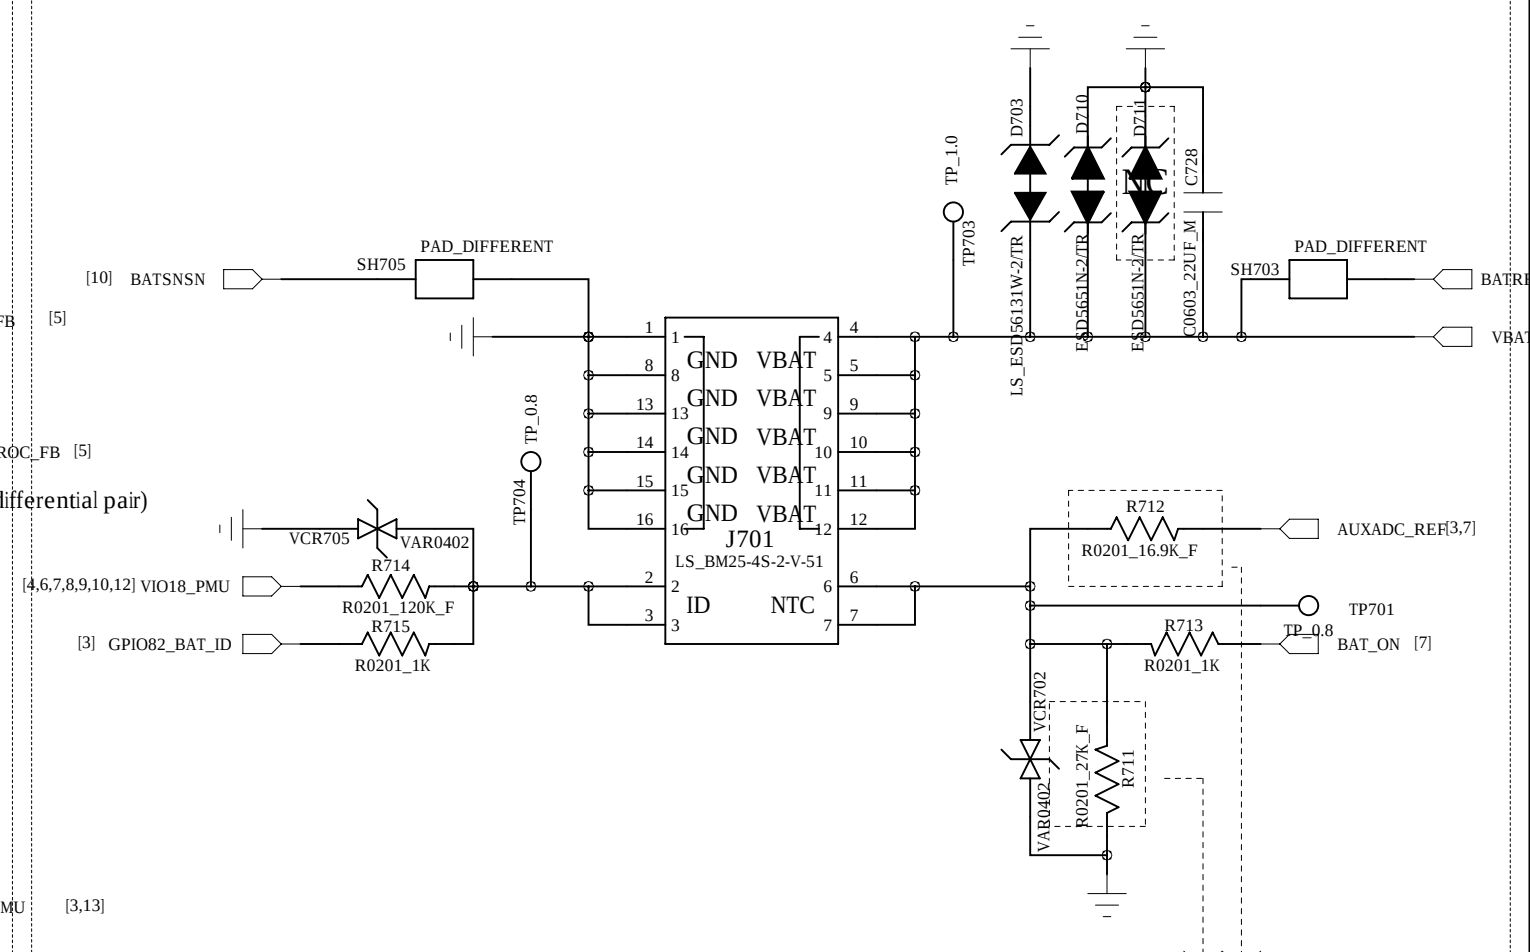

Refer to MT6350 HW design notice
if battery NTC is 10kohm, R712=16.9K_F, R711=27K_F
R712 should be closed to MT6350, and the path need shielding with GND

Buck	VPROC	0.7~1.4	2800mA	>120mil
	VPA	0.5~3.4	600mA	>25mil
	VSYS	2.2	1400mA	>60mil
Analog LDO	VRTC	2.8	2mA	>4mil
	VA	2.8	150mA	>8mil
	VCN28	2.8	30mA	>4mil
	VTCXO	2.8	40mA	>4mil
	VCAMA	2.8	150mA	>10mil
	VCN33	3.3/3.4/3.5/3.6	240mA	>10mil
Digital LDO	VIO18	1.8	300mA	>15mil
	VMC	1.8/3.3	100mA	>6mil
	VMCH	3.0/3.3	400mA	>20mil
	VEMC_3V3	3.0/3.3	400mA	>20mil
	VM	1.24/1.35/1.54/1.84	700mA	>30mil
	VRF18	1.825	200mA	>10mil
	VCN_1V8	1.8	120mA	>6mil
	VCAMD	1.2/1.3/1.5/1.8	150mA	>10mil
	VCAM_IO	1.8	100mA	>6mil
	VGP3	1.2/1.3/1.5/1.8	200mA	>10mil
	VIO28	2.8	200mA	>10mil
	VUSB	3.3	20mA	>4mil
	VCAM_AF	1.2/1.3/1.5/1.8/2.0/2.8/3.0/3.3	100mA	>6mil
	VSIM1	1.8/3.0	50mA	>4mil
	VSIM2	1.8/3.0	50mA	>4mil
	VGP1	1.2/1.3/1.5/1.8/2.0/2.8/3.0/3.3	100mA	>6mil
	VGP2	1.2/1.3/1.5/1.8/2.0/2.5/2.8/3.0	100mA	>6mil
	VDIG18	1.8	20mA	>4mil
	VIBR	1.2/1.3/1.5/1.8/2.0/2.8/3.0/3.3	100mA	>6mil

HUAQIN

DRAWN:		DATED		MODEL: AW878		DRAWING NO.:	
CHECKED		DATED		TITLE:		VERSION:	
						SHEET: 7	



eMMC+LPDDR3

221 Ball, 0.5mm pitch

VDD1=1.8V
VDD2=1.20V
VDDCA=1.2V
VDDQ= 1.20V

SAMSUNG此型号可选			
MCP_8GB-eMMC_8Gb-LPDDR3	KMQ72000SM-B3	Samsung	TLC, 16+23nm

请将HYNIX做二供验证			
MCP_8GB-eMMC_8Gb-LPDDR3	H9TQ64A8GTMCUR-KUM	Hynix	F16PL

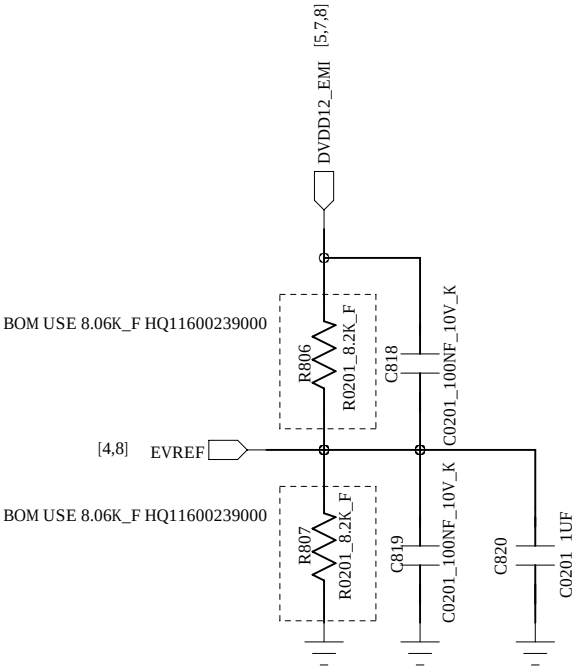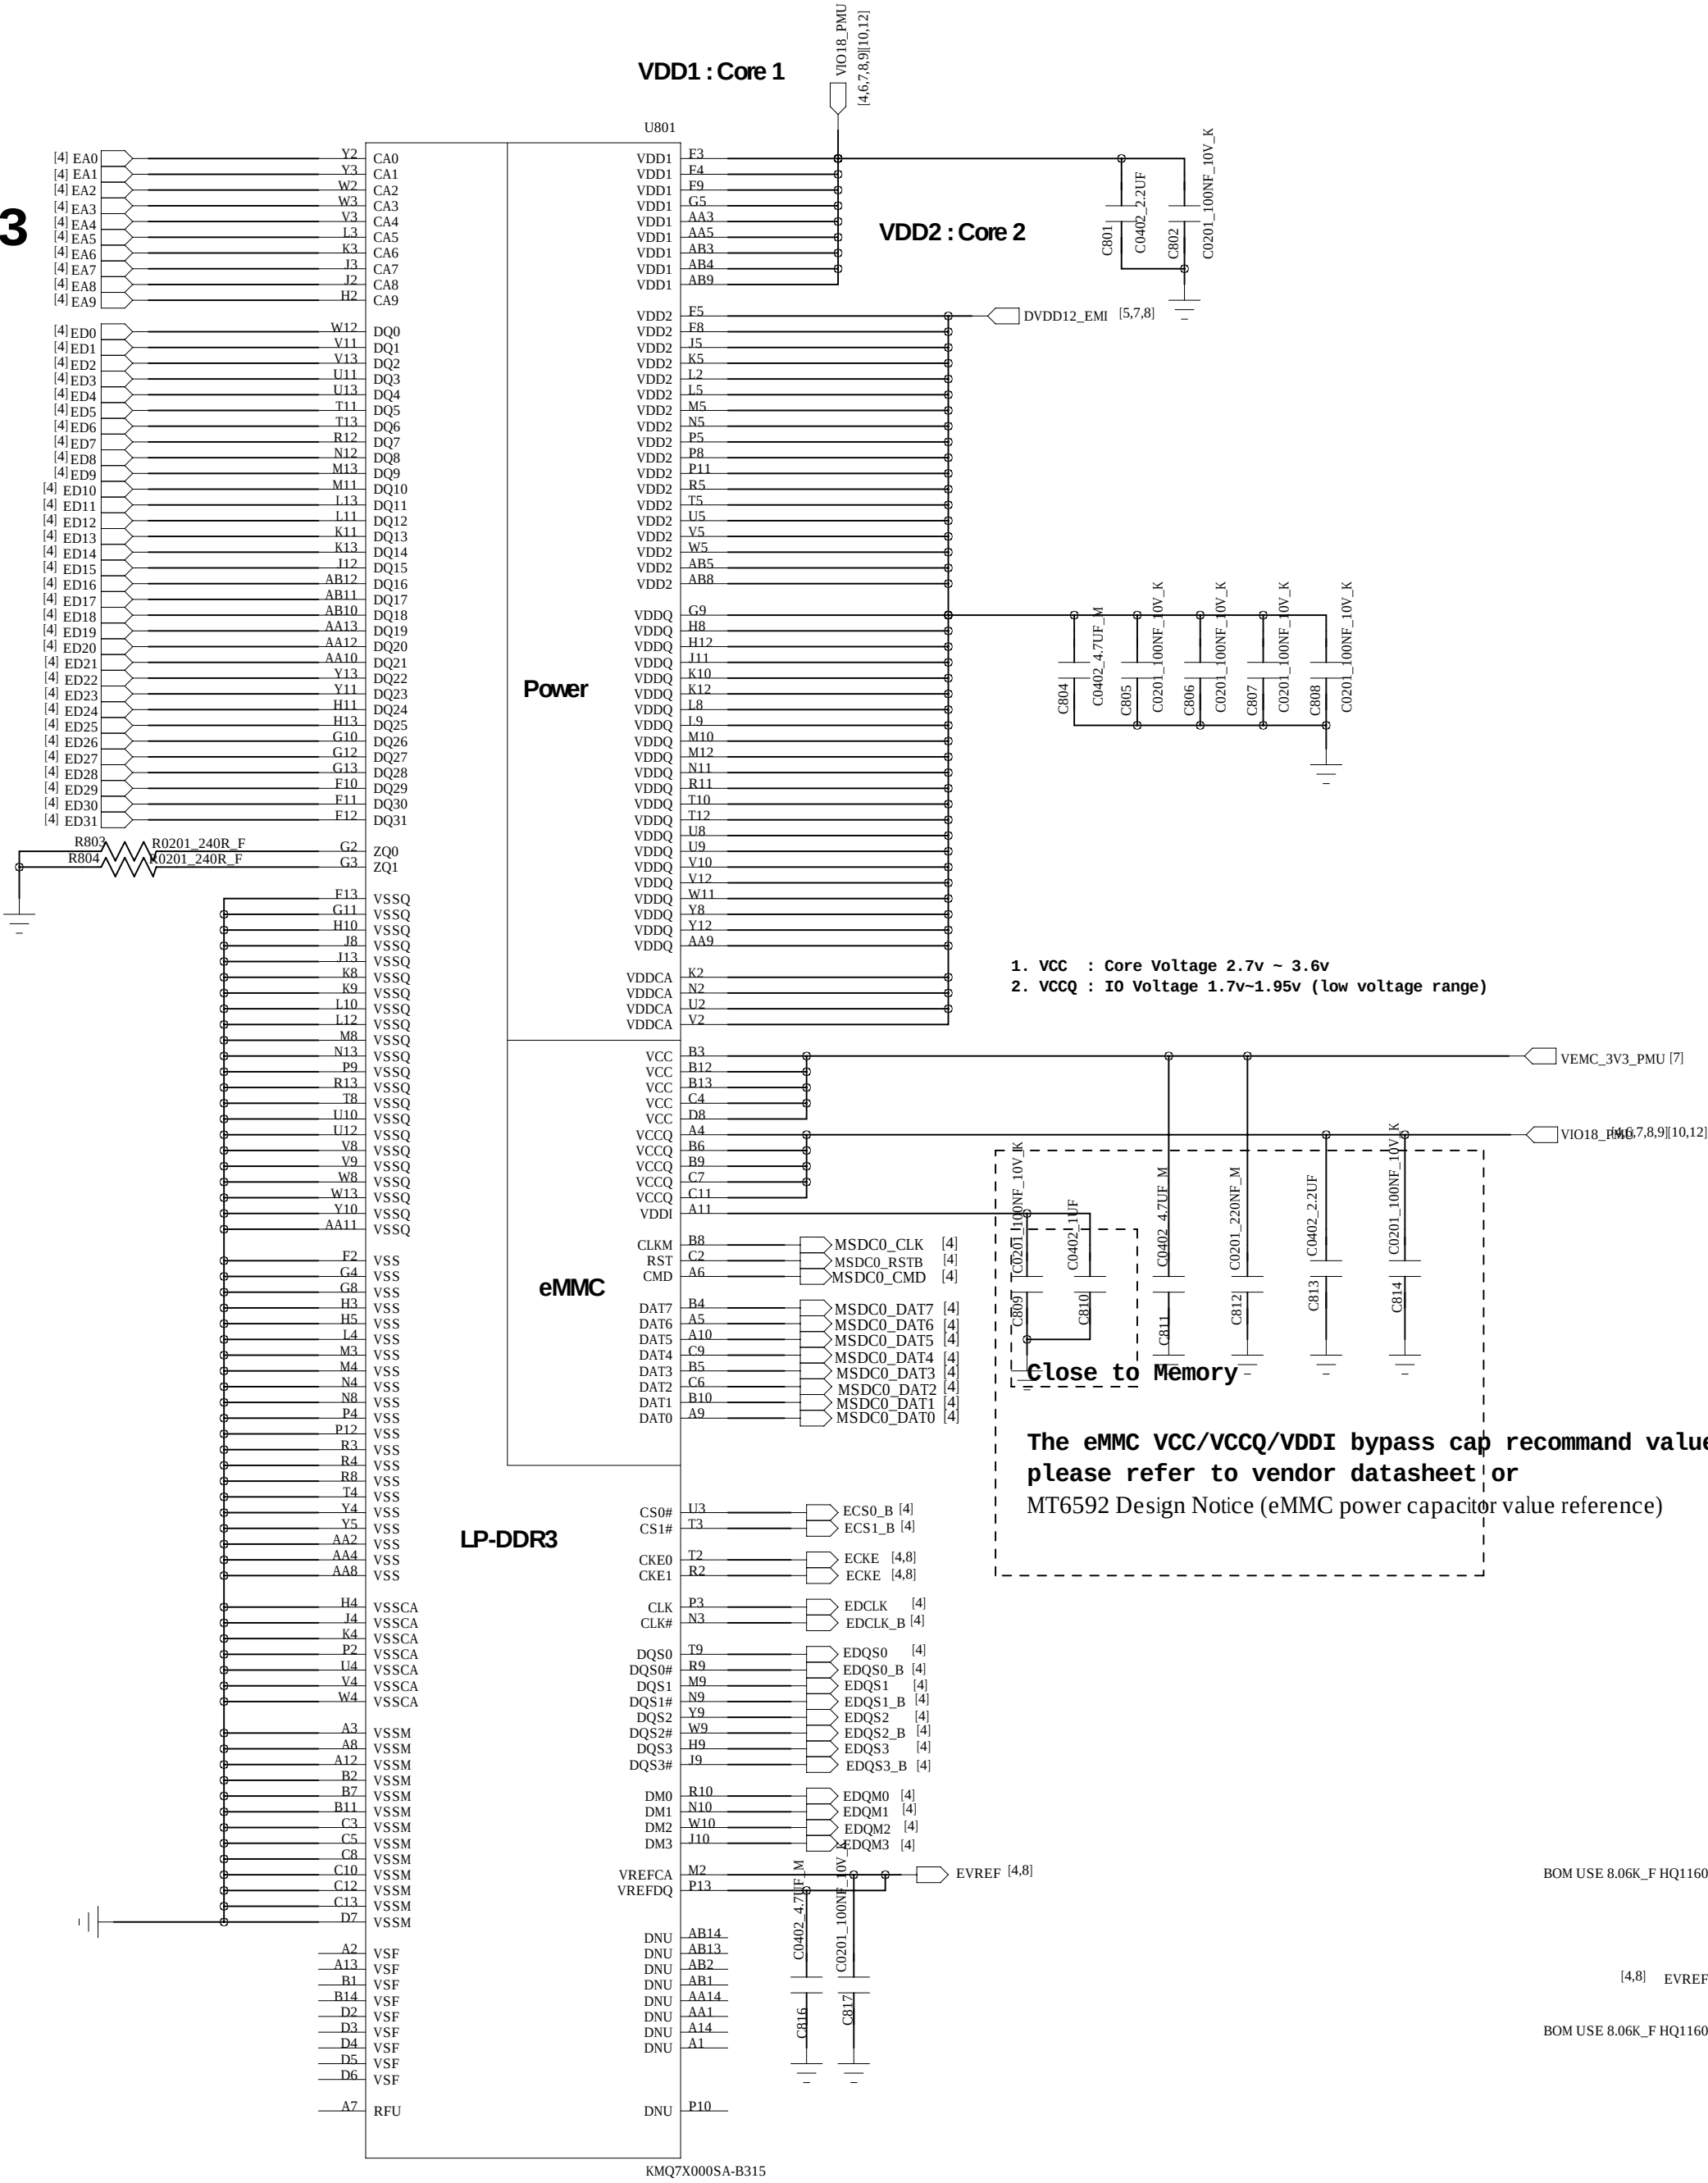

HUAQIN

MODEL: AW878

DRAWING NO.:






DRAWN:

DATED

TITLE:



VERSION:

SHEET: 8

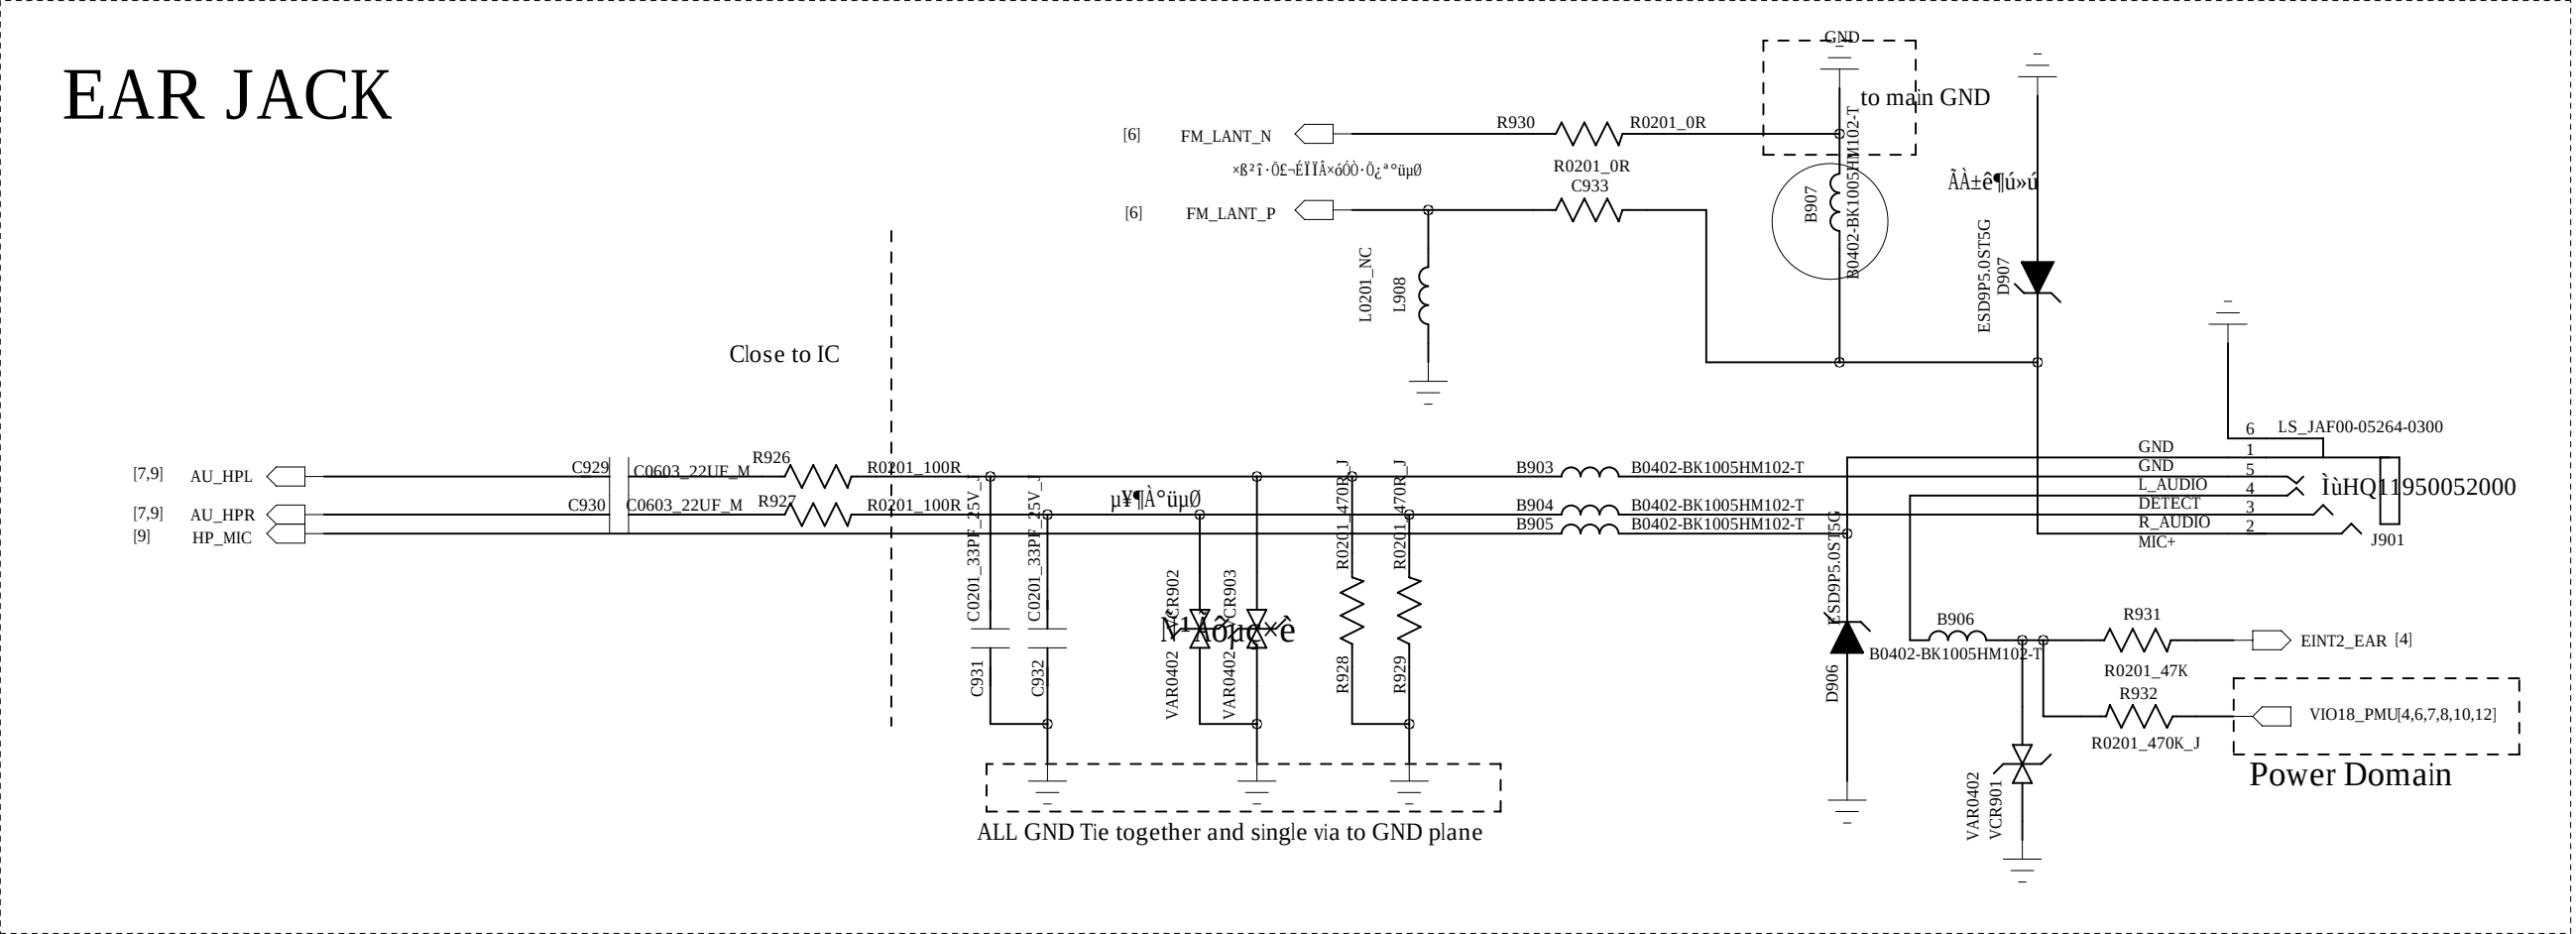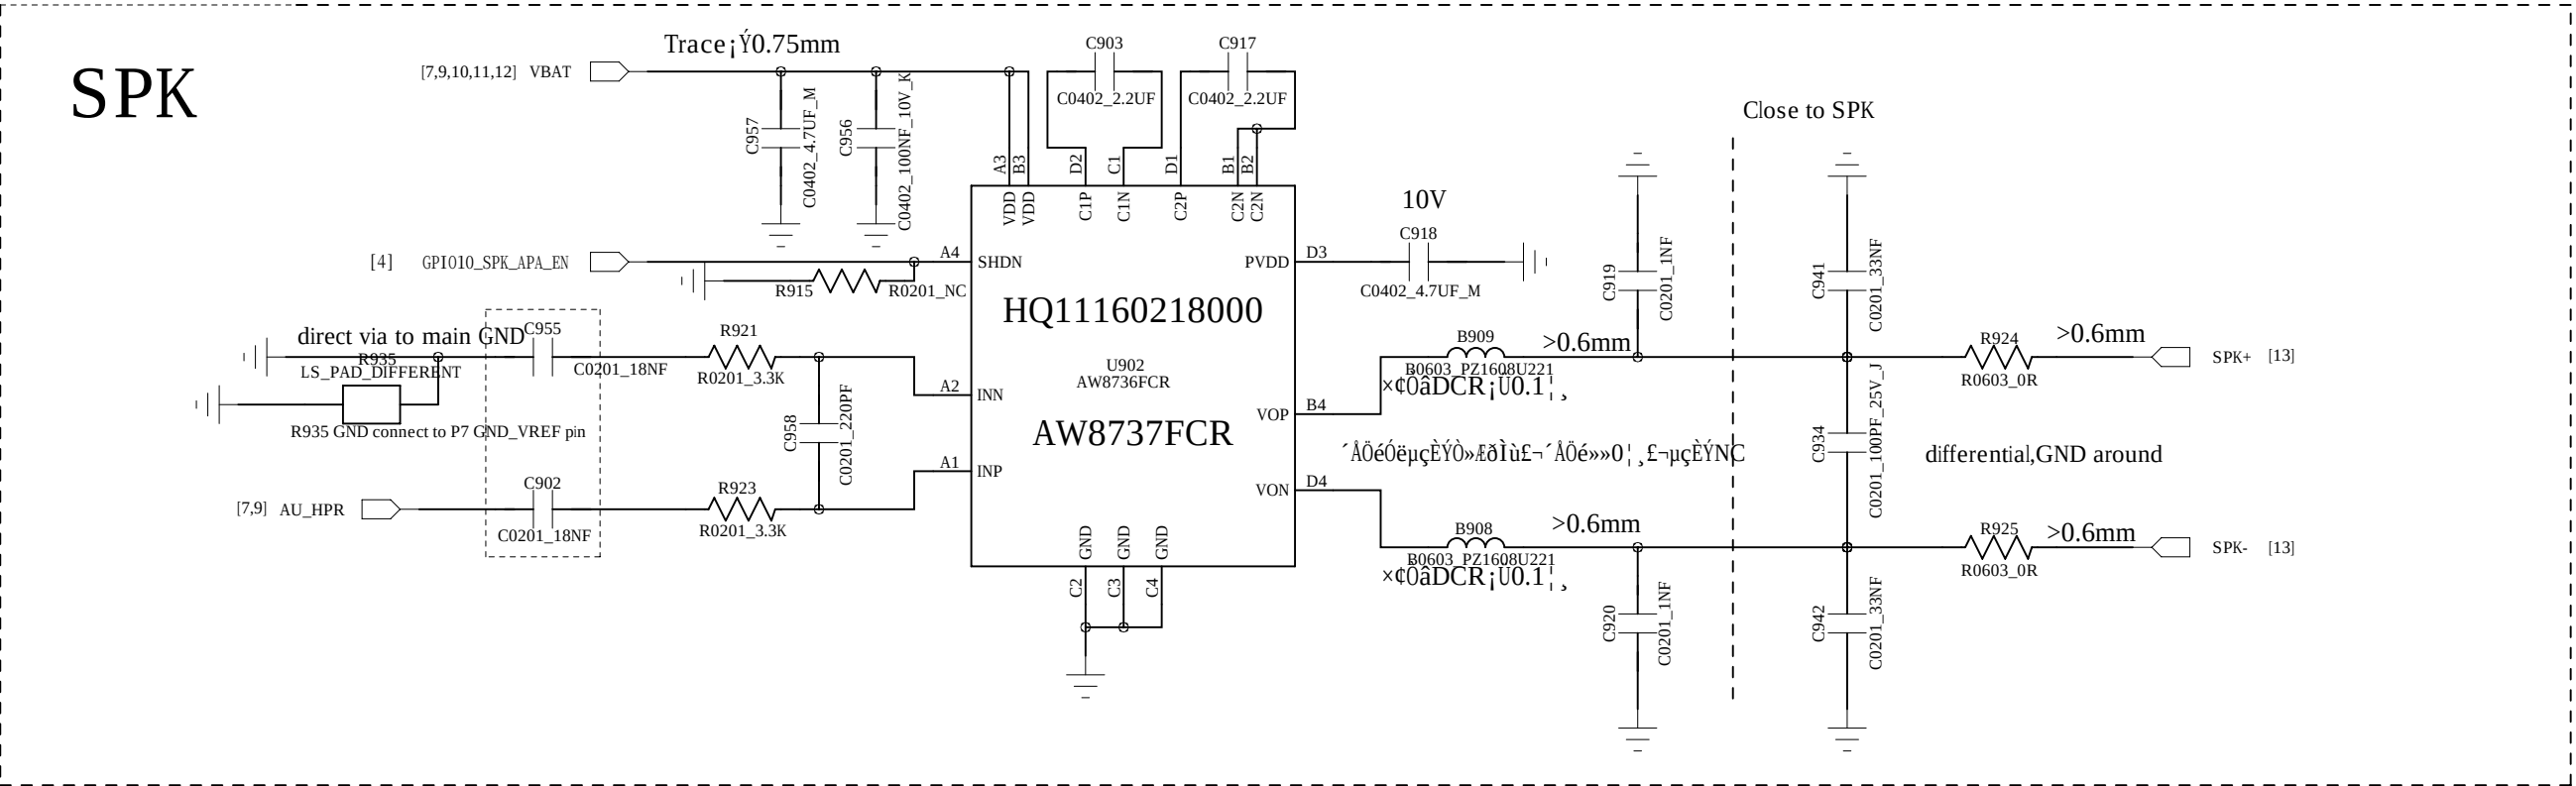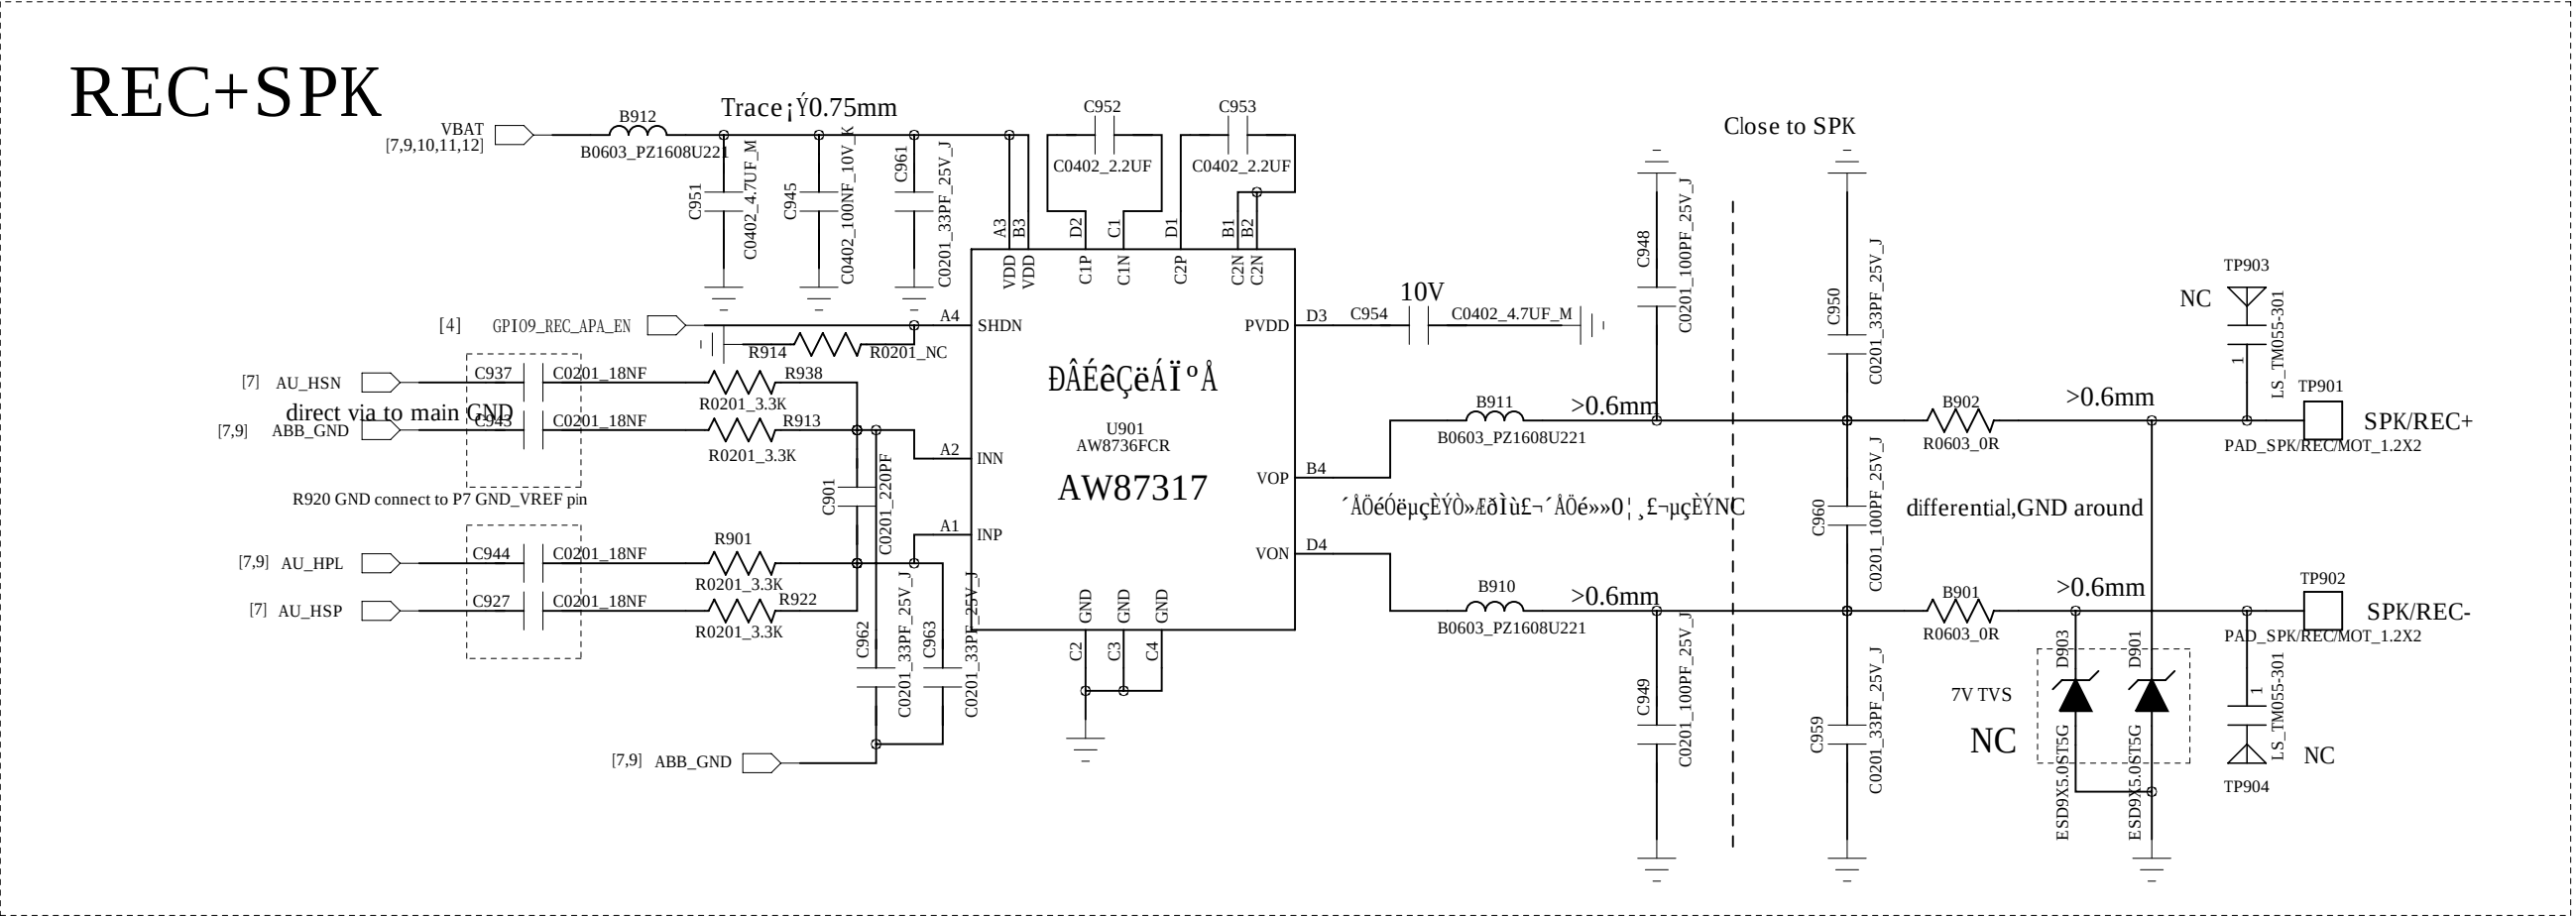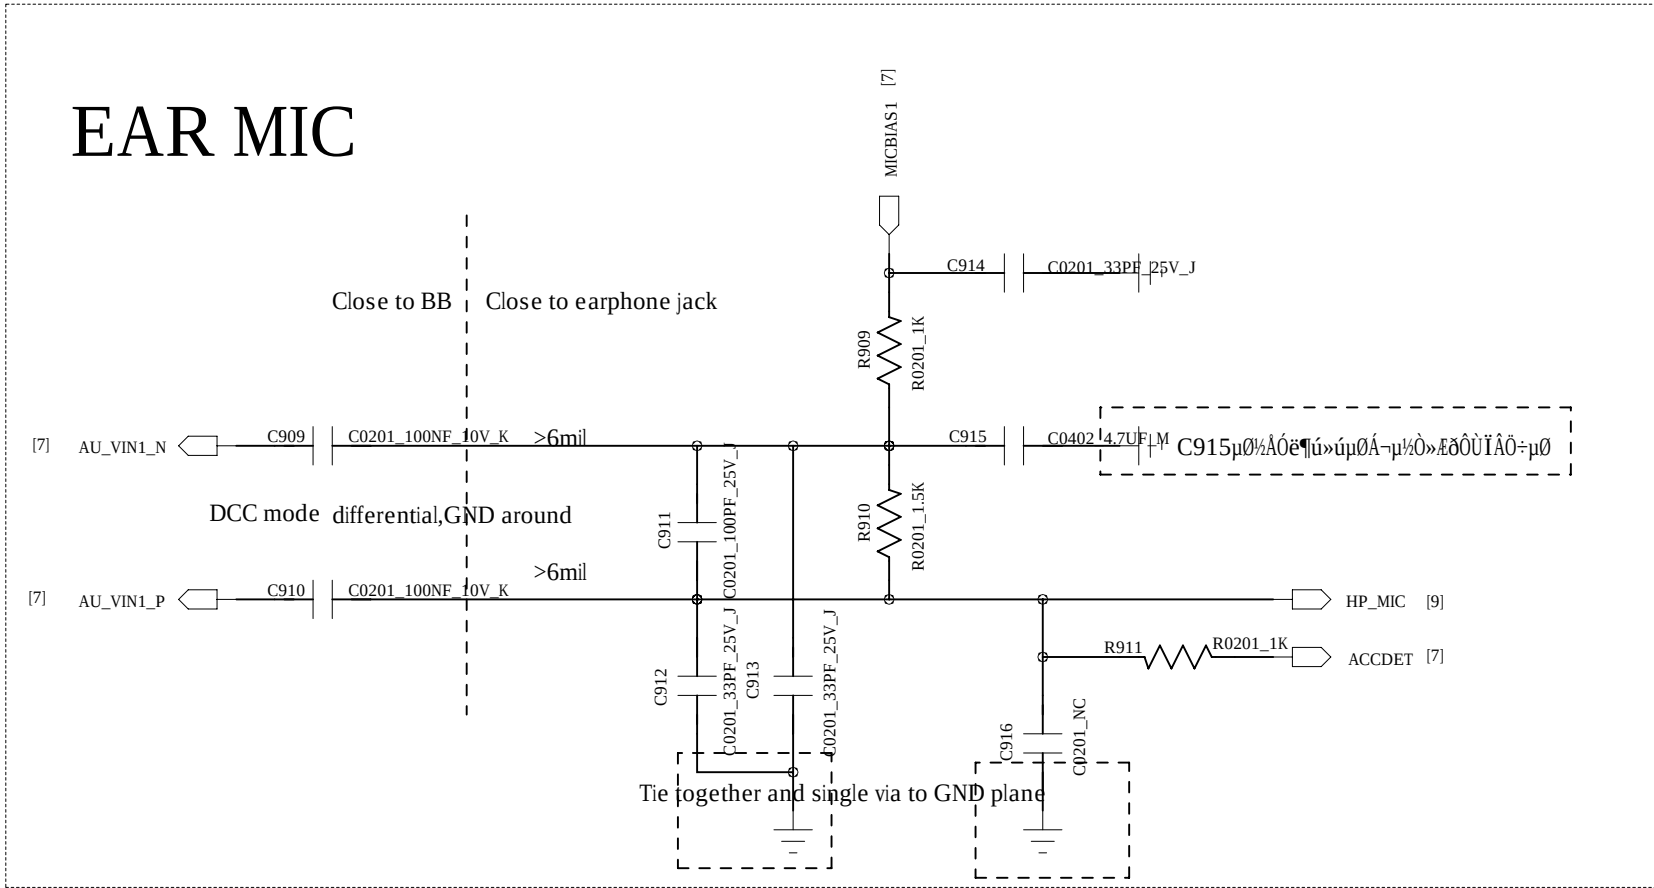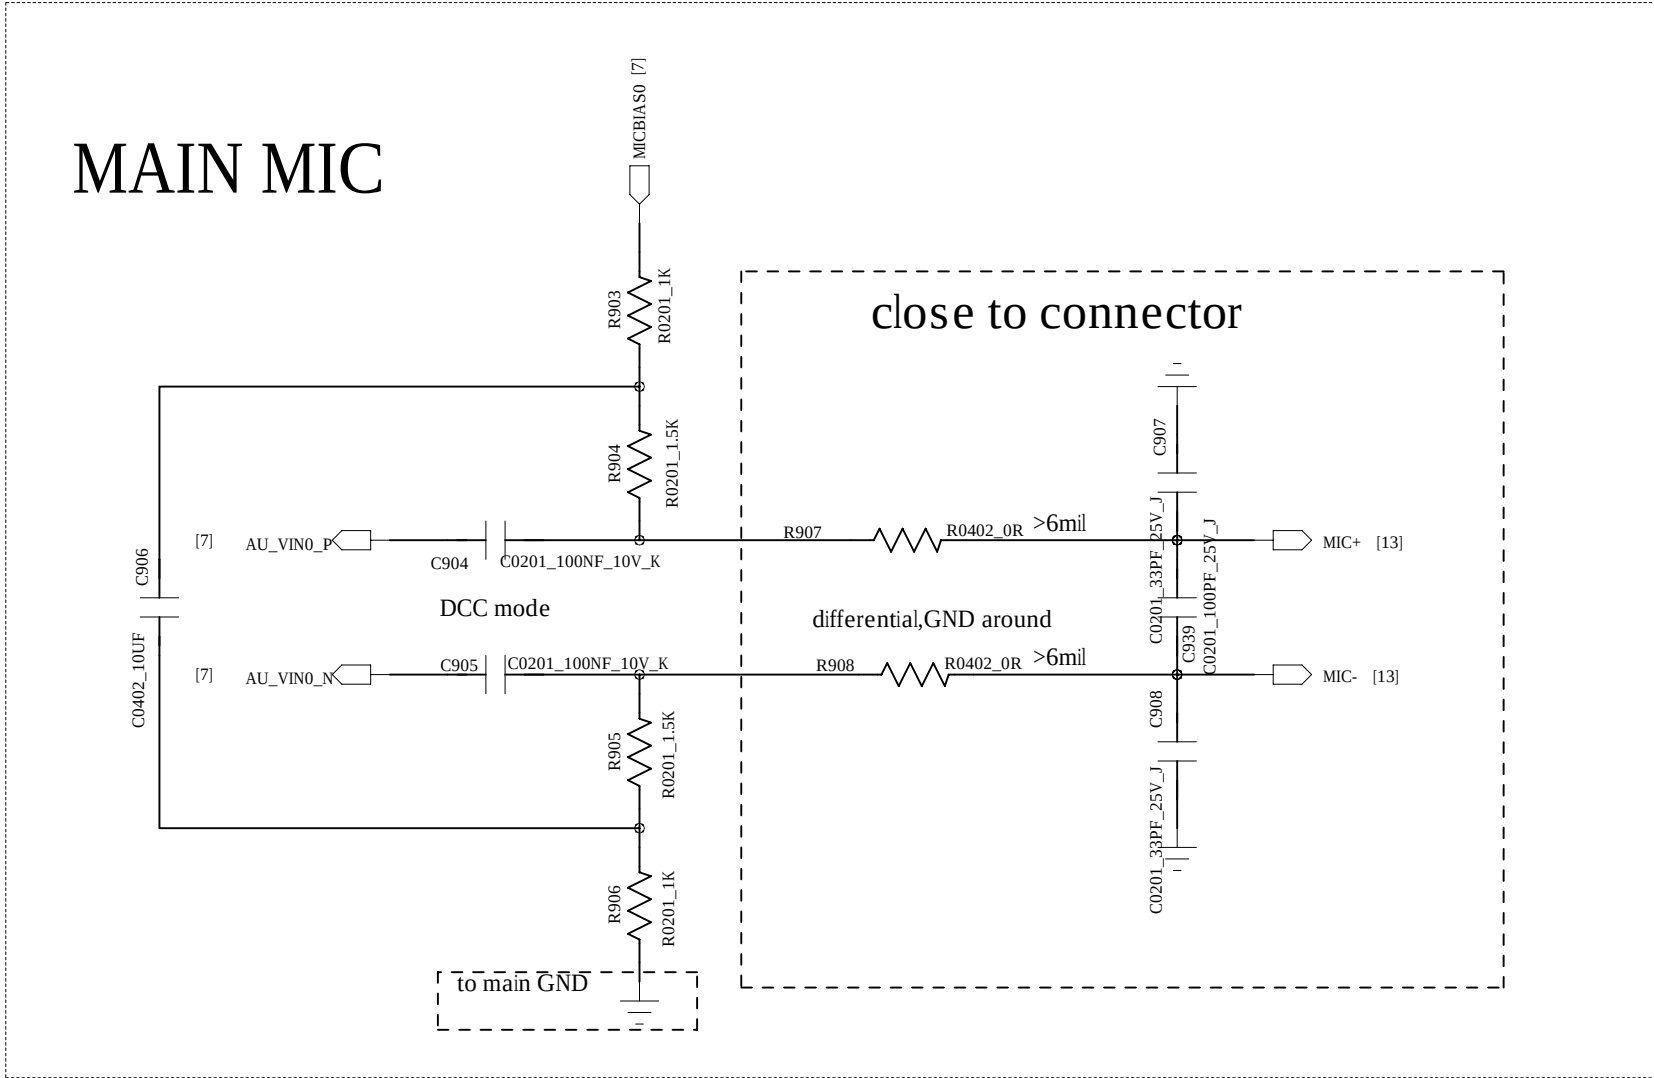


HUAQIN				MODEL: AW878		DRAWING NO.:	
DRAWN:		DATED		TITLE:		VERSION:	SHEET: 9
CHECKED		DATED					

LCM

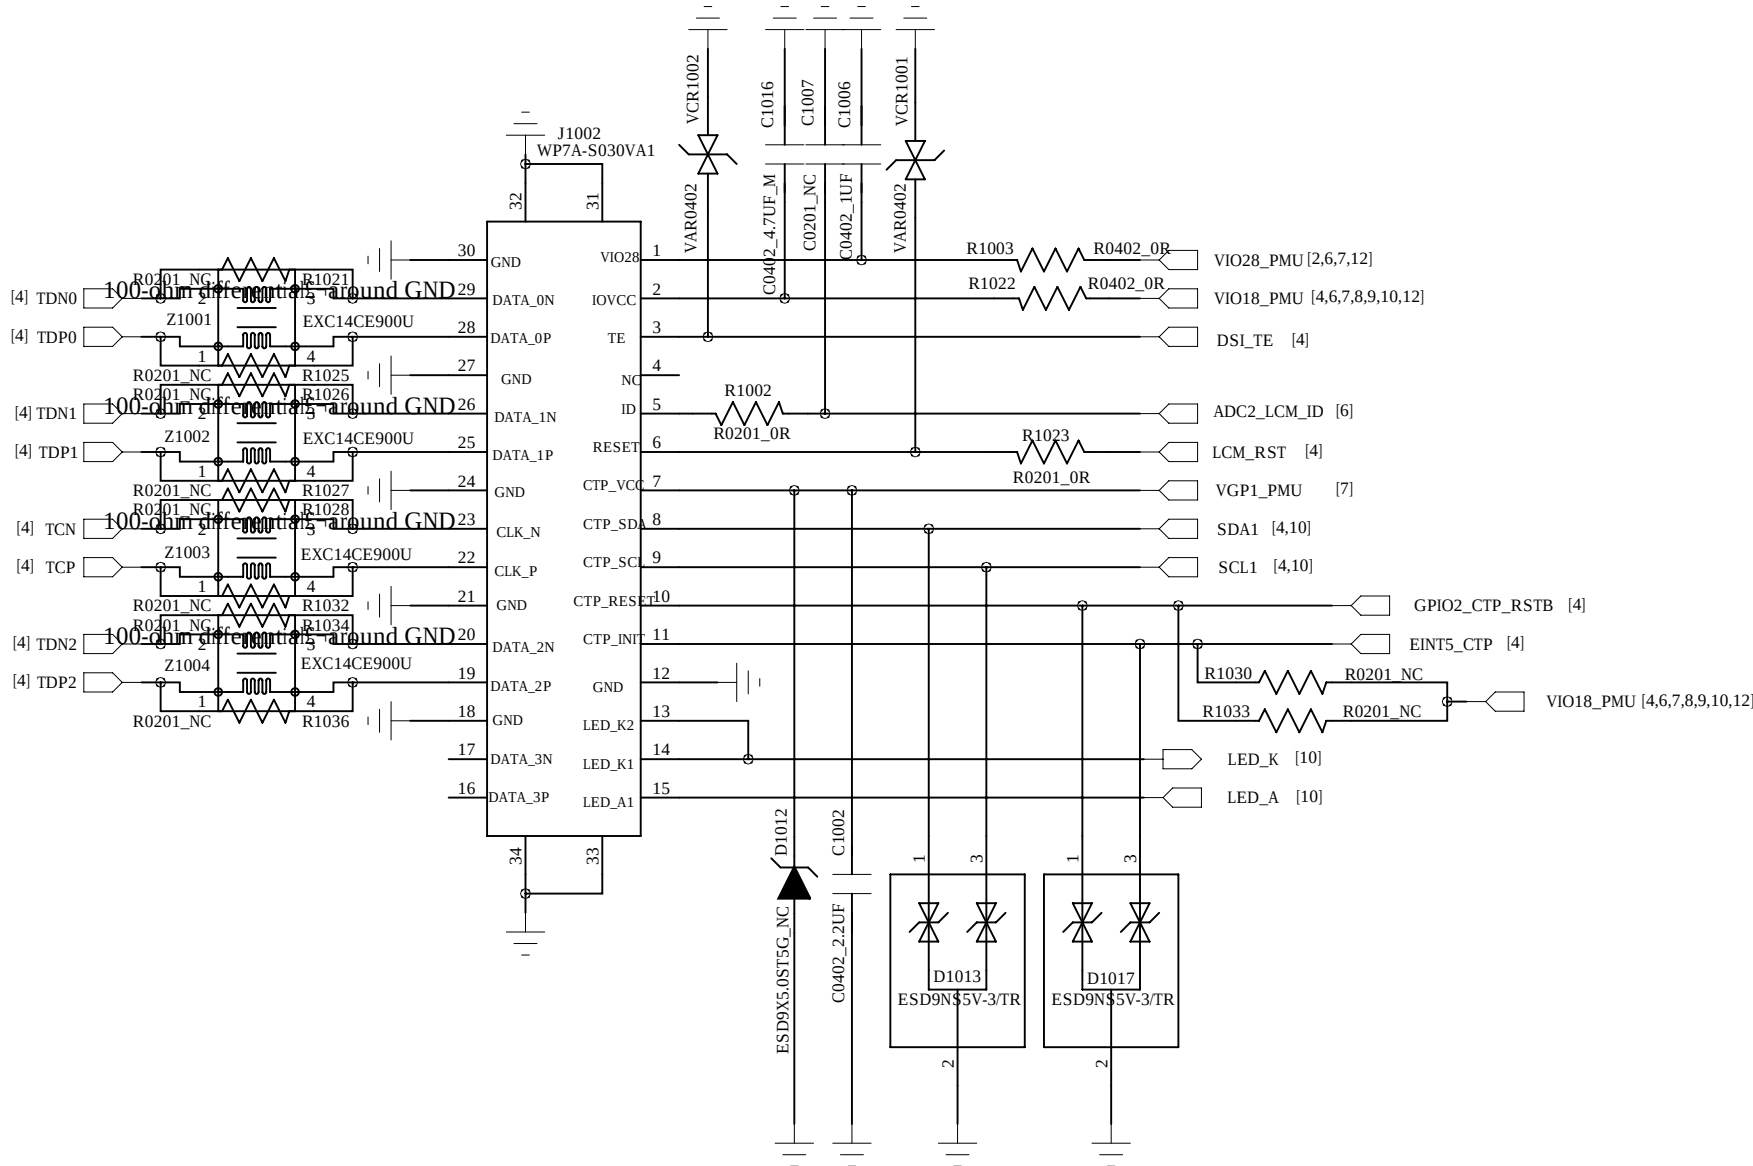


LCD BL Driver

2st:HQ11150145000-WD3139F-6/TR
1nd:HQ11150276000-SGM3752YTN6G/TR

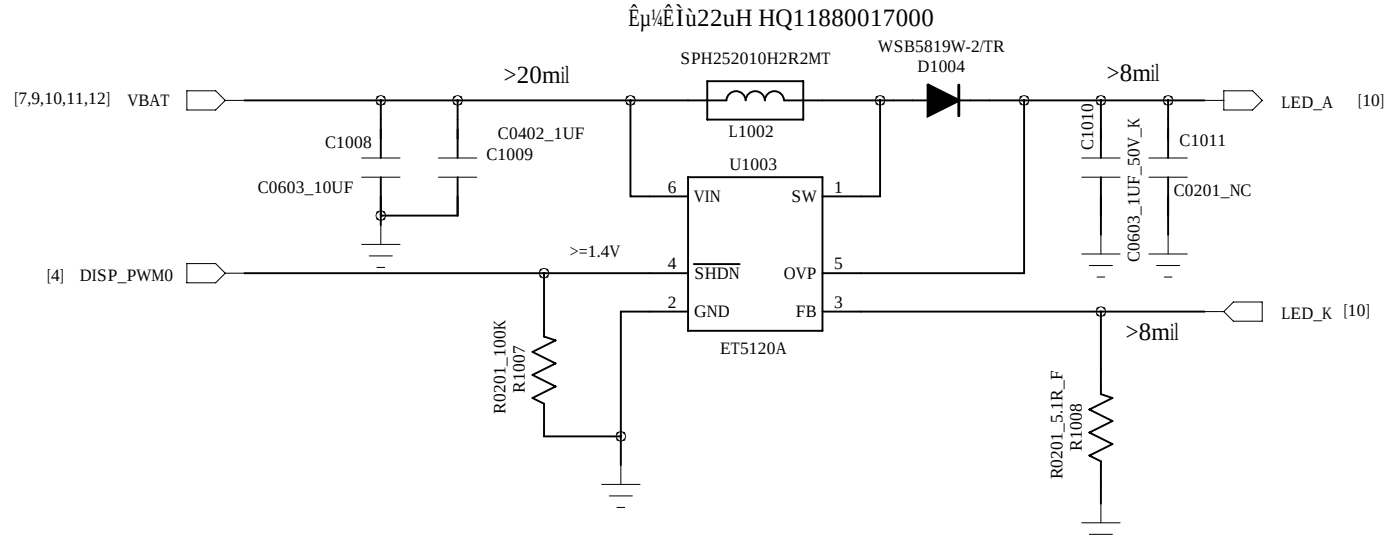


6S=20V->KTD256B
12 LED=2P6S


T-FLASH

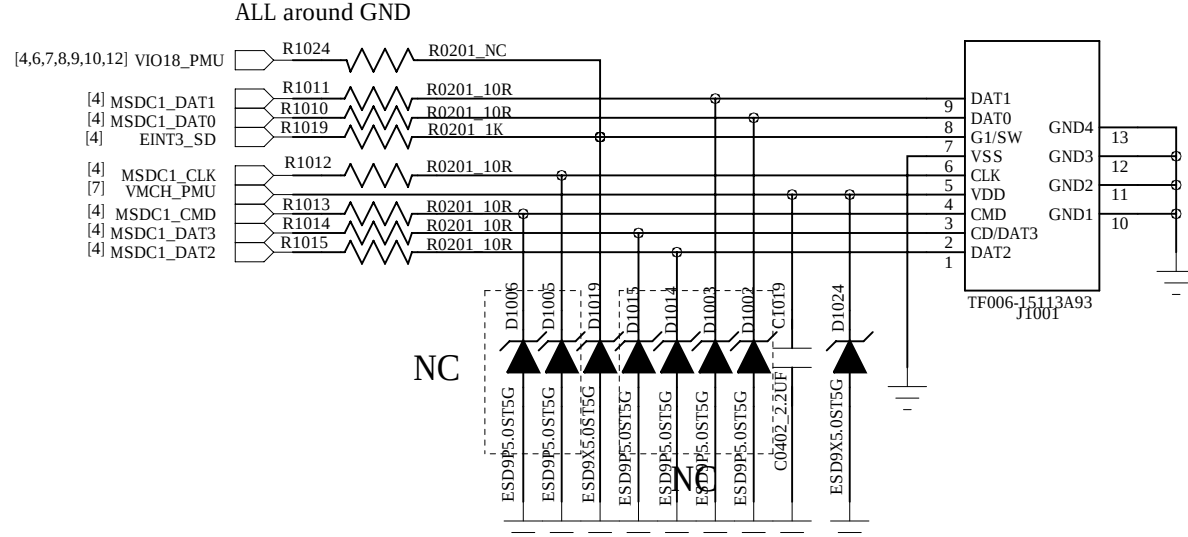


SIM1

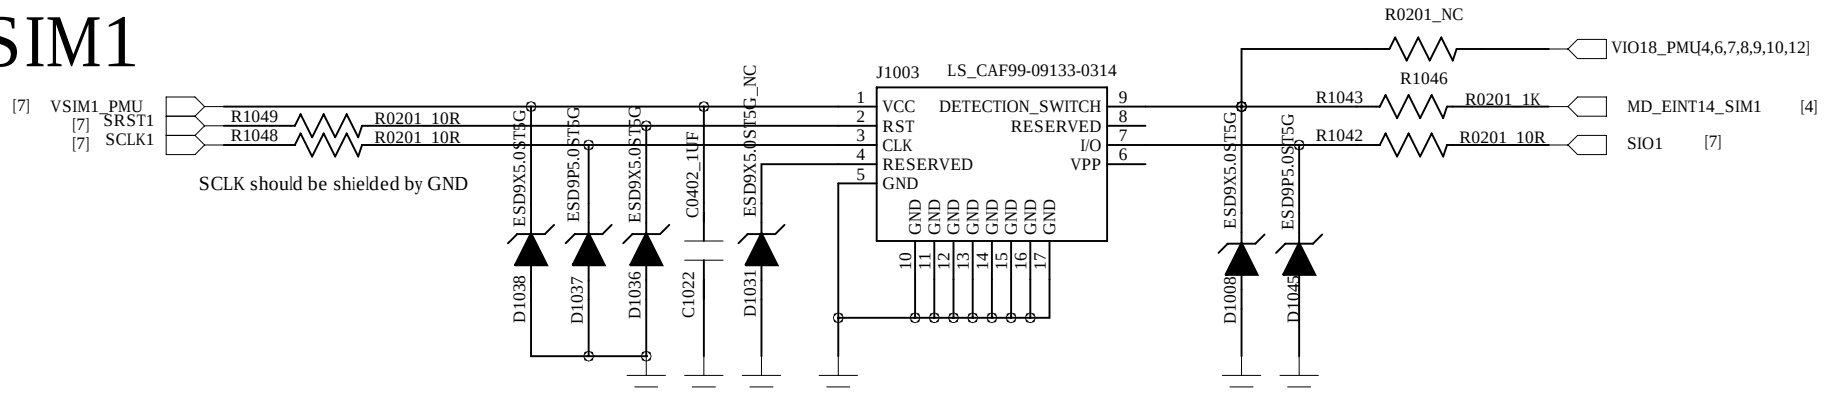

SIM2

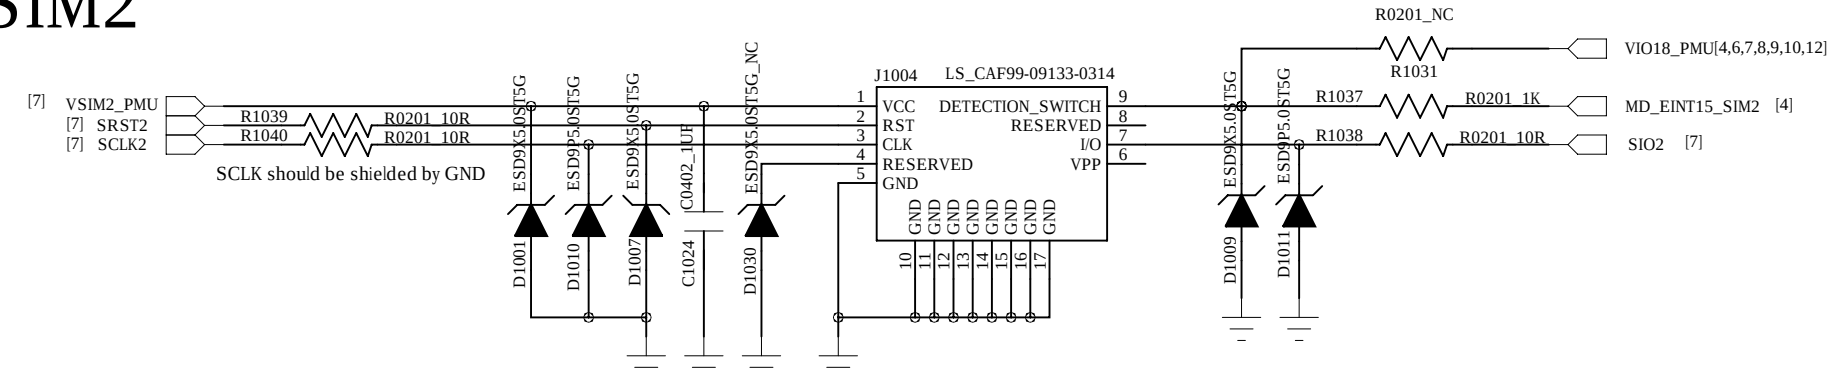

SW Charger

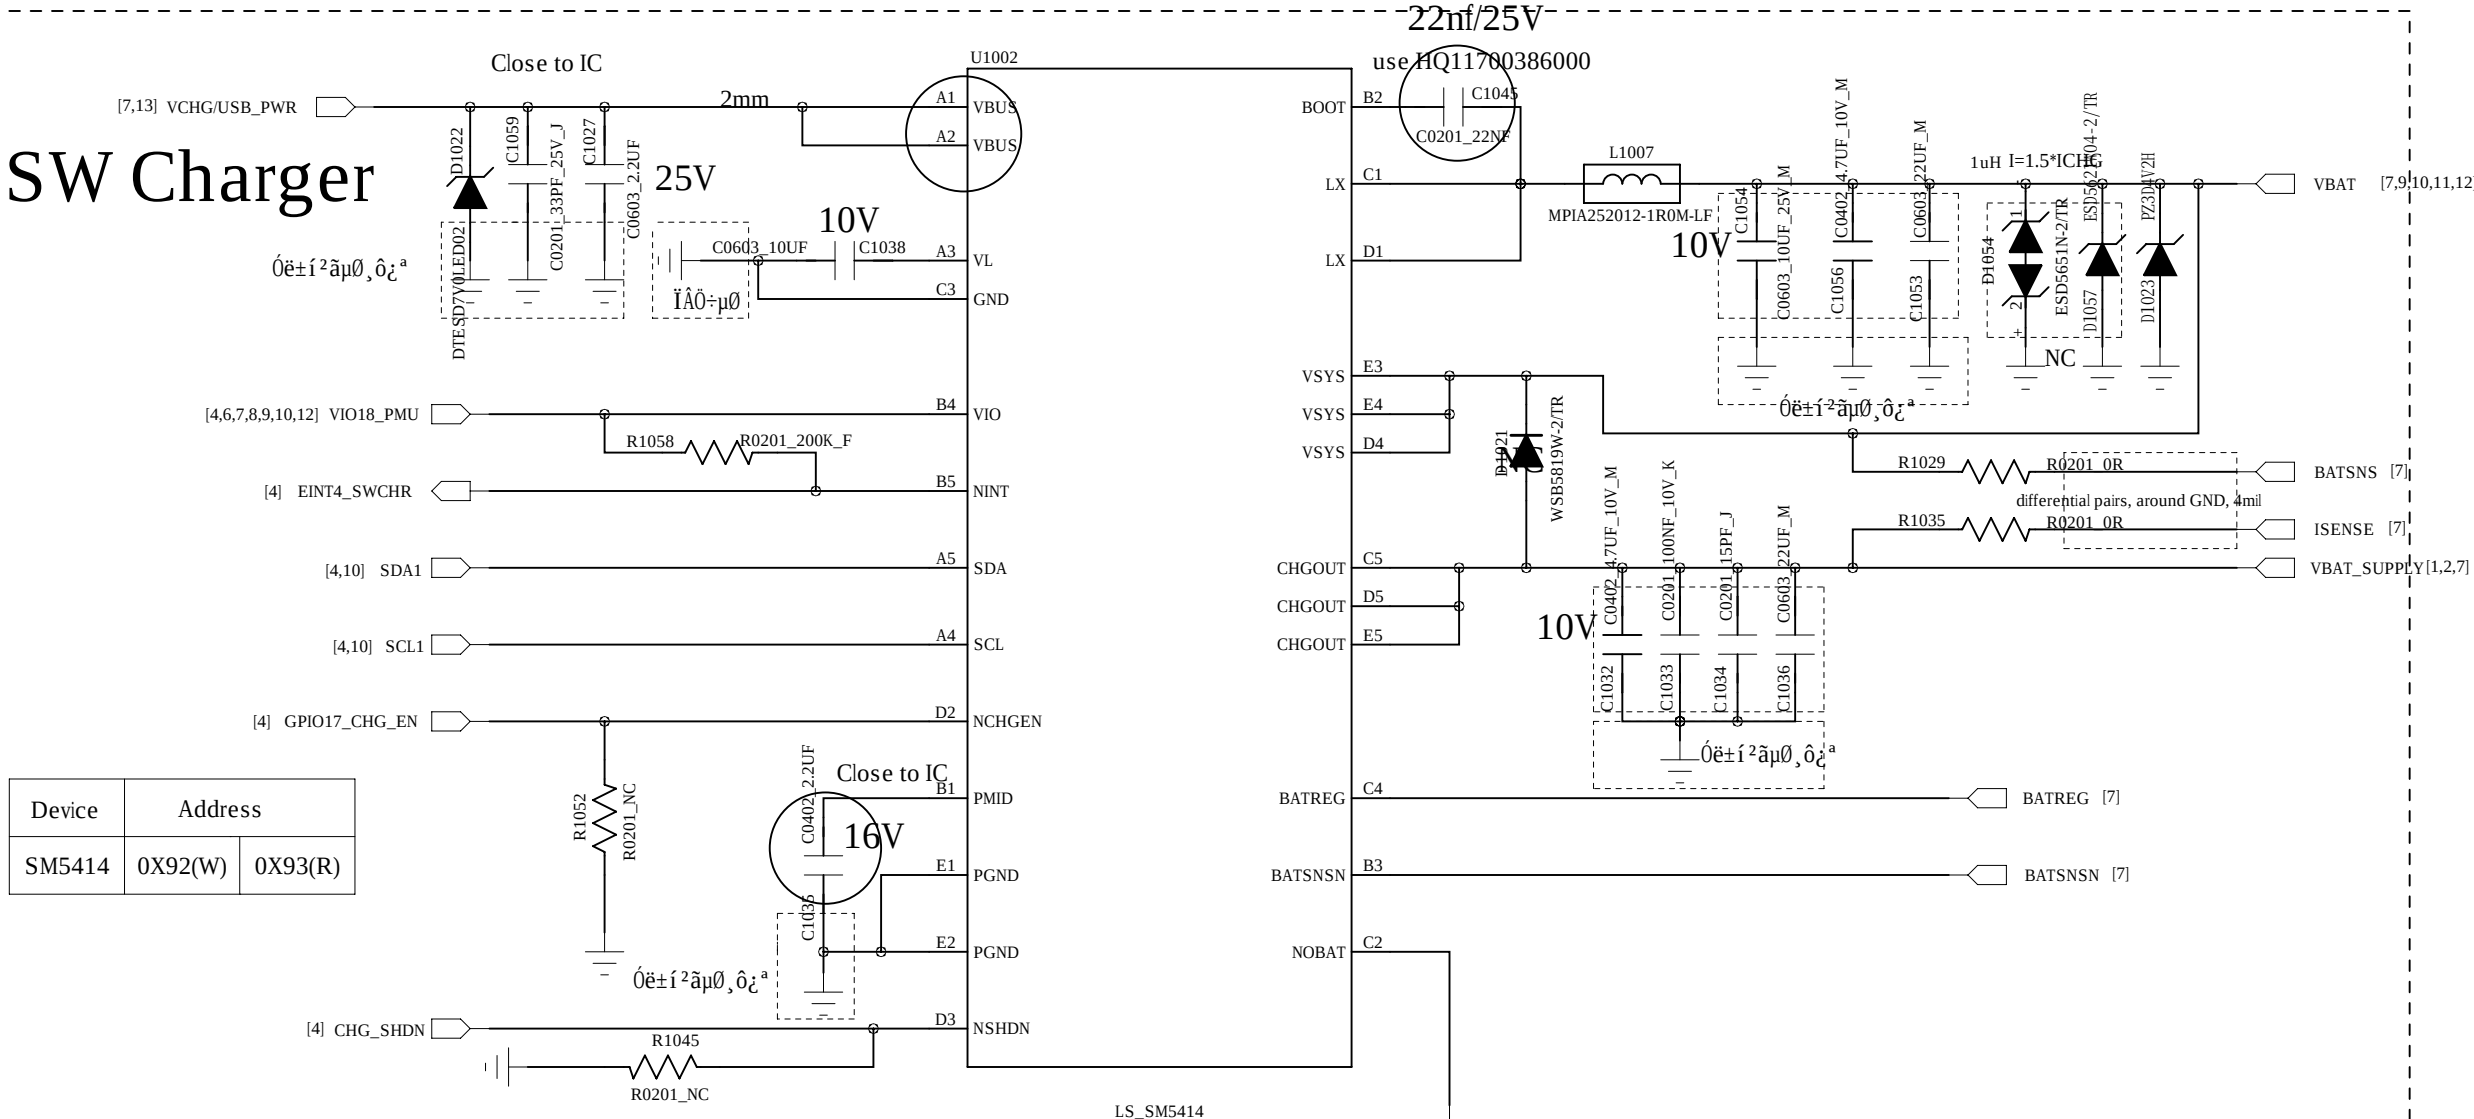

Device	Address	
SM5414	0X92(W)	0X93(R)

HUAQIN

MODEL: AW878

DRAWING NO.:

DRAWN:


DATED

TITLE:


VERSION:

SHEET: 10


Main CAMERA

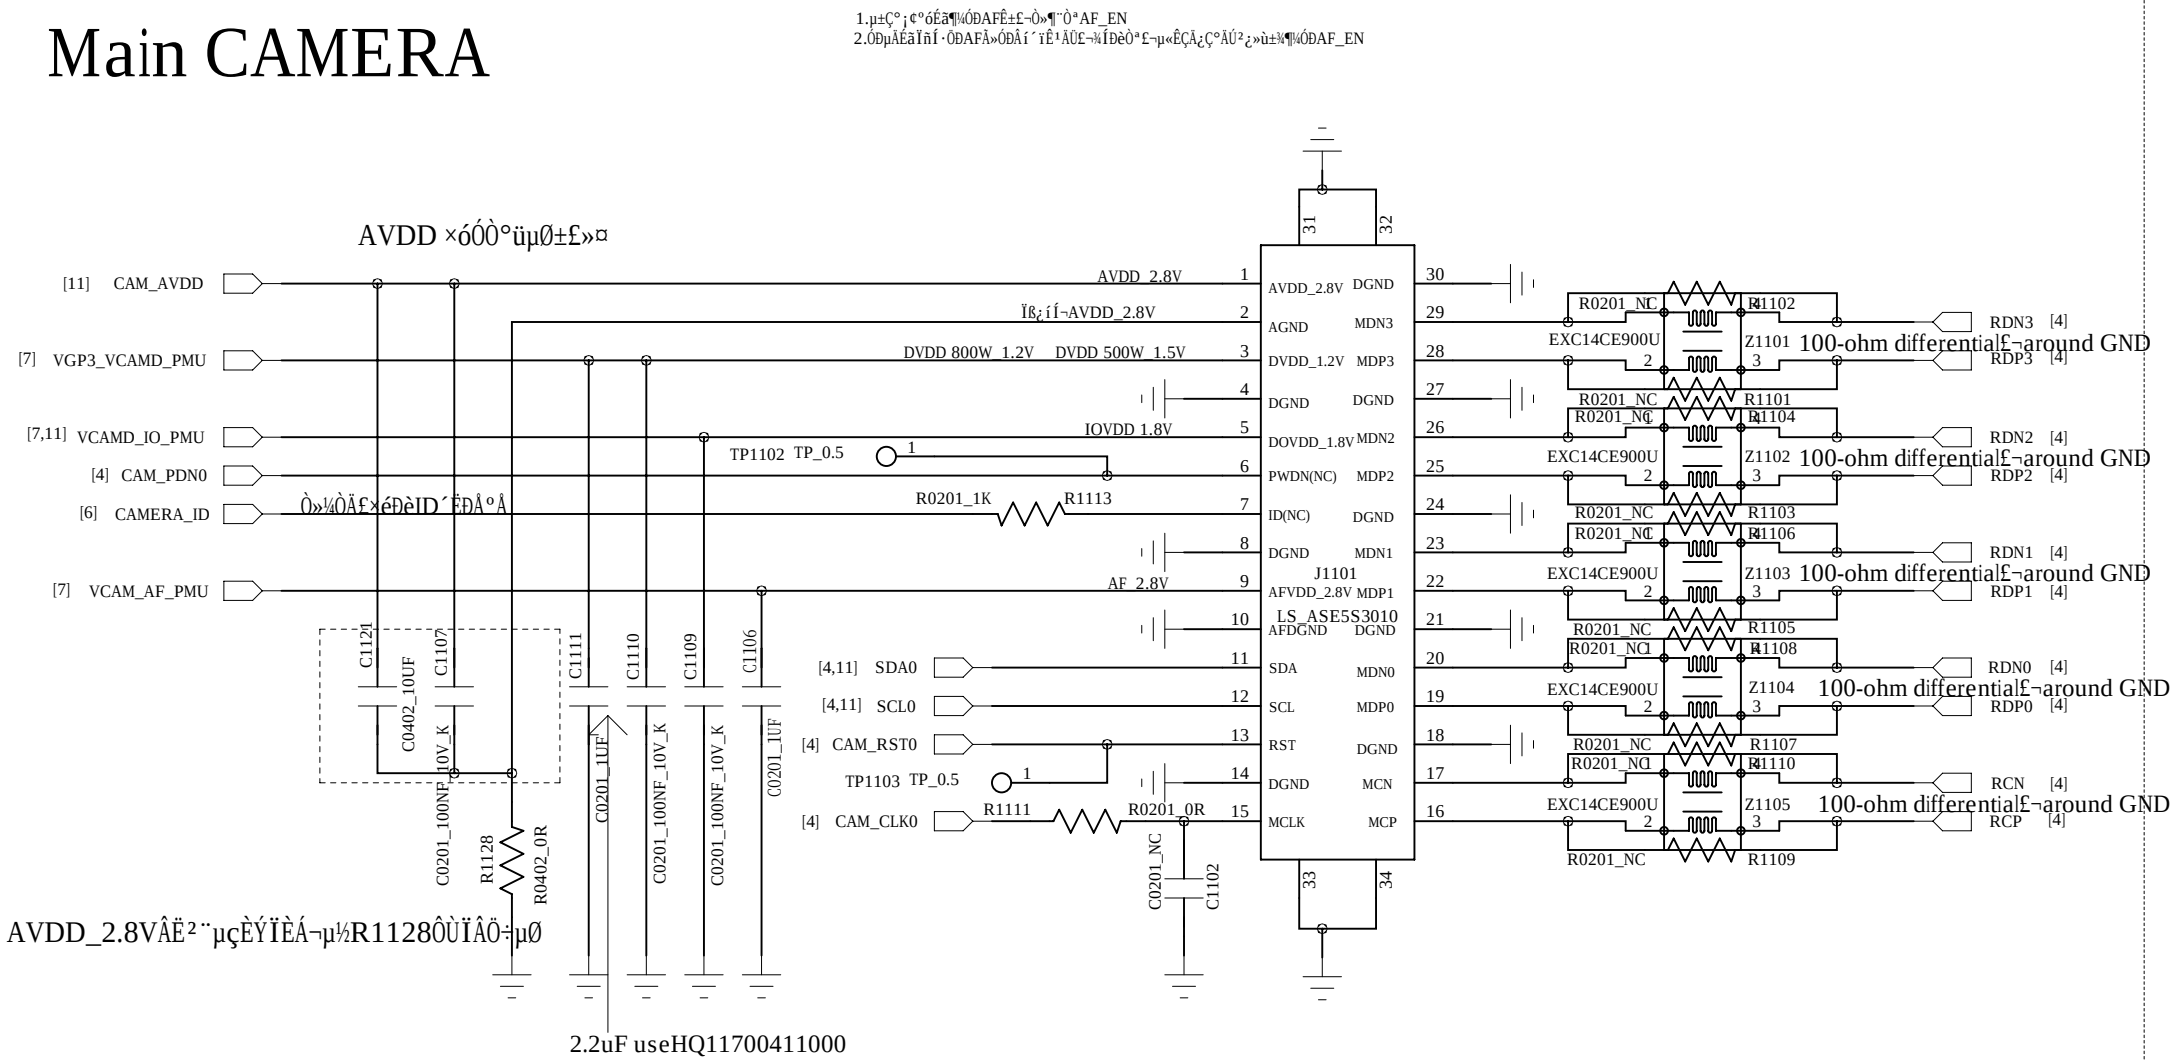


LDO

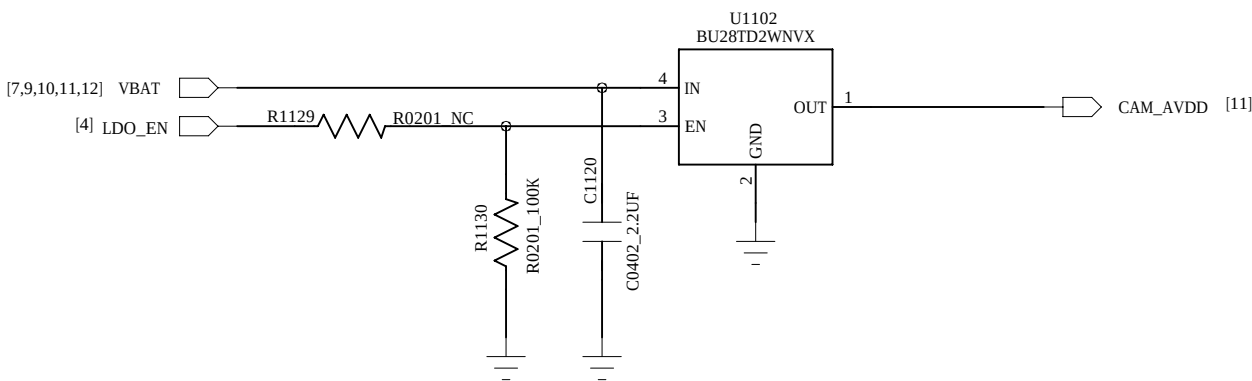


Flash LED Driver(Rear)

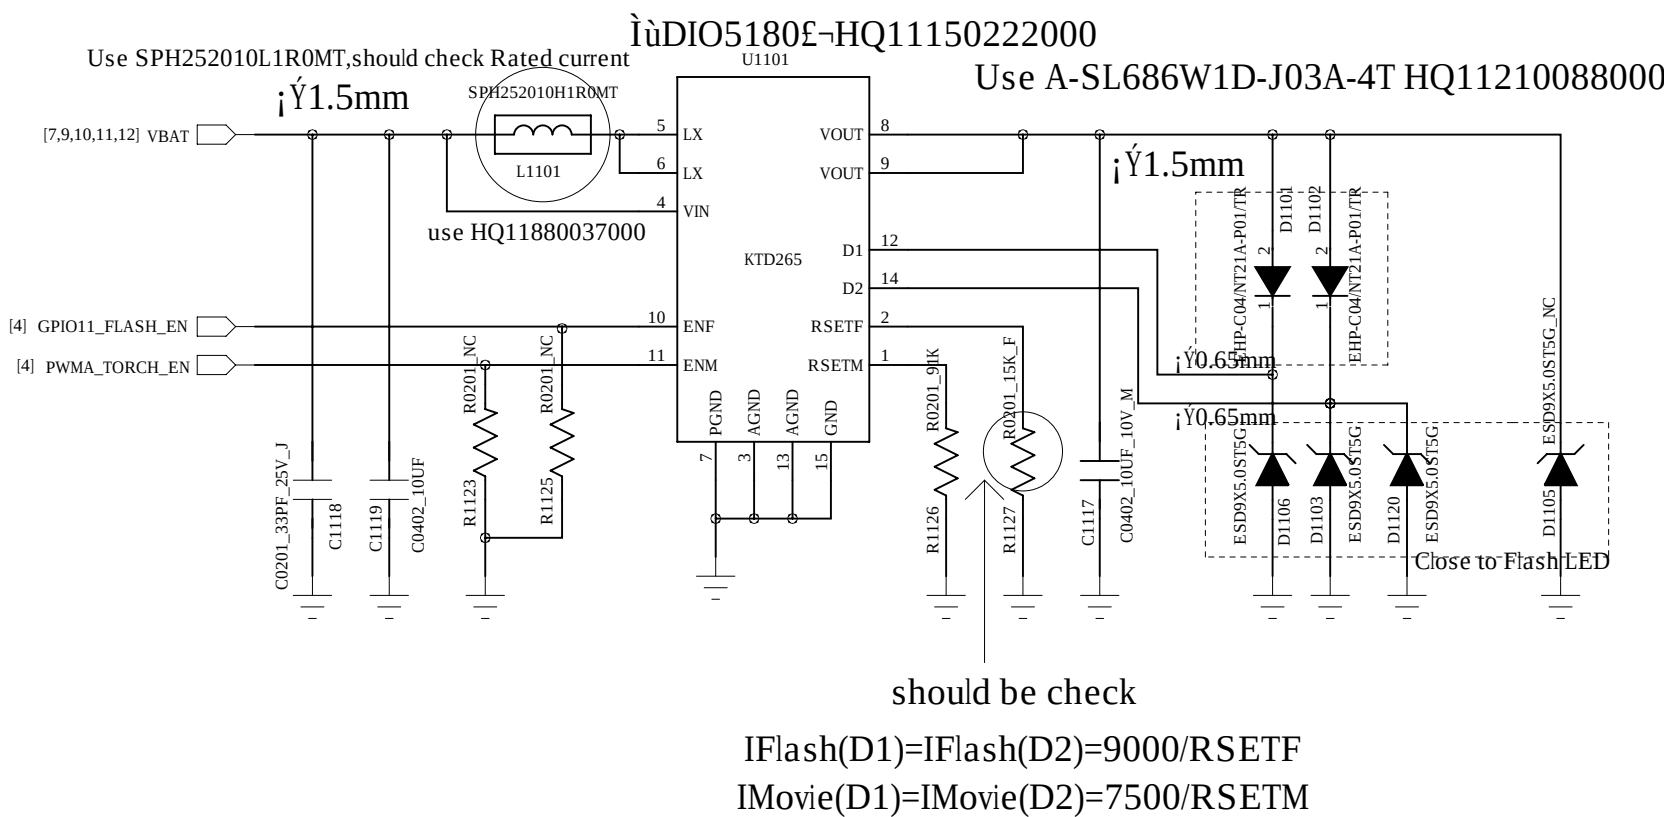

Sub CAMERA

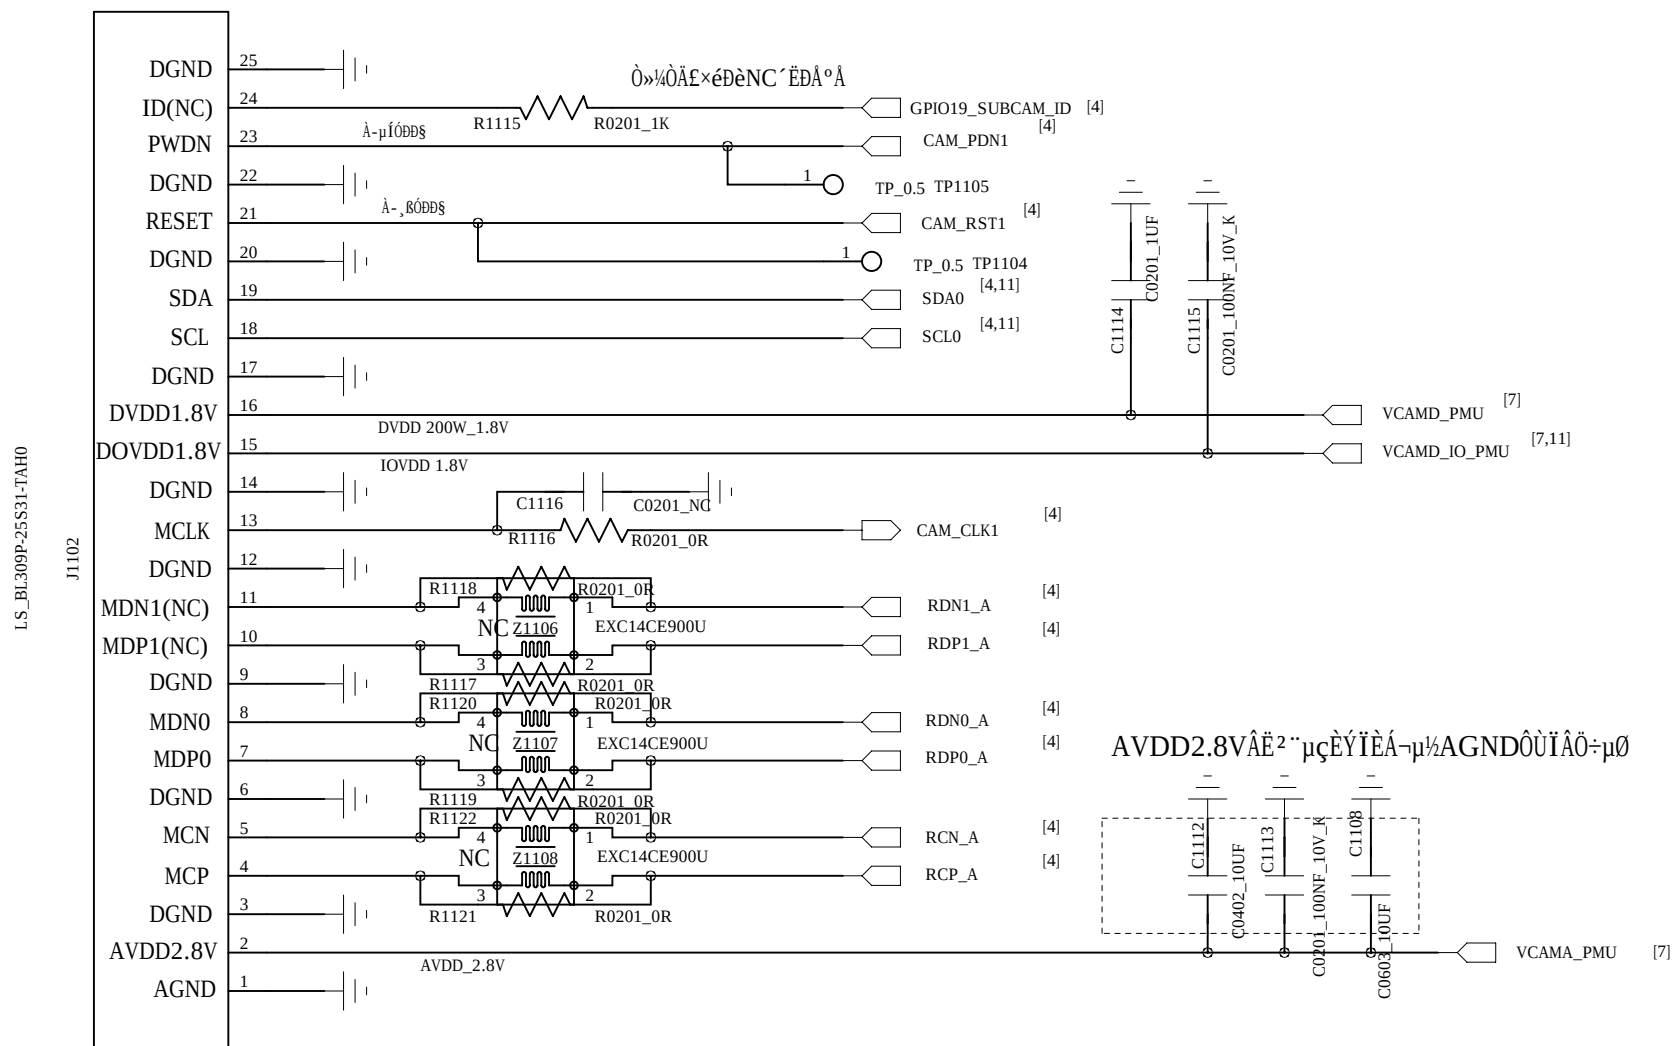

Flash LED(Sub)

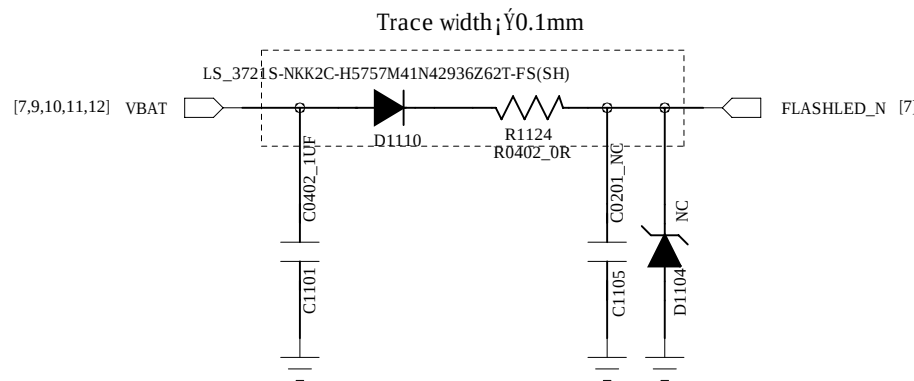

HUAQIN

MODEL: AW878

DRAWING NO.:

DRAWN

DATED

CHECKED


DATED

TITLE:

VERSION:


SHEET: 11

ALS&PS

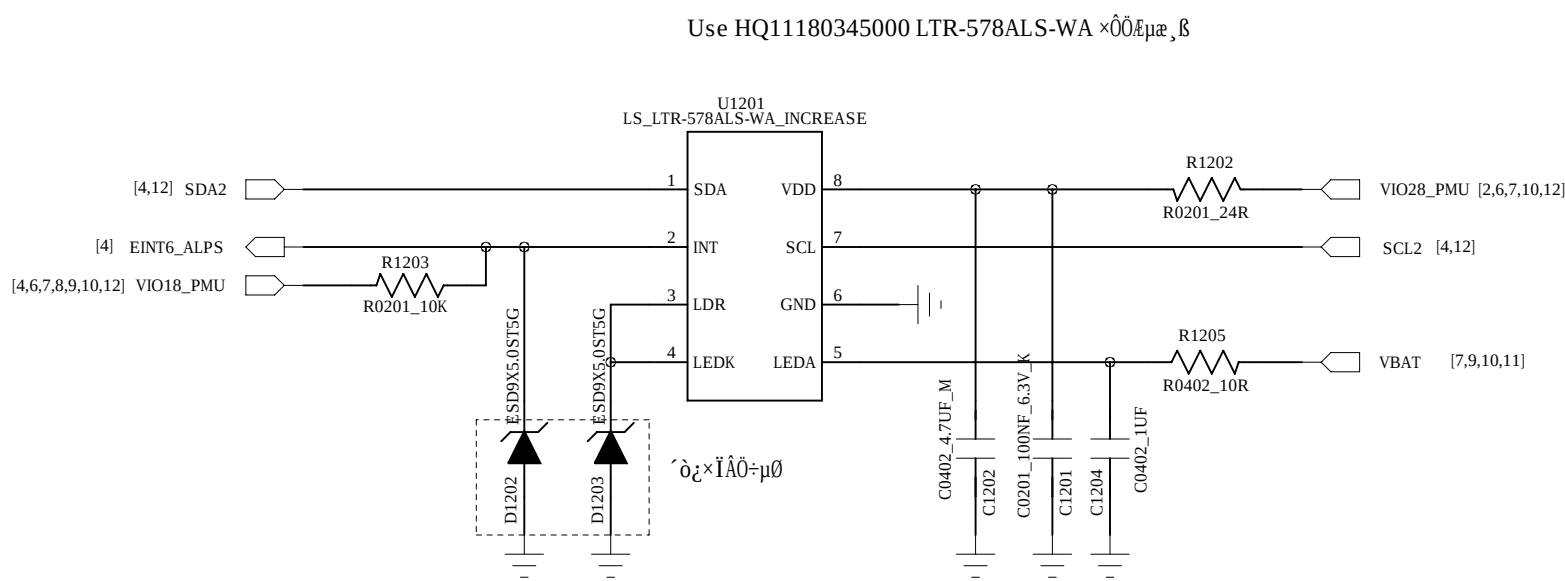


Sensor	Address
LTR-578ALS-WA	0X53H

G-sensor

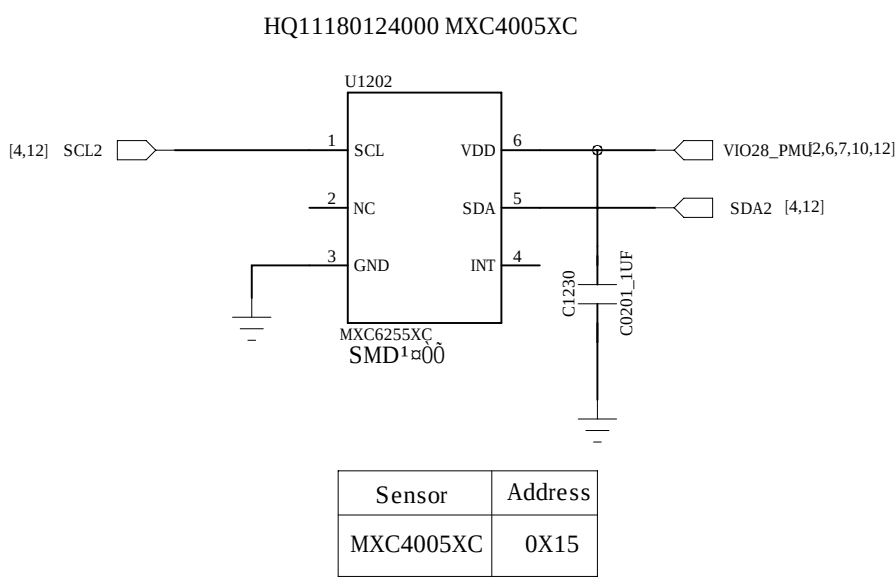


Sensor	Address
MXC4005XC	0X15

G-sensor(reserve)

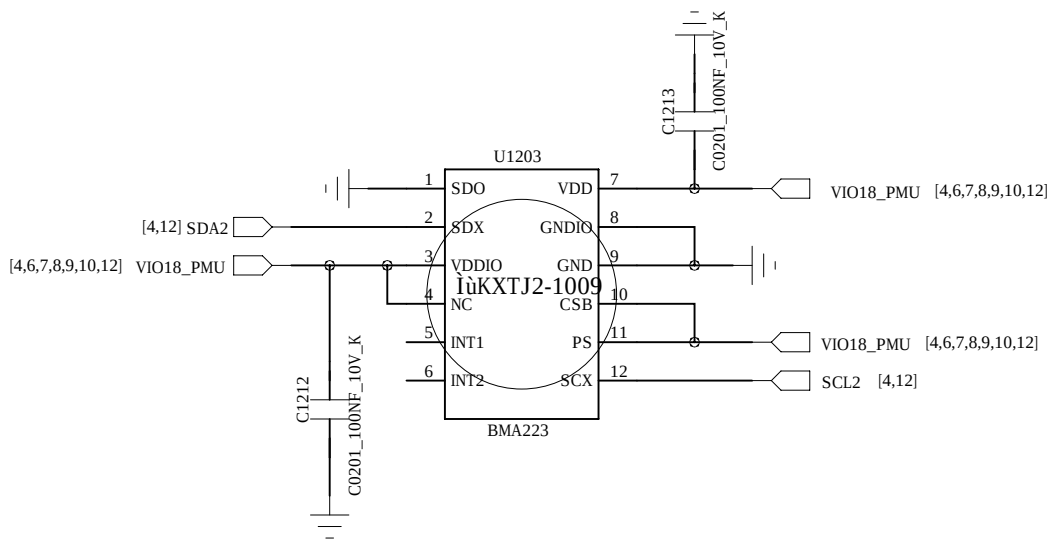

Sensor	Address
KXTJ2-1009	0x0E

E-compass(compatible)

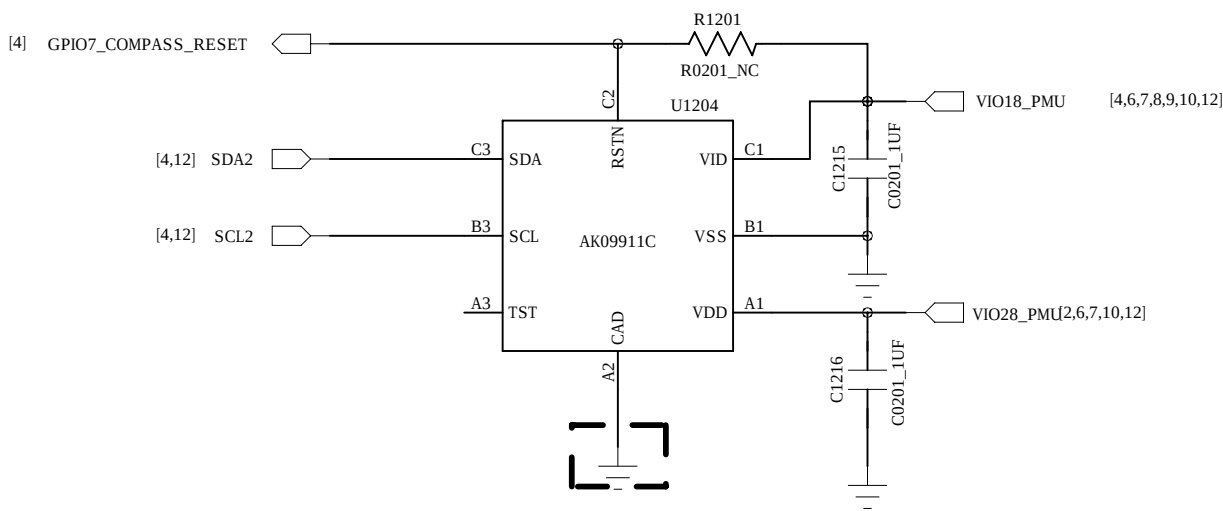

Sensor	Address
AK09911C	0X0C

HUAQIN

MODEL: AW878

DRAWING NO.:

DRAWN

DATED

TITLE:


VERSION:

SHEET: 12


CHECKED

DATED


Link

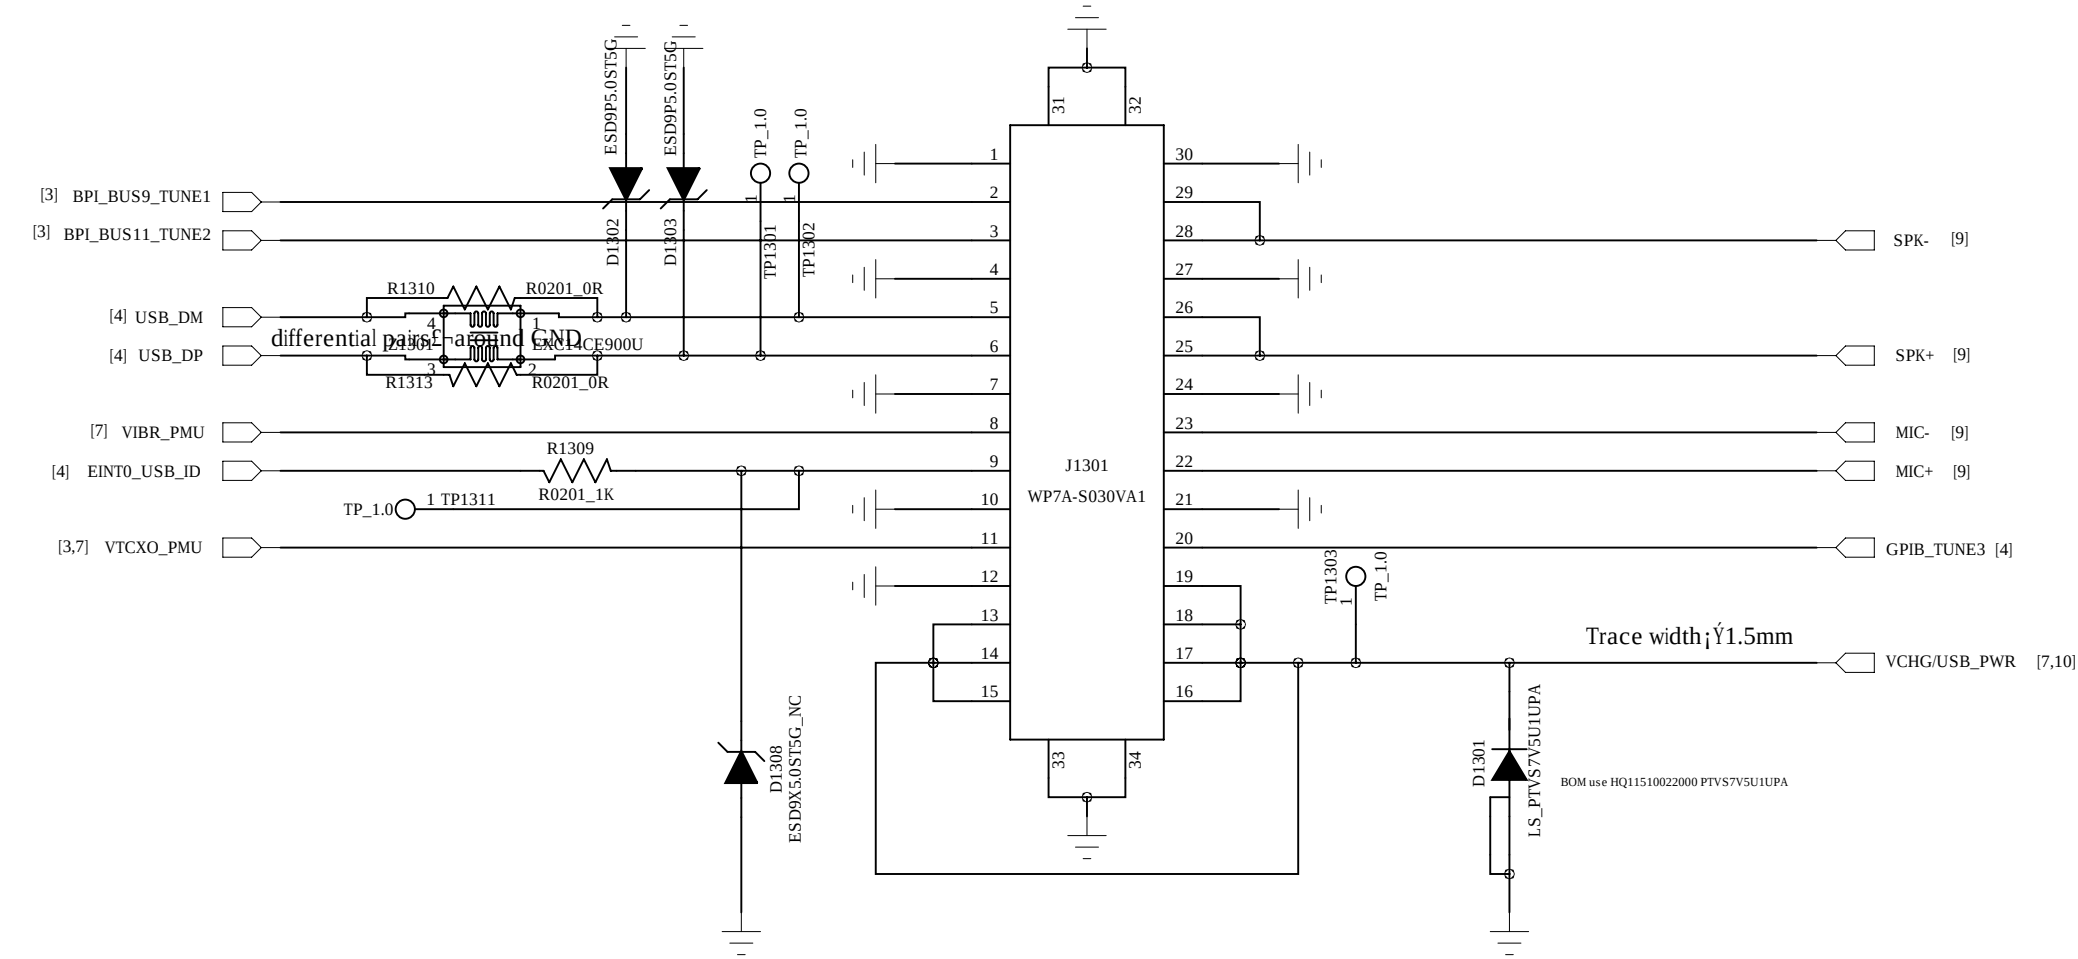

TOP

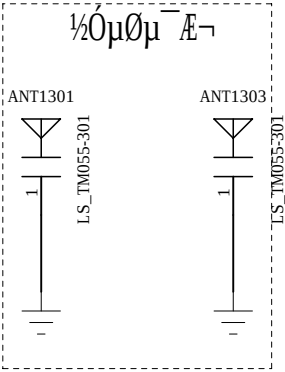

Sidekey

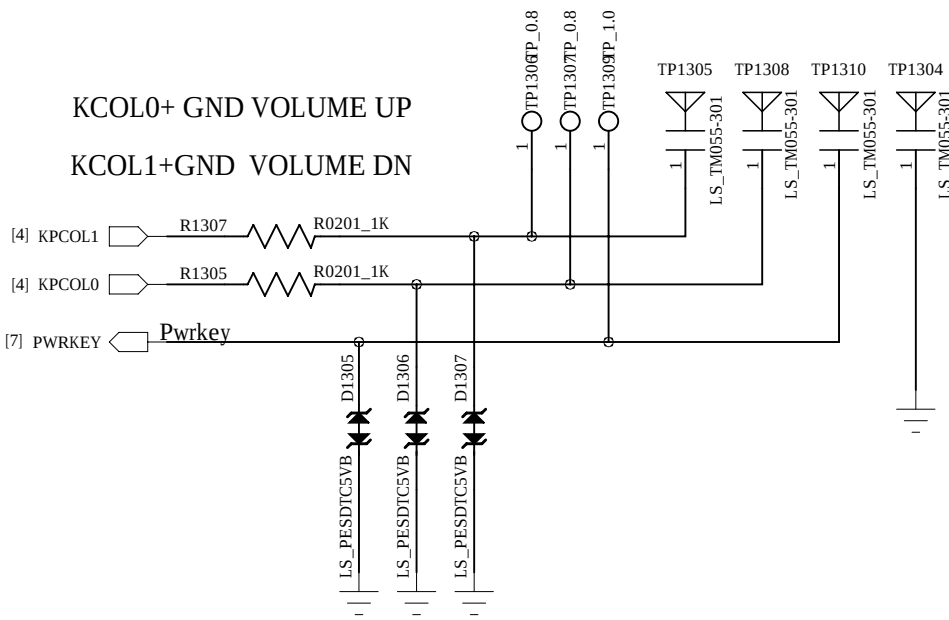

HUAQIN				MODEL: AW878		DRAWING NO.:	
DRAWN		DATED		TITLE:		VERSION:	SHEET: 13
CHECKED		DATED					

