

Firefly 1v3 Pin breakout & notes

Hdr1 Analog

- 1 Gnd
- 2 AN1 / RA1
- 3 AN2 / RA2
- 4 AN3 / RA3
- 5 5V external
input

Mikrobus1


- 1 AN0 / RA0
- 2 RST / RB5
- 3 CS / RC0
- 4 SCK / RB3
- 5 MISO / RB2
- 6 MOSI / RB1
- 7 Swi 3V3
- 8 Gnd

Hdr4 QWIIIC

- 1 Gnd / Black
- 2 Swi 3V3 / Red
- 3 SDA / Blue
- 4 SCL / Yellow

USB-C

JST connector for
3.7V LiPo battery

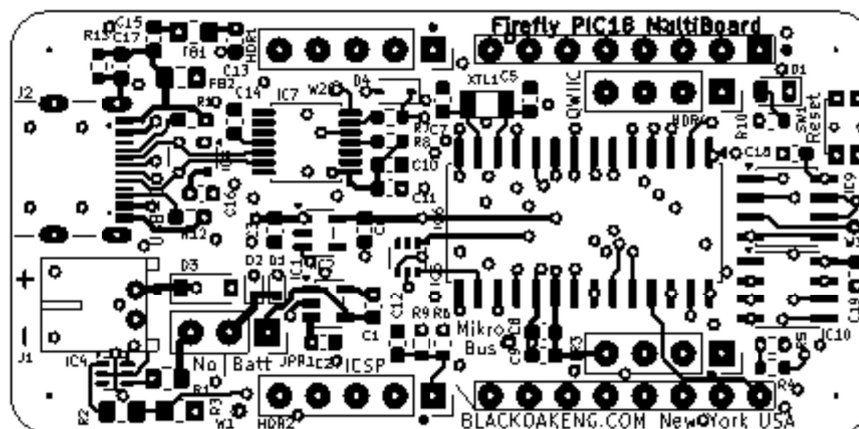

Reset

Notes
Swi 3V3 is user enabled.
Vhi is directly from power
source, so suitable for
higher current loads.
5V external may be used.

Hdr2 ICSP

- 1 /MCLR / RE3
- 2 3V3
- 3 Gnd
- 4 PGD / RB7
- 5 PGC / RB6 / LED

Mikrobus2

- 9 Gnd
- 10 Vhi (3.7 to 5V)
- 11 SDA / RC4
- 12 SCL / RC3
- 13 UART3_Tx / RC6
- 14 UART3_Rx / RC7
- 15 INT / RB0
- 16 PWM / RB4

Hdr3 Extra UART

- 1 Gnd
- 2 UART3_Tx / RC6
- 3 UART3_Rx / RC7
- 4 3V3

Black Oak Engineering
precision electronic instruments

