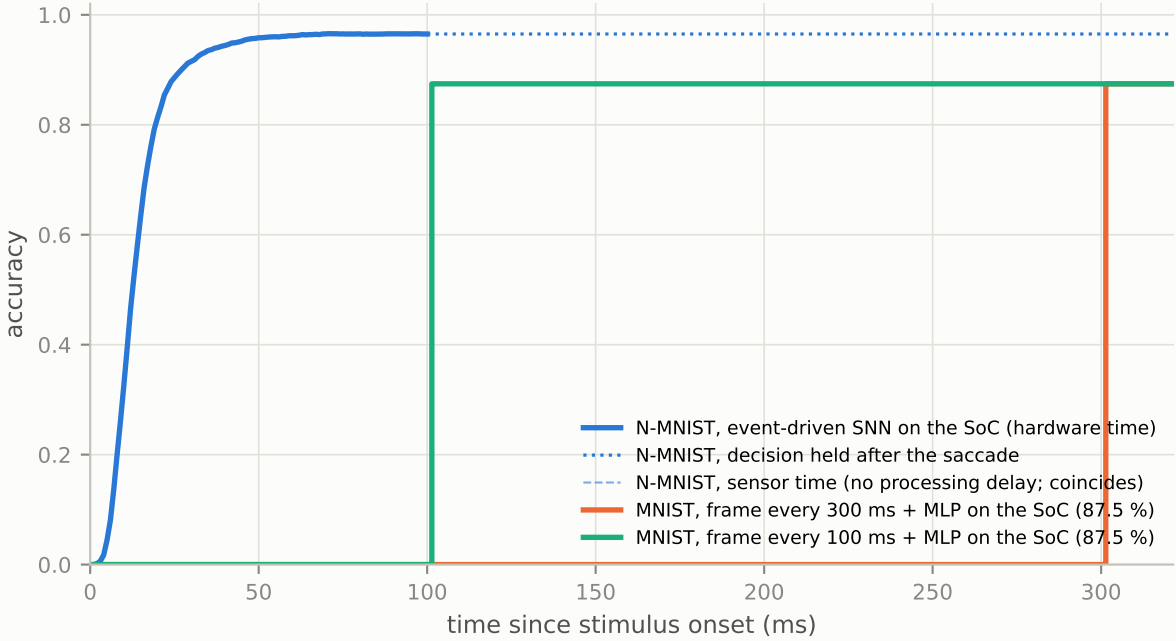
1.0
0.8
0.6
0.4
0.2
0.0
accuracy
0
50
100
150
200
250
300
time since stimulus onset (ms)
N-MNIST, event-driven SNN on the SoC (hardware time)
N-MNIST, decision held after the saccade
N-MNIST, sensor time (no processing delay; coincides)
MNIST, frame every 300 ms + MLP on the SoC (87.5 %)
MNIST, frame every 100 ms + MLP on the SoC (87.5 %)