
[Spivi](#) > [Management Tools](#) > [Installation/Operation Manuals](#)

 Search

Articles in this section



Spivi Studio Installation Manual

Follow

[Click here to easily access a printable version of the Installation Manual.](#)

INSTALLATION MANUAL – SPIVI® Studio

Congratulations on choosing Spivi® Studio!

This guide will walk you through the assembly steps of your system and prepare your facility for the ultimate experience.



Another great tool to learn more about your system is through our Spivi® Academy located on our website: www.spivi.com/academy

Section 1 - Unpacking your Spivi® Studio

Upon removing your system from the packaging please ensure the following items are included:

Name	Qty		Name	Qty	
Spivi Console	1		Power Cord	1	
CAT5 Network Cable	1		Double sided adhesive pad	1	
XBOX Controller	1		XBOX Controller Wireless Receiver	1	
AA Battery for XBOX Controller	1		USB (long) Extender	1	
USB (short) Extender	1		ANT+ USB Antenna	1	
WIFI Antenna	1		*BLE USB Stick		

WARNING:

None of the provided products or parts are waterproof.

* Optional Component.

Section 2 - Prerequisites to Set-up


1. **AV System:** Have your system powered on and ready:

- A longer HDMI extender may be needed to connect the Spivi System to your displays.
- If your instructors have their own personal display, also have handy an HDMI splitter.
- Use a 3.5mm audio cable to connect the Spivi System to your audio system.

2. **Internet:** Double check that your internet is in working order:

- If using a wall mount, please be sure the port is active.
- If using a server, contact your IT department to verify security settings on the server.

3. **QR Code Scanning App:** Have it downloaded on your smartphone for the activation process.
4. **Additional tools that may be helpful:**
 - Zip ties to organize your cables.
 - It is advisable to connect the computer to a UPS (Uninterrupted Power Supply).

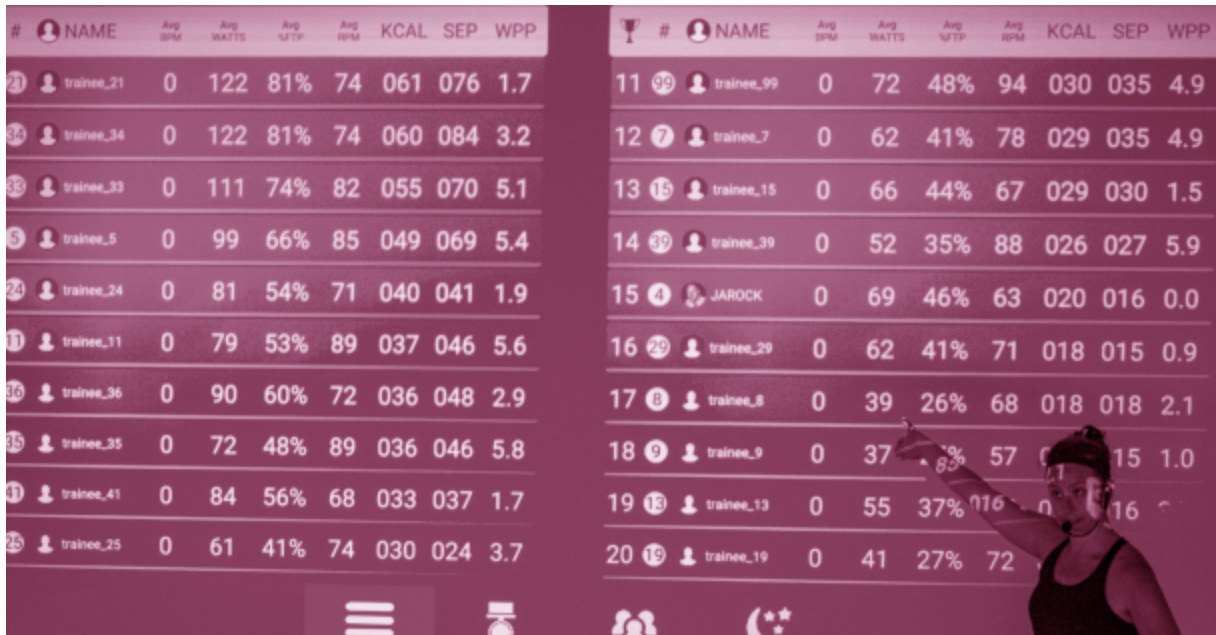


#	NAME	Avg BPM	Avg WATTS	Avg %FTP	Avg BPM	KCAL	SEP	WPP
21	trainee_21	0	122	81%	74	061	076	1.7
34	trainee_34	0	122	81%	74	060	084	3.2
33	trainee_33	0	111	74%	82	055	070	5.1
5	trainee_5	0	99	66%	85	049	069	5.4
24	trainee_24	0	81	54%	71	040	041	1.9
11	trainee_11	0	79	53%	89	037	046	5.6
36	trainee_36	0	90	60%	72	036	048	2.9
35	trainee_35	0	72	48%	89	036	046	5.8
41	trainee_41	0	84	56%	68	033	037	1.7
25	trainee_25	0	61	41%	74	030	024	3.7

#	NAME	Avg BPM	Avg WATTS	Avg %FTP	Avg BPM	KCAL	SEP	WPP
11	trainee_99	0	72	48%	94	030	035	4.9
12	trainee_7	0	62	41%	78	029	035	4.9
13	trainee_15	0	66	44%	67	029	030	1.5
14	trainee_39	0	52	35%	88	026	027	5.9
15	JAROCK	0	69	46%	63	020	016	0.0
16	trainee_29	0	62	41%	71	018	015	0.9
17	trainee_8	0	39	26%	68	018	018	2.1
18	trainee_9	0	37	28%	57	015	015	1.0
19	trainee_13	0	55	37%	116	016	016	0.0
20	trainee_19	0	41	27%	72	016	016	0.0

Section 3 - System Assembly

1. Unpack the Spivi Console, ANT+ USB Antenna, the XBOX controller, and the XBOX receiver.
2. Connect the Spivi Console to your display using an HDMI cable. Use an HDMI extender if needed. Be sure to use the correct HDMI port, as indicated in the picture below!
3. Connect the Spivi Console to the internet using the CAT5 network cable.
4. Connect the XBOX Controller Wireless Receiver to a USB port on the back of the Spivi Console. Use the USB (short) Extender to reposition the XBOX Controller Wireless Receiver to be closer to the XBOX Controller if necessary.
5. Unpack the AA batteries and install them into the XBOX controller.
6. Connect the ANT+ USB Antenna using the supplied USB extender cable into one of the USB ports of the Spivi Console. Use the provided double sided adhesive pad to stick the ANT+ USB Antenna to one of the top corners of your TV. The antenna should have a clear line of sight with the room and stick out on the top side.
7. (Optional) Connect the WIFI Antenna to the back of the Spivi Console.
8. (Optional) Connect the BLE USB dongle into one of the front USB ports on the front right side of the Spivi Console.
9. Connect the Spivi Console to a power outlet using the power cord. Power the Spivi Console on by pressing the power button.

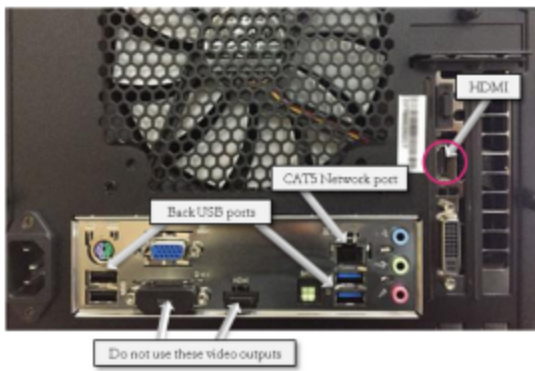


Section 4 - System Activation

In the case of a rental/leased system, your system should have already been pre-activated. **Skip to Section 5.**

After powering on your system, please follow the steps below for a one time activation for your Spivi system:

1. Locate the serial number on a barcode sticker at the back of your Spivi system.
2. Use your smartphone camera to scan the QR Code on the top left side of your screen.

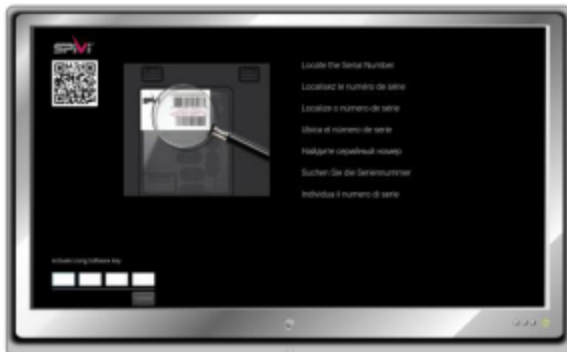

iPhone/Android Users: use your phone camera to scan the QR code then follow the link to the Spivi setup wizard.

Other Users: download a QR Code scanner app, then scan and follow the link to the Spivi setup wizard.



Follow the wizard instructions on your phone to activate the new system.



Section 5 - Bike Pairing (Maintenance Mode)

The system should automatically launch the maintenance mode for the system after activation. If you need to launch the maintenance mode manually, you can access it from the System Settings menu.


Prerequisites

1. The static fitness data receiver (ANT+ Antenna) is connected properly to the system according to the installation guide.
2. All of the fitness equipment devices (bike consoles, power sensors, cadence sensors, heart rate monitors, etc.) are installed and working properly.
3. The training room has been set up for optimal fitness equipment signal quality.
4. Look for the receiver status on the bottom area of the screen and make sure that your receivers are listed and functioning properly.

Bike Pairing

1. Use the directional pad on the Xbox controller to highlight the spot you wish to pair, then press the start button.
2. Activate the desired fitness equipment device you'd like to pair.
 - Indoor Cycling Bikes: Start pedaling the bike until the bike's console starts to display performance data.
 - Heart Rate Monitors: Turn on the strap and wear it as usual.
3. Highlight the Pair option using the Xbox controller, then press the start button to confirm.
4. The system will try to automatically detect a single active fitness equipment device and pair it with the selected training spot.
5. In case the system detects multiple fitness equipment devices, it will display a list of all available devices, and let you manually select the device that you'd like to pair, by using the directional pad.
6. Repeat the above steps for each training spot you'd like to pair.
7. Save & Exit.

For each paired training spot, the system will display the number of paired devices, signal quality indicator and real-time fitness data (heart rate, power, cadence, etc.).

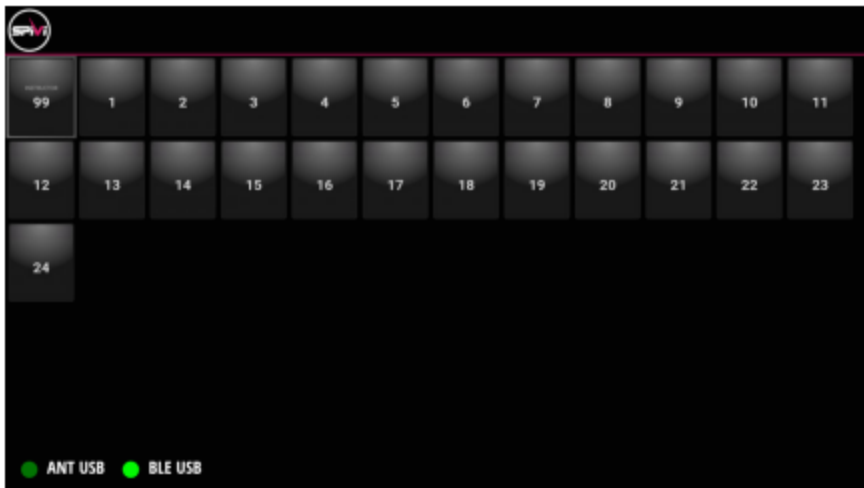

Section 6 - Notices

6.1 Radio Frequency (RF) Interference

Radio frequency (RF) interference with other devices may cause intermittent loss of information. Wireless Internet access points, microwaves, cordless phones, or other wireless devices may cause frequency interference. To mitigate the chance of interference, set wireless access points to the lowest channel possible and keep the Spivi WIFI Bridge away from interfering devices. To change the channel on the access point, please consult manufacturer's documentation.

Spivi utilizes ANT+ and BLE technologies to ensure a robust and reliable connection between the various sensors used and our product. Sensors are defined as power meter sensors, heart rate

strap sensors, cadence sensors, speed sensors, and controlled resistance sensors.

Statement of Compliance for FCC and Industry Canada:

This device complies with Industry Canada and Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The term “IC” before the radio certification number only signifies that Industry Canada technical specifications were met.

Changes or modifications to this device not expressly approved by the party responsible for compliance with FCC regulations (the manufacturer) could void the user authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful

interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

6.2 Important Precautions

It is the responsibility of the owner to ensure that all users of this Spivi® System are adequately informed of all warnings and precautions. For questions regarding this guide, contact Customer Service at the number listed at the end of this guide.

Section 7 - Warranty

Manufacturer's Warranty (under normal use)

Spivi Console (computer) - 12 months

XBOX Controller/Receiver - 3 months

In the event of a warranty issue, SpiviTech LTD will repair or replace the item at its discretion.

SpiviTech LTD is not responsible for any indirect or consequential costs or damages associated with the warranty of the product.

WARNING: OUR PRODUCTS ARE NOT COVERED UNDER THE WARRANTY IN CASES OF:

1. Water damage.
2. Physical Damage or exhibiting signs of abuse.
3. Improper maintenance or installation.
4. Using the product with non-compatible components
5. The computer case was opened.
6. Operating system malfunctions due to:
 - Power outage. It is advisable to connect the computer via a UPS (Uninterrupted Power Supply) battery back device.
 - Switching off computer without properly shutting it down.
7. A 3rd party software was installed on the Spivi computer or using the product for purposes for which it was not designed
8. This warranty is also void if the product has been modified from its original form, including changes in aesthetics, serial numbers or logos.

Warranty Procedures: If it appears that a Spivi® System is not working properly, please take the time to inspect and troubleshoot the system as best as possible. In many instances, solutions may be as simple as replacing a battery or reconnecting a cable. Often small parts can be repaired at a computer shop, instead

of the longer and more expensive option of sending the unit back for repair. To warranty the Spivi® System, return the product, where purchased or contact SpiviTech LTD. at 1-800-900-9917

Disclaimer. THE PRODUCTS AND THE SERVICES AND THE USE OF THE PRODUCTS AND THE SERVICES ARE PROVIDED BY VENDOR ON AN "AS IS" BASIS, AND VENDOR EXPRESSLY DISCLAIMS ANY AND ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING,

WITHOUT LIMITATION, WARRANTIES OF SATISFACTORY QUALITY AND FITNESS FOR A PARTICULAR PURPOSE, WITH RESPECT TO THE APPLICATION OR ANY USE THEREOF. IN NO EVENT SHALL VENDOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, PUNITIVE, OR CONSEQUENTIAL DAMAGES OF ANY KIND WHATSOEVER WITH RESPECT TO THE PRODUCTS AND THE SERVICES AND THE USE THEREOF. CUSTOMER HEREBY SPECIFICALLY AGREES AND ACKNOWLEDGES THAT THE ABOVE WARRANTY IS EXHAUSTIVE, AND IS IN LIEU OF ANY OTHER WARRANTY, EXPRESS OR IMPLIED.

IN NO EVENT SHALL VENDOR OR VENDOR'S DIRECTORS, OFFICERS, EMPLOYEES, CONTRACTORS AND AGENTS BE LIABLE FOR LOST PROFITS, LOST SALES, LOST BUSINESS, LOST OPPORTUNITY, LOST INFORMATION, LOST OR WASTED TIME OR ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES (HOWEVER ARISING, INCLUDING NEGLIGENCE) ARISING OUT OF, OR WITH RESPECT TO THE PRODUCTS AND THE SERVICES AND THE USE THEREOF.

OTHER THAN AS EXPRESSLY PROVIDED UNDER THIS AGREEMENT, VENDOR EXPRESSLY DISCLAIMS AND ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

Vendor's liability to Customer under any or all provisions of this Agreement shall be limited to the Fee actually paid by Customer to Vendor. Vendor's limitation of liability is cumulative with all Vendors' expenditures being aggregated to determine satisfaction of the limit.

If you don't agree to the above terms, you can contact us by mail or email within 30 days of order receipt/invoice to request a return. Original shipping and handling costs may be deducted from the refundable amount. This is to cover the S&H cost even though the original shipping may be offered free to the customer. Customers are responsible for the cost of return shipping. Late returns, returns which are in a un-resalable condition or are missing parts may be refused.

All rights reserved. No part of this publication may be copied, photographed, reproduced, translated, transmitted electronically or placed on digital media without the prior written consent of SpiviTech LTD.

Trademarks

Spivi® is a registered trademark of SpiviTech LTD. Other product, brand, or trade names used in this guide may be trademarks or registered trademarks of their respective owners.

Modifications

SpiviTech LTD reserves the right to make improvements and/or updates to the products described herein at any time without notice.



Was this article helpful?

Yes

No

2 out of 2 found this helpful

Have more questions? [Submit a request](#)

Return to top ^

Related articles

[Spivi Studio Operation Manual](#)

[Spivi Arena Installation Manual](#)

[My Studio – Essential Training Video](#)

[Spivi Mobile App](#)

[Spivi Arena Operation Manual](#)

Comments

0 comments

Article is closed for comments.

Group Heart Rate | Indoor Cycling Leaderboard | Treadmill Leaderboard

Copyright © 2026 SpiviTech Ltd. All Rights Reserved. Spivi® is a registered trademark. Designated trademarks and brands are the property of their respective owners. Use of this web site constitutes acceptance of the Spivi® User Agreement and Privacy Policy.