


How to remove Waveshare 5 inch screen from enclosure:

Step 1: Get a hotplate/FDM printer plate, set the plate temp to 80 degrees Celsius and place the screen face down on the plate. Make sure the screws on the back of the screen case have been removed:



Step 2: Once the back of the screen feels hot, remove the screen and push it from behind, just above the power and data connectors, using your fingers.

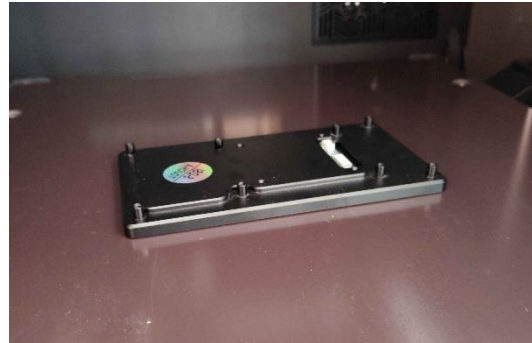

Step 3: If done correctly, there should now be a small gap at the edge of the screen when pushing. Put either your nail or a small plastic shim in here and push it lengthways to widen the gap. Move around the edge of the screen and it should eventually come out:



Authors note: This step is really annoying, and this process is probably the hardest part of the build. If anyone finds a better way to do this, please let me know.