komfovent®

Description of
C6
controller Modbus

This manual is compatible with C6 controller firmware version X.X.X.18 and above (X – does not matter).

C6 controller supports **Modbus RTU** and **Modbus TCP** protocols. Both protocols are using main commands to read and preset registers. Supported Modbus commands are presented in Table 1.

Table 1. Supported Modbus commands

Function code	Description
03	Read Holding Registers
06	Preset Single Register
16	Preset Multiple Registers

Modbus RTU protocol works via RS-485 interface. Default interface settings are presented in Table 2. Default interface settings and Modbus RTU protocol ID can be changed using the website. To change settings, connect air handling unit (AHU) to your network. Default AHU IP address is 192.168.0.60. Go to your browser and type default AHU IP address. You should see „Login" window (Fig. 1). To login type username and password. Default username: „user" and password: „user".
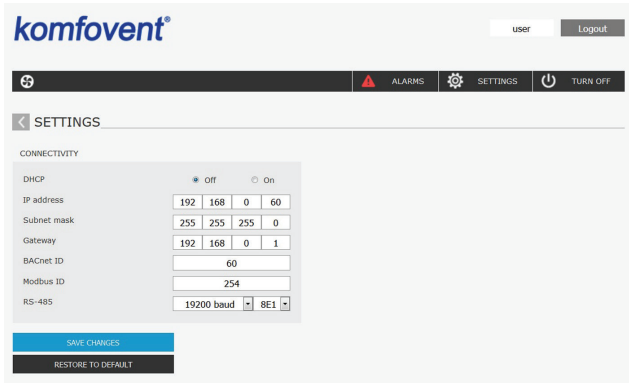
Table 2. Default settings of RS485 interface

Baudrate	19200
Word length	8
Parity	EVEN
Stop bits	1

Fig. 1. Website login window

To find RS-485 interface settings and Modbus RTU protocol ID go to „SETTINGS" and „CONNECTIVITY" (Fig. 2). If you logged in, but can't open „SETTINGS" window make sure, that JavaScript in your web browser is enabled (activated).

Fig. 2. Connectivity settings

If you can't see „Login" window, make sure that:
- your device and air handling unit are connected in the same network;
- your device and air handling unit are in the same subnet;
- your proxy server and firewall isn't blocking connection;
- you typed correct IP address.

If your device is connected directly to C6 controller, make sure, that your DHCP server is disabled and your static IP is in same subnet. If you are using PC and Windows operating system, go to „Local Area Connection Properties", go to „Internet Protocol Version 4 (TCP/IPv4) Properties" (Fig. 3), check „Use the following IP address" and type your static parameters, for example:
- IP address: 192.168.0.61;
- Subnet Mask: 255.255.255.0;
- Default gateway: 192.168.0.1.
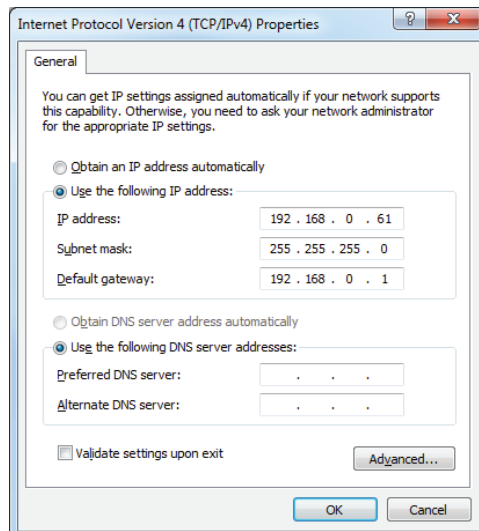
Fig. 3. Personal computer static IP address configuration

The air handling unit has external connection terminals in the control box, inside the air handling unit. Modbus A and B communication wires can be connected to 1 and 2 terminals of connection for external elements (Fig. 4, Fig. 5). To connect devices use twisted pair cable. Maximum cable length is 150 m. C6 controller ground point (any GND terminal from connection too external elements – 4, 7, 10, 29, 32, 35, 38) and other device should be connected together, if distance between the RS-485 interfaces is more than 10 m. (Fig. 4, Fig. 5).
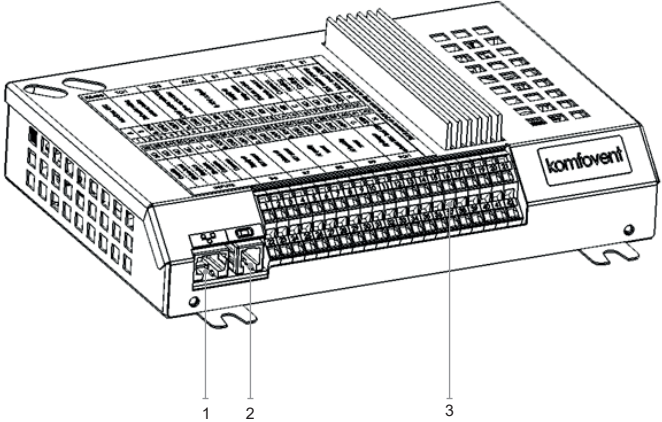

1. Ethernet connection of computer network or Internet
2. Controller panel connection
3. Connection of external elements

Fig. 4. Controller with the connection terminals

Connection diagram for external elements — top terminals (1–21):

Terminal	Group	Function	Signal
1	RS485	Modbus RTU	A
2	RS485	Modbus RTU	B
3	TG1	Water mixing valve actuator	0..10V
4	TG1	Water mixing valve actuator	GND
5	TG1	Water mixing valve actuator	+24V
6	DX	External DX unit	0..10V
7	DX	External DX unit	GND
8	DX	External DX unit	+24V
9	AUX	24V DC; 0-10V output	0..10V
10	AUX	24V DC; 0-10V output	GND
11	AUX	24V DC; 0-10V output	+24V
12	B1	Supply air temp. sensor	NTC 10k
13	B5	Return water temp. sensor	NTC 10k
14–15	OUTPUTS	Common	C
16	OUTPUTS	Heating	NO
17	OUTPUTS	Cooling	NO
18–19	OUTPUTS	Alarm	NO
20	S1	Water pump Max. load 100W	~230V
21	S1	Water pump Max. load 100W	N

Connection diagram for external elements — bottom terminals (22–42):

Terminal	Group	Function	Signal
22	INPUTS	Override	NO
23	INPUTS	Kitchen hood	NO
24	INPUTS	Fireplace	NO
25	INPUTS	Fire alarm	NC
26	INPUTS	Common	C
27	INPUTS	Common	C
28	B6	Supply air VAV sensor	0..10V
29	B6	Supply air VAV sensor	GND
30	B6	Supply air VAV sensor	+24V
31	B7	Exhaust air VAV sensor	0..10V
32	B7	Exhaust air VAV sensor	GND
33	B7	Exhaust air VAV sensor	+24V
34	B8	Air quality or humidity sensor 1	0..10V
35	B8	Air quality or humidity sensor 1	GND
36	B8	Air quality or humidity sensor 1	+24V
37	B9	Air quality or humidity sensor 2	0..10V
38	B9	Air quality or humidity sensor 2	GND
39	B9	Air quality or humidity sensor 2	+24V
40	FG1	Air damper actuator Max. load 15W	~
41	FG1	Air damper actuator Max. load 15W	~230V
42	FG1	Air damper actuator Max. load 15W	N

Fig. 5. Connection diagram for external elements

Modbus TCP protocol works via Ethernet interface, connection is provided to RJ-45 socket on the C6 controller (Fig. 4). Default IP address is 192.168.0.60, and port is 502. To connect C6 controller via Modbus TCP make sure, that proxy servers or firewall isn't blocking device destination IP address and 502 port is opened. Controller IP address can be changed using the website (Fig. 2). Instructions how to connect and login to website was presented at Modbus RTU section. IP address and subnet mask also can be changed using C6.1 touch panel. To find these settings click touch C6.1 panel screen, click „Menu" button, click „Settings" button and don't release it, for more than 5 seconds, after that „Advanced settings" window will pop-up. Click „Connectivity" button and here you will find IP address and subnet mask (Fig. 6). If you want to change one of these parameters, just click on it and edit.
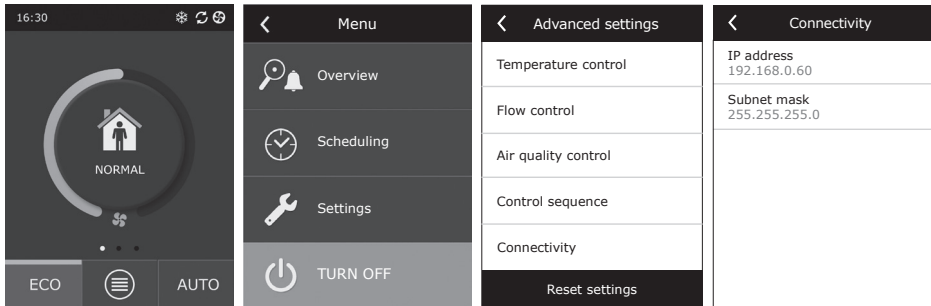
Fig. 6. C6.1 touch panel connectivity settings

For connection the CAT5 category cable should be used. The maximum cable length between device and controller C6 is 100 m.

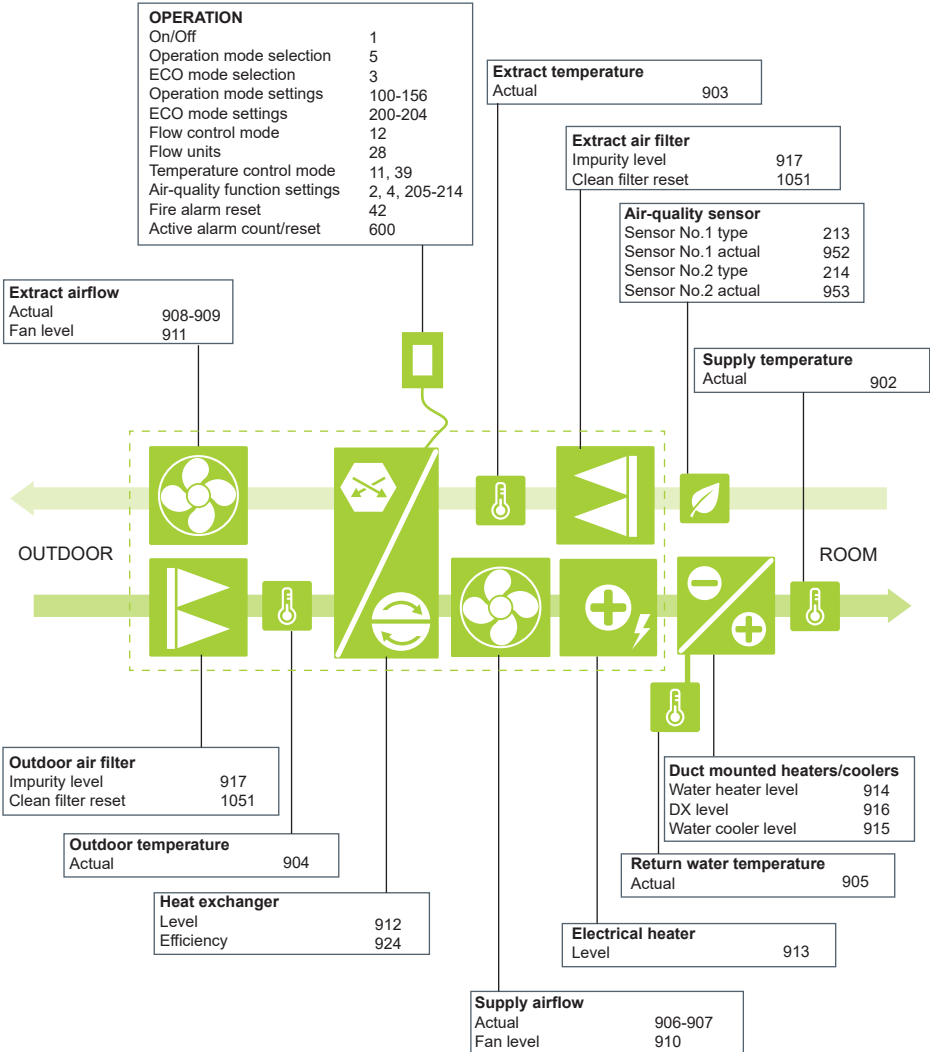C6 controller Modbus registers with descriptions are presented in Table 3.

OPERATION

On/Off	1
Operation mode selection	5
ECO mode selection	3
Operation mode settings	100-156
ECO mode settings	200-204
Flow control mode	12
Flow units	28
Temperature control mode	11, 39
Air-quality function settings	2, 4, 205-214
Fire alarm reset	42
Active alarm count/reset	600

Extract temperature

Actual	903

Extract air filter

Impurity level	917
Clean filter reset	1051

Air-quality sensor

Sensor No.1 type	213
Sensor No.1 actual	952
Sensor No.2 type	214
Sensor No.2 actual	953

Extract airflow

Actual	908-909
Fan level	911

Supply temperature

Actual	902

OUTDOOR

ROOM

Outdoor air filter

Impurity level	917
Clean filter reset	1051

Outdoor temperature

Actual	904

Heat exchanger

Level	912
Efficiency	924

Duct mounted heaters/coolers

Water heater level	914
DX level	916
Water cooler level	915

Return water temperature

Actual	905

Electrical heater

Level	913

Supply airflow

Actual	906-907
Fan level	910

Table 3

Group	Subgroups	Register number	Register name	Data			Values and Units	Examples and comments
				Access	Type	Range		
Main control	Modes	1	ON/OFF status	R/W	unsigned char	0 - 1	Off = 0, On = 1	
		2	Auto mode control	RO	unsigned char	0 - 1	Scheduling = 0, Air Quality = 1	
		3	ECO mode	R/W	unsigned char	0 - 1	Off = 0, On = 1	
		4	AUTO mode	R/W	unsigned char	0 - 1	Off = 0, On = 1	
		5	Current mode	R/W	unsigned char	0 - 10	READ ONLY: Stanby = 0, Away = 1, Normal = 2, Intensive = 3, Boost = 4, Kitchen = 5, Fireplace = 6, Override = 7, Holiday = 8, Air quality = 9, Off = 10 WRITE ONLY: Away = 1, Normal = 2, Intensive = 3, Boost = 4	
		6	Scheduler operation mode	R/W	unsigned char	0 - 3	StayAtHome = 0, WorkingWeek = 1, Office = 2, Custom = 3	
		7	Next mode	RO	unsigned char	0 - 8	Standby = 0, Away = 1, Normal = 2, Intensive = 3, Boost = 4, Kitchen = 5, Fireplace = 6, Overide = 7, Holidays = 8	
		8	Next mode start time	RO	unsigned short	0 - 1439	Minutes	(0 - 1439 => 0:00 - 23:59); 130 => 2:10
		9	Next mode weekday	RO	unsigned char	0 - 7	Week days: None = 0, Mo = 1, Tu = 2, We = 3, Th = 4, Fr = 5, Sa = 6, Su = 7	
		10	Before been mode mask	RO	Unsigned char	0 - 31	Standby => 0, Away => 1 bit, Normal => 2 bit, Intensive => 3 bit, Boost => 4 bit	
	Temperature and flow control	11	Temperature control	R/W	unsigned char	0 -3	Supply = 0, Extract = 1, Balance = 2, Room = 3	
		39	Room sensor	R/W	unsigned char	0 - 1	Panel temperature(1) = 0, Panel temperature(2) = 1	
		12	Flow control	R/W	unsigned char	0 - 2	CAV = 0, VAV = 1, DCV = 2, OFF = 3	
		13-14	Maximum supply flow	RO	unsigned int	0 - 200000	m3/h, l/s	
		15-16	Maximum extract flow	RO	unsigned int	0 - 200000	m3/h, l/s	
		17	Max supply pressure	R/W	unsigned short	0 - 1000	Pa	
		18	Max extract pressure	R/W	unsigned short	0 - 1000	Pa	

Group	Subgroups	Register number	Register name	Data			Values and Units	Examples and comments
				Access	Type	Range		
Main control	Control sequance	19	Stage 1	R/W	unsigned char	0 - 3	None = 0, External coil = 1, Electric heater = 2, External Dx unit = 3 ,	
		20	Stage 2	R/W	unsigned char	0 - 3	None = 0, External coil = 1, Electric heater = 2, External Dx unit = 3 ,	
		21	Stage 3	R/W	unsigned char	0 - 3	None = 0, External coil = 1, Electric heater = 2, External Dx unit = 3 ,	
		22	Coil type	R/W	unsigned char	0 - 1	Hot water = 0, Cold water = 1, Combi = 2,	
		40	Icing protection	R/W	unsigned char	0 - 2	Off = 0, On = 1, External coil = 2	Only for plate heat exchanger
		41	Indoor humidity	R/W	unsigned char	-1; 10 - 90	Auto = -1, Manual = 10-90%RH	Only for plate heat exchanger
	Connectivity	35	DHCP On/Off	R/W	unsigned char	0 - 1	Off = 0, On = 1	
		23-24	IP	R/W	unsigned int		default 192.168.0.60	
		25-26	Mask	R/W	unsigned int		default 255.255.255.0	
		36-37	Gateway	R/W	unsigned int		default 192.168.0.1	
		38	BACnet ID	R/W	unsigned int	0 - 4194303	default 60	
		44	Bacnet Port	R/W	unsigned short	1-65535	default 47808	
	Settings	27	Language	R/W	unsigned char	0-255	English = 0, Lithuanian = 1, Russian = 2, …	
		28	Flow units	R/W	unsigned char	0 - 1	m3/h = 0, l/s = 1	
		42	Fire alarm restart	R/W	unsigned char	0 - 1	Manual = 0, Auto = 1	
	Time and date	29	Time, HH:MM	R/W	unsigned short	MSB 0x00 - 0x17, LSB 0x00 - 0x3B	MSB - hours, LSB - minutes	0x0B36 => 11:54
		30	Year	R/W	unsigned short	2017 - 2035	Year	0x07E0 => 2016
		31	Month/Day	R/W	unsigned short	MSB 0x01 - 0x0C, LSB 0x01 - 0x1F	MSB - month, LSB - day	0x020C => Feb12
		32	Week day	RO	unsigned char	1 - 7	Mo = 1, Tu = 2, We = 3, Th = 4, Fr = 5, Sa = 6, Su = 7	
		33-34	Time since 1970	RO	unsigned int	1483228800 - 2051222400	based on seconds since standard epoch of 1/1/1970	1456329600 => 2016.02.24 16:00:00
Mode settings	Away	100-101	Supply flow	R/W	unsigned int	0 - 200000	m3/h, l/s, Pa, %	
		102-103	Extract flow	R/W	unsigned int	0 - 200000	m3/h, l/s, Pa, %	
		104	Setpoint	R/W	signed short	50 - 400	x10 C	
		105	Heating	R/W	unsigned char	0 - 1	Off = 0, On = 1	
	Normal	106-107	Supply flow	R/W	unsigned int	0 - 200000	m3/h, l/s, Pa, %	
		108-109	Extract flow	R/W	unsigned int	0 - 200000	m3/h, l/s, Pa, %	
		110	Setpoint	R/W	signed short	50 - 400	x10 C	
		111	Heating	R/W	unsigned char	0 - 1	Off = 0, On = 1	
	Intensive	112-113	Supply flow	R/W	unsigned int	0 - 200000	m3/h, l/s, Pa, %	
		114-115	Extract flow	R/W	unsigned int	0 - 200000	m3/h, l/s, Pa, %	
		116	Setpoint	R/W	signed short	50 - 400	x10 C	
		117	Heating	R/W	unsigned char	0 - 1	Off = 0, On = 1	

Group	Subgroups	Register number	Register name	Data			Values and Units	Examples and comments
				Access	Type	Range		
Mode settings	Boost	118-119	Supply flow	R/W	unsigned int	0 - 200000	m3/h, l/s, Pa, %	
		120-121	Extract flow	R/W	unsigned int	0 - 200000	m3/h, l/s, Pa, %	
		122	Setpoint	R/W	signed short	50 - 400	x10 C	
		123	Heating	R/W	unsigned char	0 - 1	Off = 0, On = 1	
	Kitchen	124-125	Supply flow	R/W	unsigned int	0 - 200000	m3/h, l/s, %	
		126-127	Extract flow	R/W	unsigned int	0 - 200000	m3/h, l/s, %	
		128	Setpoint	R/W	signed short	50 - 400	x10 C	
		129	Heating	R/W	unsigned char	0 - 1	Off = 0, On = 1	
		130	Timer time	R/W	unsigned short	0 - 300	Minutes	
	Fireplace	131-132	Supply flow	R/W	unsigned int	0 - 200000	m3/h, l/s, %	
		133-134	Extract flow	R/W	unsigned int	0 - 200000	m3/h, l/s, %	
		135	Setpoint	R/W	signed short	50 - 400	x10 C	
		136	Heating	R/W	unsigned char	0 - 1	Off = 0, On = 1	
		137	Timer time	R/W	unsigned short	0 - 300	Minutes	
	Overide	138-139	Supply flow	R/W	unsigned int	0 - 200000	m3/h, l/s, %	
		140-141	Extract flow	R/W	unsigned int	0 - 200000	m3/h, l/s, %	
		142	Setpoint	R/W	signed short	50 - 400	x10 C	
		143	Heating	R/W	unsigned char	0 - 1	Off = 0, On = 1	
		144	Mode	R/W	unsigned char	0 - 2	All time = 0, If on = 1, If off = 2	
		145	Timer time	R/W	unsigned short	0 - 300	Minutes	
		157	Delayed start	R/W	unsigned char	0 - 10	Minutes	
		158	Delayed stop	R/W	unsigned char	0 - 30	Minutes	
	Holidays	146	Microventilation	R/W	unsigned char	1 - 4	Once per day = 1, Twice per day = 2, Thrice per day = 3, Four times per day = 4,	
		147	Setpoint	R/W	signed short	50 - 400	x10 C	
		148	Heating	R/W	unsigned char	0 - 1	Off = 0, On = 1	
		149-150	From Day/Month	R/W	unsigned int	1483228800 - 2051222400	based on seconds since standard epoch of 1/1/1970	1456329600 => 2016.02.24 16:00:00
		151-152	Till Day/Month	R/W	unsigned int	1483228800 - 2051222400	based on seconds since standard epoch of 1/1/1970	1456329600 => 2016.02.24 16:00:00
		153	Year, from	R/W	unsigned short	2017 - 2035		
		154	Month/Day, from	R/W	unsigned short	MSB 0x01 - 0x0C, LSB 0x01 - 0x1F	MSB = month, LSB = day	0x020C => Feb12
		155	Year, till	R/W	unsigned short	2017 - 2035		
		156	Month/Day, till	R/W	unsigned short	MSB 0x01 - 0x0C, LSB 0x01 - 0x1F	MSB = month, LSB = day	0x020C => Feb12
Eco	Eco	200	Minimum supply air temperature	R/W	unsigned short	50 - 400	x10 C	
		201	Maximum supply air temperature	R/W	unsigned short	50 - 400	x10 C	
		202	Free heating/cooling	R/W	unsigned char	0 - 1	Off = 0, On = 1	
		203	Heating enable denied	R/W	unsigned char	0 - 1	Off = 0, On = 1	
		204	Cooling enable denied	R/W	unsigned char	0 - 1	Off = 0, On = 1	
		217	Constant heat recovery	R/W	unsigned char	0 - 1	Off = 0, On = 1	

Group	Subgroups			Register number	Register name	Data			Values and Units	Examples and comments
						Access	Type	Range		
Air quality	Air quality			205	Air quality Enable	R/W	unsigned char	0 - 1	Disabled = 0, Enabled = 1	
				206	Temperature setpoint	R/W	signed short	50 - 400	x10 C	
				207	Air quality setpoint	R/W	unsigned short	C02: 0 - 2000, VOC: 0 - 100,	ppm, %	
				208	Humidity setpoint	R/W	unsigned short	RH: 0 - 100,	%	
				209	Air quality minimum intensivity	R/W	unsigned char	0, 20 - 100	%	
				210	Air quality maximum intensivity	R/W	unsigned char	0, 20 - 100	%	
				211	Air quality heating	R/W	unsigned char	0 - 1	Off = 0, On = 1	
				212	Air quality check period	R/W	unsigned char	1 - 24	Hours	
				213	Air quality sensor type B8	R/W	unsigned char	0 - 3	None = 0, CO2 = 1, VOC = 2, RH = 3	
				214	Air quality sensor type B9	R/W	unsigned char	0 - 3	None = 0, CO2 = 1, VOC = 2, RH = 3	
Scheduler	Stay at home	Operation program 1	Weekday mask	300	Weekday mask	R/W	unsigned char	0b00000000 - 0b01111111	Mo => 0 bit, Tu => 1 bit, We => 2 bit, Th => 3 bit, Fr => 4 bit, Sa => 5 bit, Su => 6 bit	
			Event 1	301	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				302	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				303	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 2	304	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				305	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				306	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 3	307	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				308	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				309	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 4	310	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				311	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				312	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 5	313	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				314	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				315	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05

Group	Subgroups		Register number	Register name	Data			Values and Units	Examples and comments
					Access	Type	Range		
Scheduler	Stay at home	Operation program 1 — Weekday mask	316	Weekday mask	R/W	unsigned char	0b00000000-0b01111111	Mo => 0 bit, Tu => 1 bit, We => 2 bit, Th => 3 bit, Fr => 4 bit, Sa => 5 bit, Su => 6 bit	
		Event 1	317	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
			318	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			319	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
		Operation program 2 — Event 2	320	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
			321	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			322	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
		Event 3	323	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
			324	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			325	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
		Event 4	326	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
			327	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			328	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
		Event 5	329	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
			330	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			331	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
		Operation program 3 — Weekday mask	332	Weekday mask	R/W	unsigned char	0b00000000-0b01111111	Mo => 0 bit, Tu => 1 bit, We => 2 bit, Th => 3 bit, Fr => 4 bit, Sa => 5 bit, Su => 6 bit	
		Event 1	333	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
			334	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			335	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
		Event 2	336	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
			337	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			338	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05

Group	Subgroups			Register number	Register name	Data			Values and Units	Examples and comments
						Access	Type	Range		
Scheduler	Stay at home	Operation program 3	Event 3	339	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				340	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				341	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 4	342	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				343	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				344	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 5	345	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				346	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				347	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
		Operation program 4	Weekday mask	348	Weekday mask	R/W	unsigned char	0b00000000-0b01111111	Mo => 0 bit, Tu => 1 bit, We => 2 bit, Th => 3 bit, Fr => 4 bit, Sa => 5 bit, Su => 6 bit	
			Event 1	349	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				350	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				351	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 2	352	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				353	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				354	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 3	355	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				356	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				357	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 4	358	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				359	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				360	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 5	361	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				362	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				363	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05

Group	Subgroups		Register number	Register name	Data			Values and Units	Examples and comments
					Access	Type	Range		
Scheduler	Working week	Operation program 1 / Weekday mask	364	Weekday mask	R/W	unsigned char	0b00000000 - 0b01111111	Mo => 0 bit, Tu => 1 bit, We => 2 bit, Th => 3 bit, Fr => 4 bit, Sa => 5 bit, Su => 6 bit	
		Event 1	365	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
			366	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			367	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
		Event 2	368	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
			369	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			370	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
		Event 3	371	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
			372	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			373	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
		Event 4	374	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
			375	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			376	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
		Event 5	377	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
			378	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			379	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
		Operation program 2 / Weekday mask	380	Weekday mask	R/W	unsigned char	0b00000000- 0b01111111	Mo => 0 bit, Tu => 1 bit, We => 2 bit, Th => 3 bit, Fr => 4 bit, Sa => 5 bit, Su => 6 bit	
		Event 1	381	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
			382	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			383	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
		Event 2	384	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
			385	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			386	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05

Group	Subgroups			Register number	Register name	Data			Values and Units	Examples and comments
						Access	Type	Range		
Scheduler	Working week	Operation program 2	Event 3	387	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				388	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				389	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 4	390	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				391	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				392	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 5	393	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				394	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				395	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
		Operation program 3	Weekday mask	396	Weekday mask	R/W	unsigned char	0b00000000- 0b01111111	Mo => 0 bit, Tu => 1 bit, We => 2 bit, Th => 3 bit, Fr => 4 bit, Sa => 5 bit, Su => 6 bit	
			Event 1	397	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				398	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				399	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 2	400	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				401	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				402	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 3	403	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				404	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				405	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 4	406	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				407	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				408	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 5	409	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				410	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				411	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05

M-C6_20-08

Group	Subgroups			Register number	Register name	Data			Values and Units	Examples and comments
						Access	Type	Range		
Scheduler	Working week	Operation program 4	Weekday mask	412	Weekday mask	R/W	unsigned char	0b00000000-0b01111111	Mo => 0 bit, Tu => 1 bit, We => 2 bit, Th => 3 bit, Fr => 4 bit, Sa => 5 bit, Su => 6 bit	
			Event 1	413	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				414	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				415	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 2	416	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				417	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				418	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 3	419	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				420	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				421	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 4	422	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				423	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				424	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 5	425	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				426	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				427	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
	Office	Operation program 1	Weekday mask	428	Weekday mask	R/W	unsigned char	0b00000000 - 0b01111111	Mo => 0 bit, Tu => 1 bit, We => 2 bit, Th => 3 bit, Fr => 4 bit, Sa => 5 bit, Su => 6 bit	
			Event 1	429	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				430	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				431	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 2	432	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				433	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				434	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05

Group	Subgroups			Register number	Register name	Data			Values and Units	Examples and comments
						Access	Type	Range		
Scheduler	Office	Operation program 1	Event 3	435	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				436	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				437	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 4	438	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				439	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				440	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 5	441	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				442	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				443	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
		Operation program 2	Weekday mask	444	Weekday mask	R/W	unsigned char	0b00000000-0b01111111	Mo => 0 bit, Tu => 1 bit, We => 2 bit, Th => 3 bit, Fr => 4 bit, Sa => 5 bit, Su => 6 bit	
			Event 1	445	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				446	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				447	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 2	448	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				449	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				450	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 3	451	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				452	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				453	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 4	454	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				455	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				456	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 5	457	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				458	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				459	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05

Group	Subgroups		Register number	Register name	Data			Values and Units	Examples and comments
					Access	Type	Range		
Scheduler	Office	Operation program 3	Weekday mask	460	Weekday mask	R/W	unsigned char	0b00000000-0b01111111	Mo => 0 bit, Tu => 1 bit, We => 2 bit, Th => 3 bit, Fr => 4 bit, Sa => 5 bit, Su => 6 bit	
			Event 1	461	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				462	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				463	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 2	464	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				465	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				466	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 3	467	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				468	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				469	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 4	470	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				471	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				472	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 5	473	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				474	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				475	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
		Operation program 4	Weekday mask	476	Weekday mask	R/W	unsigned char	0b00000000-0b01111111	Mo => 0 bit, Tu => 1 bit, We => 2 bit, Th => 3 bit, Fr => 4 bit, Sa => 5 bit, Su => 6 bit	
			Event 1	477	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				478	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				479	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 2	480	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				481	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				482	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05

Group	Subgroups			Register number	Register name	Data			Values and Units	Examples and comments
						Access	Type	Range		
Scheduler	Custom	Operation program 4	Event 3	483	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				484	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				485	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 4	486	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				487	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				488	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 5	489	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				490	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				491	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
		Operation program 1	Weekday mask	492	Weekday mask	R/W	unsigned char	0b00000000 - 0b01111111	Mo => 0 bit, Tu => 1 bit, We => 2 bit, Th => 3 bit, Fr => 4 bit, Sa => 5 bit, Su => 6 bit	
			Event 1	493	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				494	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				495	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 2	496	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				497	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				498	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 3	499	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				500	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				501	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 4	502	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				503	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				504	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 5	505	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				506	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				507	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05

Group	Subgroups			Register number	Register name	Data			Values and Units	Examples and comments
						Access	Type	Range		
Scheduler	Custom	Operation program 2	Weekday mask	508	Weekday mask	R/W	unsigned char	0b00000000-0b01111111	Mo => 0 bit, Tu => 1 bit, We => 2 bit, Th => 3 bit, Fr => 4 bit, Sa => 5 bit, Su => 6 bit	
			Event 1	509	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				510	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				511	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 2	512	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				513	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				514	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 3	515	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				516	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				517	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 4	518	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				519	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				520	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 5	521	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				522	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				523	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
		Operation program 3	Weekday mask	524	Weekday mask	R/W	unsigned char	0b00000000-0b01111111	Mo => 0 bit, Tu => 1 bit, We => 2 bit, Th => 3 bit, Fr => 4 bit, Sa => 5 bit, Su => 6 bit	
			Event 1	525	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				526	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				527	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 2	528	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				529	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				530	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05

Group	Subgroups			Register number	Register name	Data			Values and Units	Examples and comments
						Access	Type	Range		
Scheduler	Custom	Operation program 3	Event 3	531	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				532	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				533	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 4	534	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				535	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				536	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 5	537	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				538	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				539	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
		Operation program 4	Weekday mask	540	Weekday mask	R/W	unsigned char	0b00000000-0b01111111	Mo => 0 bit, Tu => 1 bit, We => 2 bit, Th => 3 bit, Fr => 4 bit, Sa => 5 bit, Su => 6 bit	
			Event 1	541	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				542	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				543	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 2	544	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				545	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				546	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 3	547	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				548	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				549	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 4	550	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				551	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				552	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
			Event 5	553	Mode	R/W	unsigned char	0 - 4	Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4	
				554	Start time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05
				555	Stop time	R/W	unsigned short	0:00 - 23:59	MSB - hours, LSB - minutes	0x0805 => 8:05

Group	Subgroups		Register number	Register name	Data			Values and Units	Examples and comments
					Access	Type	Range		
Alarms	Active alarms		600	Active alarms count	R/W	unsigned char	0 - 10		Writing 0x99C6 - Active alarms reset and restore previous mode
			601	Active alarm 1 code (newest)	RO	unsigned char	0x01 - 0xFF		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
			602	Active alarm 2 code	RO	unsigned char	0x01 - 0xFF		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
			603	Active alarm 3 code	RO	unsigned char	0x01 - 0xFF		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
			604	Active alarm 4 code	RO	unsigned char	0x01 - 0xFF		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
			605	Active alarm 5 code	RO	unsigned char	0x01 - 0xFF		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
			606	Active alarm 6 code	RO	unsigned char	0x01 - 0xFF		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
			607	Active alarm 7 code	RO	unsigned char	0x01 - 0xFF		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
			608	Active alarm 8 code	RO	unsigned char	0x01 - 0xFF		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
			609	Active alarm 9 code	RO	unsigned char	0x01 - 0xFF		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
			610	Active alarm 10 code	RO	unsigned char	0x01 - 0xFF		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
	Alarms history	Alarm 1	611	Alarm history count	RO	unsigned char	0 - 50		
			612	Alarm (newest) year	RO	unsigned short	2016 - 2250	Year	
			613	Alarm (newest) month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
			614	Alarm (newest) time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
			615	Alarm (newest) seconds	RO	unsigned char	0 - 59	Seconds	
			616	Alarm (newest) code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 2	617	Alarm year	RO	unsigned short	2016 - 2250	Year	
			618	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
			619	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
			620	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
			621	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)

Group	Subgroups	Register number	Register name	Data			Values and Units	Examples and comments
				Access	Type	Range		
Alarms	Alarms history	Alarm 3						
		622	Alarm year	RO	unsigned short	2016 - 2250	Year	
		623	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		624	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
		625	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		626	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 4						
		627	Alarm year	RO	unsigned short	2016 - 2250	Year	
		628	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		629	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
		630	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		631	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 5						
		632	Alarm year	RO	unsigned short	2016 - 2250	Year	
		633	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		634	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
		635	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		636	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 6						
		637	Alarm year	RO	unsigned short	2016 - 2250	Year	
		638	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		639	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
		640	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		641	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 7						
		642	Alarm year	RO	unsigned short	2016 - 2250	Year	
		643	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		644	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
		645	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		646	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 8						
		647	Alarm year	RO	unsigned short	2016 - 2250	Year	
		648	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		649	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
		650	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		651	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 9						
		652	Alarm year	RO	unsigned short	2016 - 2250	Year	
		653	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		654	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
		655	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		656	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)

Group	Subgroups	Register number	Register name	Data			Values and Units	Examples and comments
				Access	Type	Range		
Alarms	Alarms history	Alarm 10						
		657	Alarm year	RO	unsigned short	2016 - 2250	Year	
		658	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		659	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
		660	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		661	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 11						
		662	Alarm year	RO	unsigned short	2016 - 2250	Year	
		663	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		664	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
		665	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		666	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 12						
		667	Alarm year	RO	unsigned short	2016 - 2250	Year	
		668	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		669	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
		670	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		671	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 13						
		672	Alarm year	RO	unsigned short	2016 - 2250	Year	
		673	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		674	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
		675	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		676	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 14						
		677	Alarm year	RO	unsigned short	2016 - 2250	Year	
		678	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		679	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
		680	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		681	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 15						
		682	Alarm year	RO	unsigned short	2016 - 2250	Year	
		683	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		684	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
		685	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		686	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 16						
		687	Alarm year	RO	unsigned short	2016 - 2250	Year	
		688	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		689	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
		690	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		691	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)

Group	Subgroups	Register number	Register name	Data			Values and Units	Examples and comments
				Access	Type	Range		
Alarms	Alarms history	Alarm 17						
		692	Alarm year	RO	unsigned short	2016 - 2250	Year	
		693	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		694	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
		695	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		696	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 18						
		697	Alarm year	RO	unsigned short	2016 - 2250	Year	
		698	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		699	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
		700	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		701	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 19						
		702	Alarm year	RO	unsigned short	2016 - 2250	Year	
		703	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		704	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
		705	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		706	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 20						
		707	Alarm year	RO	unsigned short	2016 - 2250	Year	
		708	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		709	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
		710	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		711	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 21						
		712	Alarm year	RO	unsigned short	2016 - 2250	Year	
		713	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		714	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
		715	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		716	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 22						
		717	Alarm year	RO	unsigned short	2016 - 2250	Year	
		718	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		719	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
		720	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		721	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 23						
		722	Alarm year	RO	unsigned short	2016 - 2250	Year	
		723	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		724	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
		725	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		726	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)

Group	Subgroups	Register number	Register name	Access	Type	Range	Values and Units	Examples and comments
					Data			
Alarms	Alarms history	Alarm 24						
		727	Alarm year	RO	unsigned short	2016 - 2250	Year	
		728	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		729	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
		730	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		731	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 25						
		732	Alarm year	RO	unsigned short	2016 - 2250	Year	
		733	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		734	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
		735	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		736	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 26						
		737	Alarm year	RO	unsigned short	2016 - 2250	Year	
		738	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		739	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
		740	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		741	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 27						
		742	Alarm year	RO	unsigned short	2016 - 2250	Year	
		743	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		744	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
		745	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		746	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 28						
		747	Alarm year	RO	unsigned short	2016 - 2250	Year	
		748	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		749	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
		750	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		751	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 29						
		752	Alarm year	RO	unsigned short	2016 - 2250	Year	
		753	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		754	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
		755	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		756	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 30						
		757	Alarm year	RO	unsigned short	2016 - 2250	Year	
		758	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		759	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
		760	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		761	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)

Group	Subgroups		Register number	Register name	Data			Values and Units	Examples and comments
					Access	Type	Range		
Alarms	Alarms history	Alarm 31	762	Alarm year	RO	unsigned short	2016 - 2250	Year	
			763	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
			764	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
			765	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
			766	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 32	767	Alarm year	RO	unsigned short	2016 - 2250	Year	
			768	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
			769	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
			770	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
			771	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 33	772	Alarm year	RO	unsigned short	2016 - 2250	Year	
			773	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
			774	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
			775	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
			776	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 34	777	Alarm year	RO	unsigned short	2016 - 2250	Year	
			778	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
			779	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
			780	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
			781	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 35	782	Alarm year	RO	unsigned short	2016 - 2250	Year	
			783	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
			784	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
			785	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
			786	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 36	787	Alarm year	RO	unsigned short	2016 - 2250	Year	
			788	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
			789	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
			790	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
			791	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 37	792	Alarm year	RO	unsigned short	2016 - 2250	Year	
			793	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
			794	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
			795	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
			796	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)

komfovent®

Group	Subgroups	Register number	Register name	Data			Values and Units	Examples and comments
				Access	Type	Range		
Alarms	Alarms history	Alarm 38	797	Alarm year	RO	unsigned short	2016 - 2250	Year	
			798	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
			799	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
			800	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
			801	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 39	802	Alarm year	RO	unsigned short	2016 - 2250	Year	
			803	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
			804	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
			805	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
			806	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 40	807	Alarm year	RO	unsigned short	2016 - 2250	Year	
			808	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
			809	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
			810	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
			811	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 41	812	Alarm year	RO	unsigned short	2016 - 2250	Year	
			813	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
			814	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
			815	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
			816	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 42	817	Alarm year	RO	unsigned short	2016 - 2250	Year	
			818	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
			819	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
			820	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
			821	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 43	822	Alarm year	RO	unsigned short	2016 - 2250	Year	
			823	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
			824	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
			825	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
			826	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		Alarm 44	827	Alarm year	RO	unsigned short	2016 - 2250	Year	
			828	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
			829	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
			830	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
			831	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)

Group	Subgroups	Register number	Register name	Data			Values and Units	Examples and comments
				Access	Type	Range		
		832	Alarm year	RO	unsigned short	2016 - 2250	Year	
		833	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		834	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
	Alarm 45	835	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		836	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		837	Alarm year	RO	unsigned short	2016 - 2250	Year	
		838	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		839	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
	Alarm 46	840	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		841	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		842	Alarm year	RO	unsigned short	2016 - 2250	Year	
		843	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		844	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
	Alarm 47	845	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		846	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
Alarms	Alarms history	847	Alarm year	RO	unsigned short	2016 - 2250	Year	
		848	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		849	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
	Alarm 48	850	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		851	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		852	Alarm year	RO	unsigned short	2016 - 2250	Year	
		853	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		854	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
	Alarm 49	855	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		856	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
		857	Alarm year	RO	unsigned short	2016 - 2250	Year	
		858	Alarm month-day	RO	unsigned short	01.01 - 12.31	Month and day	0x020C => Feb12
		859	Alarm time	RO	unsigned short	0:00 - 23:59	Hours and minutes	0x0805 => 8:05
	Alarm 50	860	Alarm seconds	RO	unsigned char	0 - 59	Seconds	
		861	Alarm code	RO	unsigned char	1 - 127 F alarms, 129 - 255 W alarms		0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1)
Monitoring	Detailed information	900	Status icon bit mask	RO	unsigned short	0 - 8191	Starting => 0 bit, Stoping => 1 bit, Fan => 2 bit, Rotor => 3 bit, Heating => 4 bit, Cooling => 5 bit, HeatingDenied => 6 bit, CoolingDenied => 7 bit, FlowDown => 8 bit, FreeHeating => 9 bit, FreeCooling => 10 bit, AlarmF => 11 bit, AlarmW => 12 bit	

komfovent®

Group	Subgroups	Register number	Register name	Data			Values and Units	Examples and comments
				Access	Type	Range		
Monitoring	Detailed information	901	Heating/cooling config	RO	unsigned char	0 - 7	Electric heater => 0 bit, Water cooler/heater => 1 bit, DX unit => 2 bit	
		902	Supply temperature	RO	signed short	-500 - 1200	x10 C	30000=>B1 sensor not used
		903	Extract Temperature	RO	signed short	-500 - 1200	x10 C	
		904	Outdoor temp	RO	signed short	-500 - 1200	x10 C	
		905	Water temperature	RO	signed short	-500 - 1200	x10 C	
		906-907	Current supply flow	RO	unsigned int	0 - 200000	m3/h, l/s	
		908-909	Current extract flow	RO	unsigned int	0 - 200000	m3/h, l/s	
		910	Current supply fan intensivity	RO	unsigned short	0 - 1000	x10 %	
		911	Current extract fan intensivity	RO	unsigned short	0 - 1000	x10 %	
		912	Heat exchanger	RO	unsigned short	0 - 1000	x10 %	
		913	Electric heater	RO	unsigned short	0 - 1000	x10 %	
		914	Water heater	RO	unsigned short	0 - 1000	x10 %	
		915	Water cooler	RO	unsigned short	0 - 1000	x10 %	
		916	DX unit	RO	signed short	-1000 - +1000	x10 %	
		917	Filters Imupurity	RO	unsigned char	0 - 100	%	
		918	Air dampers	RO	unsigned char	0 - 100	%	
		919	Supply pressure	RO	unsigned short	0 - 1000	Pa	
		920	Extract pressure	RO	unsigned short	0 - 1000	Pa	
		952	Air quality or humidity (sensor 1 - B8)	RO	unsigned short	0 - 65535	ppm,%	
		953	Air quality or humidity (sensor 2 - B9)	RO	unsigned short	0 - 65535	ppm,%	
		955	Heat exchanger type	RO	unsigned char	0 - 1	Plate = 0, Rotary = 1	
	Eficiency status	921	Power consumption	RO	unsigned short	0 - 65535	W	
		922	Heater power	RO	unsigned short	0 - 65535	W	
		923	Heat exchanger recovery	RO	unsigned short	0 - 65535	W	
		924	Heat exchanger efficiency	RO	unsigned char	0 - 100	%	
		925	Energy saving	RO	unsigned char	0 -100	%	
		926	SPI	RO	unsigned short	0 - 65535	W/(m3/h)	
	Consumption	927-928	AHU consumption, Day	RO	unsigned int	0 - 4294967296	Wh	
		929-930	AHU consumption, Month	RO	unsigned int	0 - 4294967296	Wh	
		931-932	AHU consumption, Total	RO	unsigned int	0 - 4294967296	Wh	
		933-934	Add. air heater consumption, Day	RO	unsigned int	0 - 4294967296	Wh	
		935-936	Add. air heater consumption, Month	RO	unsigned int	0 - 4294967296	Wh	
		937-938	Add. air heater consumption, Total	RO	unsigned int	0 - 4294967296	Wh	
		939-940	Recovered energy, Day	RO	unsigned int	0 - 4294967296	Wh	
		941-942	Recovered energy, Month	RO	unsigned int	0 - 4294967296	Wh	
		943-944	Recovered energy, Total	RO	unsigned int	0 - 4294967296	Wh	
		945	SPI per day	RO	unsigned short	0 - 65535	W/(m3/h)	
	Panel	946	Panel 1 temperature	RO	signed short	-500 - 1200	x10 C	
		947	Panel 1 humidity	RO	signed char	0 - 100	%	
		948	Panel 1 air quality	RO	unsigned short	0 - 65535	ppm, ppb	
		949	Panel 2 temperature	RO	signed short	-500 - 1200	x10 C	
		950	Panel 2 humidity	RO	signed char	0 - 100	%	
		951	Panel 2 air quality	RO	unsigned short	0 - 65535	ppm, ppb	

Group	Subgroups	Register number	Register name	Data			Values and Units	Examples and comments
				Access	Type	Range		
Monitoring	Panel	954	Connected panels	RO	unsigned char	0 - 3	None = 0, Panel(1) = 1, Panel(2) = 2, Panel(1) and Panel(2) = 3	
Others	DOUT	958	Alarm	RO	unsigned char	0 - 1	Off = 0, On = 1	
		959	Heating	RO	unsigned char	0 - 1	Off = 0, On = 1	
		960	Cooling	RO	unsigned char	0 - 1	Off = 0, On = 1	
		1000-1001	Firmware version	RO	unsigned int	1 - 4294967295	1st number 8bit <<24, 2nd number 4bit <<20, 3rd number 8bit <<12, 4th number 12bit<<0	18886660 => 1.2.3.4
		1002-1003	Panel 1 firmware version	RO	unsigned int	1 - 4294967295	1st number 8bit <<24, 2nd number 4bit <<20, 3rd number 8bit <<12, 4th number 12bit<<0	18886660 => 1.2.3.4
		1004-1005	Panel 2 firmware version	RO	unsigned int	1 - 4294967295	1st number 8bit <<24, 2nd number 4bit <<20, 3rd number 8bit <<12, 4th number 12bit<<0	18886660 => 1.2.3.4
		1050	Reset settings	R/W	unsigned short	0 - 11	Reset Away settings = 1, Reset Normal settings = 2, Reset Intensive settings = 3, Reset Boost settings = 4, Reset Holidays settings = 5, Reset Overide settings = 6, Reset Kitchen settings = 7, Reset Fireplace settings = 8, Reset Air quality settings = 9, Reset Eco settings = 10, Reset Advanced settings = 11	
		1051	Clean filters calibration	R/W	unsigned char	1	Confirm = 1	Resets filters counter, if filter clogging is more than 1%

UAB KOMFOVENT

TECHNINĖS PRIEŽIŪROS SKYRIUS / SERVICE AND SUPPORT
Tel. +370 5 200 8000
service@komfovent.com

ООО «КОМФОВЕНТ»
Россия, Москва
ул. Выборгская д. 16,
стр. 1, 2 этаж, 206 офис
Тел. +7 499 673 22 73
info.oka@komfovent.com
www.komfovent.ru

ООО «КОМФОВЕНТ»
390017 г. Рязань
Ряжское шоссе, 20 литера Е, пом Н6
Тел.: +7 491 255 95 71
info.oka@komfovent.com
www.komfovent.ru

ИОOO «Комфовент»
Республика Беларусь, 220125 г. Минск,
ул. Уручская 21 – 423
Тел. +375 17 266 5297, 266 6327
info.by@komfovent.com
www.komfovent.by

Komfovent AB
Ögärdesvägen 12B
433 30 Partille, Sverige
Tel. +46 31 487 752
info_se@komfovent.com
www.komfovent.se

Komfovent Oy
Muuntotie 1 C1
FI-01 510 VANTAA
Tel. +358 0 408 263 500
info_fi@komfovent.com
www.komfovent.com

Komfovent GmbH
Konrad-Zuse-Str. 2a, 42551 Velbert,
Deutschland
Tel. +49 0 2051 6051180
info@komfovent.de
www.komfovent.de

SIA Komfovent
Bukaišu iela 1, LV-1004 Riga
Tel. +371 24 664433
info@komfovent.lv
www.komfovent.lv

Vidzemes filiāle
Alejas iela 12A, LV-4219 Valmiermuiža,
Valmieras pagasts, Burtnieku novads
Tel. +371 29 358 145
kristaps.zaicevs@komfovent.com
www.komfovent.lv

www.komfovent.com

PARTNERS

AT	J. PICHLER Gesellschaft m. b. H.	www.pichlerluft.at
BE	Ventilair group	www.ventilairgroup.com
	ACB Airconditioning	www.acbairco.be
CZ	REKUVENT s.r.o.	www.rekuvent.cz
CH	WESCO AG	www.wesco.ch
	SUDCLIMATAIR SA	www.sudclimatair.ch
CH / LI	CLIMAIR GmbH	www.climair.ch
	Trivent AG	www.trivent.com
DK	Øland A/S	www.oeland.dk
EE	BVT Partners	www.bvtpartners.ee
FR	ATIB	www.atib.fr
HR	Microclima	www.microclima.hr
HU	AIRVENT Légtechnikai Zrt.	www.airvent.hu
	Gevent Magyarország Kft.	www.gevent.hu
	Merkapt	www.merkapt.hu
IR	Fantech Ventilation Ltd	www.fantech.ie
IS	Blikk & Tæknibjónustan ehf	www.bogt.is
	Hitataekni ehf	www.hitataekni.is
IT	Icaria srl	www.icariavmc.it
NL	Ventilair group	www.ventilairgroup.com
	DECIPOL-Vortvent	www.vortvent.nl
	CLIMA DIRECT BV	www.climadirect.com
NO	Ventilution AS	www.ventilution.no
	Ventistål AS	www.ventistal.no
	Thermo Control AS	www.thermocontrol.no
PL	Ventia Sp. z o.o.	www.ventia.pl
SE	Nordisk Ventilator AB	www.nordiskventilator.se
SI	Agregat d.o.o	www.agregat.si
SK	TZB produkt, s.r.o.	www.tzbprodukt.sk

komfovent®