
weazlbook

R04 / ORIGINAL TAPER / DIMENSIONAL APPROVAL

80 x 156 mm shell
14 mm top / 26 mm grip





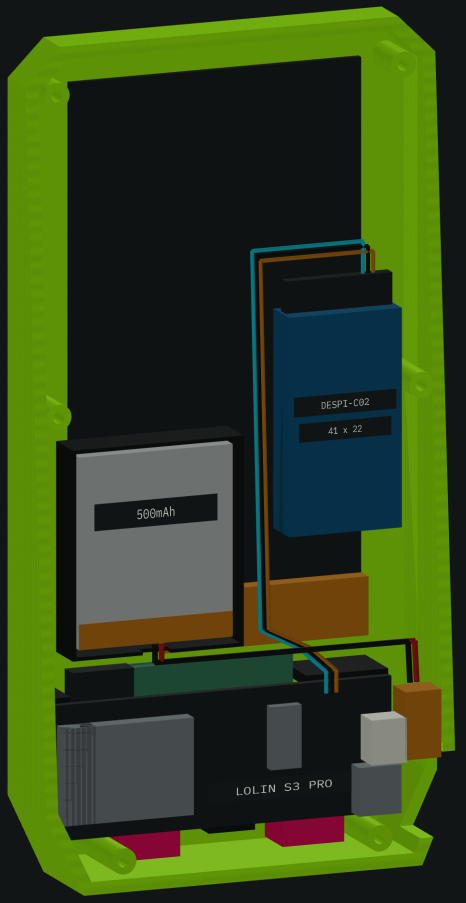

01 ASSEMBLED

Portrait screen. Black cap.
Separate BACK / MARK keys.

02 SIDE

Taper excludes
3.95 mm nub.


03 REAR OPEN

Actual rear view: left/right reverse.
Blocks show reserved occupied space.

Screen content is illustrative. This review approves shape and packaging direction.

SPACE FOR THE HARDWARE

Exact drawing scale 1:1 at 100% print. All dimensions in mm; X right, Y down, Z into the case.

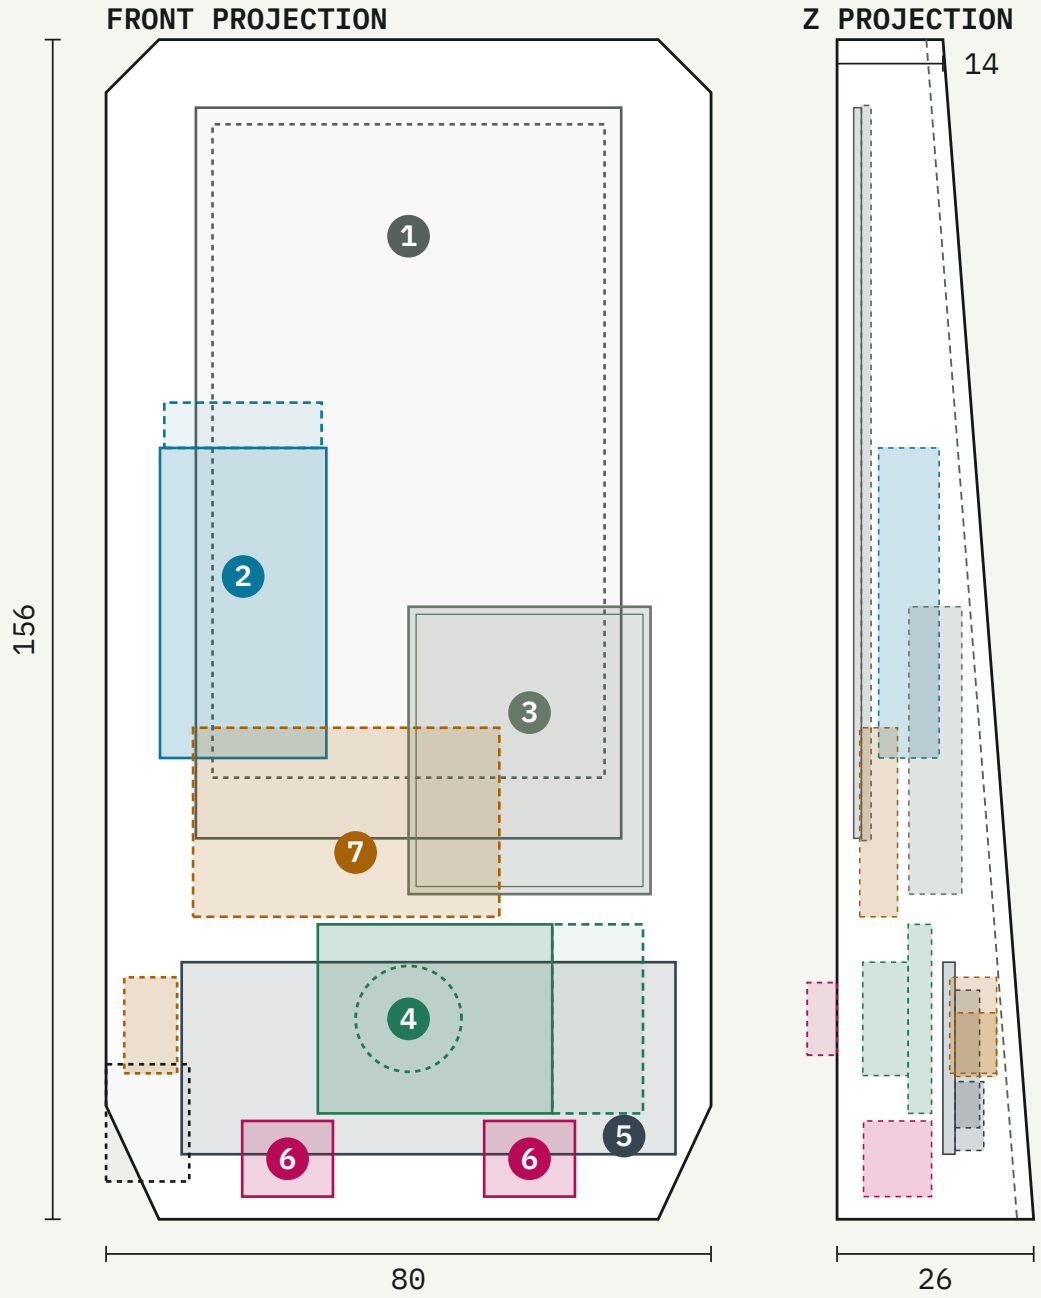

1 DISPLAY
56.24 x 96.62 at X11.88 / Y9.

2 DRIVER LEFT
22 x 41 at X7.13 / Y54; Z5.5-13.5.

3 CELL BAY RIGHT
32 x 38 at X40 / Y75; Z9.5-16.5.

4 FIVE-WAY NAV
31 x 25 at X28 / Y117; rear <=Z12.5.*

5 LOLIN S3 PRO
65.3 x 25.4 at X10 / Y122; PCB Z14-15.6.*

6 BACK / MARK
12 x 10 bays, X18 and X50 / Y143; 9 deep.*

7 FPC FOLD ALLOWANCE
X11.5-52 / Y91-116 / Z3-8. Provisional.

---

* Reserved assembly dimensions. Published PCB footprints do not establish installed height.

Side view projects every X position. Some apparent overlaps are parts side by side in X.

Front projection reverses when viewed from the rear. Dashed outlines are allowances; amber also marks the PH plug/lead check.

PUBLISHED PARTS / RESERVED SPACE

Source links are attached to each part name. Full manufacturer geometry and measured assemblies remain distinct.

PART / SOURCE	PUBLISHED	R04 PACKAGING ALLOWANCE
1 DISPLAY GDEY0397T81P >	56.24 x 96.62 x 0.92 Tolerance: +/-0.2/0.2/0.1	Glass Z2.2-3.22 includes upper tolerance. A separate insulation space sits behind.
2 DRIVER DESPI-C02 >	41 x 22 PCB. 24-pin FPC; 3.3 V SPI.	8 mm full-depth space, Z5.5-13.5. 6 mm header projection; height unmeasured.
3 BATTERY Adafruit #1578 >	29 x 36 x 4.75 catalog. Protected 500 mAh cell.	Cell envelope 30 x 36 x 6; bay 32 x 38 x 7. Retain factory leads.
4 NAV MODULE EC Buying / Amazon >	31 x 25 PCB; holes 3 dia. Stem location photo-derived.	Rear limit Z12.5 is provisional. 12 mm for side header and wiring.
5 MAINBOARD LOLIN S3 PRO >	65.3 x 25.4 PCB. USB + microSD onboard.	PCB Z14-15.6; local connectors to Z21.1. Port/plug shapes are simplified allowances.
6 TWO TACTILES Omron B3F-1000 >	6 x 6 x 4.3 each. 7.7 lead-inclusive width.	Each installed bay 12 x 10 x 9. Printed keys and guides above the switches.
CAP + ADAPTER Sprintek 109-00060 >	Fits 2.4 mm square or 3.15 mm round Sprintek stem.	Shown cap dia.9.6 x 2.3 is provisional. Keep dia.14 sweep; measure adapter/socket.

FPC: 33.66 mm published tail reach. R2 fold and seated-tip Y93 are proposed; the driver carrier needs insertion-depth adjustment.

PH/JST region reaches Z21.1. Only about 0.2-0.6 mm nominal rear-cover clearance remains locally; this is a measured-fit gate.


Amber blocks are FPC and plug/lead check space. Colored strands show harness corridors, not a final wire count or pinout.



INSIDE COVER

ONE-TO-ONE PAPER CHECK

Approve hand spacing and profile. The outline is not a drill, cut or production template.

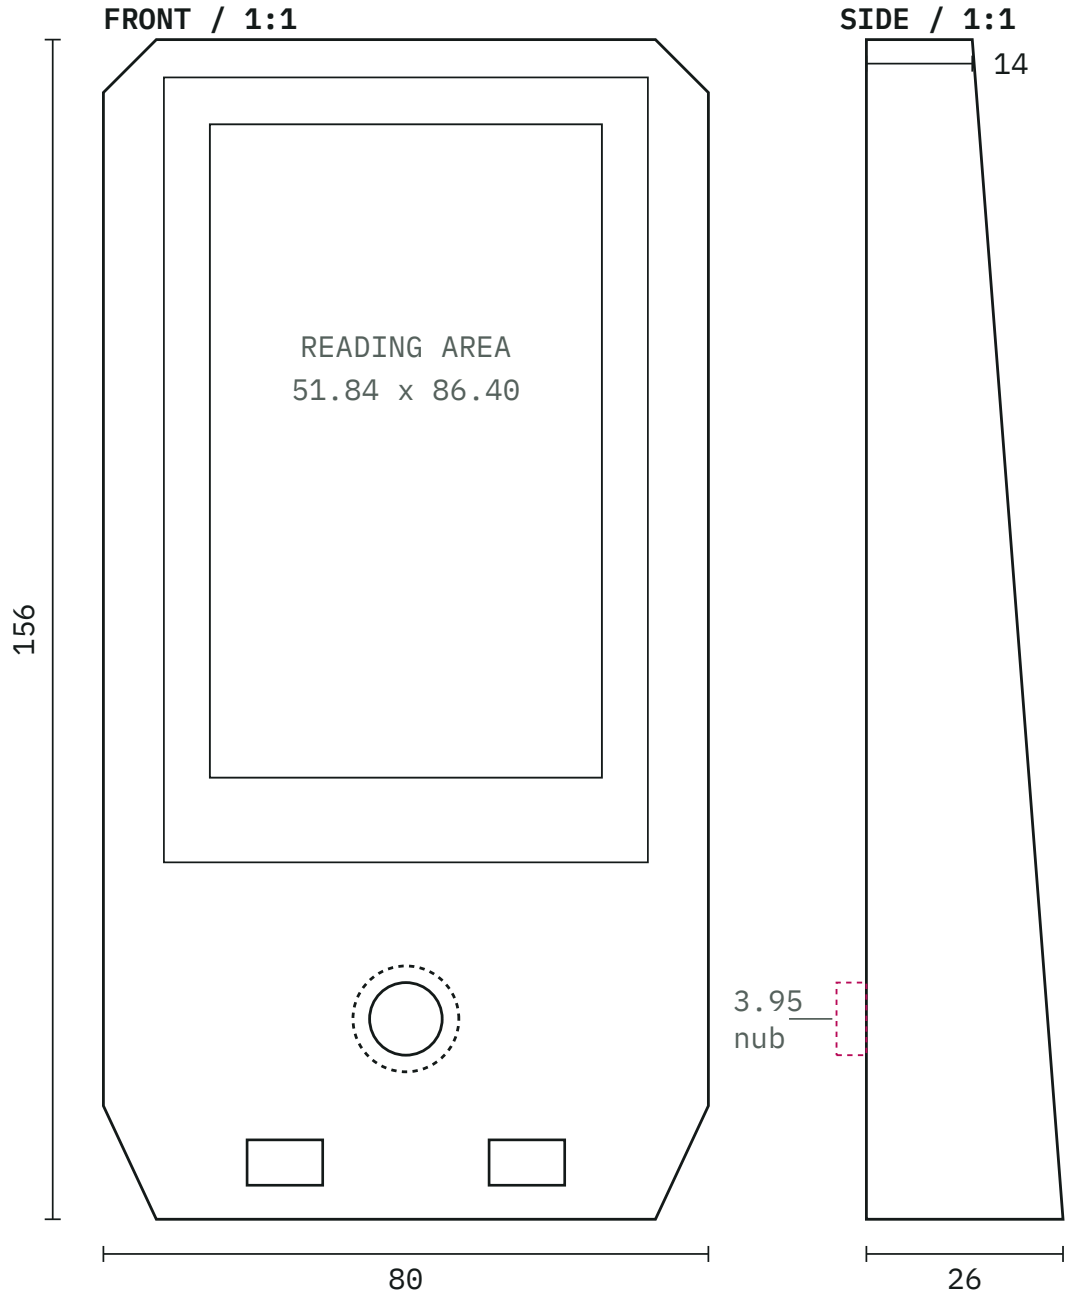

FOUR MEASUREMENTS TO CLOSE

01 / DISPLAY ASSEMBLY

Delivered GDEY panel suffix; adapter height, slot position and insertion depth; gentle FPC fold with strain relief.

02 / NAV + CAP

Stem and cap socket, installed depth, lateral sweep and select travel. Keep the carrier replaceable.

03 / USB + BATTERY PLUG

Actual housings, cable boot and lead turn together. The left opening is an open recess; the PH check volume is provisional.

04 / CELL + SERVICE

Protected cell thickness and wire exit; rear-cover clearance and rear-only microSD access. Retain factory battery leads.

Print at 100% / Actual Size.
Disable Fit to Page.
Verify this bar measures 50 mm.

50 mm

Short 28 AWG device harness.
No measured runtime or working firmware is represented by this mockup.