# A4.2 SINGLE POWER LED | TWO BOARDS + TWO PLAIN M3 L BRACKETS

Front panel + perpendicular main PCB. No middle board, spacers or UI headers. mm. PLACEMENT ONLY.

## FRONT PANEL

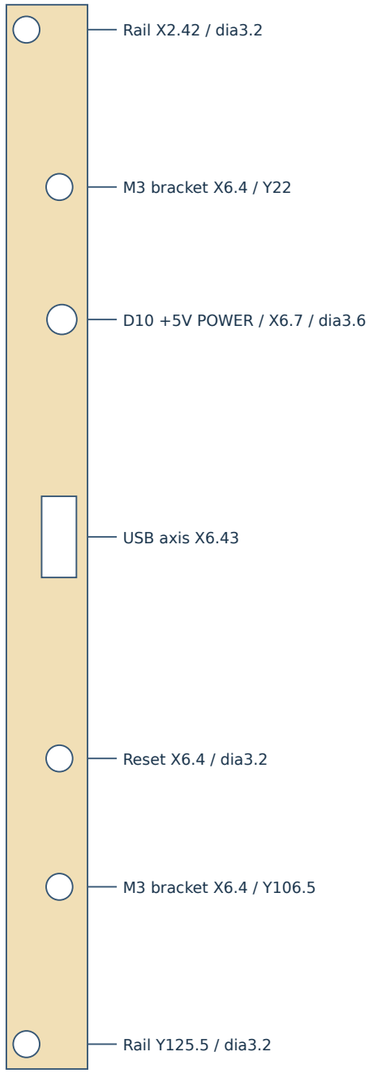


9.8 x 128.5 x 1.6 FR4
Round corner rail holes retained.
6mm rail screw heads overhang .58mm.
Check adjacent panels; no countersink.

## SIDE / YZ ELEVATION

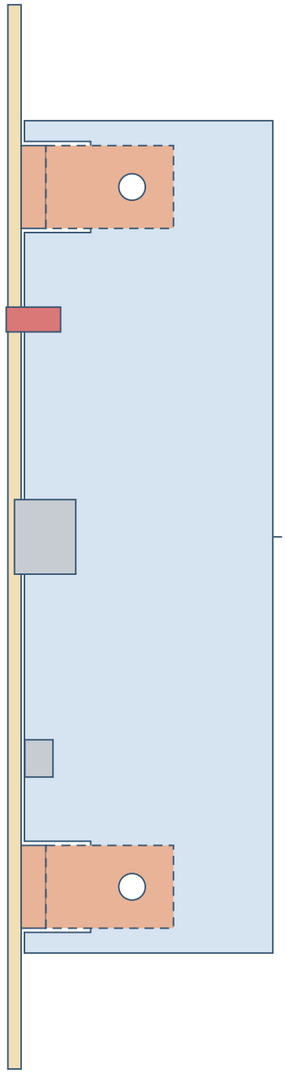

Main PCB: 100.5 x 30 x 1.6
Front edge Z2; rear Z32
Two local bracket cutbacks to Z10
PCB depth behind panel rear: 30.4
NOT finished cabled depth.

J7: 16 numbered solder-through lands
J2: keyed 2x8 MALE IDC on flying lead
75-100mm lead, strain-relieved
Connector not squeezed into 2HP.
No third PCB.

USB native footprint unchanged; whole PCB moved right 1.53mm.
Back face X3.1 / component face X4.7.
Plain L is on BACK face; countersink in plastic only.
USB and LED/reset panel openings follow the new axes.

## MAIN PCB / COMPONENT SIDE

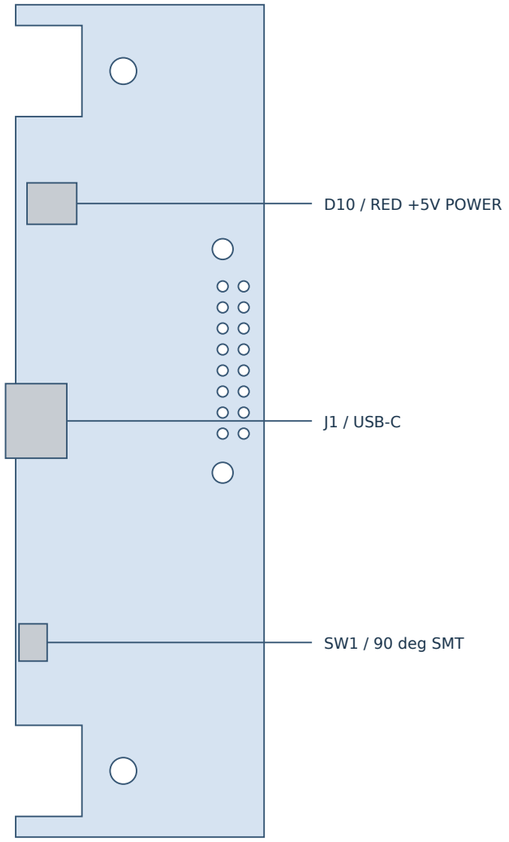


D10 ONLY: RED 3mm +5V POWER THT, formed 90 deg.
SW1: E-Switch TL3340AF160QG, SMT.
Three signal pads + two solder anchors.
Front-side fine-tip soldering; 2 locating holes.
3.3mm body height; axis X6.4, recessed Z2.05.
Pins1+3 common; pin2 other contact. No plunger.

12 V power output pin pairs:
1-2: -12V | 3-8: GND | 9-10: +12V
11-12: +5V | 13-16: NOT CONNECTED
POWER OUTPUT, not a rack power input!
Do not connect to another active PSU.

No routing. D10: P5 -> R32 1k -> LED -> GND. No blink/controller. D11/D12 and two holes removed. Physical fit and power safety unqualified.