V1 TOP USB / SINGLE POWER LED | TWO BOARDS + TWO PLAIN M3 L BRACKETS

Front panel + perpendicular main PCB. No middle board, spacers or UI headers. mm. V1 ROUTING PREPARATION; 60 POWER PARTS STAGED OFF-BOARD.

FRONT PANEL

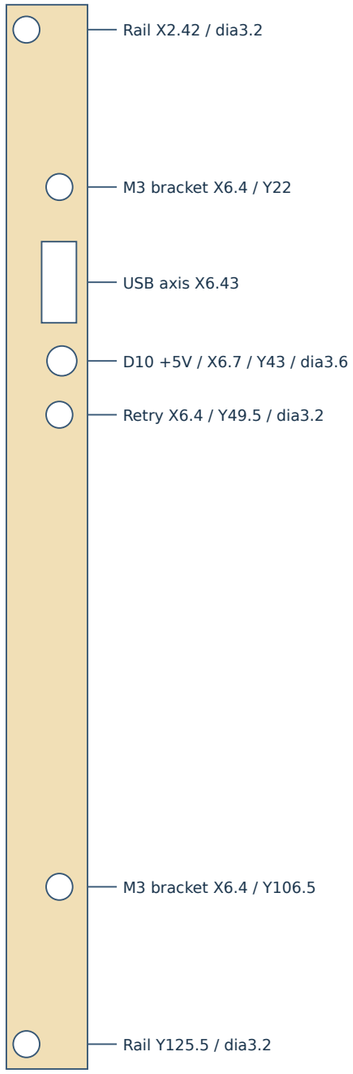

9.8 x 128.5 x 1.6 FR4
Round corner rail holes retained.
6mm rail screw heads overhang .58mm.
Check adjacent panels; no countersink.

SIDE / YZ ELEVATION

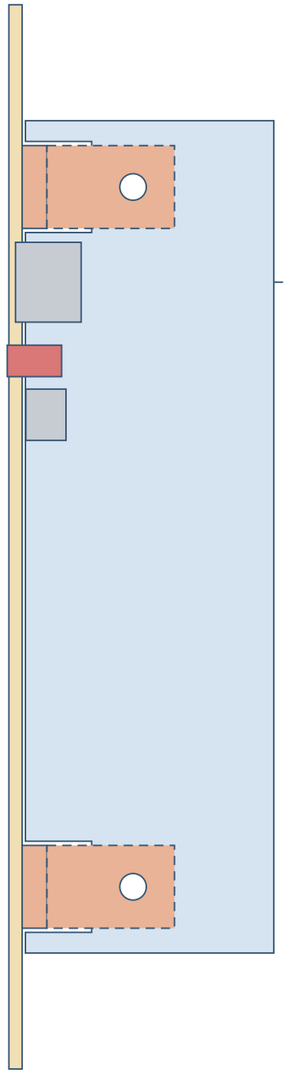

Main PCB: 100.5 x 30 x 1.6
Front edge Z2; rear Z32
Current local cutbacks end at Z10
For this foot + loose M3 hardware
PCB depth behind panel rear: 30.4
NOT finished cabled depth.

J7: 16 numbered solder-through lands
Keyed 2x8 MALE IDC on flying lead
75-100mm lead, strain-relieved
Connector not squeezed into 2HP.
No third PCB.

USB pad/model pattern retained; port at Y33.5.
PCB BACK X3.1 / component face X4.7.
Web on PCB BACK; foot on front panel REAR (Z1.6).
Screws normal to each face; PCB not fed through L.
Uncut FR4/foot overlap: X3.1..4.7, Z2..4.6.
Y17..27 / 101.5..111.5; current configuration only.
Cutbacks clear THIS L + M3 nut/tool access.
Z10 retained, not a proven minimum.
90-degree face mounts do not inherently need notches.
Notch-free 2HP here needs changed hardware; not selected.
USB and LED/reset openings follow the shown axes.

MAIN PCB / COMPONENT SIDE

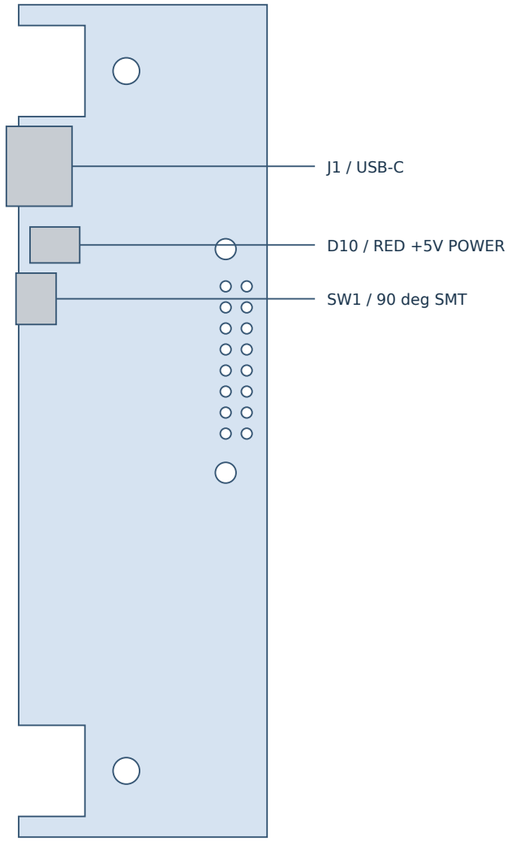

D10 ONLY: RED 3mm +5V POWER THT, formed 90 deg.
SW1: E-Switch TL3340AF160QG, SMT.
Three signal pads + two solder anchors.
Front-side fine-tip soldering; 2 locating holes.
3.3mm body height; axis X6.4, recessed Z2.05.
Pins1+3 common; pin2 other contact. No plunger.

12 V power output pin pairs:
1-2: -12V | 3-8: GND | 9-10: +12V
11-12: +5V | 13-16: NOT CONNECTED
POWER OUTPUT, not a rack power input!
Do not connect to another active PSU.

No routing. D10: P5 -> R32 1k -> LED -> GND. No blink/controller. L1/L4 max4.0mm +0.25 assembly budget; L2/L3 max4.7 +0.25. Physical trial/bench validation pending.