





ADB & Battery
File: egret.kicad_sch
Expansion Slot and Jumpers
File: romfpu.kicad_sch
RAM Transceivers
File: xcvr.kicad_sch
SCSI & Serial
File: scsi.kicad_sch
Sound
File: sound.kicad_sch
CPU
File: cpu.kicad_sch
System ROM 128K & 256K
File: rom.kicad_sch
RAM
File: ram.kicad_sch
Serial
File: serial.kicad_sch
DFAC
File: dfac.kicad_sch
EAGLE
File: eagle.kicad_sch
System ROM 512K & 1M
File: rom2.kicad_sch
RAM Expansion
File: simm.kicad_sch
Floppy
File: floppy.kicad_sch
Test Points
File: test.kicad_sch
System ROM Early Rev
File: rom3.kicad_sch
+5V
L7
G1_5V
C102
10nF
C98
100nF
G1
31.3344MHz
197-0512E
Vcc
GND
OUT
32MC
ZG1
31.3344MHz
TP186
L10
Ferrite
SNDPOS
VIDOUT
VIDOUTF
R83
100R
R85
1.2K
C90
68pF
HSYNC
R76
47R
C97
680pF
VSYNC
+12V
J11
POWER/ANALOG
R49
47R
PWM
-12V
Fused 5V for ADB and Floppy
F1
1A
C31
10nF
Chassis Ground
L2
Ferrite
560pF
C26
C23
10nF
C50
10nF
C83
100nF
C21
10uF 16V
C79
10uF 16V
C106
10uF 16V
C34
10nF
C95
10nF
C96
10nF
C103
10nF
C105
10nF
C107
10nF
C114
10nF
C77
100nF
C80
100nF
C85
100nF
C86
100nF
C89
100nF
C92
100nF
C94
100nF
C100
100nF
C101
100nF
C104
100nF
C109
100nF
C110
100nF
C111
100nF
C112
100nF
C113
100nF
C27
10nF
C82
100nF
R95
100K
R93
4.7K
RxDA+
RxDA-
BSY
BURNIN
TxDA-
TxDA+
J15
BURN-IN
ZH1
MountingHole
ZH2
MountingHole
ZH3
MountingHole
ZH4
MountingHole
FD1
Fiducial
FD2
Fiducial
FD3
Fiducial
FD4
Fiducial
FD5
Fiducial
FD6
Fiducial
Bradley Bell
Sheet: /
File: ClassicIIReloaded.kicad_sch
Title: Classic II Reloaded
Size: USLetter
Date: 2025-06-23
Rev:
KiCad E.D.A. 9.0.9
Id: 1/17

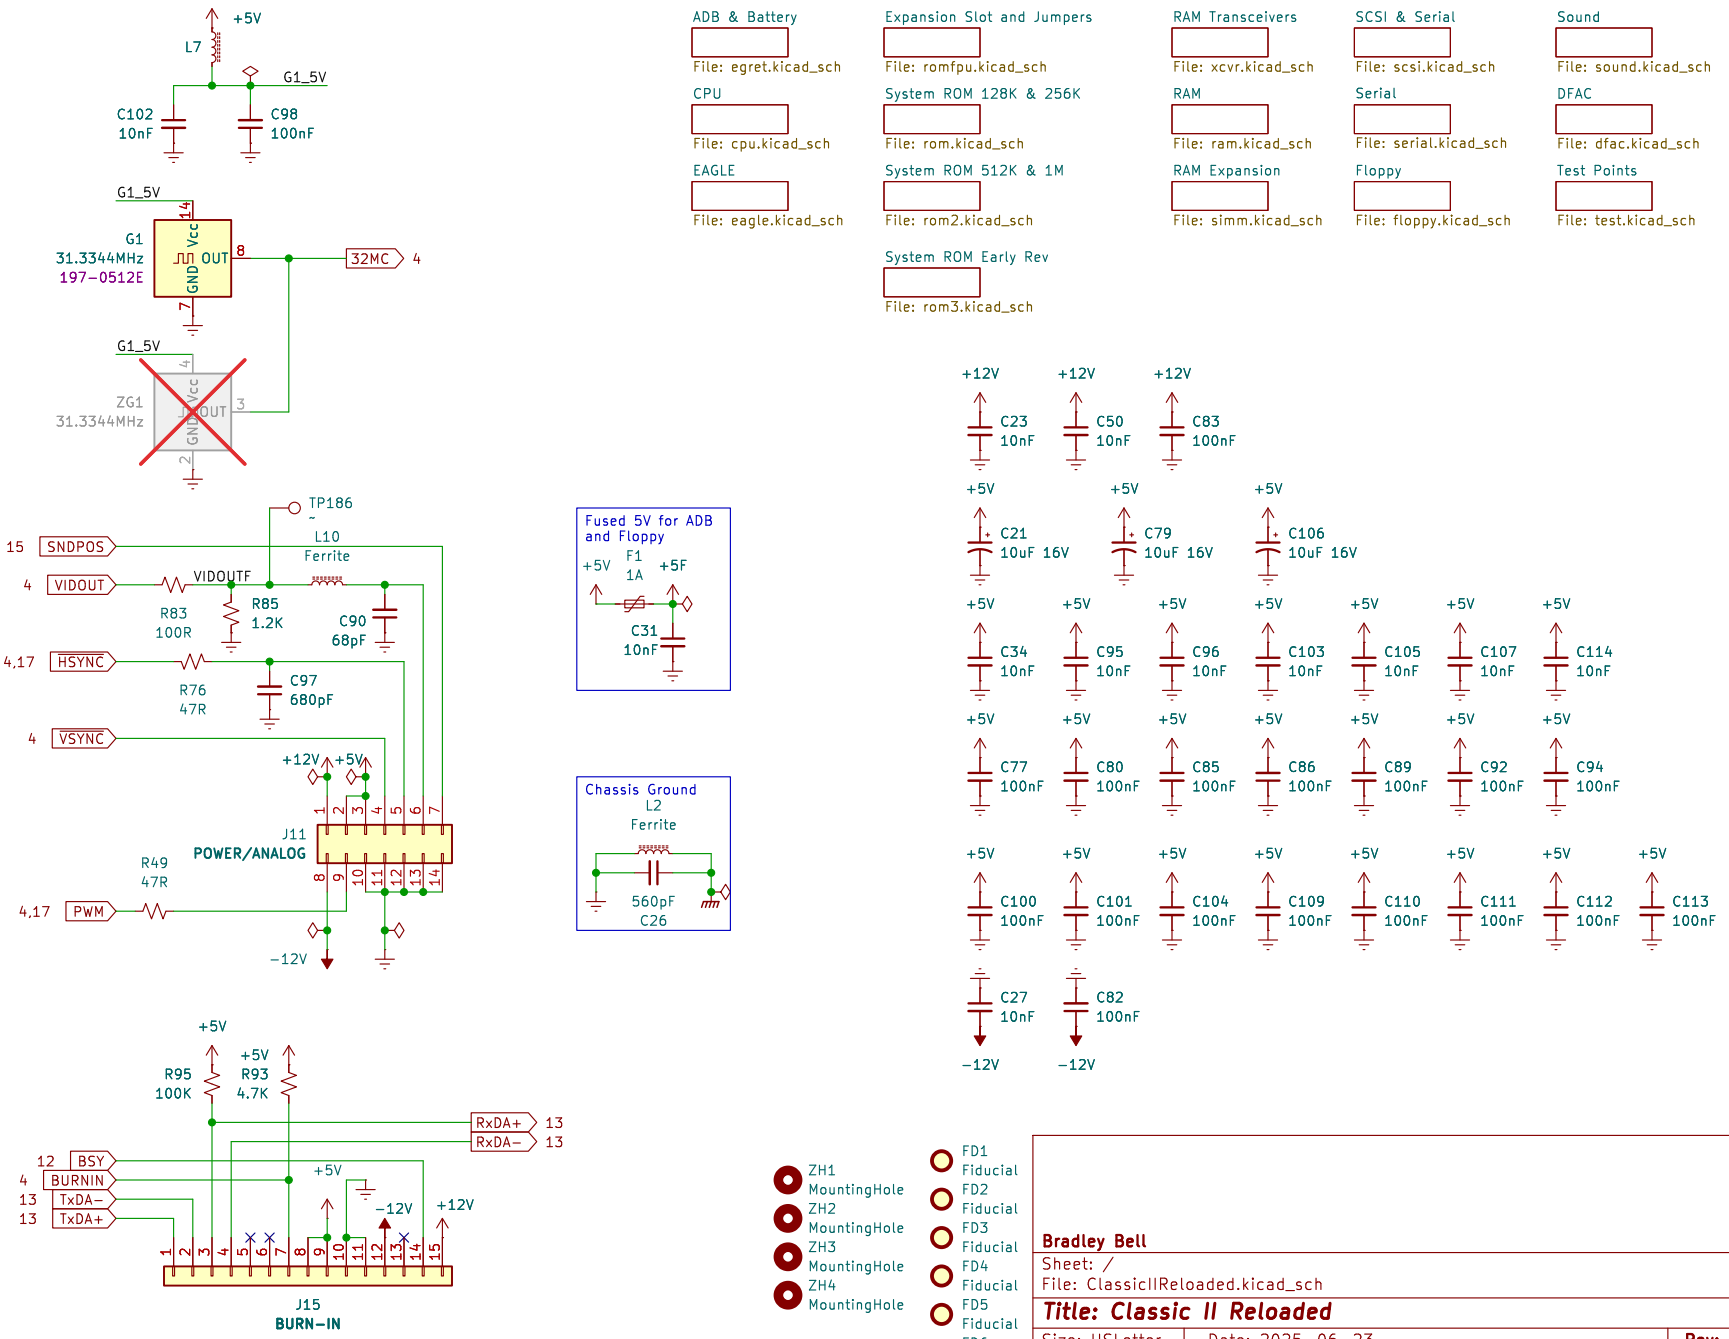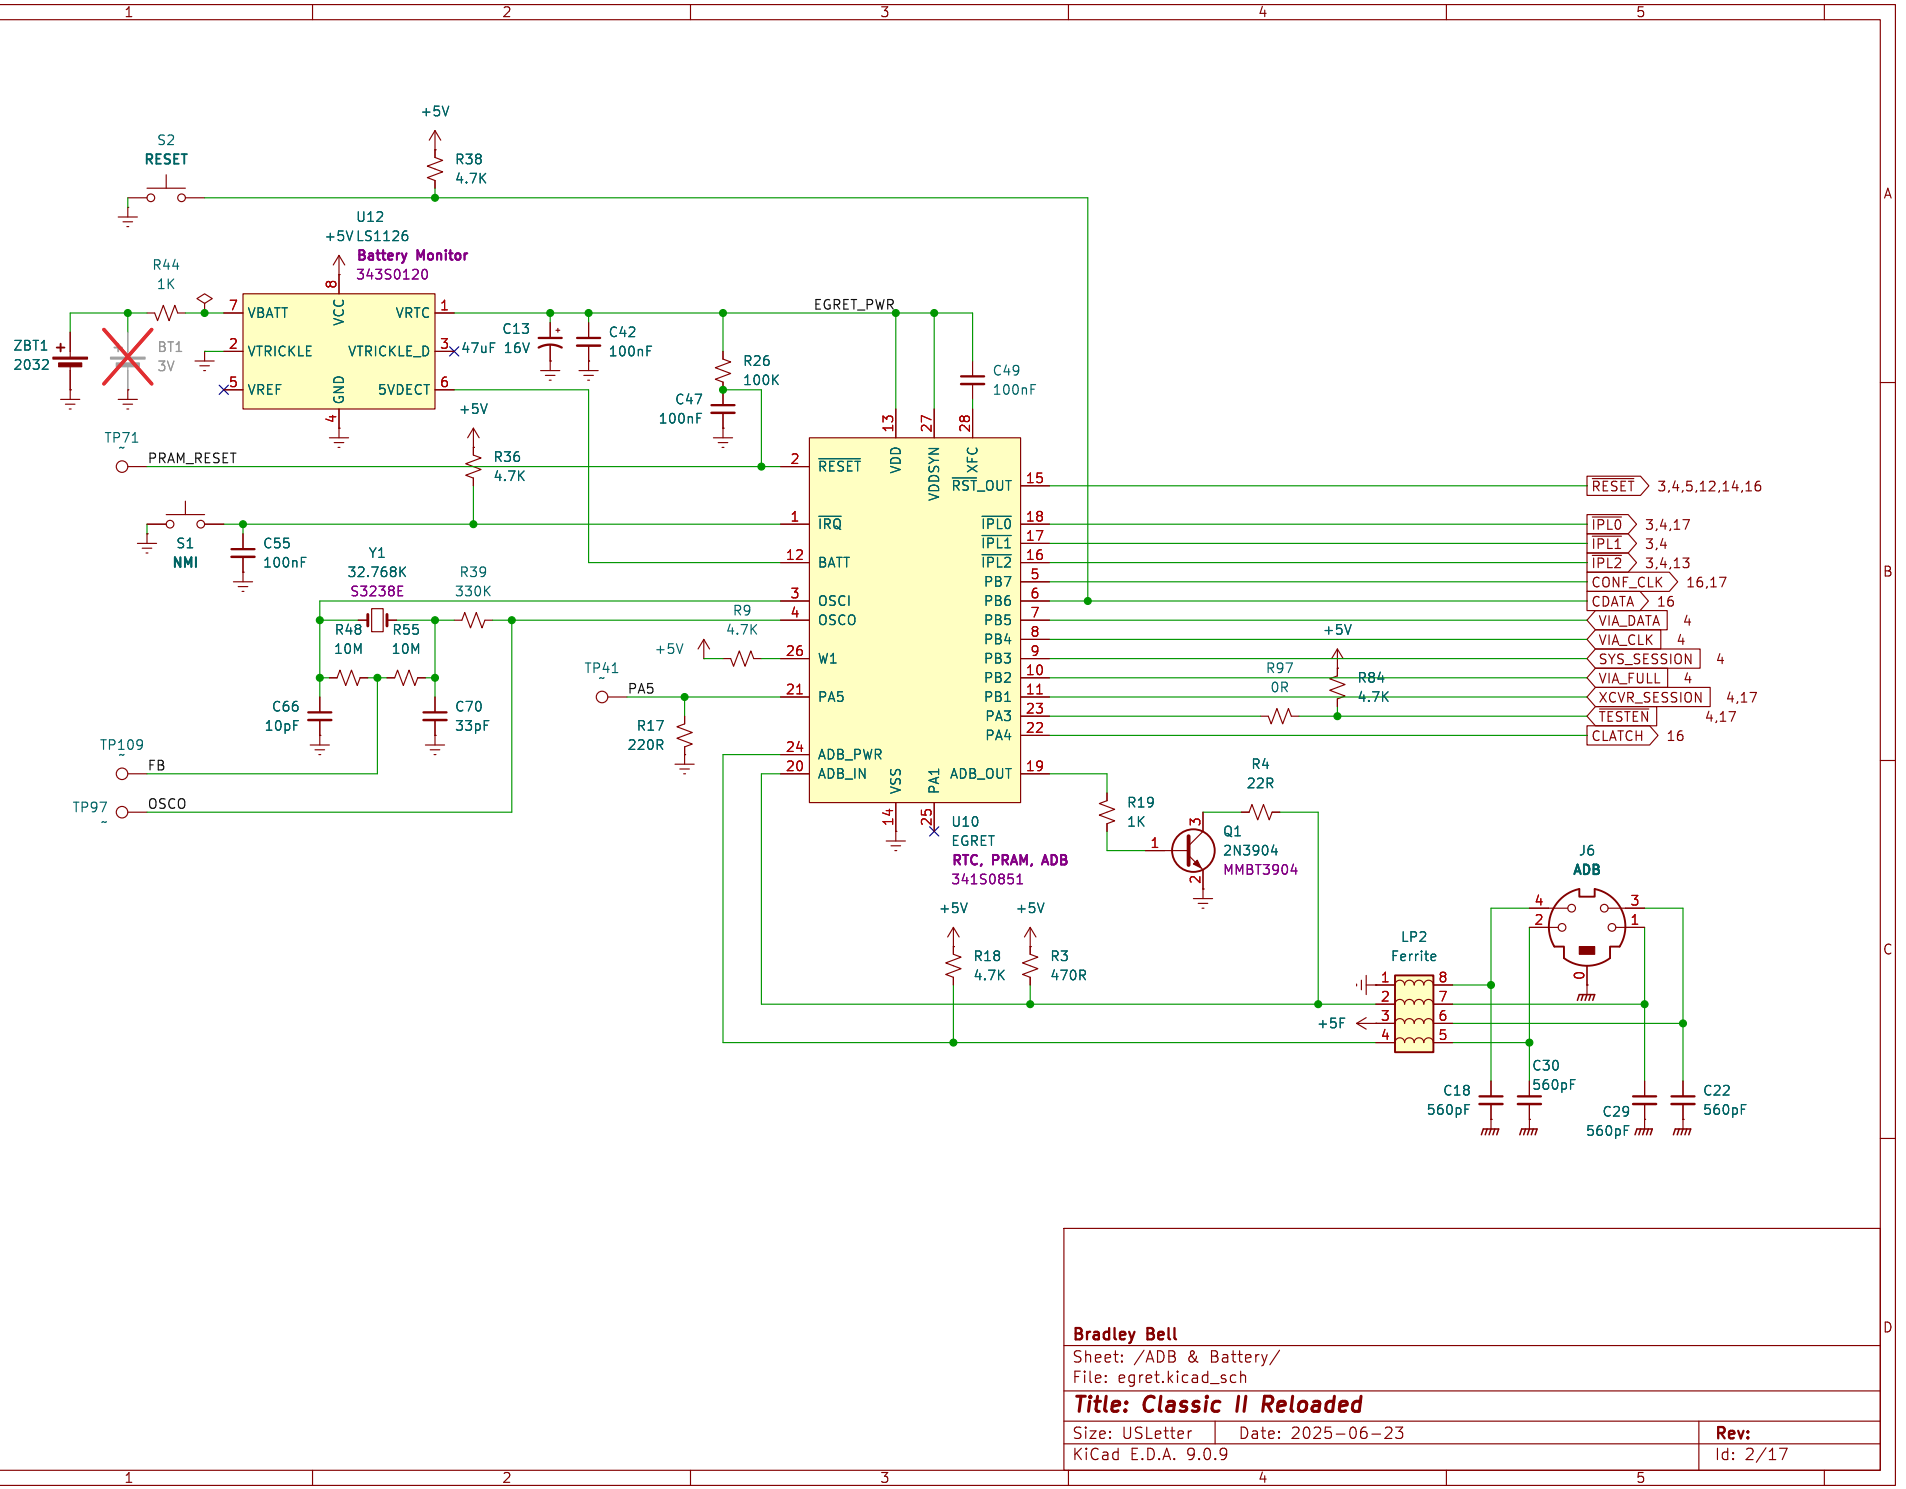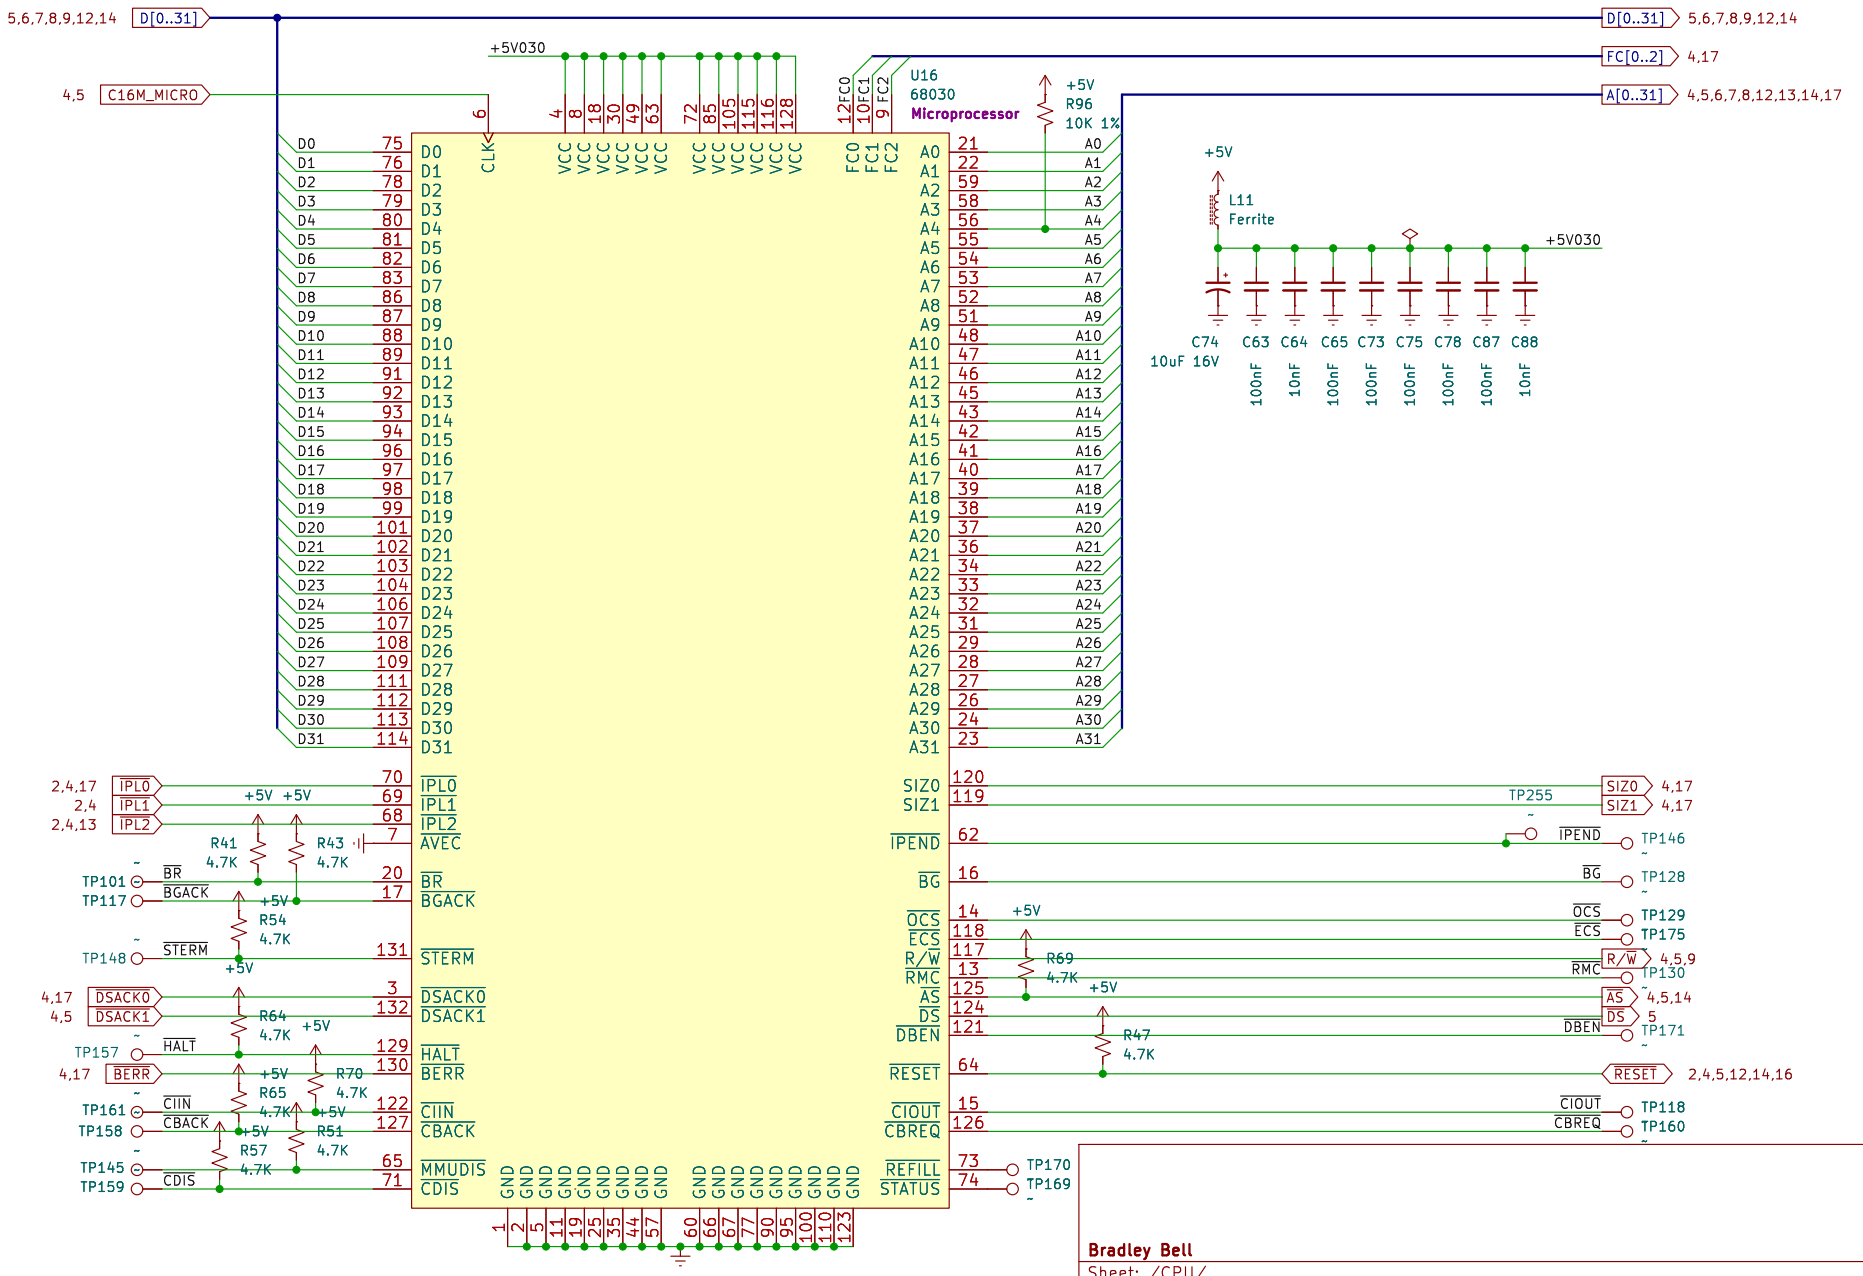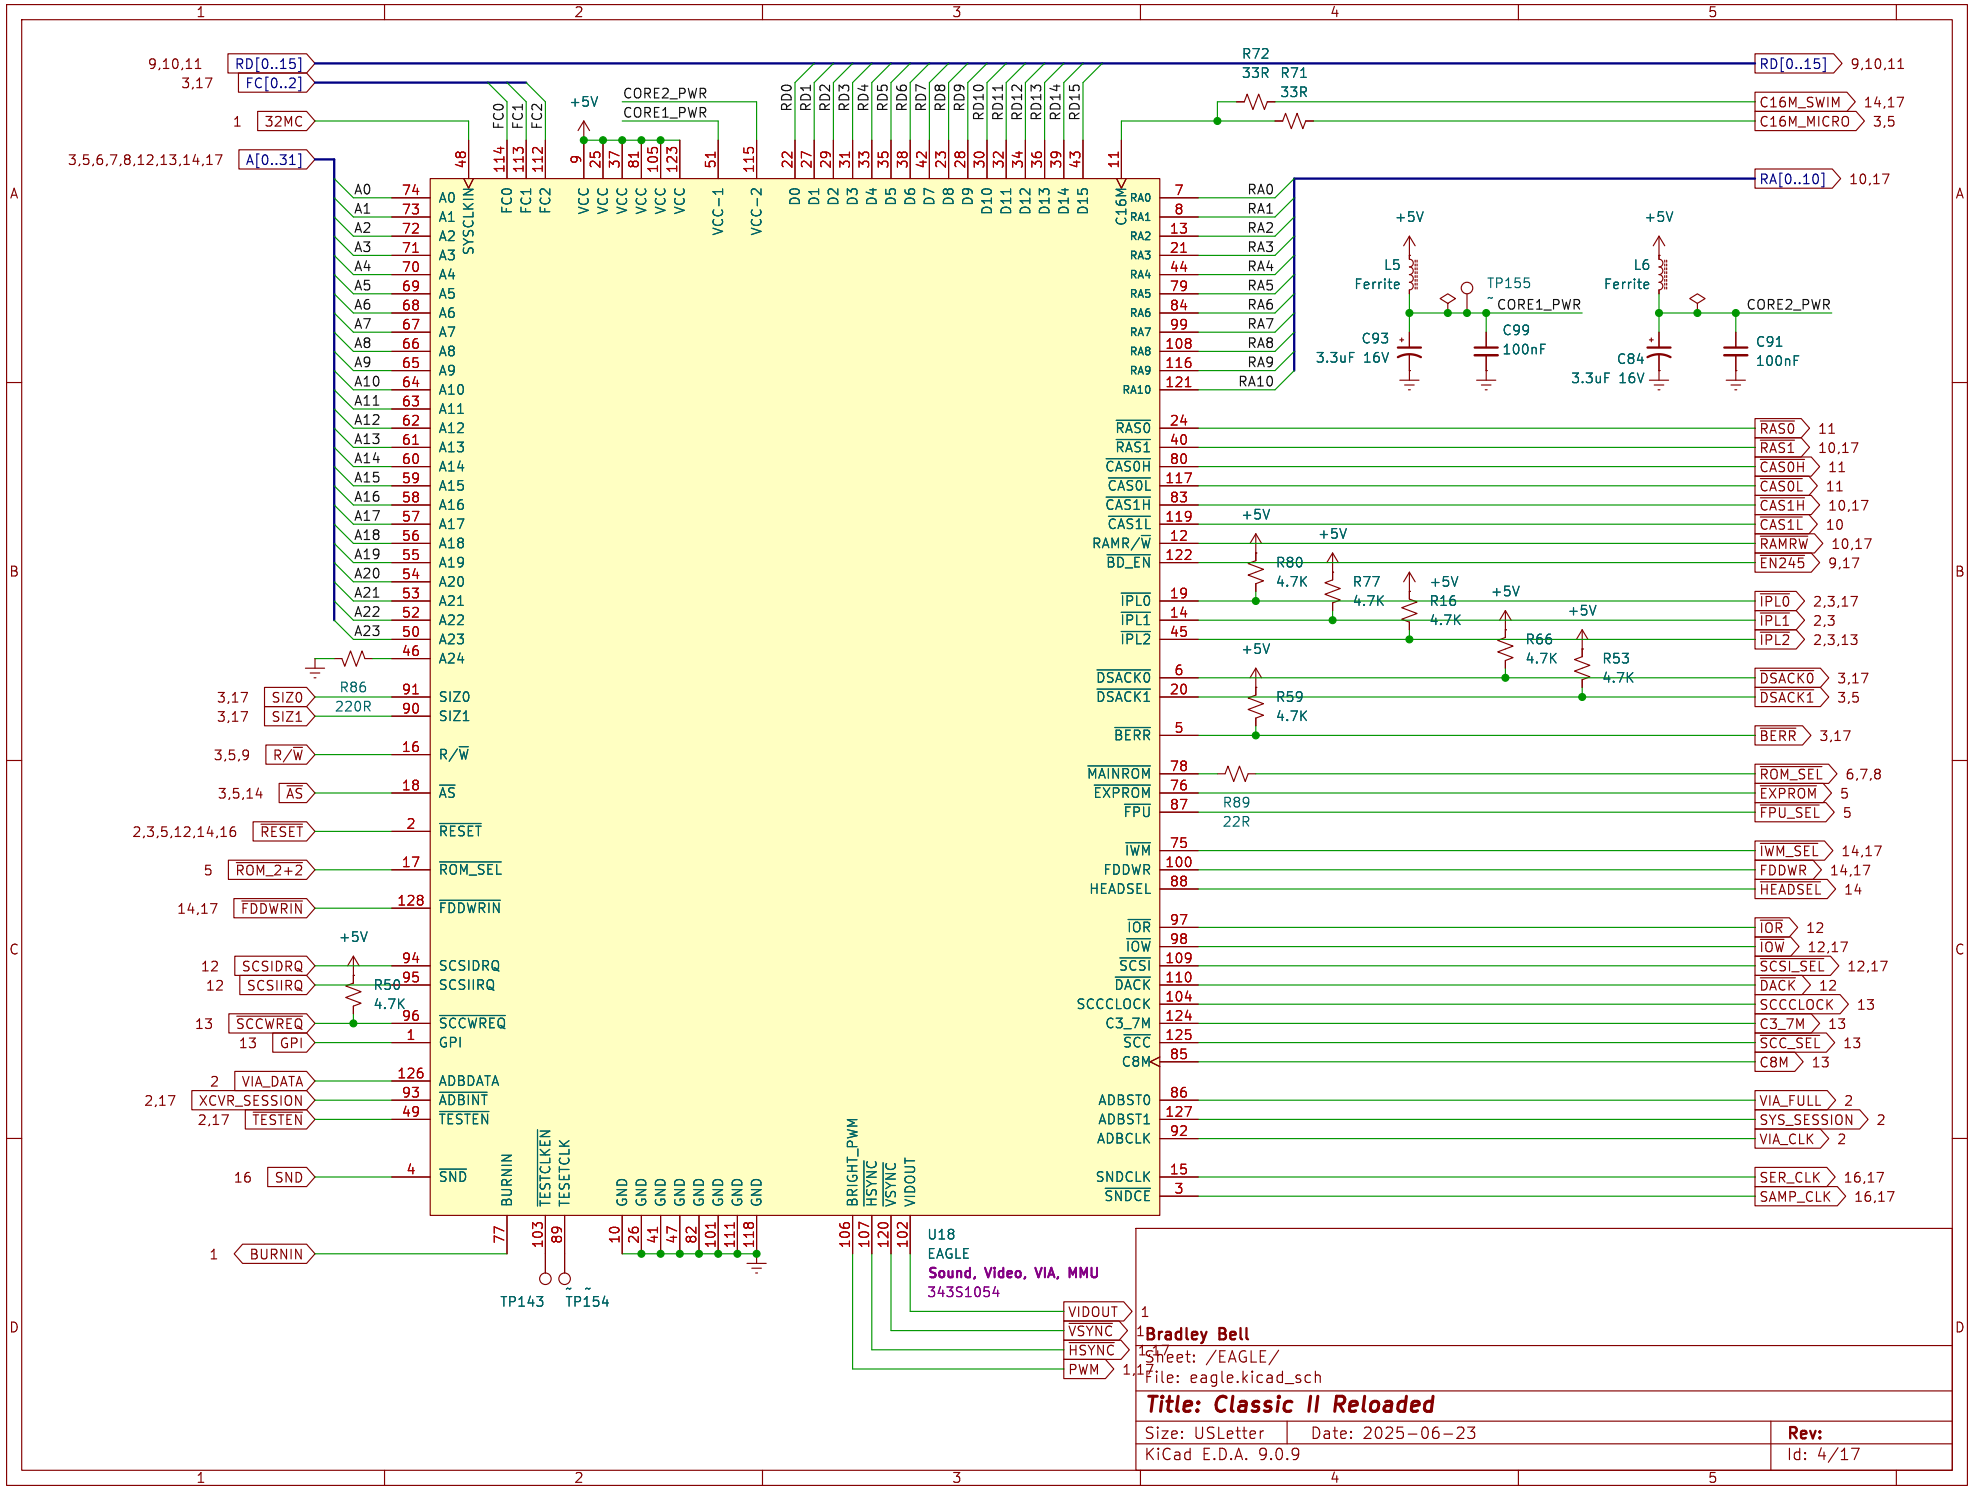


Bradley Bell	
Sheet: /ADB & Battery/	
File: egret.kicad_sch	
Title: Classic II Reloaded	
Size: USLetter | Date: 2025-06-23	**Rev:**
KiCad E.D.A. 9.0.9	Id: 2/17


5,6,7,8,9,12,14
D[0..31]
4,5
C16M_MICRO
+5V030
U16
68030
Microprocessor
FC[0..2]
4,17
A[0..31]
4,5,6,7,8,12,13,14,17
+5V
R96
10K 1%
L11
Ferrite
C74
10uF 16V
C63
C64
C65
C73
C75
C78
C87
C88
100nF
10nF
2,4,17
IPL0
2,4
IPL1
2,4,13
IPL2
R41
4.7K
R43
4.7K
TP101
BR
TP117
BGACK
R54
4.7K
TP148
STERM
4,17
DSACK0
4,5
DSACK1
R64
4.7K
TP157
HALT
4,17
BERR
R70
4.7K
R65
4.7K
TP161
CIIN
TP158
CBACK
R51
4.7K
R57
4.7K
TP145
CDIS
TP159
TP255
SIZ0
SIZ1
IPEND
TP146
BG
TP128
OCS
TP129
ECS
TP175
R/W
4,5,9
RMC
TP130
AS
4,5,14
DS
5
DBEN
TP171
R69
4.7K
R47
4.7K
RESET
2,4,5,12,14,16
CIOUT
TP118
CBREQ
TP160
REFILL
STATUS
TP170
TP169
Bradley Bell
Sheet: /CPU/
File: cpu.kicad_sch
Title: Classic II Reloaded
Size: USLetter
Date: 2025-06-23
Rev:
KiCad E.D.A. 9.0.9
Id: 3/17



U18
EAGLE
Sound, Video, VIA, MMU
343S1054
Bradley Bell
Sheet: /EAGLE/
File: eagle.kicad_sch
Title: Classic II Reloaded
Size: USLetter
Date: 2025-06-23
Rev:
KiCad E.D.A. 9.0.9
Id: 4/17

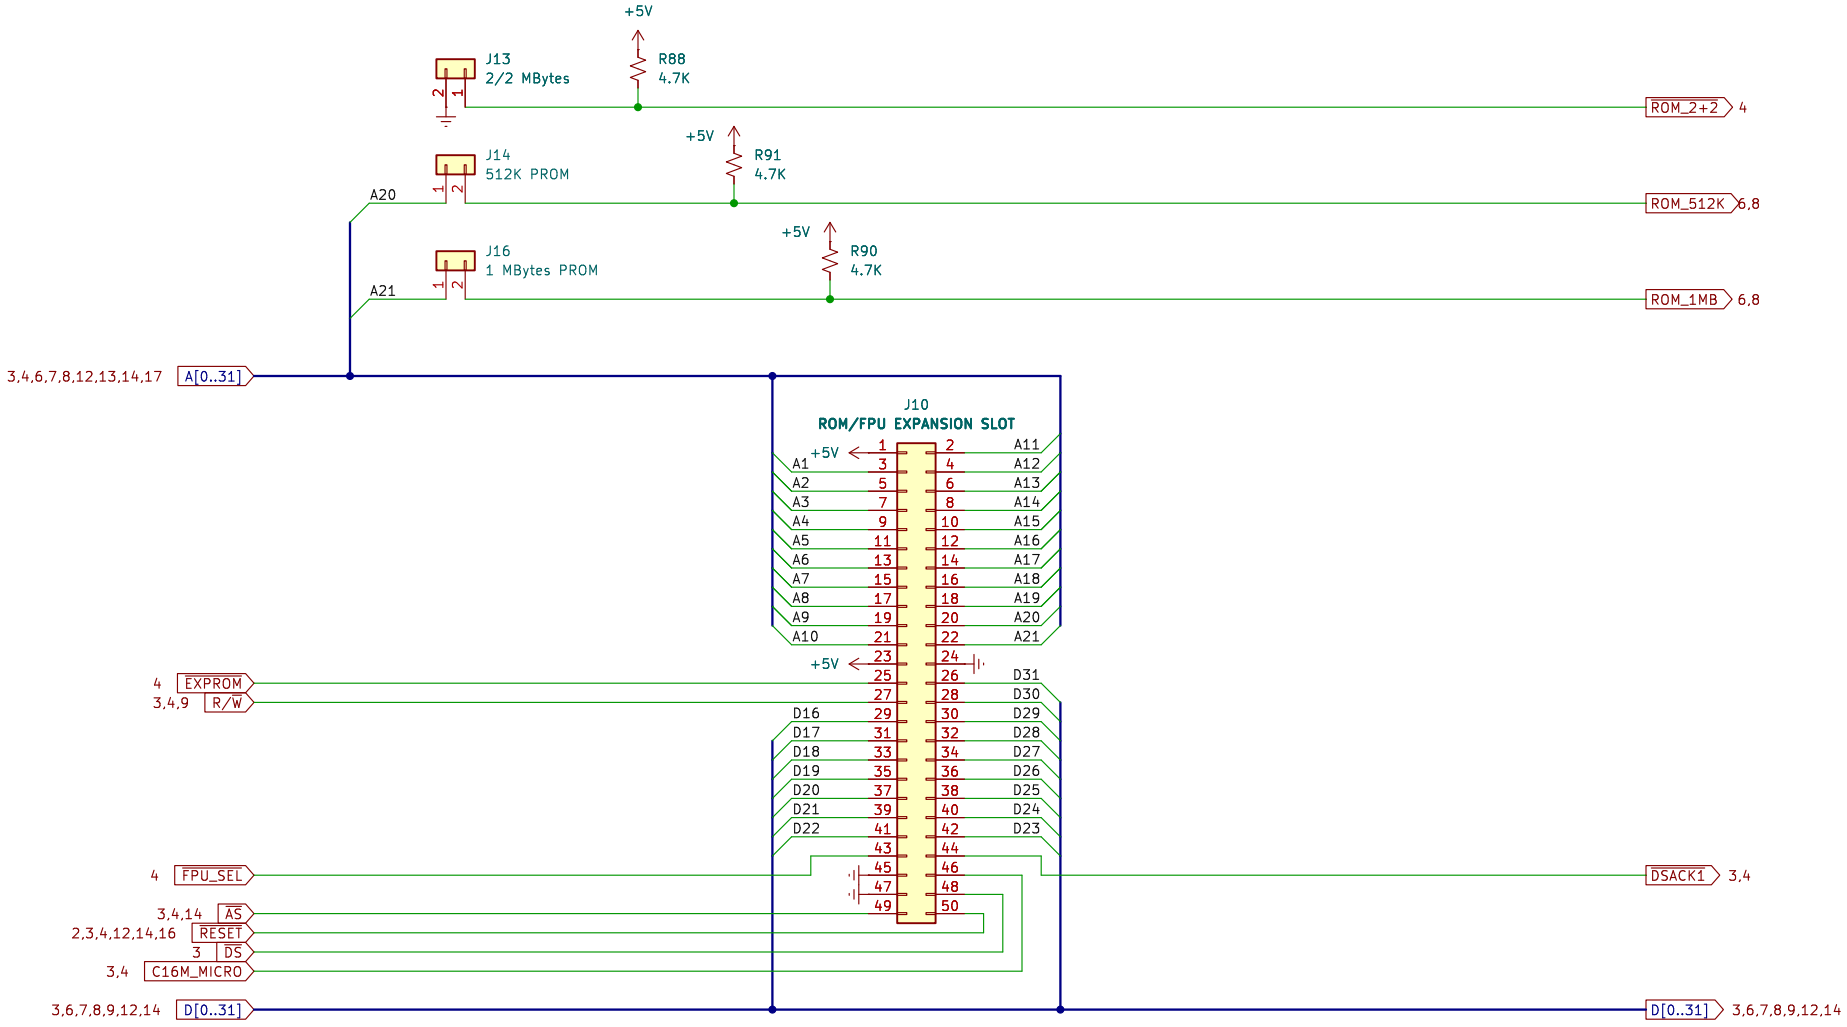


Bradley Bell	
Sheet: /Expansion Slot and Jumpers/	
File: romfpu.kicad_sch	
Title: Classic II Reloaded	
Size: USLetter | Date: 2025-06-23	**Rev:**
KiCad E.D.A. 9.0.9	Id: 5/17

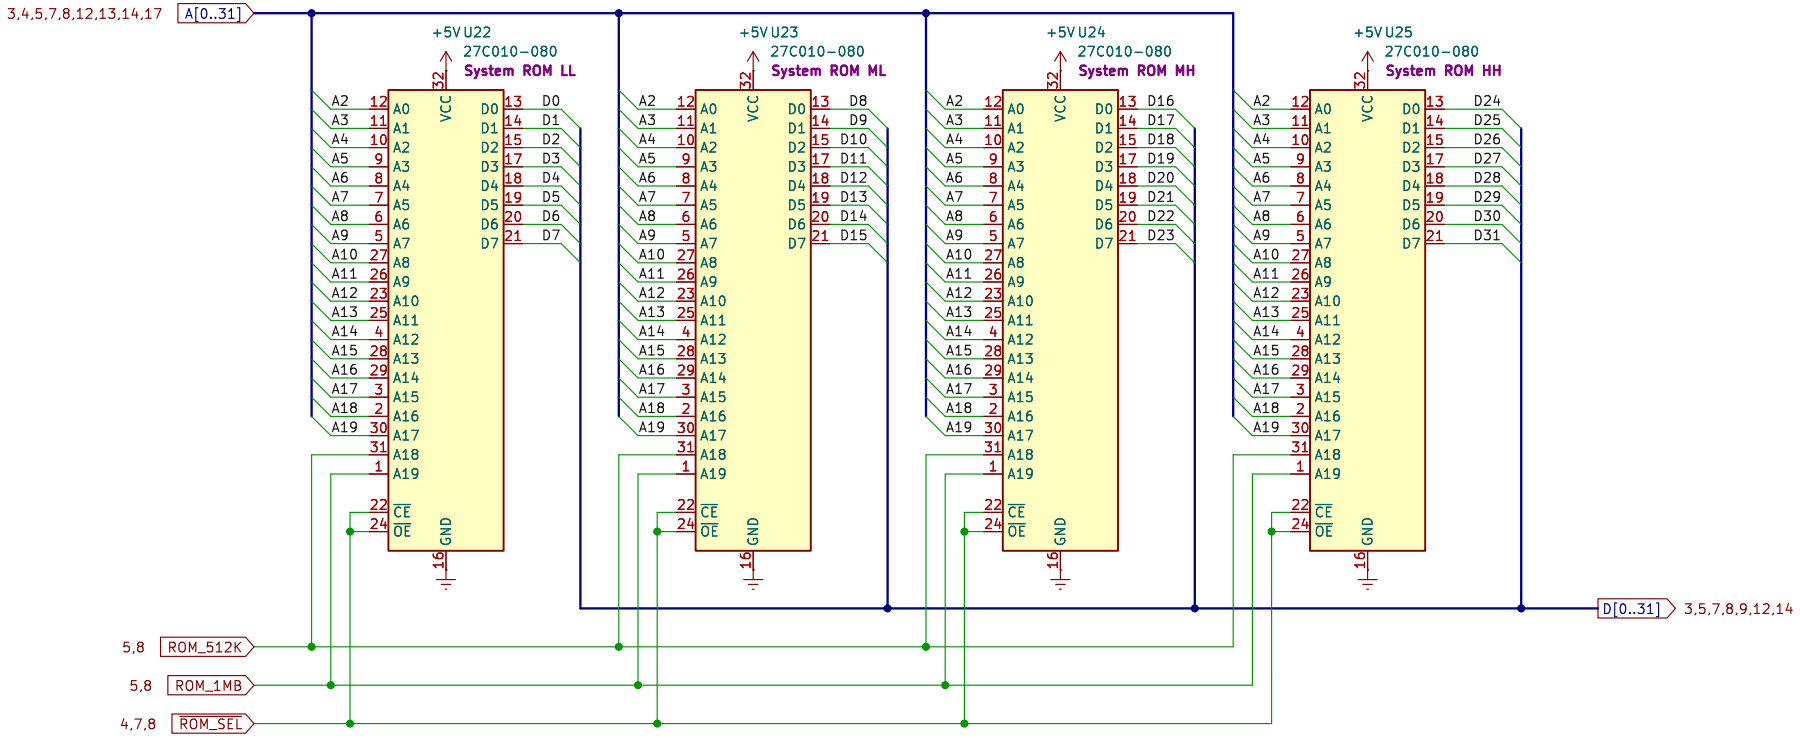


Bradley Bell	
Sheet: /System ROM Early Rev/	
File: rom3.kicad_sch	
Title: Classic II Reloaded	
Size: USLetter	Date: 2025-06-23
KiCad E.D.A. 9.0.9	**Rev:** Id: 6/17

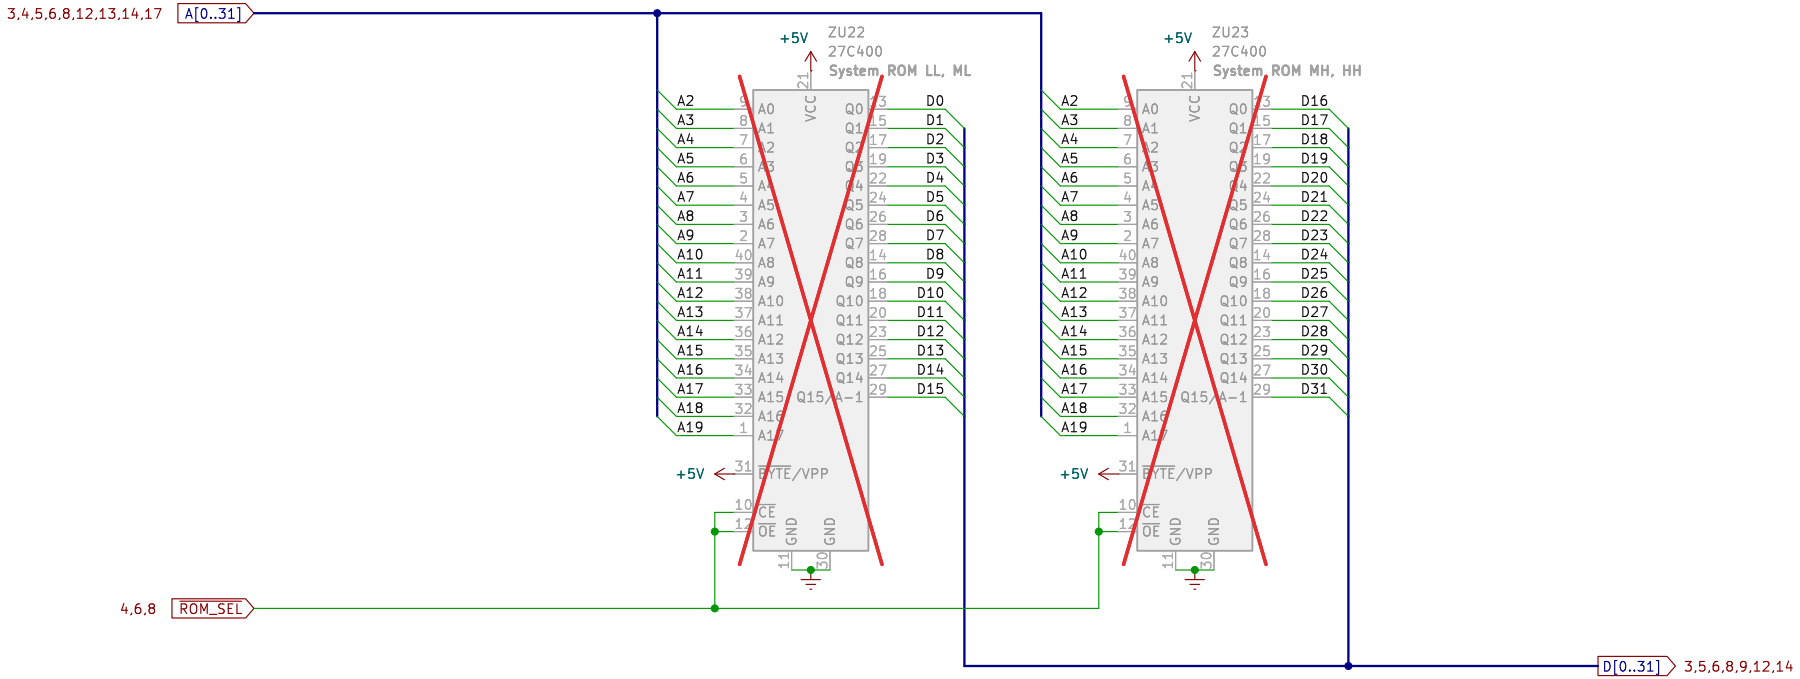


Bradley Bell	
Sheet: /System ROM 128K & 256K/	
File: rom.kicad_sch	
Title: Classic II Reloaded	
Size: USLetter | Date: 2025-06-23	**Rev:**
KiCad E.D.A. 9.0.9	Id: 7/17

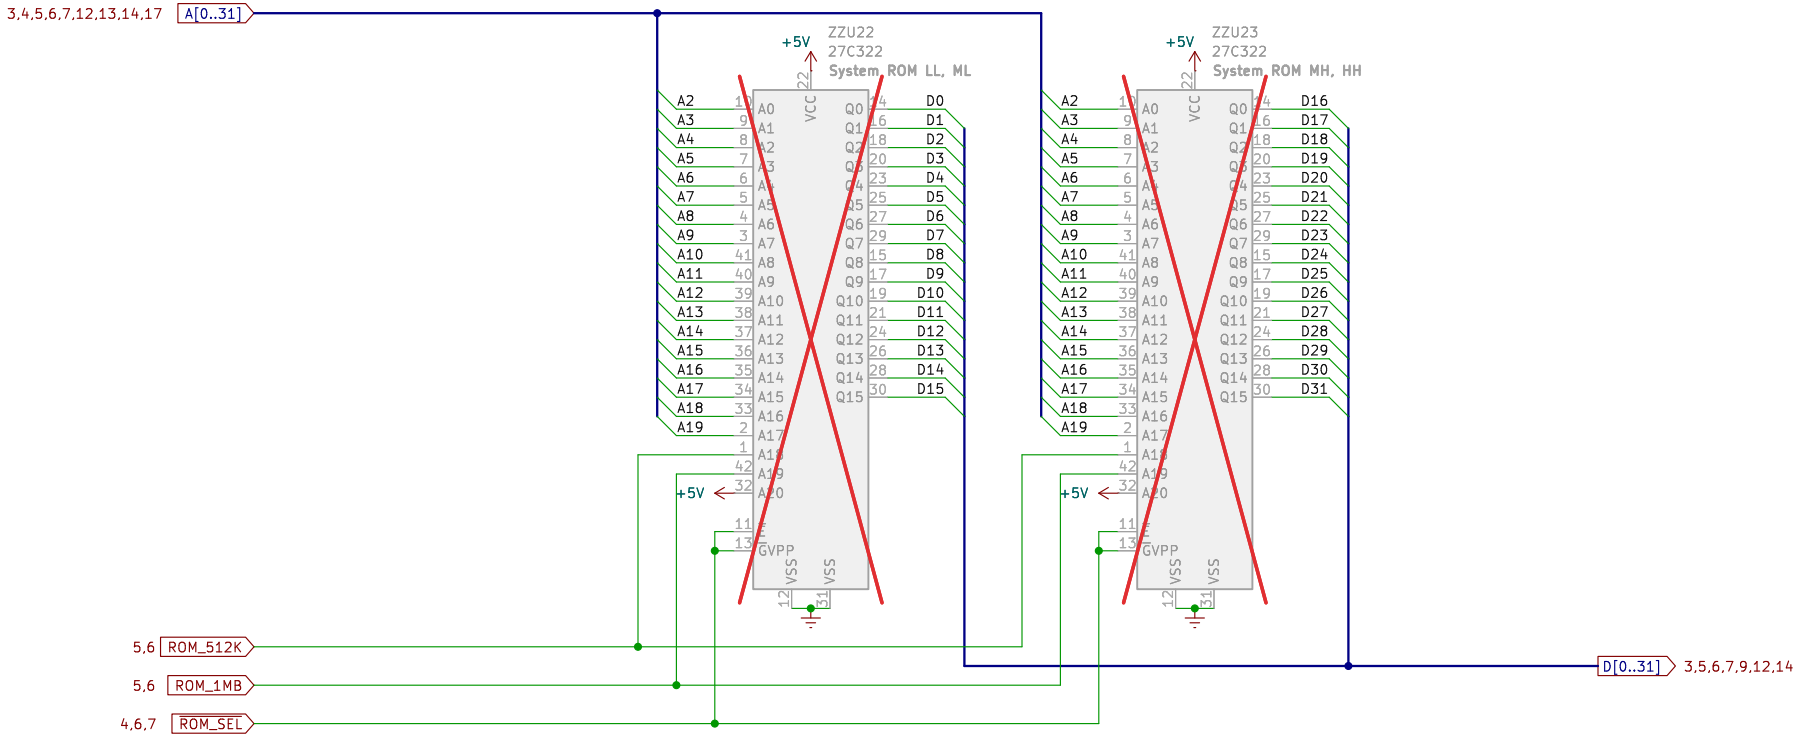


Bradley Bell	
Sheet: /System ROM 512K & 1M/	
File: rom2.kicad_sch	
Title: Classic II Reloaded	
Size: USLetter | Date: 2025-06-23	**Rev:**
KiCad E.D.A. 9.0.9	Id: 8/17

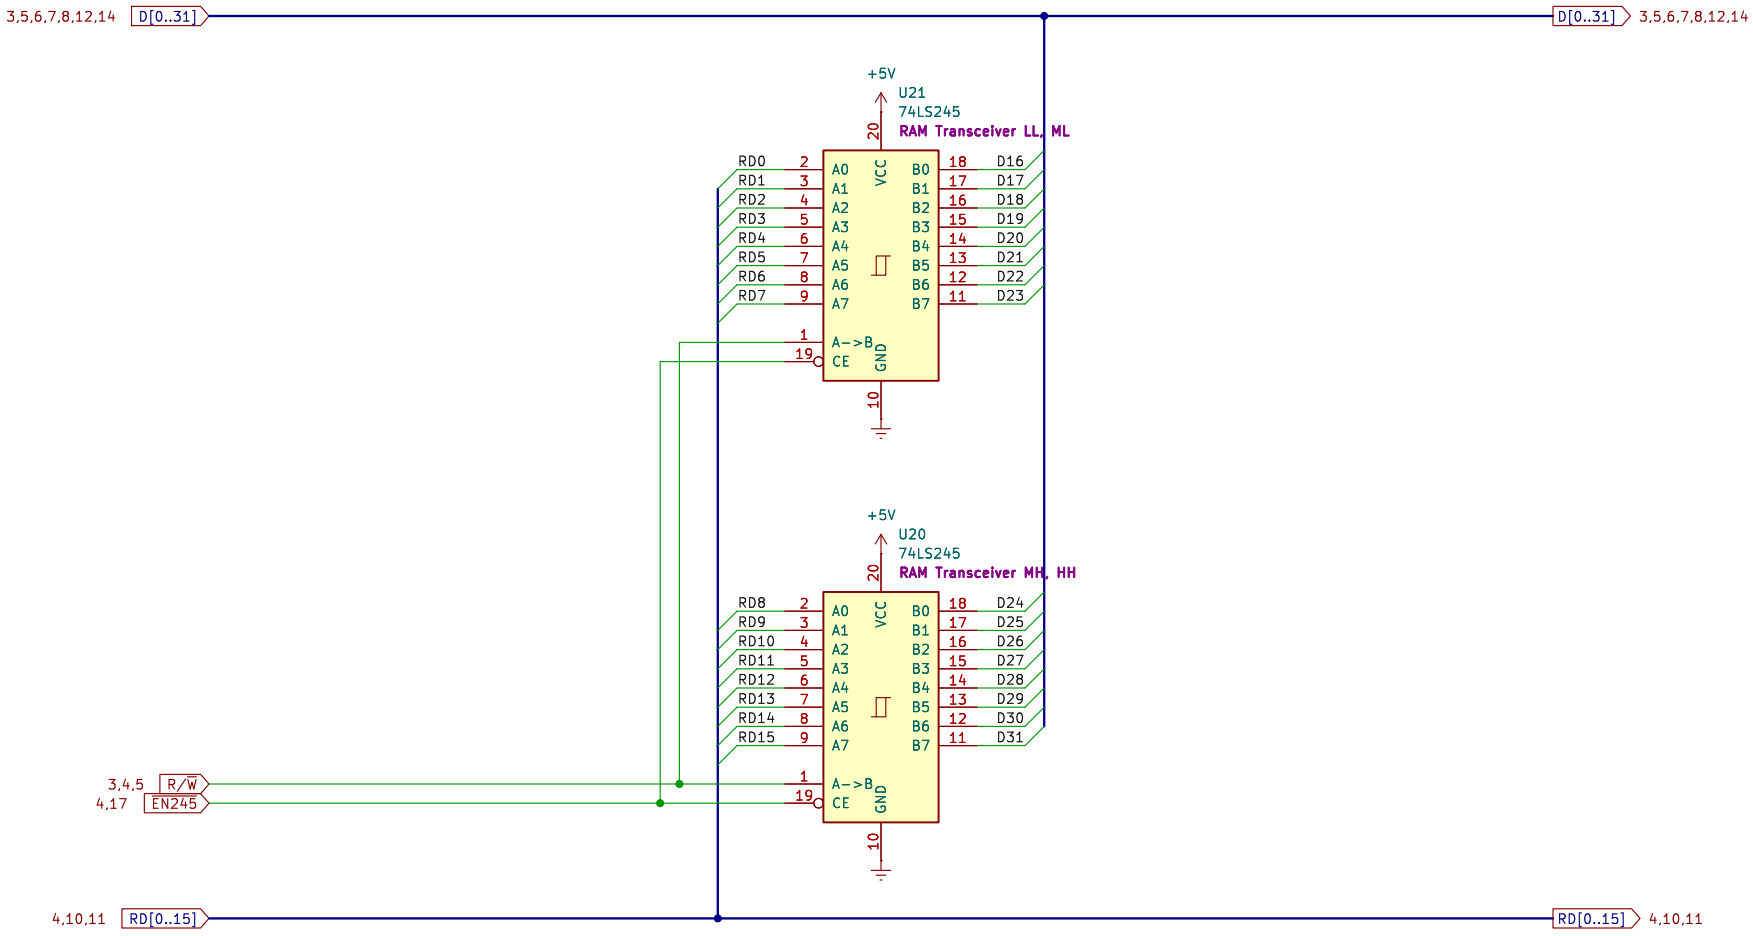


Bradley Bell	
Sheet: /RAM Transceivers/	
File: xcvr.kicad_sch	
Title: Classic II Reloaded	
Size: USLetter | Date: 2025-06-23	**Rev:**
KiCad E.D.A. 9.0.9	Id: 9/17

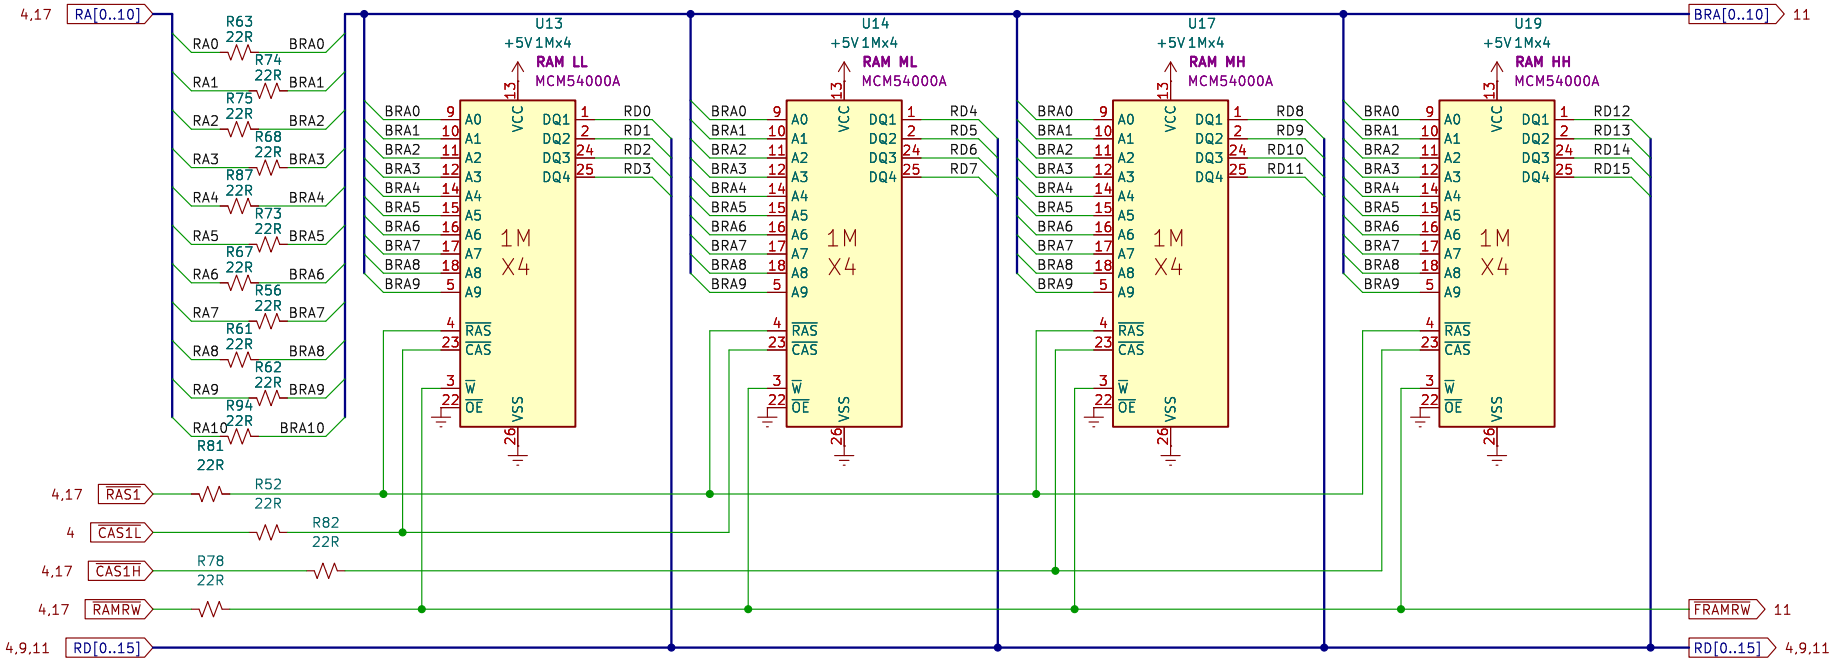


Bradley Bell		
Sheet: /RAM/		
File: ram.kicad_sch		
Title: Classic II Reloaded		
Size: USLetter	Date: 2025-06-23	**Rev:**
KiCad E.D.A. 9.0.9		Id: 10/17

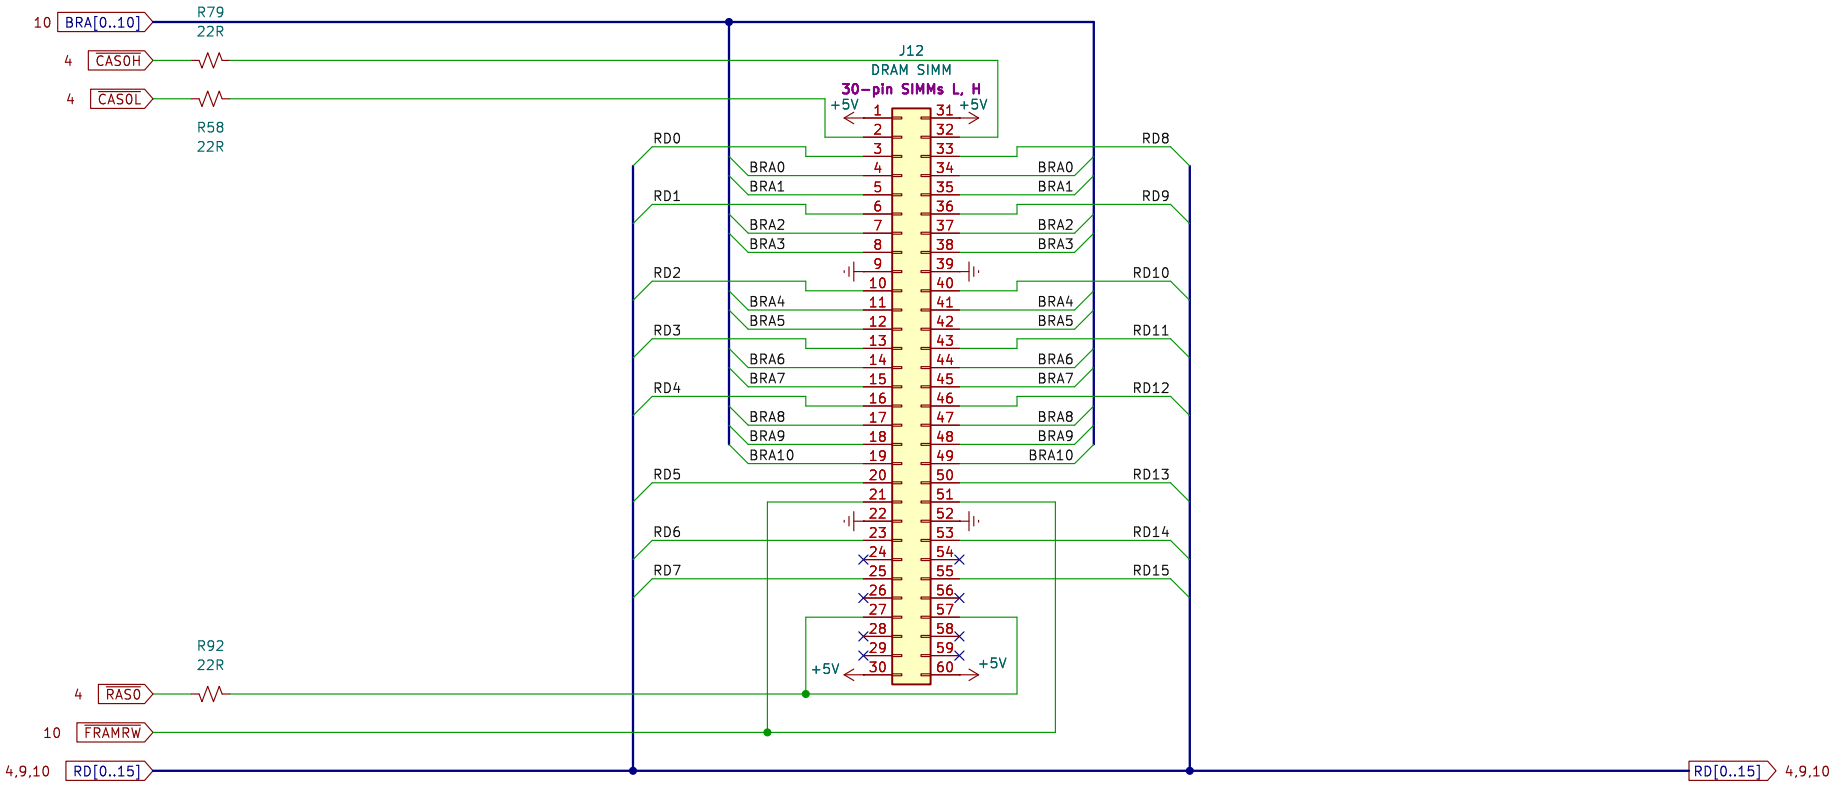



Bradley Bell	
Sheet: /RAM Expansion/	
File: simm.kicad_sch	
Title: Classic II Reloaded	
Size: USLetter | Date: 2025-06-23	**Rev:**
KiCad E.D.A. 9.0.9	Id: 11/17

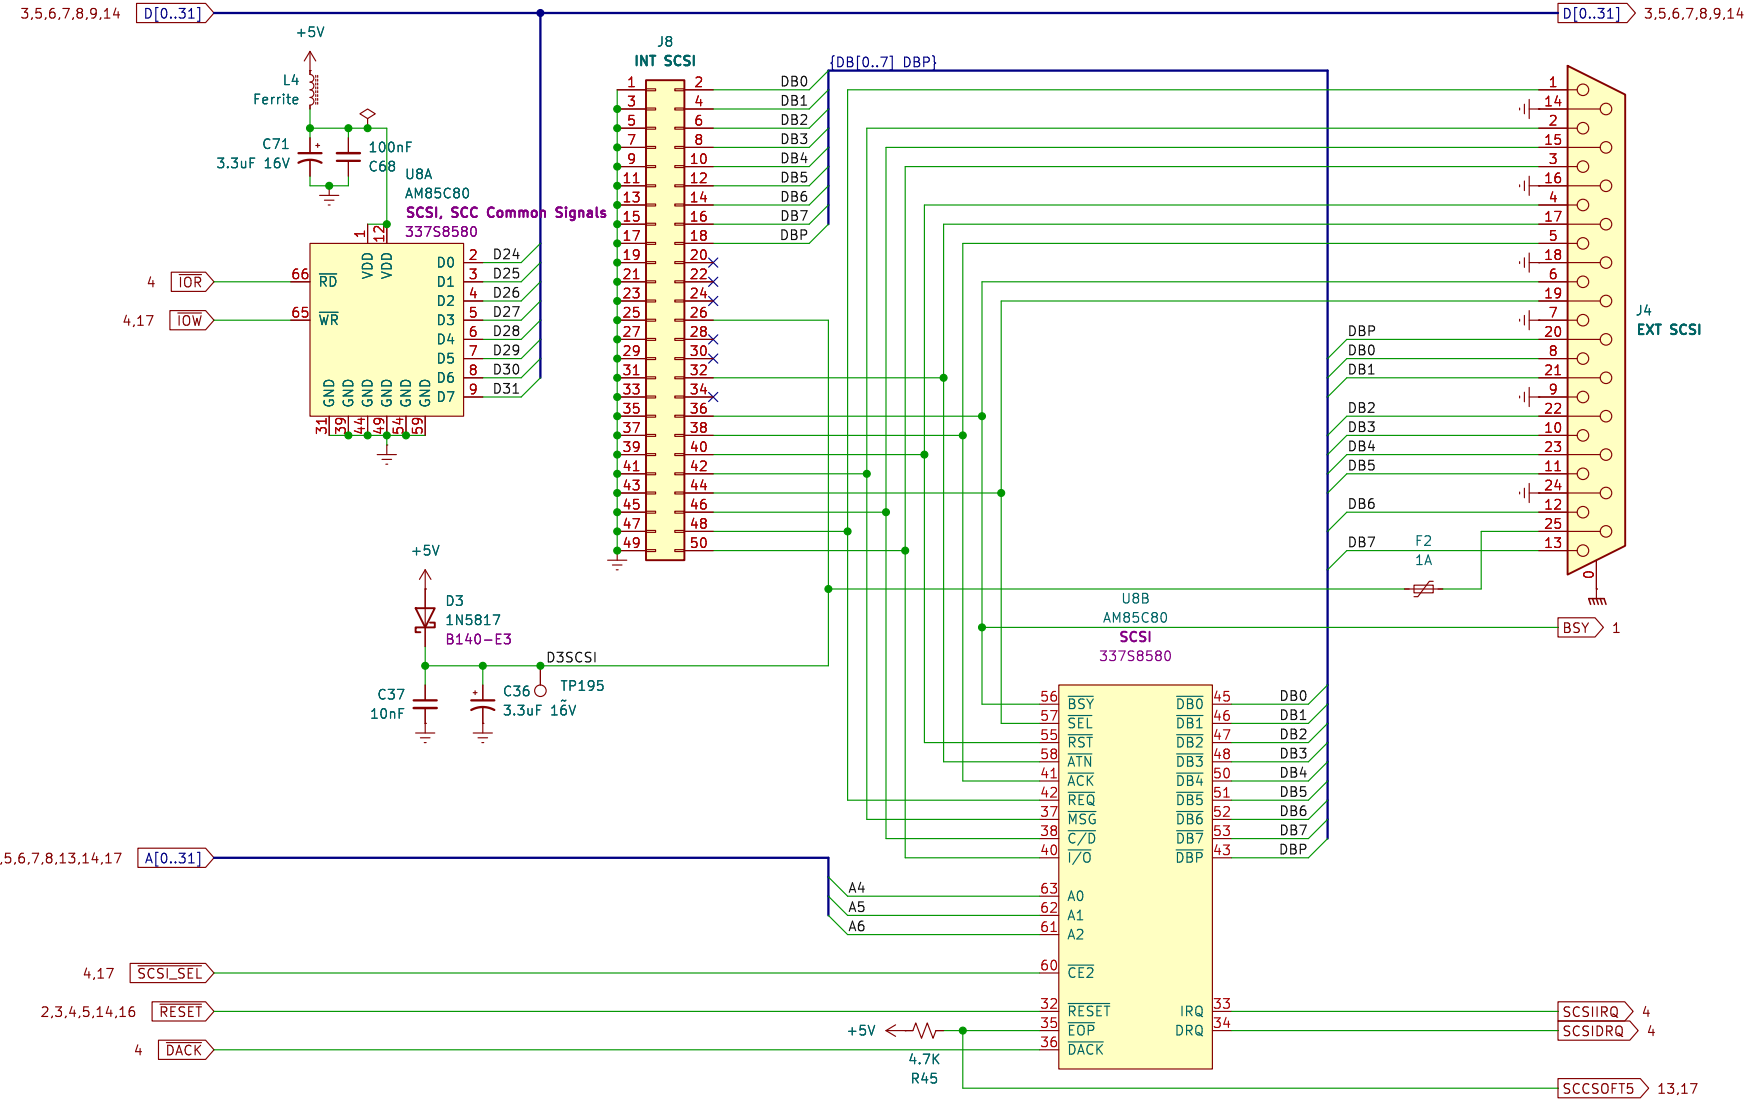


Bradley Bell	
Sheet: /SCSI & Serial/	
File: scsi.kicad_sch	
Title: Classic II Reloaded	
Size: USLetter	Date: 2025-06-23
KiCad E.D.A. 9.0.9	Id: 12/17

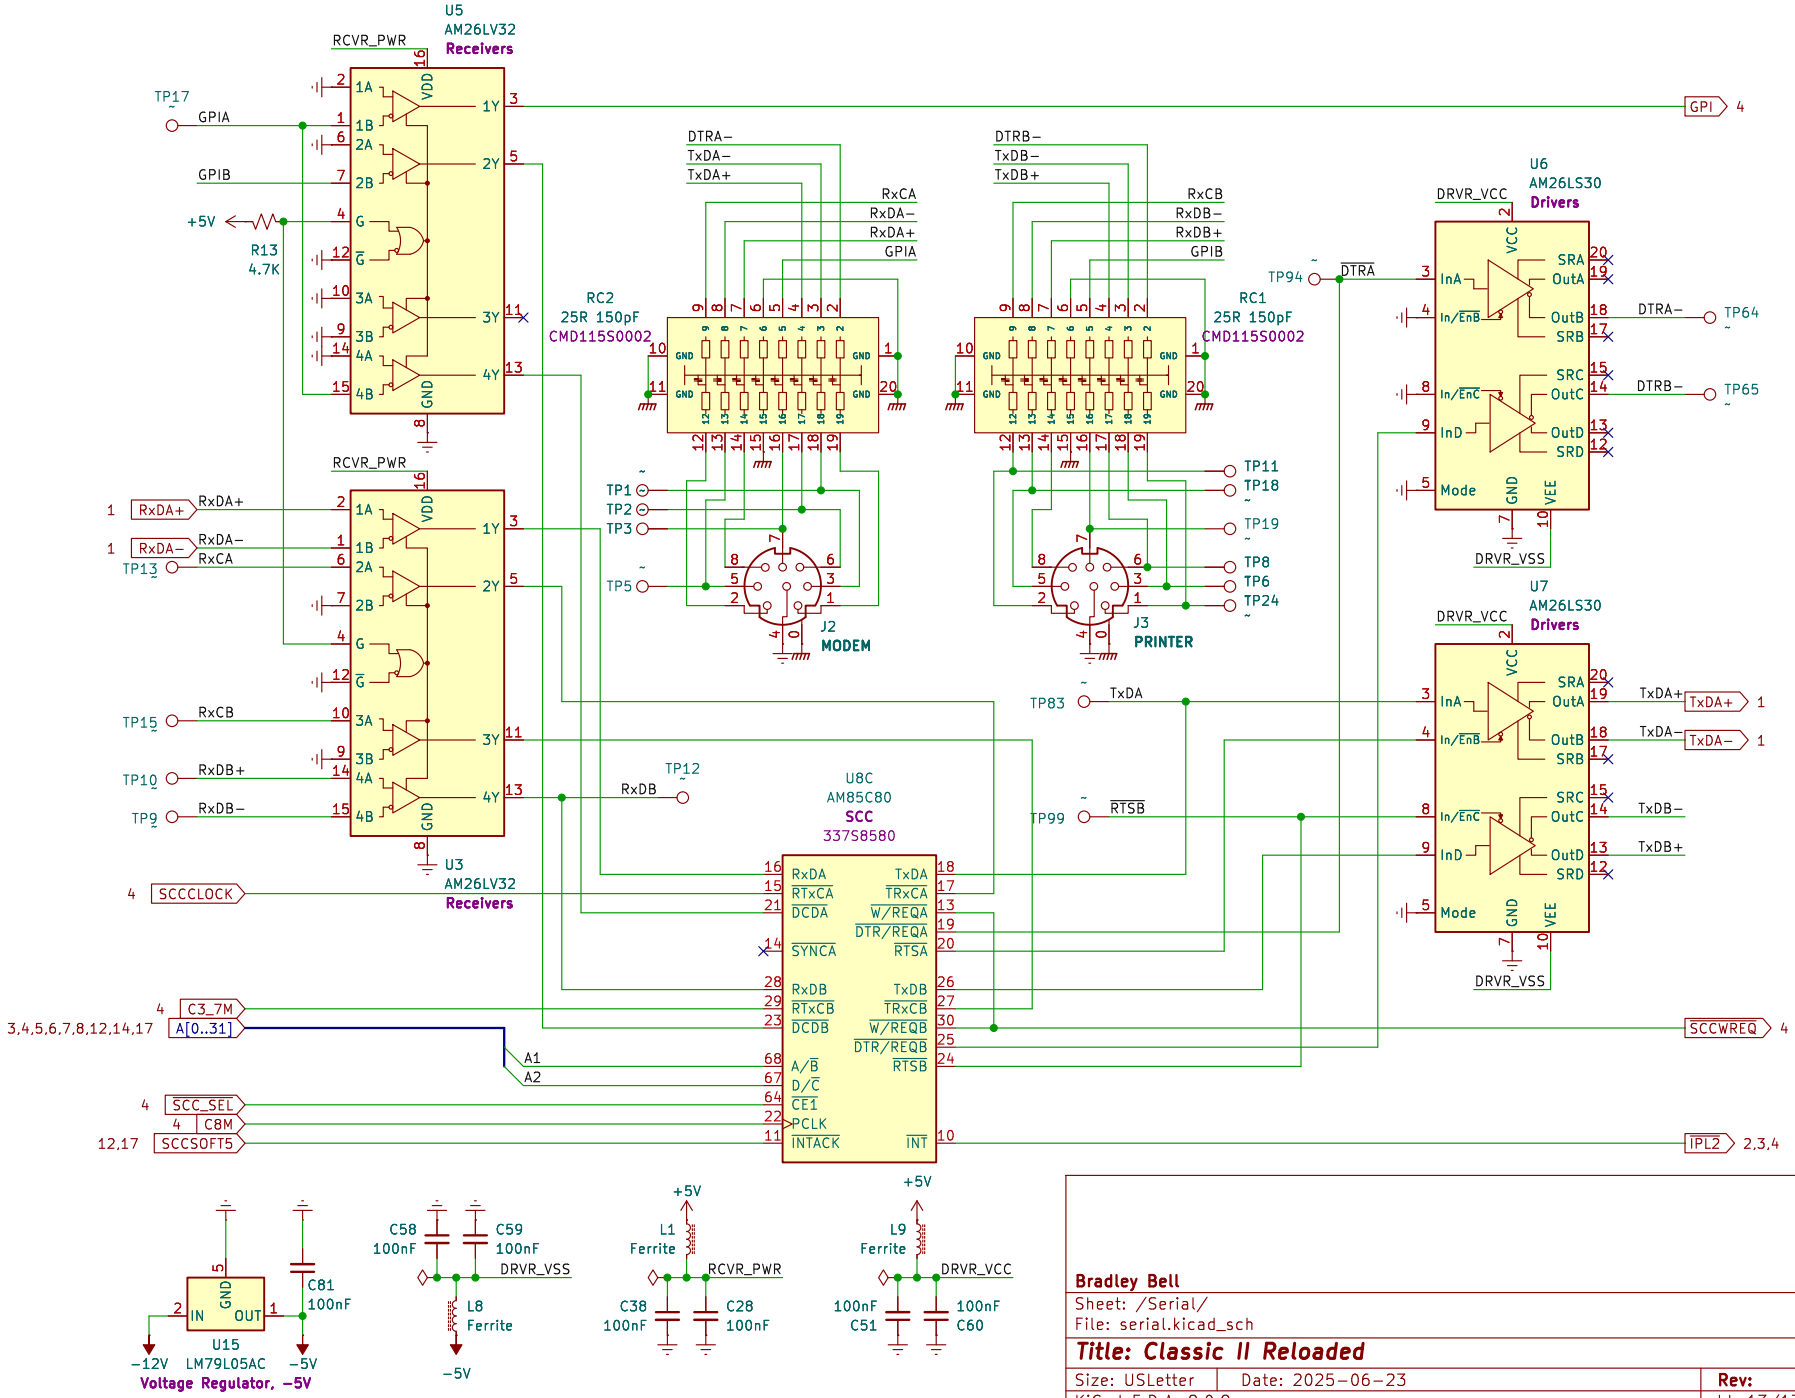

U5
AM26LV32
Receivers
RCVR_PWR
TP17
GPIA
GPIB
+5V
R13
4.7K
GPI 4
U3
AM26LV32
Receivers
RxDA+
RxDA−
RxCA
RxCB
RxDB+
RxDB−
SCCCLOCK 4
RC2
25R 150pF
CMD115S0002
DTRA−
TxDA−
TxDA+
RxCA
RxDA−
RxDA+
GPIA
J2
MODEM
RC1
25R 150pF
CMD115S0002
DTRB−
TxDB−
TxDB+
RxCB
RxDB−
RxDB+
GPIB
J3
PRINTER
U6
AM26LS30
Drivers
DRVR_VCC
DRVR_VSS
DTRA
DTRA− TP64
DTRB− TP65
U7
AM26LS30
Drivers
TxDA
TxDA+ TxDA+ 1
TxDA− TxDA− 1
RTSB
TxDB−
TxDB+
U8C
AM85C80
SCC
337S8580
RxDB
TxDA
RTSB
C3_7M 4
A[0..31] 3,4,5,6,7,8,12,14,17
A1
A2
SCC_SEL 4
C8M 4
SCCSOFT5 12,17
SCCWREQ 4
IPL2 2,3,4
U15
LM79L05AC
Voltage Regulator, −5V
−12V
−5V
C81
100nF
C58
100nF
C59
100nF
L8
Ferrite
L1
Ferrite
C38
100nF
C28
100nF
L9
Ferrite
C51
100nF
C60
100nF
Bradley Bell
Sheet: /Serial/
File: serial.kicad_sch
Title: Classic II Reloaded
Size: USLetter
Date: 2025-06-23
Rev:
KiCad E.D.A. 9.0.9
Id: 13/17

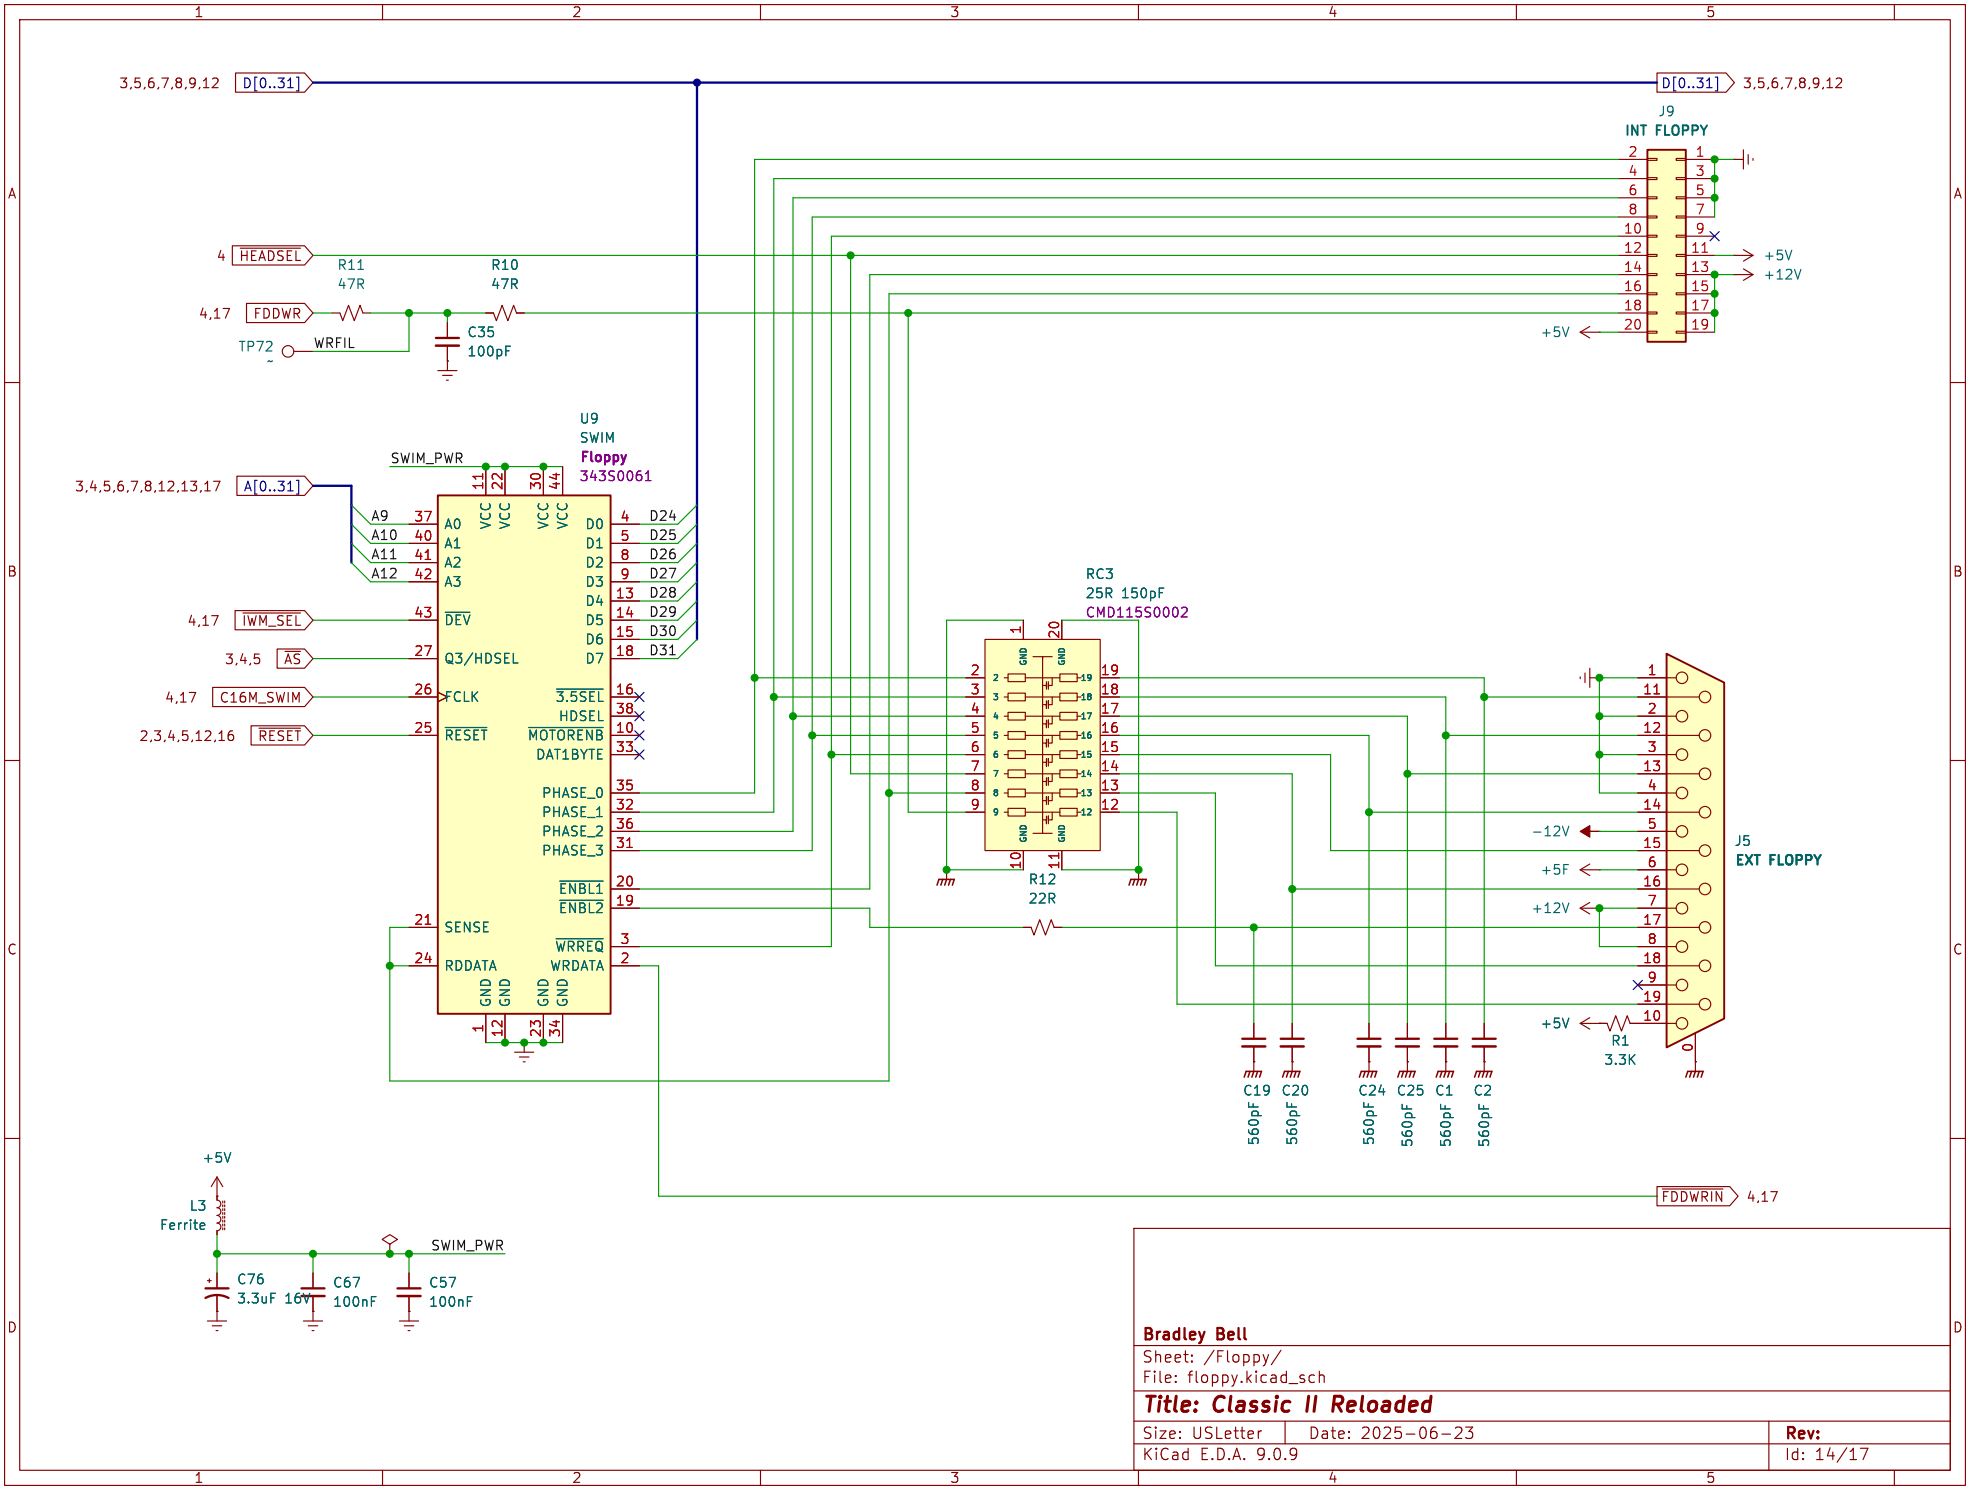
3,5,6,7,8,9,12
D[0..31]
D[0..31]
3,5,6,7,8,9,12
J9
INT FLOPPY
4
HEADSEL
R11
47R
R10
47R
4,17
FDDWR
TP72
WRFIL
C35
100pF
+5V
+12V
+5V
U9
SWIM
Floppy
343S0061
SWIM_PWR
3,4,5,6,7,8,12,13,17
A[0..31]
A9
A10
A11
A12
4,17
IWM_SEL
3,4,5
AS
4,17
C16M_SWIM
2,3,4,5,12,16
RESET
A0
A1
A2
A3
DEV
Q3/HDSEL
FCLK
RESET
VCC
VCC
VCC
VCC
D0
D1
D2
D3
D4
D5
D6
D7
D24
D25
D26
D27
D28
D29
D30
D31
3.5SEL
HDSEL
MOTORENB
DAT1BYTE
PHASE_0
PHASE_1
PHASE_2
PHASE_3
ENBL1
ENBL2
WRREQ
WRDATA
SENSE
RDDATA
GND
RC3
25R 150pF
CMD115S0002
R12
22R
J5
EXT FLOPPY
-12V
+5F
+12V
+5V
R1
3.3K
C19
C20
C24
C25
C1
C2
560pF
FDDWRIN
4,17
+5V
L3
Ferrite
SWIM_PWR
C76
3.3uF 16V
C67
100nF
C57
100nF
Bradley Bell
Sheet: /Floppy/
File: floppy.kicad_sch
Title: Classic II Reloaded
Size: USLetter
Date: 2025-06-23
Rev:
KiCad E.D.A. 9.0.9
Id: 14/17

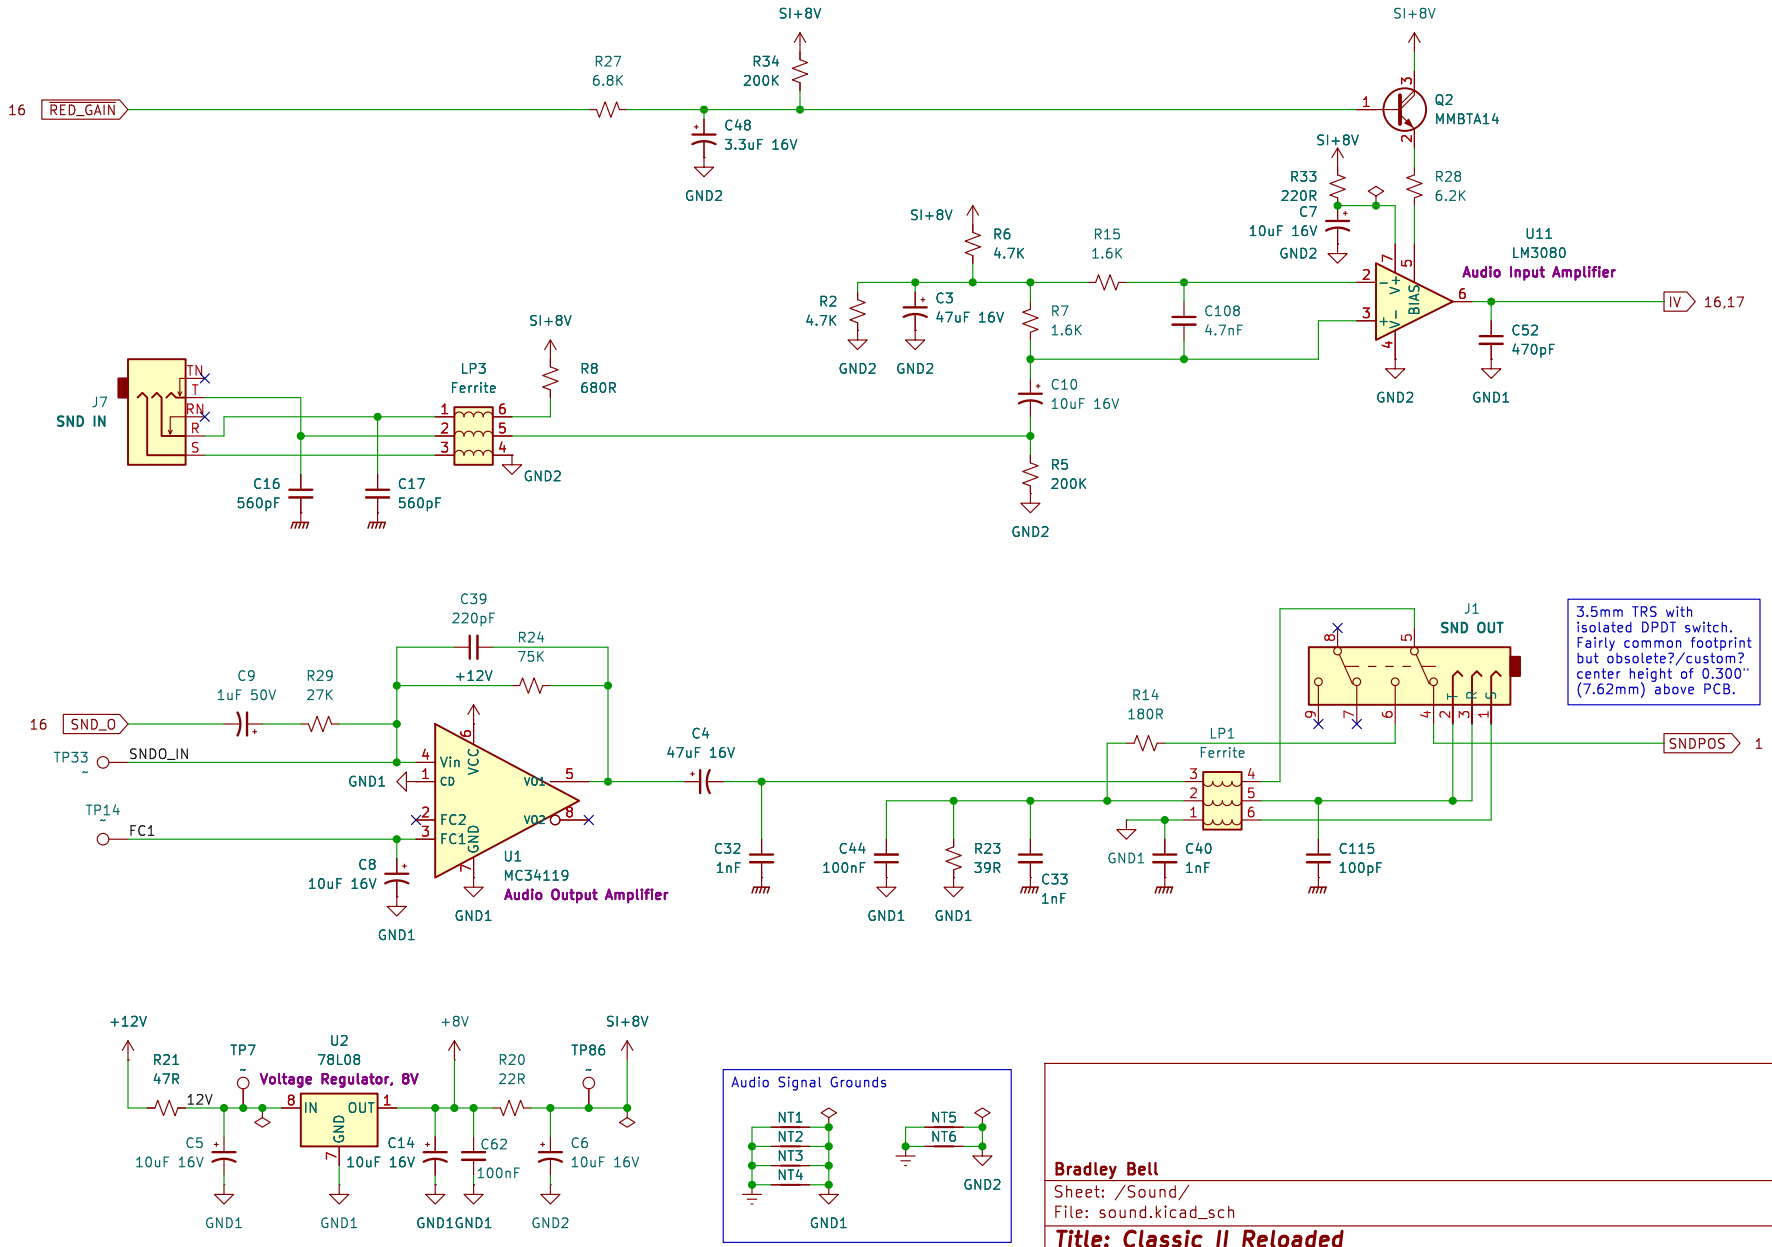
16
RED_GAIN
R27
6.8K
SI+8V
R34
200K
C48
3.3uF 16V
GND2
Q2
MMBTA14
R33
220R
C7
10uF 16V
R28
6.2K
U11
LM3080
Audio Input Amplifier
R6
4.7K
R15
1.6K
R2
4.7K
C3
47uF 16V
R7
1.6K
C108
4.7nF
C10
10uF 16V
R5
200K
C52
470pF
GND1
IV
16,17
J7
SND IN
LP3
Ferrite
R8
680R
C16
560pF
C17
560pF
C39
220pF
R24
75K
+12V
C9
1uF 50V
R29
27K
SND_O
SNDO_IN
TP33
TP14
FC1
U1
MC34119
Audio Output Amplifier
C8
10uF 16V
C4
47uF 16V
C32
1nF
C44
100nF
R23
39R
C33
1nF
R14
180R
LP1
Ferrite
C40
1nF
C115
100pF
J1
SND OUT
SNDPOS
3.5mm TRS with isolated DPDT switch. Fairly common footprint but obsolete?/custom? center height of 0.300" (7.62mm) above PCB.
+12V
R21
47R
TP7
U2
78L08
Voltage Regulator, 8V
+8V
R20
22R
TP86
C5
10uF 16V
C14
10uF 16V
C62
100nF
C6
10uF 16V
Audio Signal Grounds
NT1
NT2
NT3
NT4
NT5
NT6
Bradley Bell
Sheet: /Sound/
File: sound.kicad_sch
Title: Classic II Reloaded
Size: USLetter
Date: 2025-06-23
Rev:
KiCad E.D.A. 9.0.9
Id: 15/17

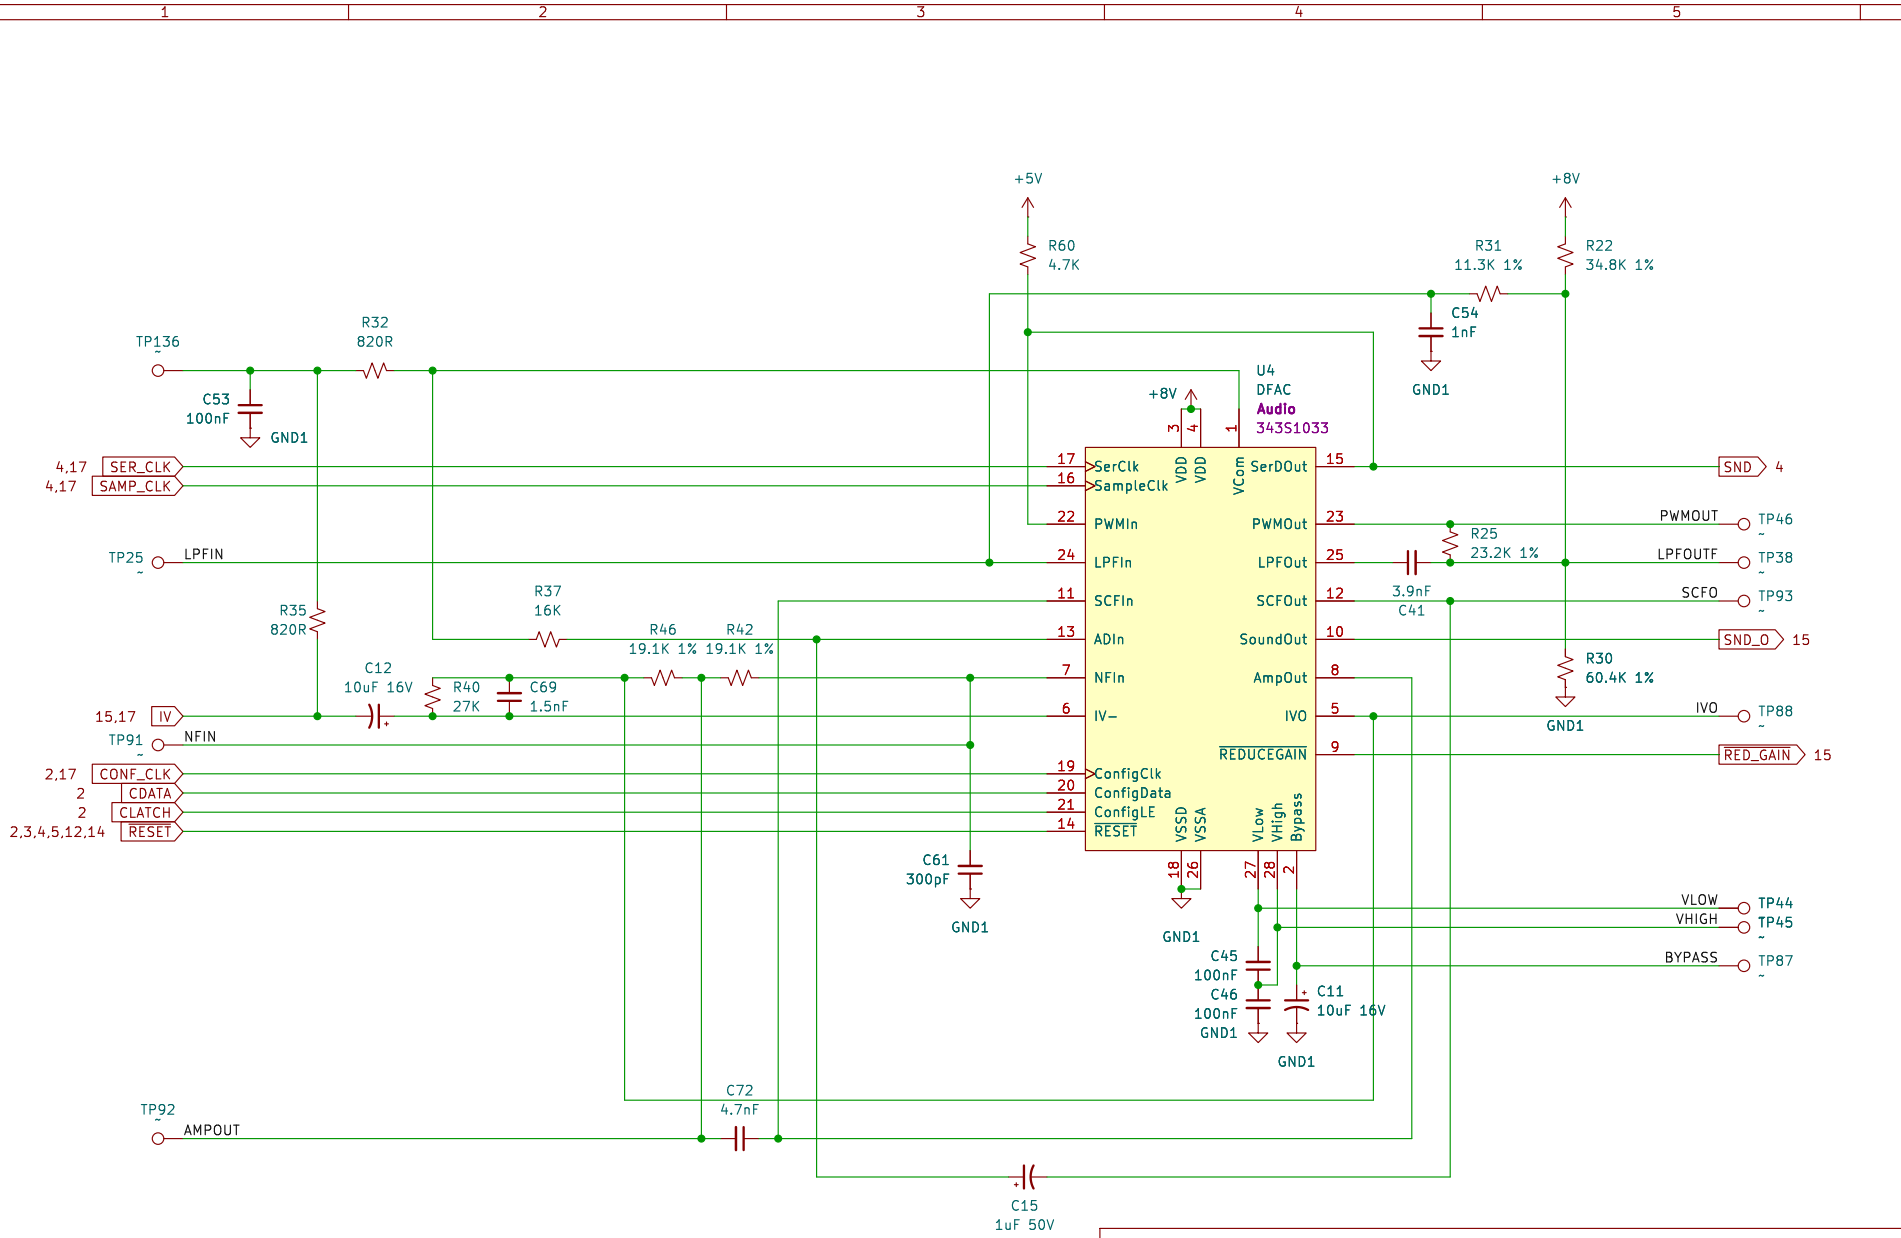

Bradley Bell	
Sheet: /DFAC/	
File: dfac.kicad_sch	
Title: Classic II Reloaded	
Size: USLetter | Date: 2025-06-23	**Rev:**
KiCad E.D.A. 9.0.9	Id: 16/17

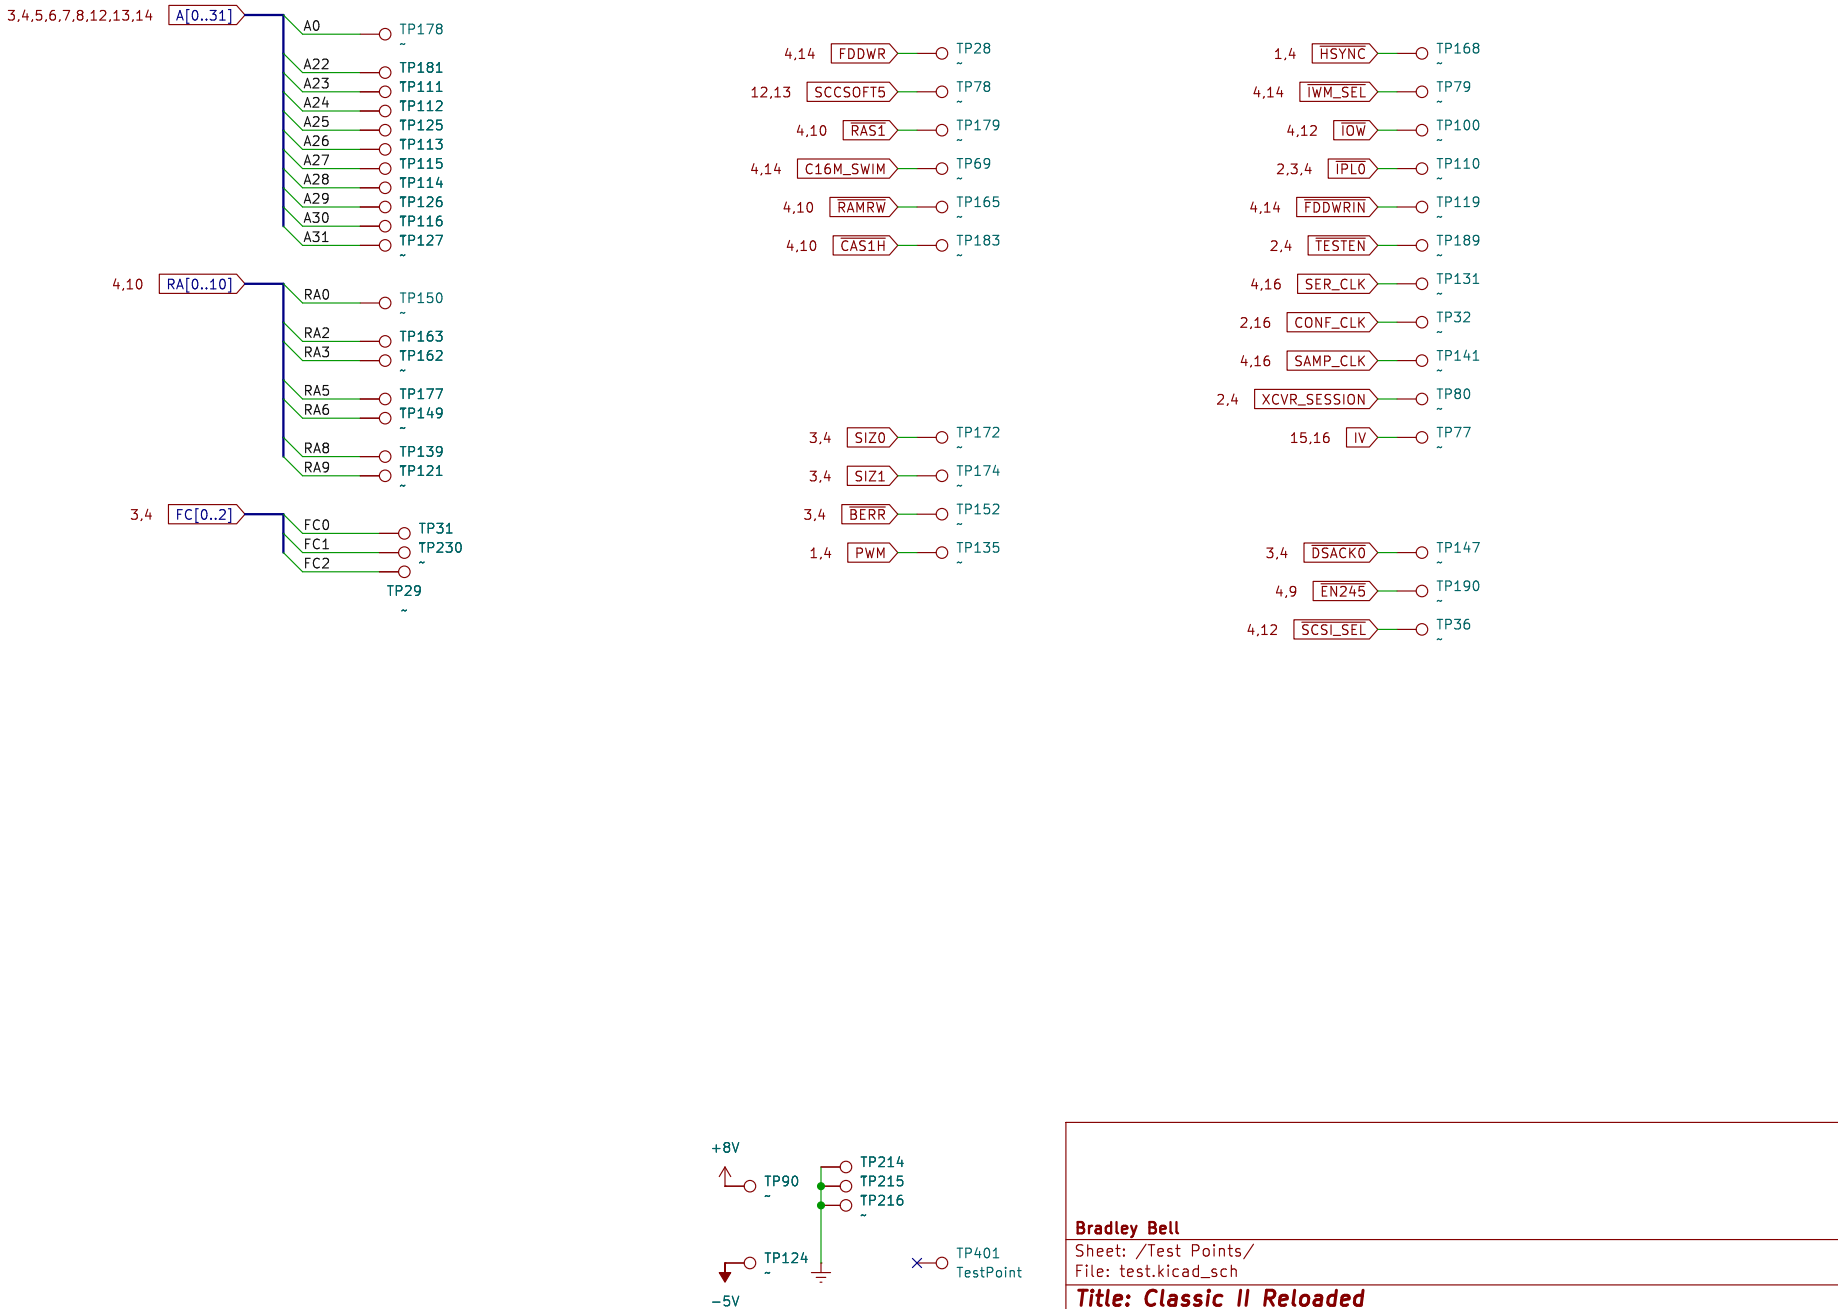

Bradley Bell	
Sheet: /Test Points/	
File: test.kicad_sch	
Title: Classic II Reloaded	
Size: USLetter | Date: 2025-06-23	**Rev:**
KiCad E.D.A. 9.0.9	Id: 17/17