

MUTATYI


User Manual



Portable Monitor



Button Introduction

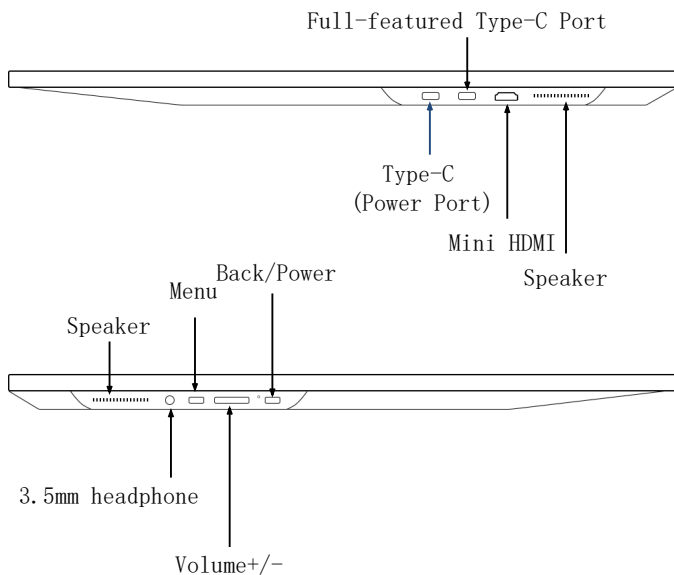

3.5mm jack: Headphone/speaker extension interface.

Menu:Enter the system menu or confirm function

Volume:

A:Pressing on both sides can quickly adjust the volume level.

B:Press the middle button to quickly adjust the brightness

C:Entering the menu, it can also be used as an up and down flip button

Back/Power: Short press is the back button, long press for 3 seconds is the power on/off button.

Type-C(Power Port):

Provides external power support, supportsreverse charging, compatible with the PD2.0 power supply protocol, andsupports voltage input of 5V/9V/12V/15V/19V/20V.

Mini HDMI:Responsible for audio and video signal transmission

Full-featured Type-C Port:Support high-speed data transmission and fast charging



Button Operation

Press the power button/back button for 3 seconds to turn the monitor on/off.

Press the MENU button to open the monitor OSD menu. In the menu, use the VOLUME+/- buttons to control the up and down , press the MENU button to confirm, and briefly press the POWER/BACK button to go back.

Note:For devices with a full-featured Type-C interface, they can be connected using the USB-C to USB-C cable in the accessories, but they must be connected to the full-featured type-c of the display screen.If a regular type-c power port is connected, it will not work properly.




Connection Introduction:

一、If the device has a fully functional Type-C interface (Thunderbolt 3/4/5, USB 3.1 Type C DP ALT-MODE port)




full-featured port symbols

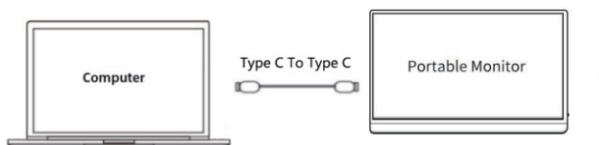

Method 1

Please use the full-featured Type-C to Type-C cable(package include) to connect the device and the portable monitor.


Note:The portable monitor only has one fully functional type-c port, please distinguish the full-featured and power type-c port.

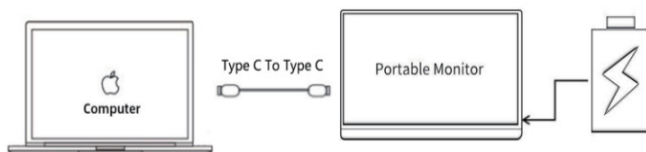

Method 2


Note: If you choose the method 1, when the battery or voltage of your device is too low, the display screen may flash and can't work. At this time, you still need to power on your devices or the portable monitor..

二、If the device has no fully functional Type-C interface (Connect to device with an Hdmi interface)

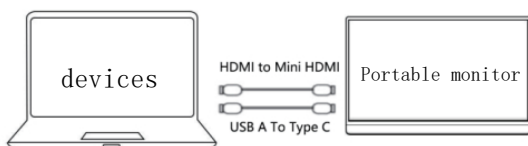

Method 3

HDMI to Mini HDMI + USB A to Type-C

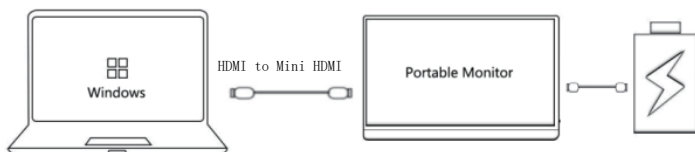

Method 4


HDMI to Mini HDMI + Type-C to USB A + Adapter

Note: If you choose the method 3, when the battery or voltage of your device is too low, the display screen may flash and can't work. At this time, you still need to power on your devices or the portable monitor. Or you can choose method 2.


Note: If you buy a touchscreen display, you can only use methods 1, 2, and 3. And it must be connected to the full-featured Type-C interface of the monitor. If the charging Type-C interface is connected, the touch function cannot be used.



Uses of display screens

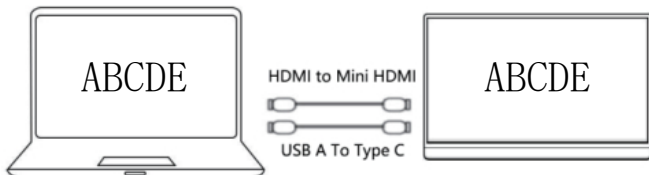

一、Copy: the two screens are identical.
Suitable for presentations, meetings, multi person viewing, and gaming.

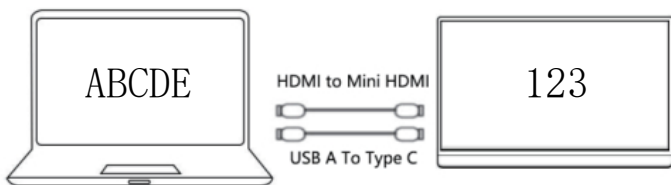

二、Expansion: The external screen can accommodate different windows and operate independently.
Suitable for multitasking, stock trading, editing, and programming

Setting method: Open System Settings - Display - Copy/Expand




Menu


1. Picture




2. OSD Setting




3. Temperature




4. Option




5. Advance




6. Reset



7. Information



8. ColorEffect





Troubleshooting

1、I am using the USB-A to USB Type-C cable to connect the monitor and device, but the screen displays "No Signal" or flash.

USB-A to USB Type-C cable is for power supply only and do not support video transmission.

2、Frequent flashing/restarting of the monitor

Flashing or frequent restarts are usually caused by insufficient power supply. At this point, you need to connect an additional power source to your device or portable display screen.

3、Black Screen or No Signal

A、Please use the original cable

B、If you choose a full-featured first-line connection, please ensure that you are connecting to the full-featured interface on the portable display screen, not a regular charging interface.

C、If you choose a USB-A to USB Type-C cable for connection, you must also connect an HDMI to Mini HDMI cable at the same time.

D、Regardless of the type of connection, if your device's battery or voltage is too low, you still need to connect the power cord to the device or portable display screen.

4、Touch function cannot be used

If it is a touch screen display, the touch function does not support iPhone, iPad, and game consoles

5、My phone has a Type-C port, but it does not respond after connecting to this monitor

A. Some phones' Type-C ports only support charging and not display output. The portable monitor only support the phone with full-featured interface(Thunderbolt 3/4/5, USB 3.1 Type C DP ALT-MODE port)

B. If you phone hasfull-featured interface,it may not be providing enough power to the monitor. At this point, you need to connect an additional power source to your device or portable display screen.

6、Compatible devices

Mobile phones and laptops with full-featured interfaces. Desktop computers, laptops, and gaming consoles with DHMI interface. If it is a touch screen display, the touch function does not support iPhone, iPad, and game consoles