
Grok Station
Getting started

A short tour of what your station does and where to find it.

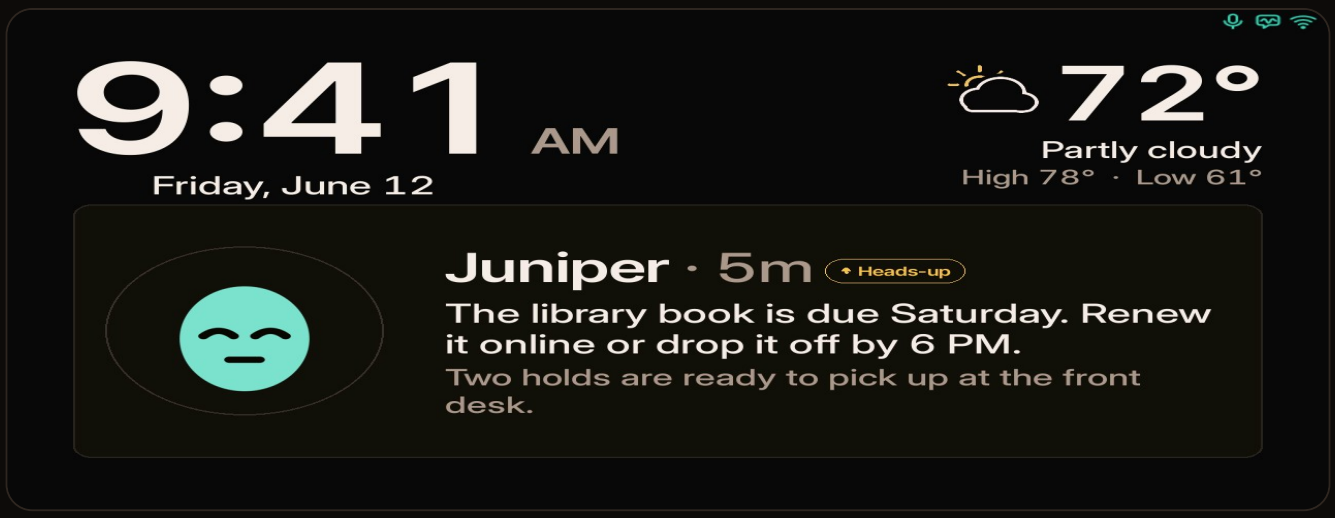

What Grok Station is
A tour of the screens
Bot updates on the clock
Lights and home devices
On your phone
What's new in 0.13
First run and sign-in
Talking to the station
Bots and wake words
Settings pages
Features at a glance
Troubleshooting basics

rev1.5 · written against version 0.13.41 · November 12, 2026.

Every screenshot comes from a demo station with made-up bots, devices, network names and addresses.

START HERE

What Grok Station is

Grok Station is a voice station you keep at home. It runs on a Raspberry Pi with a screen and a USB speaker and microphone. Say “Hey Grok”, ask a question, and the answer is spoken and shown on the station’s own screen. Your other Grok bots can answer too, each with its own wake word, and the station can run kitchen timers, show cards like the weather or a recipe, and switch lights on and off. You set it all up from a phone or laptop on your home network.


What you need

- A Raspberry Pi 4 with 2 GB of memory or more (a Pi 5 is the one to get), a microSD card of 16 GB or more, and a power supply.
- A screen plugged into the Pi, from 800×480 up to 4K, used in landscape.
- Any USB speaker and microphone, or one USB speakerphone.
- An xAI API key.
- For bots other than Grok: a computer on your home network running the Grok Bot app that stays on all the time.

Put it on the Pi

1. In Raspberry Pi Imager, write **Raspberry Pi OS Lite (64-bit)** to the card, with a station name, Wi-Fi (or Ethernet) and SSH.
2. Boot the Pi, sign in, and run the one-line installer from the project README. It asks no questions.
3. Press Enter to restart when it finishes. The screen then shows the address to open and a short setup code.

> Prefer not to type commands on the Pi? The README also explains how to build a ready-to-boot card on a Linux computer. That card sets up Wi-Fi through the station’s own setup hotspot.

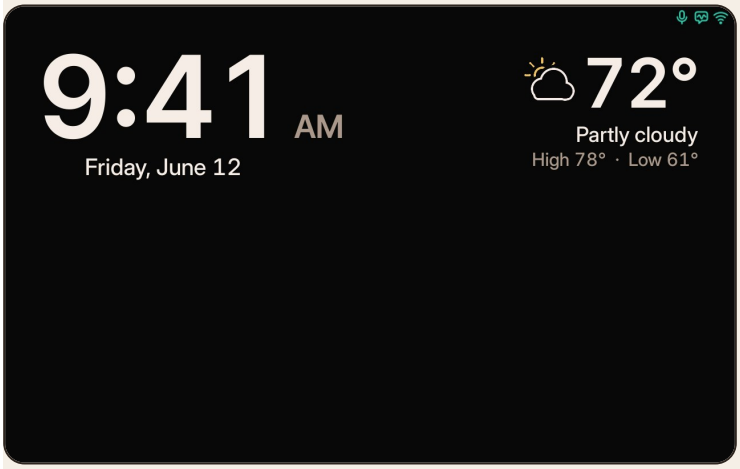


The station when nothing is happening: clock, date and weather. The small icons at top right show the microphone, whether Grok can be reached, and Wi-Fi.

SETUP

First run and sign-in

1. **Wi-Fi.** If the Pi isn't on a network yet, the screen shows a setup hotspot: a Wi-Fi name, a password and a page to open. Join it, open the page, and pick your home Wi-Fi. The hotspot then turns off.
2. **Open the admin page.** On a phone or laptop on the same network, open the address on the station screen (it ends in `.local`, or use the number address). Your browser warns about the certificate the first time; that's expected, so continue.
3. **Enter the setup code** from the station screen. It works once.
4. **Choose an admin password** of at least 10 characters. There is no username.
5. **Paste your xAI API key** and save. The page never shows the key again. Voice starts as soon as it's saved.
6. **Add your main bot first** on the Bots page (see page 7).

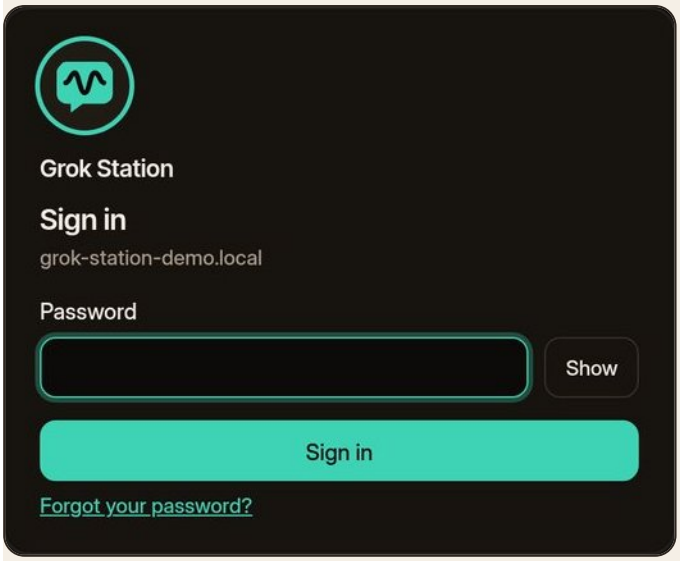

Signing in later: just the password.

Signing out

Sign out is the link at the bottom left of every page, next to "Signed in as admin" and the version number. It signs out the browser you're using. On a phone, open the **More** tab and press **Sign out**.


Changing the admin password signs out every browser.

ORIENTATION

A tour of the screens

The admin page

On a laptop, the menu on the left has three groups. **Home** is the status overview. Under **Station**: Bots, Privacy, Audio, Display, Time and location, Network and Integrations. Under **System**: xAI API, Updates and System. On a phone, the same pages sit behind four tabs at the bottom (Home, Bots, System, More).

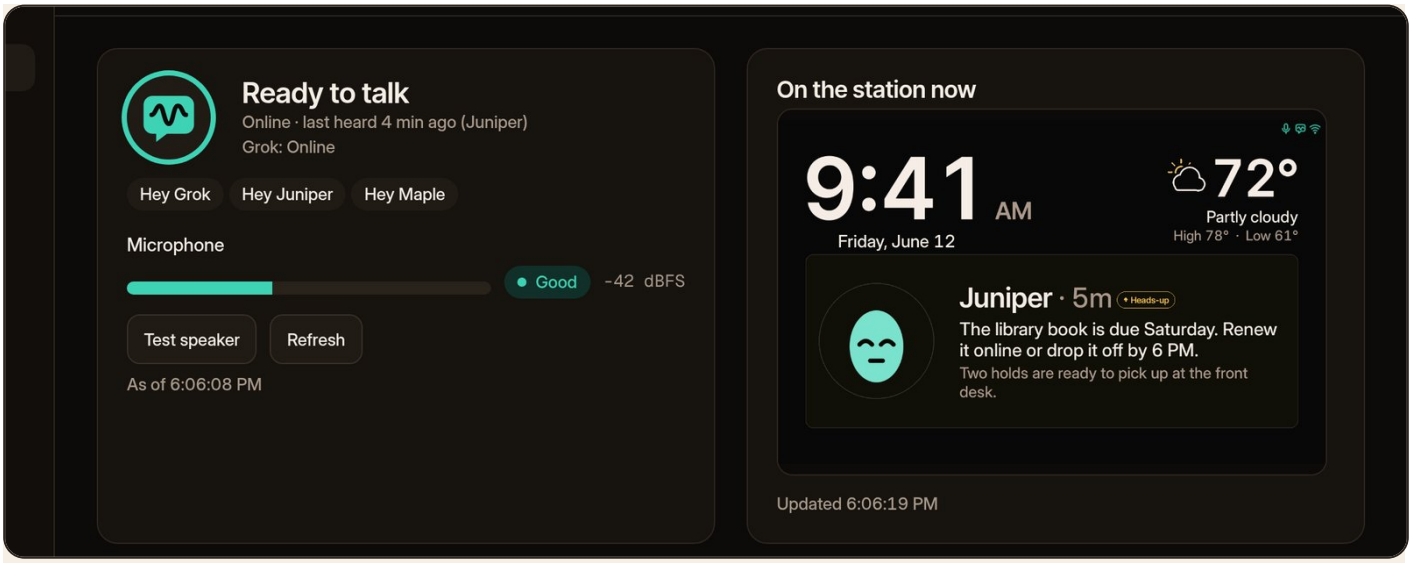

Home: whether the station is ready to talk, the Grok line (Online, No internet, Can't reach Grok, or Checking), the live microphone level, a live picture of the station screen (here with an update card), and tiles for voice, network, services and bots.

The station screen

- **Idle:** a big clock, the date and the weather at the top. The space above them matches the space below the card area. Running timers sit along the bottom.
- **Bot updates:** one large card under the clock, one update at a time (see "Bot updates on the clock").
- **Talking:** the conversation takes the update card's place: the bot's picture with a glowing ring, your question in quotes, and the answer. Long answers scroll as they are spoken. Updates come back when the conversation ends.
- **Status icons (top right):** network, Grok (teal when reachable, amber when the internet or Grok can't be reached), microphone, and an update arrow only when a newer version is ready.
- **Night:** an optional dim night clock, and the screen can dim on a schedule or at sunset. Bot updates are hidden at night.

EVERYDAY USE

Talking to the station

Start with the wake word, then ask. After an answer the station keeps listening for a few seconds, so you can ask a follow-up without the wake word.

- Say **“Hey Grok, how far is the Moon?”** Grok is built in and always on.
- Say **“Hey Grok, ask Juniper for a fun fact.”** Hands one question to another bot.
- Say **“Hey Grok, connect me with Atlas.”** Switches the whole conversation to that bot.
- Say **“Hey Atlas, …”** A bot’s own wake word goes straight to that bot.
- Say **“Goodbye.”** Also “stop”, “never mind”, “cancel” or “that’s all”. Ends the conversation right away.



An answer with a weather card. Weather, time and conversion cards use the whole screen.




Another bot answering with its own picture, in the card space under the clock.

Timers

Up to eight named kitchen timers, from one second to 24 hours. They keep running after the conversation ends and ring on the station.

1. Say **“Set a pasta timer for 10 minutes.”**
2. Say **“What’s running?”** or Say **“Add two minutes to the pasta timer.”**
3. When it rings: Say **“Stop.”**

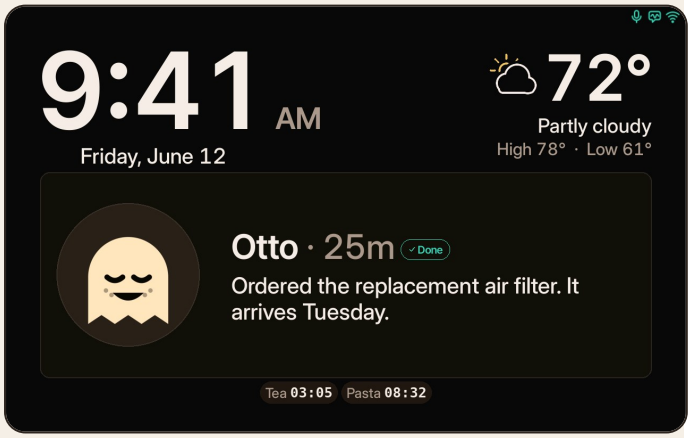

Two timers along the bottom. The update card moves up to make room.


Cards from your bots

Bots can put a card on the screen with an answer: a recipe, a sports score, your calendar, or a home card. Ask to see one that is already up (“show me the score again”) and it stays on screen while the bot answers. During a recipe, say “next step”, “back”, “repeat”, “start over” or “done”. Bots can also look up your calendar, reminders or the weather to answer (read only).


EVERYDAY USE · NEW IN 0.13.41

Bot updates on the clock


A bot whose **Updates** switch is on (Bots page) can post short updates to the station. They show under the clock in one large card, one update at a time.

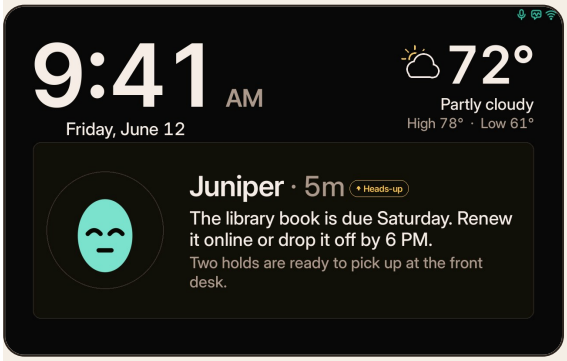

Juniper’s update: picture, name, age (5m), a Heads-up label, the update, and a detail line in a softer color.

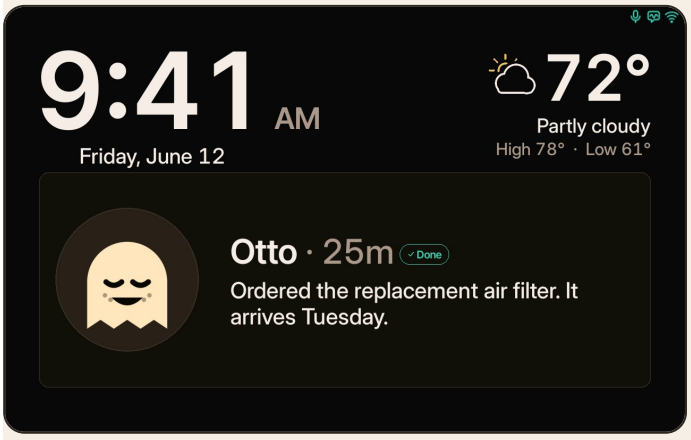

An update with no detail line, labeled Done.

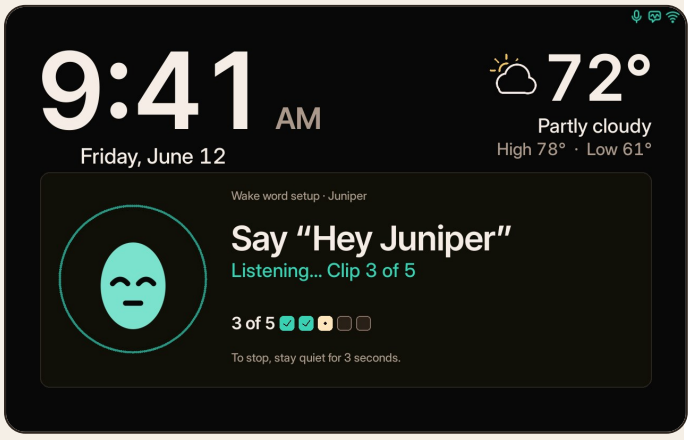

Wake word training in the same space: clip 3 of 5.

- **What the card shows:** the bot’s picture (or its first letter), its name, how long ago, and a label: **Needs you**, **Heads-up**, **Working on** or **Done**. Then the update, up to three lines, and up to two lines of detail. Anything longer is cut short with an ellipsis.
- **Rotation:** each update stays 20 seconds, then the next one comes up. Change it on **Display › Update rotation** (10 to 60 seconds). Anything that needs you comes first. There is no count in the corner.
- **Talking takes its place:** when you say a wake word, the conversation fills the same space. Wake word training uses it too. Updates come back when you’re done.
- **Quiet hours:** updates are hidden at night and are never read aloud. Say **“Hey Grok, pause updates”** to stop them for 10 minutes, or “resume updates” to bring them back.


BOTS

Add your bots

Grok is built in. Any other Grok bot you use can answer on the station too. Your **main bot** (gold star) is added first; it helps set up the rest.

Add a bot


1. Open **Bots** and press **Add bot**.
2. Give it a name and a short ID, and pick a voice. Every bot's key is made and kept on your always-on home computer, so there is nothing to choose.
3. Paste the **webhook URL** and **webhook key** from your bot. The station tests the connection (up to 3 minutes) and the row says Connected only after the test passes.

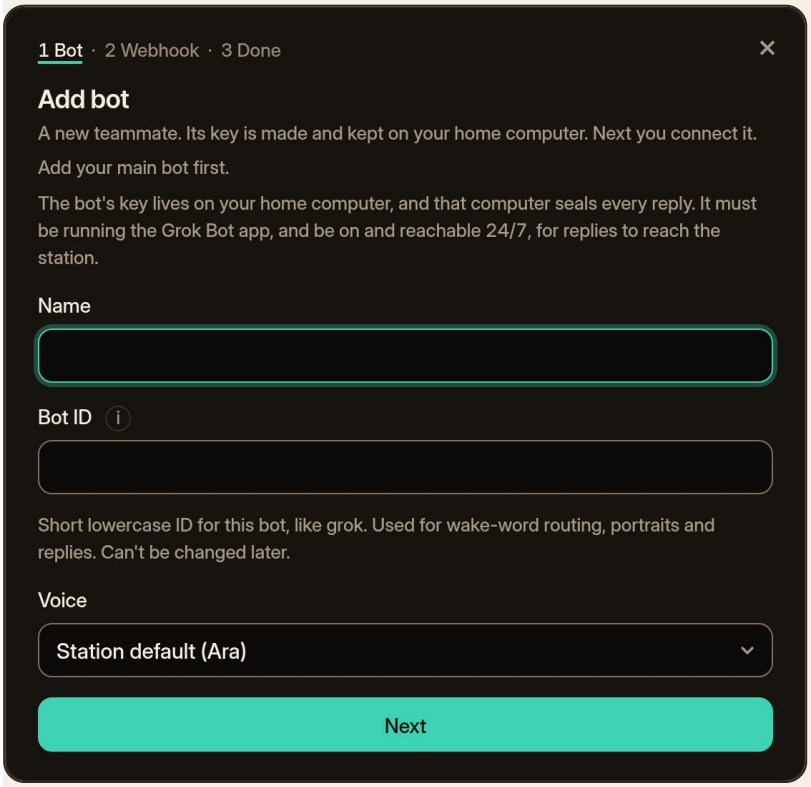

Add bot, step 1 of 3.

The Bots page

Each row shows the bot's picture (ring: teal online, red offline, gray checking), which home computer sends its replies, its wake word with an on/off switch, an **Updates** switch, and **Configure**. The switches line up in the same columns on every row. The ··· menu next to Add bot has Refresh avatars, Rescan bots and Revoke all bots. **Update** shows on a bot's row only when that bot needs it.

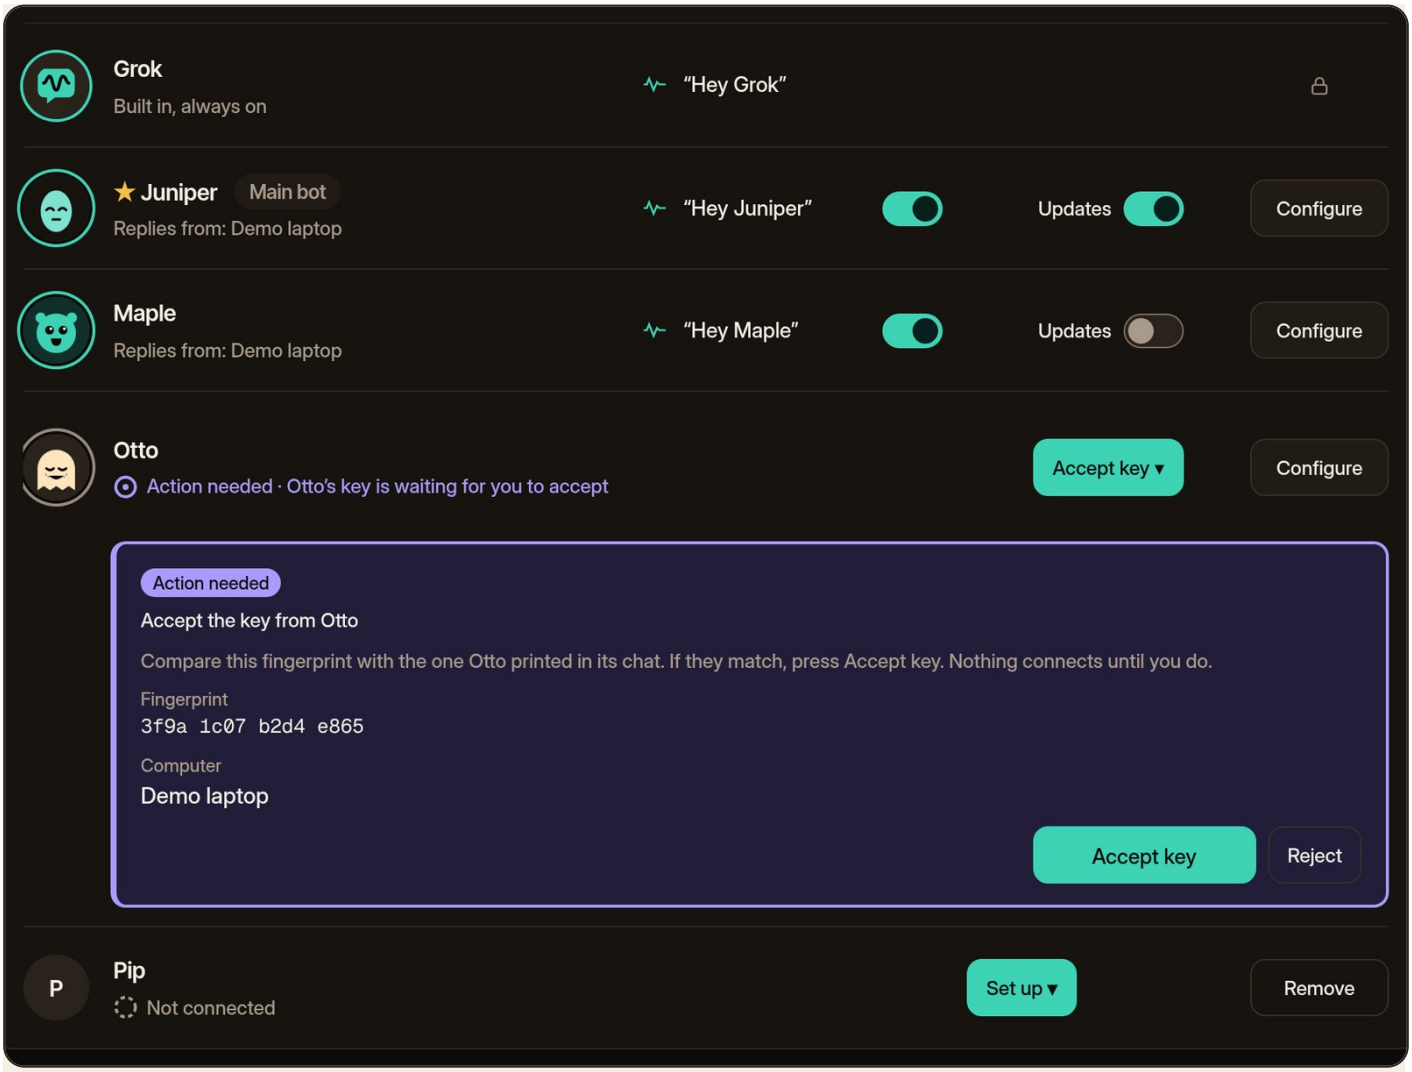


Juniper (main bot) with Updates on, Maple with Updates off, Otto waiting for you to accept its key, and Pip not connected yet.

BOTS · UPDATED IN 0.13.41


Set up the rest of your team

Say **"Hey Grok, update my team list"**, or open the ··· menu on Bots and choose **Rescan bots**. Your main bot sends the names of your other bots, and each new one gets its own row that says **Not connected**, with a **Set up** button.

1. **Set up.** Press **Set up** on the row. A panel shows exactly what your main bot will pass on: the station address, its fingerprint, the release and the install checks. Nothing is sent until you press **Confirm and send**.
2. **Say yes once.** The first time, the new bot shows a card in its own chat with the same values. Reply yes only if the station address and fingerprint match your station's Settings page. There is nothing to paste.
3. **Check the fingerprint.** The bot sends back its key and prints a fingerprint in its chat. The row says **Action needed**. Compare the fingerprint in the panel with the one in the chat, then press **Accept key**, or **Reject** if they differ.
4. **Paste the webhook.** The bot sends two links, Webhook URL and Webhook key. Paste the two values on the row. The bot is connected only after the test passes.

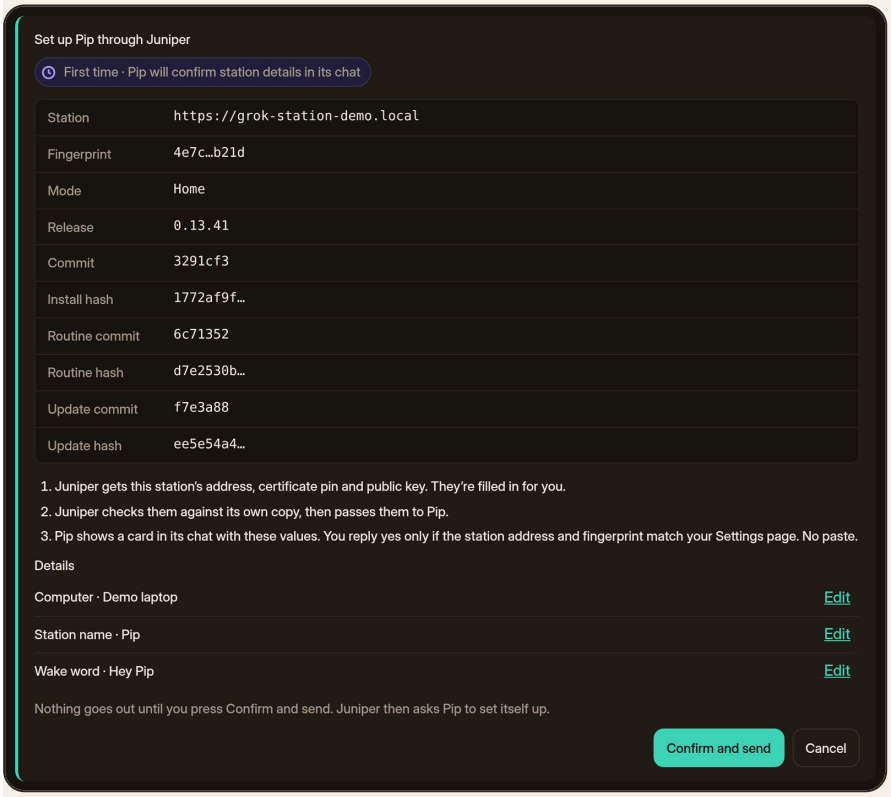

Set up for Pip through Juniper. Every value is shown before anything goes out.

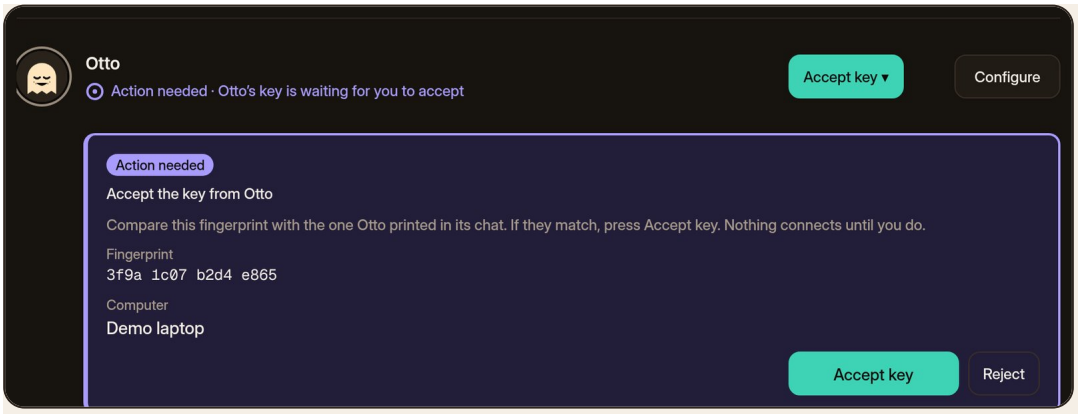

Accept key: the fingerprint (fake here) and the computer Otto set up on.

> If the key arrives without a fingerprint, the panel says "No fingerprint yet" and Accept key is off. Reload, or press Set up again. If a bot never sends its key back, the row says the setup timed out and the bot is not paired. Press Set up to try again.

Updates switch

Each connected bot has an **Updates** switch in its row. Every bot starts off; turn one on to see its updates on the clock (see "Bot updates on the clock"). While a change saves you'll see "Saving…", and if it can't save the switch goes back with "Couldn't save. Try again."

Voice tip

The **Voice tip** button in the Bots header reminds you of the phrase to say after adding a bot. Press Esc, tap outside or move away to close it.



The Voice tip open.


BOTS

Wake words

"Hey Grok" is always on. Each bot can have its own wake word, like "Hey Atlas", trained on the station from your own voice. No other computer is needed.

1. Say **"Hey Grok, train my wake word for Atlas"** (or "set up my wake word for Atlas"), or press **Train wake word** on the bot's row.
2. A training tile opens on the station. It counts down 3-2-1, chimes, and records five clips of you saying the phrase.
3. To stop, stay quiet for 3 seconds. Nothing from an unfinished clip is kept.
4. If the word isn't reliable yet, the station says which check failed, with the numbers. Say the same sentence again (or press **Train more**) to add five more clips, said clearly somewhere quiet, or pick a longer phrase.

In **Configure**, the Wake word tab turns the word on or off, trains more, changes the phrase, or removes it. Its score line counts the last 20 tries (for example "Last 20 tries: 80% recognized · 4 missed · 1 false wake"), and **Clear training** deletes that bot's recordings so you can start fresh. Other tabs: **Voice and avatar**, **Connection** (which home computer replies) and **More** (set as main bot, delete bot).

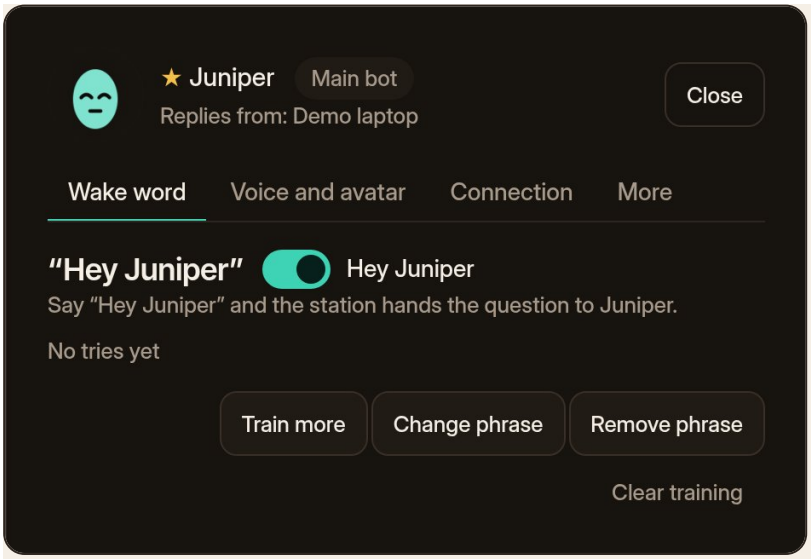


Configure for Juniper, Wake word tab.

A wake word that sounds too much like another one gets a warning with suggestions. An exact duplicate is refused.

Lights and home devices

The **Integrations** page connects the station to lights and switches on your home network. It all runs on the station, nothing goes to the cloud. Voice control is off until you turn on **Voice home control** (it asks for your admin password).

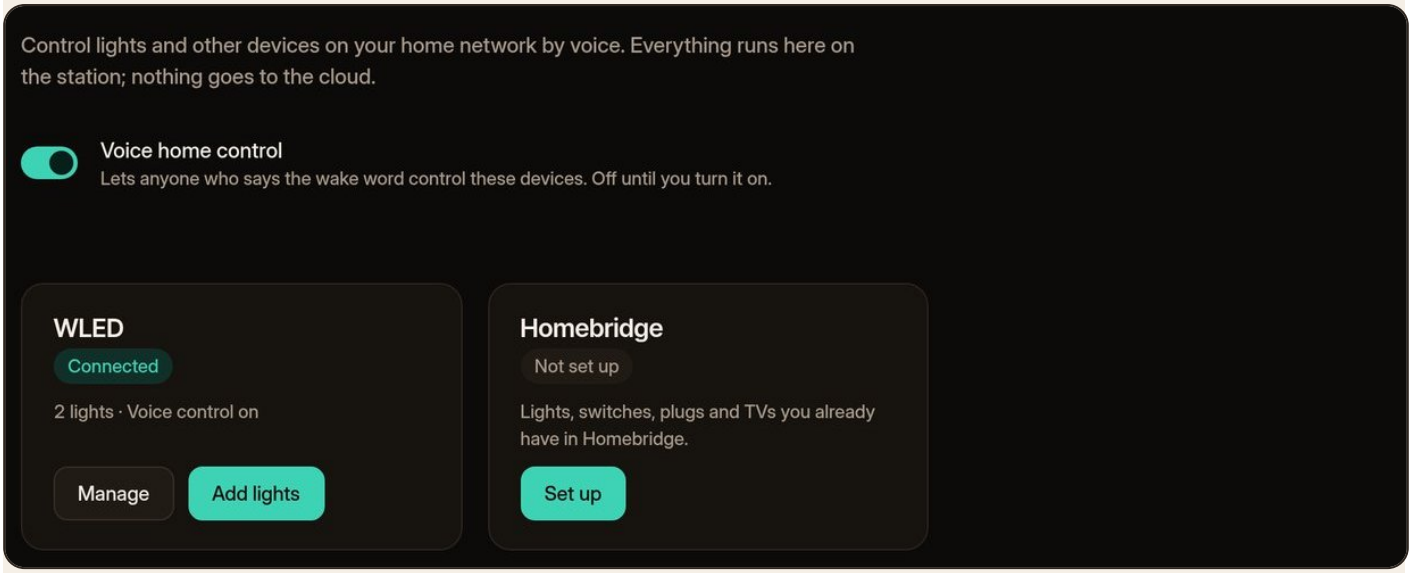


Integrations with two WLED lights saved and Voice home control on.

WLED lights


1. Under WLED, press **Set up** (later, **Add lights**).
2. Let the station find lights on your network, or type an address.
3. Name each light, then **Test** it.
4. Say “turn off the porch light”, “set the porch to 40 percent” or “set the porch to blue”. A short tone means done or failed.

Homebridge

1. Under Homebridge, press **Set up** and type your Homebridge address.
2. In Homebridge, make a login for Grok Station with Admin turned off. Enter it here and the station checks it.
3. Pick the lights, switches, outlets, fans and TVs to control (on and off only). Locks, cameras, garage doors and thermostats are never offered.
4. If a name sounds like a bot or another device, pick a new voice name.

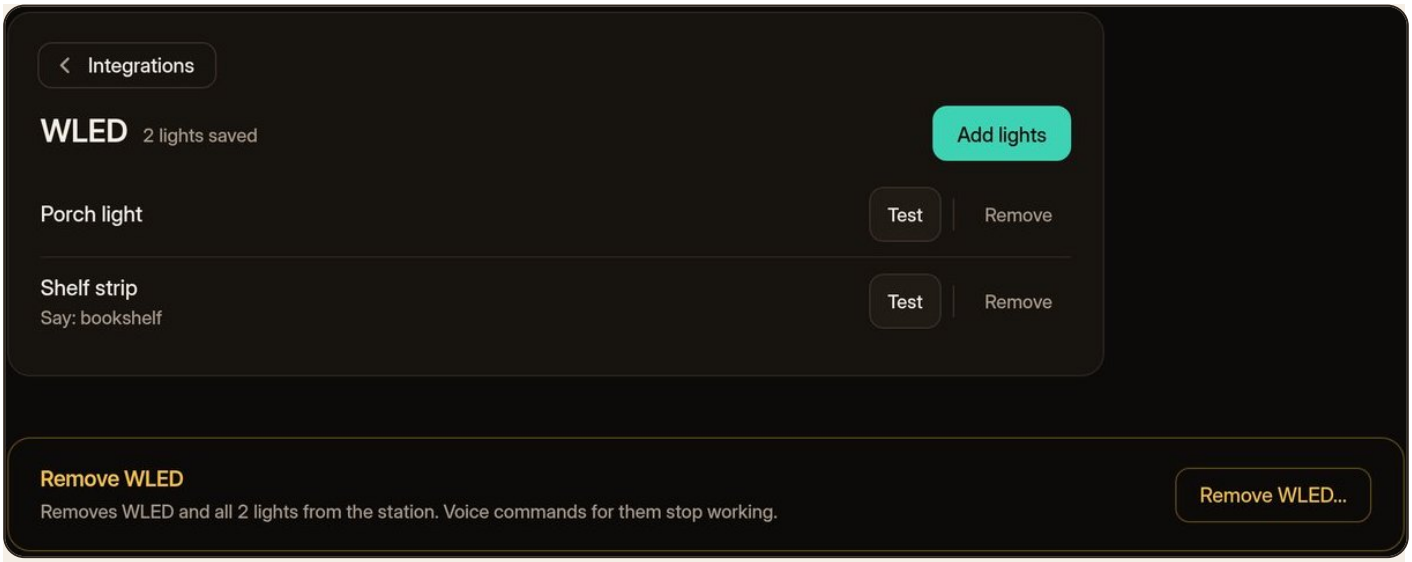

WLED: test or remove each light. The back button returns to Integrations.

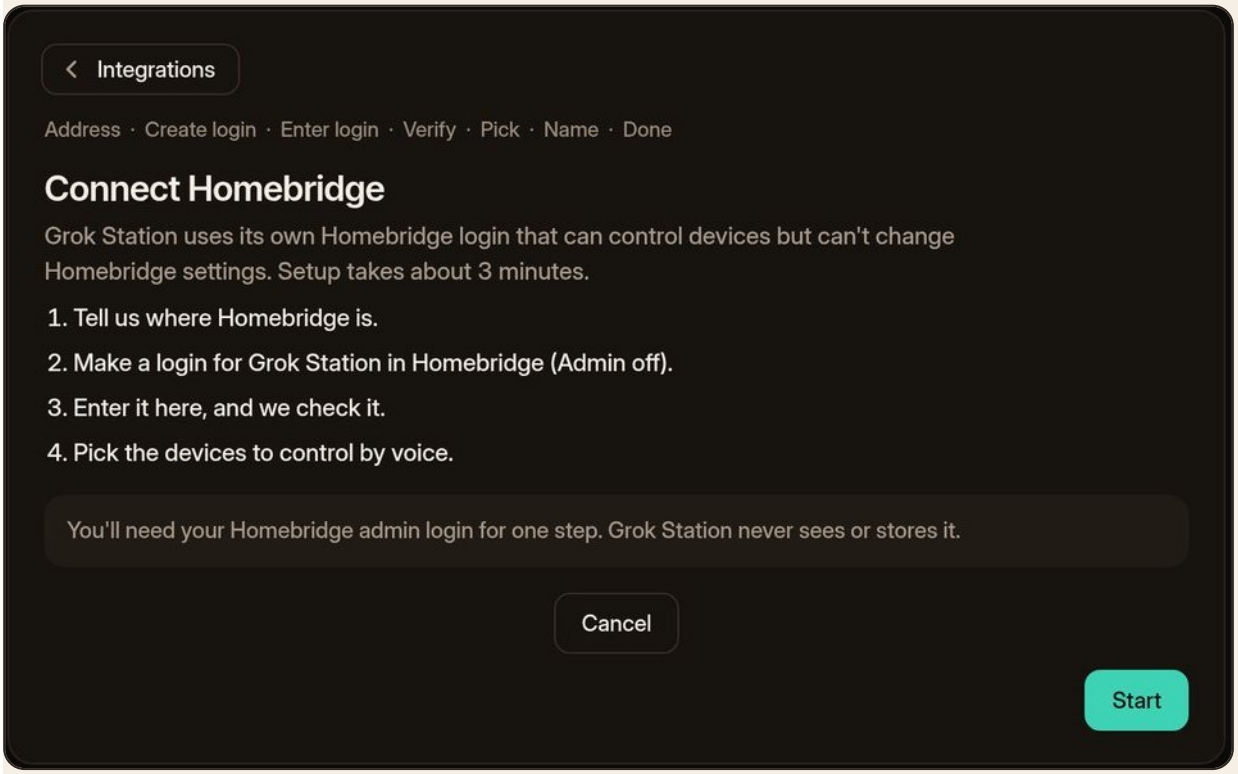


Connect Homebridge: about 3 minutes.

SETTINGS

Privacy, Audio and Display


Privacy

Passwords, keys, tokens, SSNs and card numbers are always blocked from replies. Turn on **Block personal info in replies** to also block household names, emails, phone numbers, addresses, IPs and host names. A blocked answer ends with a short message on the station.

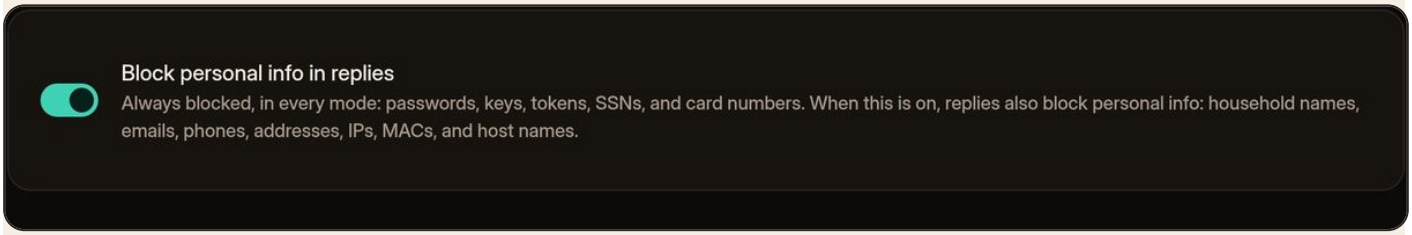

Audio


1. Pick the **microphone and speaker** and press **Play test sound**.
2. Adjust the mic boost if the station doesn't hear you well.
3. Choose the alarm, listen and end sounds, and the **waiting tone** that plays while a bot is thinking.
4. Leave the **microphone reset** switches on so a stuck speakerphone fixes itself.

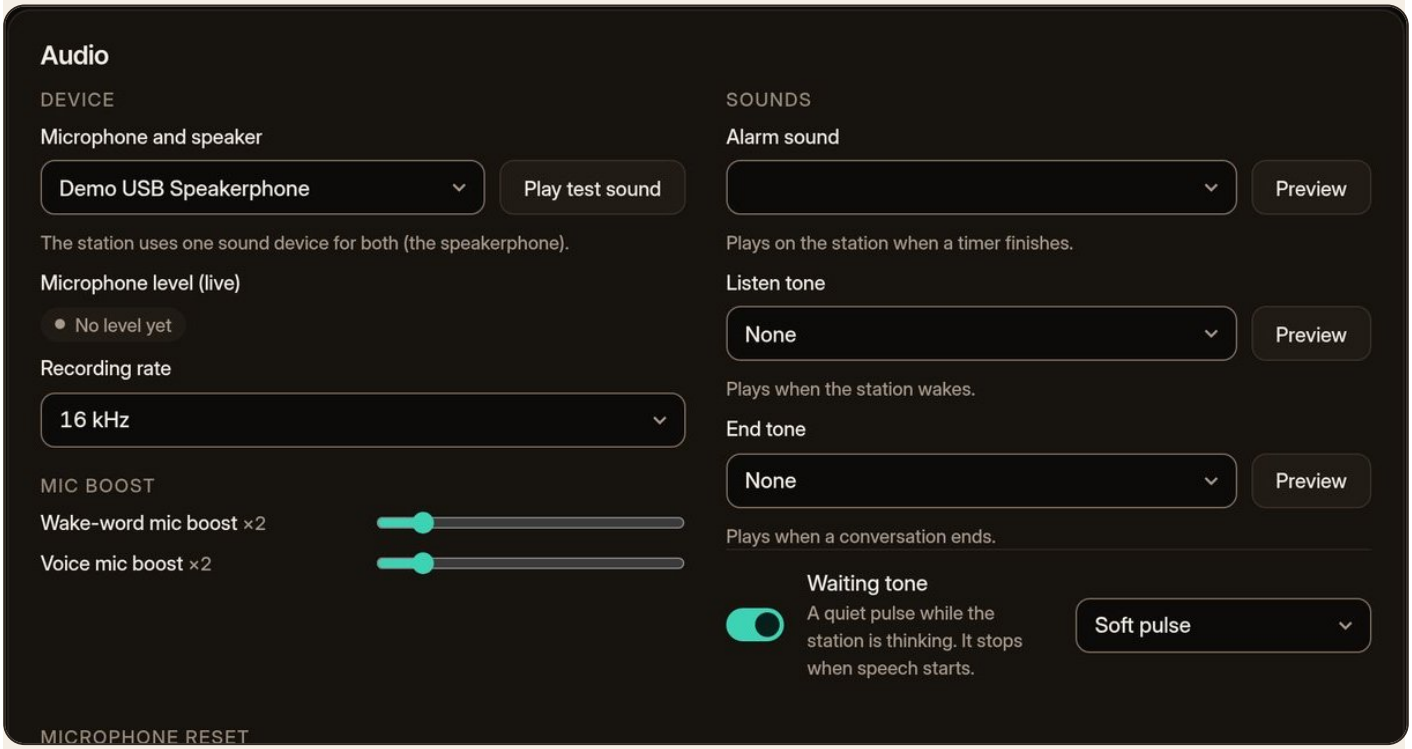

Display

1. Turn on the **night clock** and set its hours.

2. Under **Timing**, set how long messages and score cards stay up, and **Update rotation**: how long each bot update stays on the card (20 seconds by default).
3. Under **Brightness**, choose Schedule, Sunrise and sunset, or a light sensor, with day and night levels.
4. Check the live preview on the right, then press **Save**. The page warns you if you leave with unsaved changes.

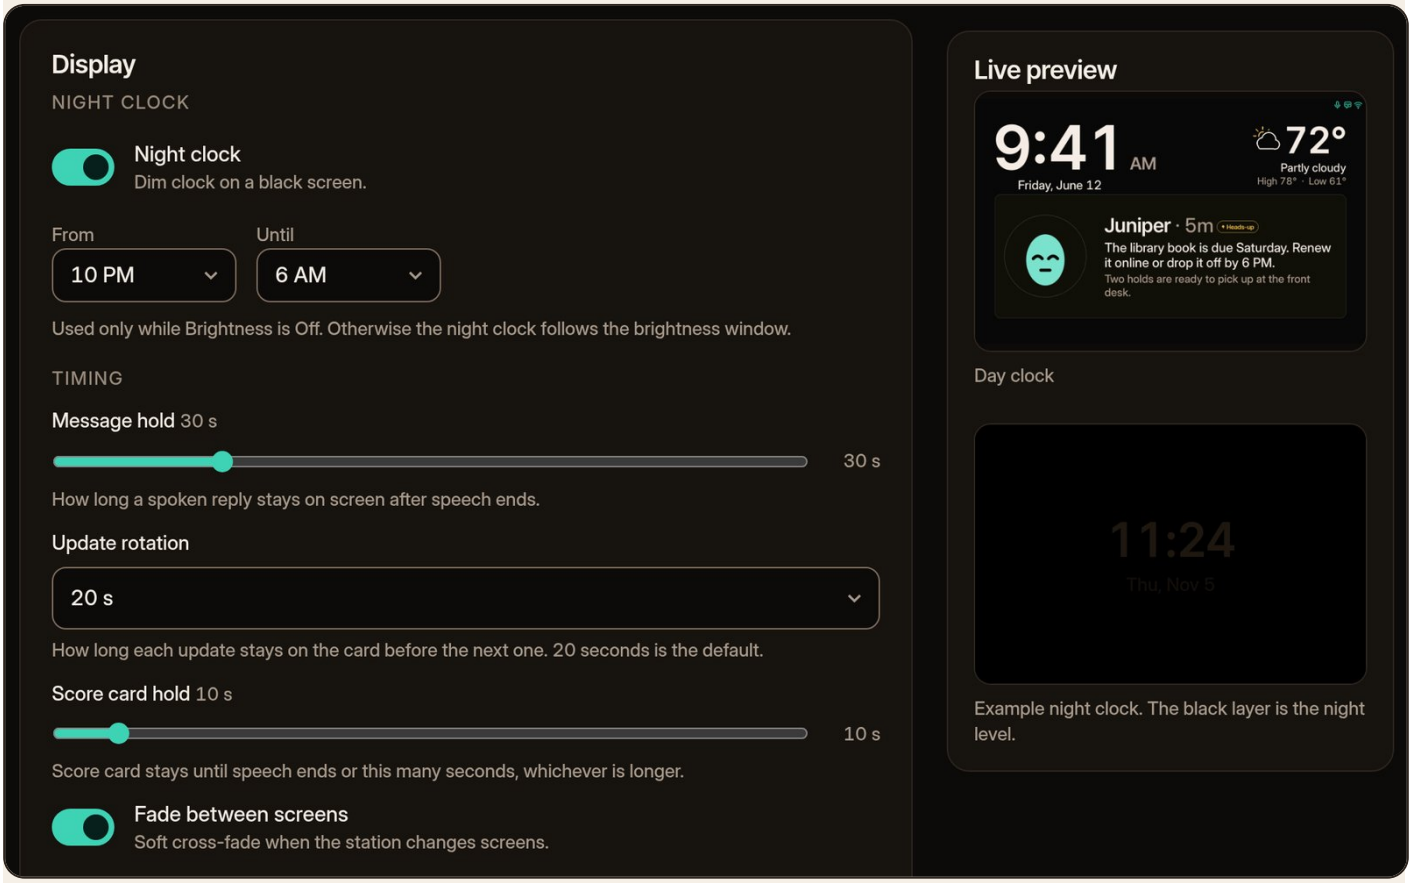


SETTINGS

Time, Network, xAI API and Updates


Time and location

The time zone and your town or ZIP drive the clock, the weather on the station, sunset dimming, and Grok's time and weather answers. Type a town or ZIP, press **Find**, then **Save**. Use **Change location** to edit it later.

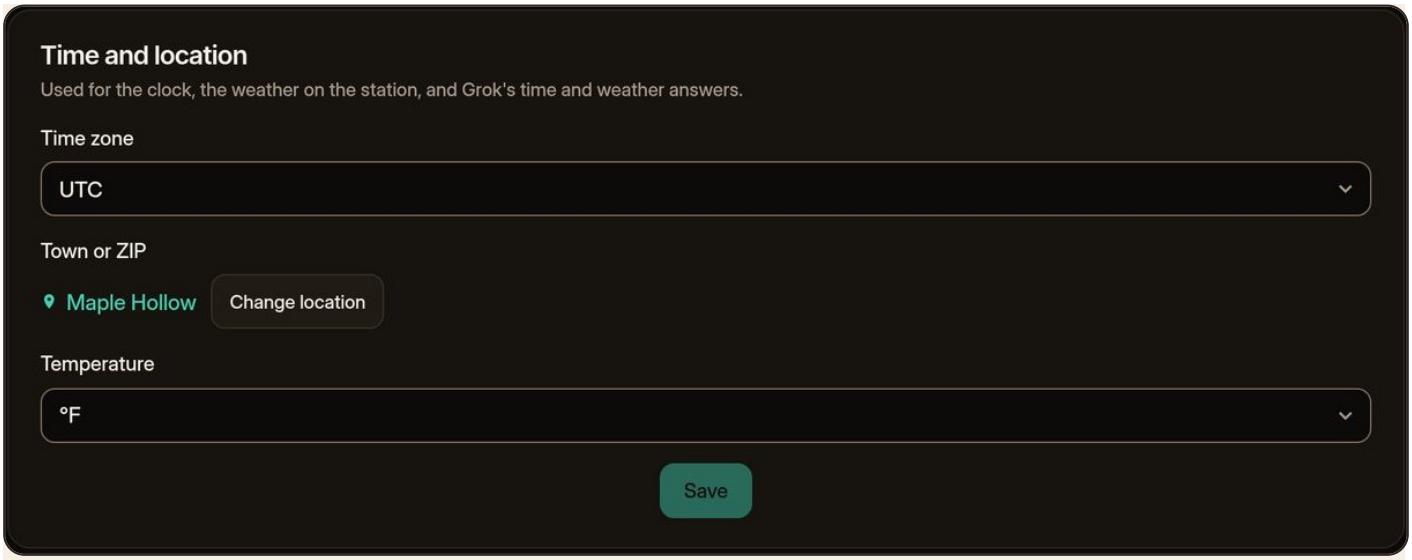

Network

Shows the connection and the station's address. **Scan** finds Wi-Fi networks to join, and you can rename the station (its `.local` address follows). If joining a new network fails, the station goes back to the old one.

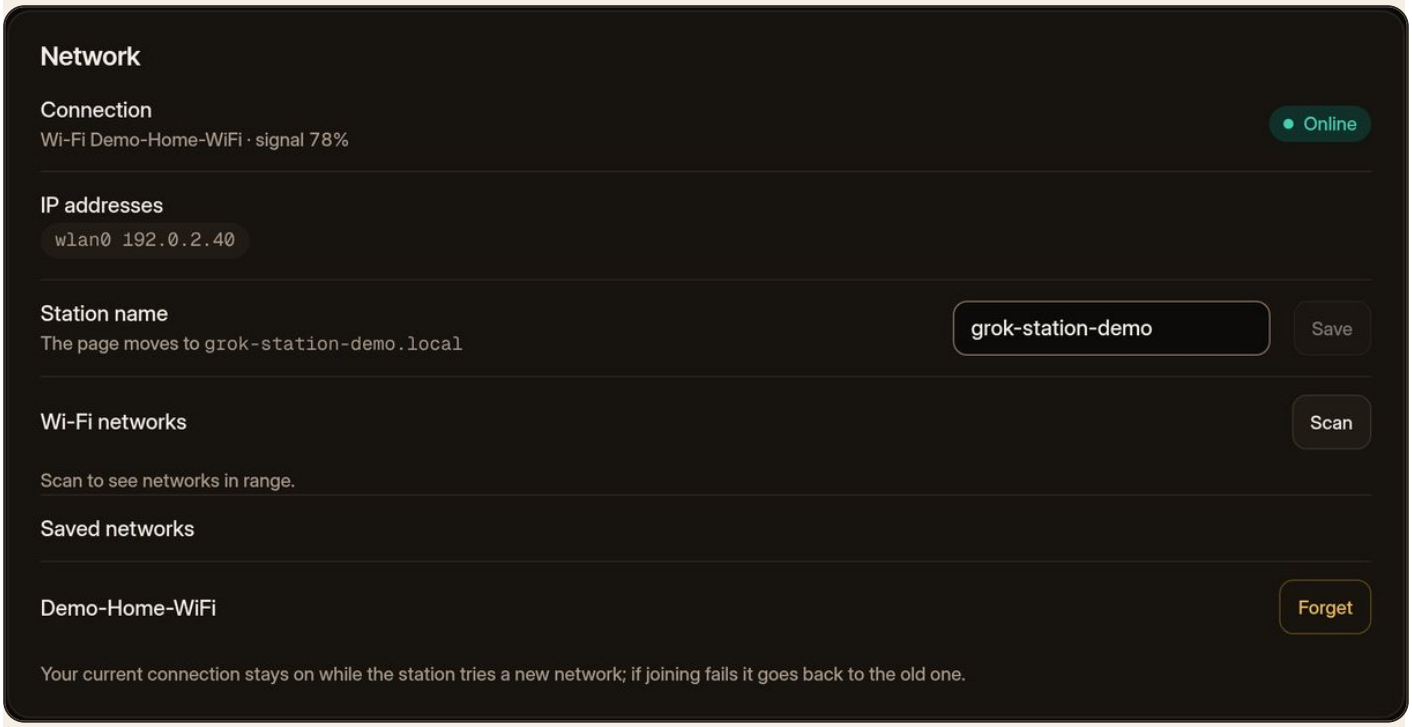


xAI API

Shows whether your key is set. **Replace key** swaps it; the key itself is never shown.

Updates

Check now looks for a newer version, and **Update** appears only when there is one. **Daily check** only checks, it never installs. **View update log** shows why an update failed. After a station update, open Bots and press **Update** on any bot that shows it, starting with your main bot.

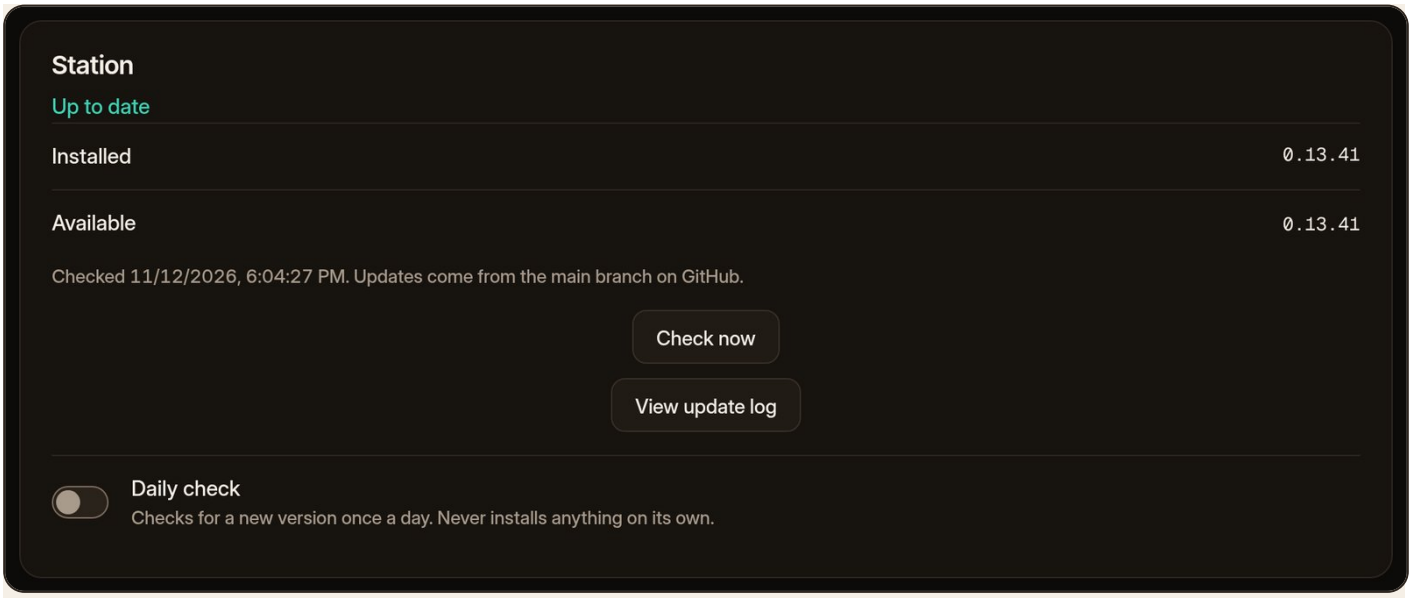


SETTINGS

System

The System page is grouped into sections you open and close: **Status**, **Password and security** and **Troubleshooting**, with **Reboot station** and **Run setup again** in a Danger zone at the bottom.



Status: temperature, uptime, memory, disk, services and network. A service whose state can’t be read shows “unknown”.

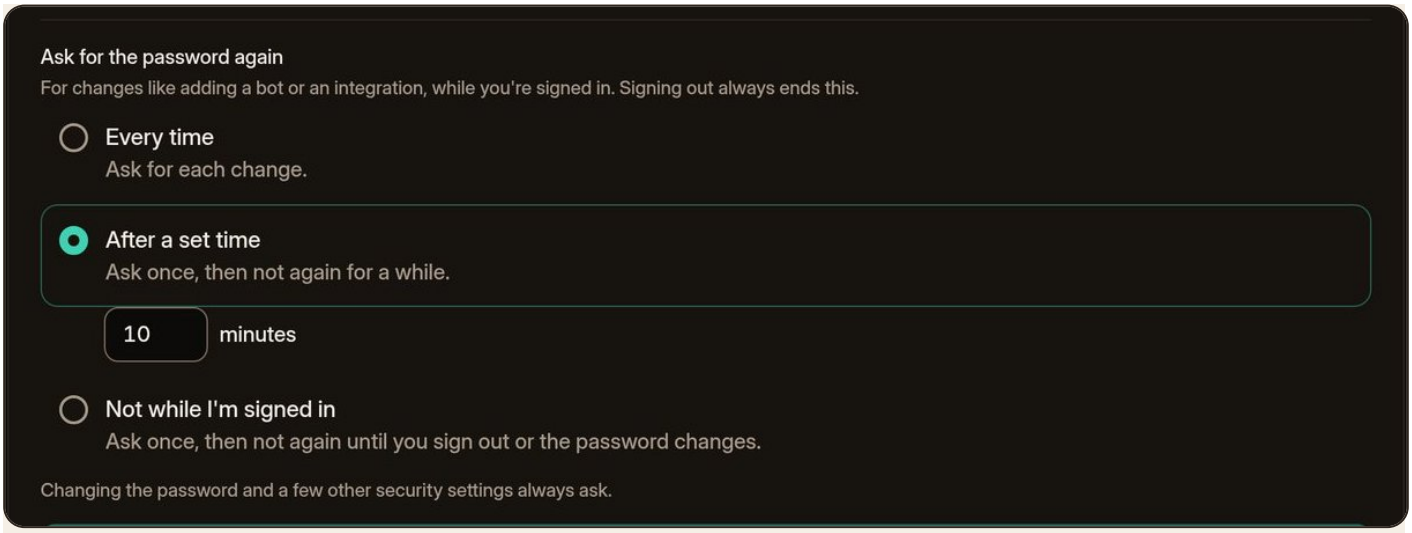


Password and security: choose when the password is asked again.

Ask for the password again

Some actions (like turning privacy off) ask for your password again. Choose how often:

- **Every time.**
- **After a set time**, 1 to 120 minutes (10 by default).
- **Not while I'm signed in.** You stay signed in until you sign out or the password changes, and only a password change or a factory reset asks again.

Allowed networks (also under Password and security) lets up to 4 private networks, such as your VPN, open this page and send bot replies. It is empty by default, and saving it asks for your password.

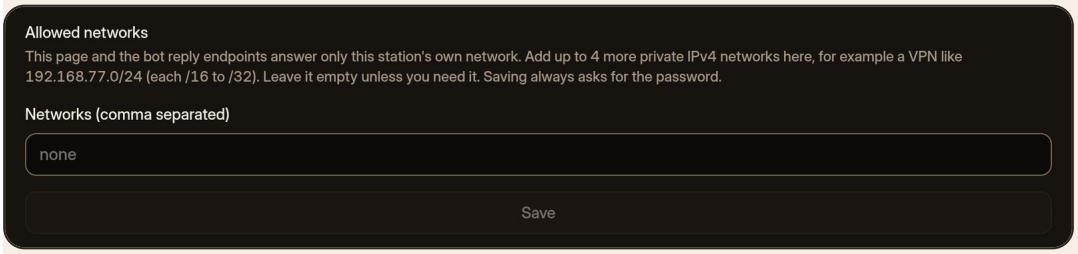

Allowed networks, empty by default. The example in the help text comes from the station itself.

Troubleshooting has the station logs and **Restart voice**. The **security certificate** fingerprint lets you check the browser warning is really your station.

ANYWHERE

On your phone

The admin page works on a phone. The menu becomes four tabs at the bottom: **Home**, **Bots**, **System** and **More** (every other page, plus Sign out). Pop-ups like the Voice tip open as a sheet from the bottom with a Close button. On the Bots page each row stacks onto separate lines, and the values you can edit sit in a **Details** list.

REFERENCE

Features at a glance

FEATURE	WHERE TO FIND IT	SINCE
Hey Grok, built-in voice assistant	Always on; Bots	**Before 0.1.0***
Follow-up questions without the wake word	Voice	**Before 0.1.0***
Ask another bot (“Hey Grok, ask …”)	Voice	**0.2.0**
Kitchen timers (up to eight)	Voice; station screen	**0.3.0**
Screen dimming (schedule, sunset, light sensor)	Display	**0.4.0**
Ready-to-boot card image	README	**0.5.0**
Import your team list from your main bot	Voice; Bots	**0.6.0**
Cards on the screen (recipe, sports, calendar, home)	Station screen	**0.7.0**
Key on your home computer (every bot since 0.13.37)	Bots › Add bot	**0.8.2**
Main bot (gold star)	Bots › Configure › More	**0.8.11**
View update log	Updates	**0.8.12**
Setup hotspot for Wi-Fi	Station screen	**0.9.2**
Wake words trained on the station	Bots › Train wake word	**0.10.0**
“Connect me with …” a bot	Voice	**0.10.3**
Bot picture and online ring	Bots	**0.12.7**
Waiting tone	Audio	**0.12.7**
“Goodbye” ends a conversation	Voice	**0.12.0**
Automatic microphone reset	Audio	**0.12.2**
Bot status and tiles in the card space under the clock	Station screen	**0.12.16**
WLED lights and Voice home control	Integrations	**0.13.0**
Homebridge devices	Integrations	**0.13.1**
Bots can check calendar, reminders, weather	Voice	**0.13.1**
Grok status icon and Grok line	Station screen; Home	**0.13.2**
Train a wake word by voice	Voice; station tile	**0.13.5**
Ask for the password again (3 choices)	System › Password and security	**0.13.8**
Team setup from your main bot	Bots	**0.13.9**
Voice tip button	Bots header	**0.13.9**
Bot updates on the clock screen; pause by voice	Station screen; Voice	**0.13.10**
Set up each bot from its own row	Bots › Set up	**0.13.11**
Updates switch for each bot	Bots	**0.13.11**
“Set up my wake word for …”	Voice	**0.13.11**
Update rotation setting	Display › Timing	**0.13.21**
Clear training and the last-20 score	Bots › Configure › Wake word	**0.13.22**
Allowed networks (VPN access)	System › Password and security	**0.13.29**
Rescan bots	Bots › ⋯ menu	**0.13.30**
Confirm and send, then Accept key with a fingerprint check	Bots › Set up	**0.13.33**
One update card at a time	Station screen	**0.13.41**
Privacy filter for replies	Privacy	**Before 0.1.0***
Sign out	Bottom left; More on phones	**Before 0.1.0***

* Before 0.1.0: part of the station before it had version numbers (git history, October 19, 2026).

RELEASE NOTES

What's new in 0.13

VERSION	WHAT CHANGED FOR YOU
0.13.41 **Nov 12, 2026**	**One update at a time.** Bot updates show in one large card, the same size as the wake word and training panels: the bot's picture on the left, its name, how long ago and a label such as Heads-up, then up to three lines and up to two lines of detail. **Display › Update rotation** sets how long each one stays (20 seconds by default). The count in the corner and the Paused label are gone; a conversation takes the card's place and updates come back when it ends. The clock and weather sit higher, with the same space above them as below the card. **Cards on request.** Asking for a score, a recipe, your calendar, home readings, the weather, the time or a conversion brings up that card, and asking to see one that is already up keeps it on screen while the bot answers. **Setup timeout.** If a bot never sends its key back after the request reached it, the row says the setup timed out and the bot is not paired. **After installing,** press Update on your main bot.
0.13.40 **Nov 10, 2026**	If a bot's key arrives without a fingerprint, the Accept key panel says "No fingerprint yet" and Accept key is dimmed and sends nothing: reload, or press Set up again. The Updates switch now lines up with the wake word switch.
0.13.39 **Nov 10, 2026**	After you accept a bot's key, the Bots page no longer asks you to set that bot up again or copy instructions. The Accept key panel also shows the fingerprint for a bot you removed and set up again. **After installing,** press Update on your main bot.
0.13.38 **Nov 10, 2026**	The Bots page buttons work again: Refresh avatars, Rescan bots, Add bot and Revoke all bots. A team list you asked for by voice is no longer refused when your main bot answers after the conversation ends.
0.13.37 **Nov 10, 2026**	**Every bot keeps its key on your always-on home computer.** Add bot and Configure no longer ask where the key lives. A bot set up the old way (key on its own computer) stops answering until you press Set up again; its row says so. **Clearer setup.** A bot waiting for you says "Action needed" with an Accept key button. The Set up test waits up to 3 minutes, and the row says Connected only after it passes. Set up asks before replacing a request that is still open. Remove forgets a bot's setup, so it comes back as new after Rescan bots. **After installing,** press Update on each bot.
0.13.36 **Nov 10, 2026**	What you type into the webhook URL and key fields on the Bots page no longer disappears when the page refreshes.
0.13.35 **Nov 10, 2026**	Your main bot shows Update until it runs this exact release, and Set up on another bot says "Update the main bot first." until it does. **After installing,** press Update on the main bot first, then on the others.
0.13.34 **Nov 10, 2026**	The admin page opens again after an install or update (0.13.33 could leave it restarting). A bot Update that gets no reply now ends after 10 minutes with "Update failed: No reply within 10 minutes." and the Update button back.
0.13.33 **Nov 10, 2026**	**New first-time setup.** Set up on a bot that isn't connected is Confirm and send, then one yes in that bot's own chat. The bot sends back its key and computer name. Compare the fingerprint on the row with the one in the bot's chat and press Accept key (or Reject), then paste the webhook URL and key from the two links the bot sends. The bot is connected only then. **After installing,** press Update on each bot.
0.13.32 **Nov 9, 2026**	A bot's update status is no longer blocked when its ID happens to contain a run of digits that looks like a Social Security number. Real ones in answers are still blocked.
0.13.31 **Nov 9, 2026**	When a trained wake word isn't good enough, the station says which check failed, with the numbers, and what to do: record 5 more clips somewhere quiet, or choose a longer phrase.
0.13.30 **Nov 9, 2026**	**Rescan bots.** The ⋯ menu on Bots asks your main bot for the team list without speaking; new names show up as Not set up. Turning off Block personal info applies to the very next reply.

0.13.29 **Nov 9, 2026**	**Allowed networks.** System › Password and security can list up to 4 private networks (a VPN, for example) that may open the admin page and send bot replies. It is empty by default and saving it asks for your password. Bots on a home computer can post again after another program left cache files in the helper's folder, and a refused post now says why.
0.13.28 **Nov 6, 2026**	A bot update is accepted for 10 minutes, the same wait as the Bots page, and pressing Update again on a bot that already has the release finishes cleanly.
0.13.27 **Nov 6, 2026**	Display settings are grouped into Night clock, Timing, Brightness and Units. Night clock and Fade save with the rest of the page, and the page warns you if you leave with unsaved changes. A refused station post says why: no key, not paired, Updates off, or station not reachable.
0.13.26 **Nov 6, 2026**	First-time Set up can send again (it stopped at "bad request"). The wake word and Updates switches stay lined up on the right, even with a long phrase.
0.13.25 **Nov 5, 2026**	Confirm and send says why a send failed, also after Try again. A problem reaching your main bot no longer looks like the station itself is offline.
0.13.24 **Nov 5, 2026**	Pressing Update works again for bots that last updated on 0.13.22.
0.13.23 **Nov 5, 2026**	Pressing Update no longer stops at "The bot's instructions don't match this release" when the only difference is your name.
0.13.22 **Nov 5, 2026**	**Clear training** on a bot's Wake word tab deletes that bot's recordings after you confirm. The score line counts only recordings since then, for example "Last 20 tries: 80% recognized · 4 missed · 1 false wake".
0.13.21 **Nov 5, 2026**	Bot updates on the clock get two bigger tiles with the bot's picture (or its first letter), sized to the screen, with a soft fade when they change. **Display › Update rotation** (10 to 60 seconds, 20 by default) replaces Card rotation. The tiles were replaced by one card in 0.13.41. This release includes the 0.13.20 changes, which were not released on their own.
0.13.19 **Nov 5, 2026**	Fixes only, nothing new on screen: bots still on 0.13.17 can update again.
0.13.18 **Nov 5, 2026**	Bot updates work like short emails: a label, a headline of up to 60 characters and an optional detail of up to 90. A new update replaces the same kind from the same bot, updates expire after 24 hours, and a Needs you stays until it is cleared.
0.13.17 **Nov 5, 2026**	**No-paste Set up.** Confirm and send shows the values your main bot will pass on, then asks it to set the bot up. A bot setting up for the first time shows a confirm card in its own chat; answer yes. The row says what it is waiting for: your main bot, the bot to confirm, the bot to finish, or webhook details. **After installing,** press Update on each bot.
0.13.16 **Nov 5, 2026**	**Set up through your main bot.** Pressing **Set up** on a bot's row sends the setup request through your main bot; the panel and the waiting line name that main bot. Wording is clearer, and the waiting line wraps to two lines instead of cutting off. Failed and expired rows say "Send the request again, or enter the details yourself." A row keeps its setup state when the list refreshes.
0.13.15 **Nov 1, 2026**	**Fixed bot-row columns.** Every row lines up the same way, so a long wake word no longer pushes Configure sideways; Configure stays last on the right. The caption under the Updates switch is gone; the switch shows on or off by itself. **Sent setup rows.** After you send, the row says the request was sent and shows the webhook details filling in when the bot replies, with **Send request again** and **Enter details myself**.
0.13.14 **Nov 1, 2026**	**Updates switch.** The switch and the word "Updates" are one button, so a tap anywhere on either turns a bot's updates on or off. Rows keep the same height whether updates are on or off, and Configure stays in the same place. A row with updates off says "Updates off". While a change saves you'll see "Saving…", and if it can't save the switch goes back with "⚠ Couldn't save. Try again."

0.13.13 **Oct 31, 2026**	Bot update switches, automatic avatars and the voice list now save properly on the station; before, a change could quietly fail to stick. If deleting a wake word fails, the admin page now says so and tells you the word is still saved.
0.13.12 **Oct 30, 2026**	A card a bot sends right after its spoken answer (a recipe, for example) now shows on the station instead of being dropped. Two trained wake words can now sound alike, as long as the station can tell them apart. On a phone, **Paste values**, **Resend** and **Remove** now sit side by side on one line. Buttons show a clear outline again when you move to them with the keyboard.
0.13.11 **Oct 30, 2026**	**Set up each bot from its own row.** The separate Set up bots section and the "not connected" callout are gone, and so is Configure all. A bot that isn't connected has a **Set up** button; it opens a panel showing exactly what will be sent, and nothing is sent until you press **Send setup**. After you send, the row shows **Paste values**, **Resend** and **Remove**. **Updates switch.** Each connected bot has an Updates switch with a line saying what it posts. Every bot starts off. **Wake word by voice.** Say "Hey Grok, set up my wake word for <bot>" to start training. **On a phone,** rows stack and the values you can edit sit in a Details list. **After installing,** press Update on each bot.
0.13.10 **Oct 30, 2026**	**Bot updates on the clock screen.** Three tiles show at a time ("Updates · 1 to 3 of 4") and rotate every 20 seconds (one card at a time since 0.13.41). Anything that needs you is pinned first. Updates are hidden at night and never read aloud. Every bot starts off; turn it on with the Updates switch on Bots (added in 0.13.11). **Pause by voice.** Say "Hey Grok, pause updates" or "resume updates". A pause ends on its own after 10 minutes. If the station can't be reached, you'll hear "I couldn't reach the station, so updates aren't paused." (or "...so updates are still paused.") **Recipe tile.** A step's timer is offered once per recipe, and a "yes" said while the offer is still being spoken is ignored. A plain timer you set during a step becomes the step timer ("Step 3 · 10 min"). The dish name shows exactly as written. If three timers ring together, each keeps its name, and "stop" stops them all. **After installing,** press Update on each bot.
0.13.9	Set up bots list for your team (replaced by per-row setup in 0.13.11). Voice tip button in the Bots header. Training tile has no buttons and stops after 3 seconds of quiet. System page grouped into sections with a Danger zone. A stuck microphone resets itself after about a minute. "Not while I'm signed in" keeps you signed in until you sign out. Back buttons on the WLED and Homebridge pages. Restarting the station from the admin page keeps you signed in. If a bot's picture can't load, a letter stand-in shows instead of a blank space.
0.13.8	"Train my wake word for ..." starts training by itself with a 3-2-1 countdown and five clips. Update all moves into a callout; Refresh avatars and Revoke all bots move to the ⋯ menu. Three choices for asking the password again.
0.13.7	Homebridge address shows under Connected. Adding Homebridge devices is shorter, with a Voice names step only when a name clashes. Security updates.
0.13.6	Two safety fixes, nothing new on screen.
0.13.5	Train a bot's wake word from the station or the Bots page. Clearer warnings when a light's name sounds like another. Homebridge device groups collapse.
0.13.4	Fewer false microphone warnings. Homebridge with many accessories works.
0.13.3	A clear screen when Homebridge needs accessory control turned on.
0.13.2	New Grok status icon on the station and a Grok line on Home.
0.13.1	Homebridge devices by voice. One Voice home control switch for everything. Bots can look up calendar, reminders and weather.
0.13.0	New Integrations page with WLED lights. A bot's status moves into its picture's tooltip. Blocked answers end with a short message.

After a station update, open Bots and press **Update** on any bot that shows it, starting with your main bot. Since 0.13.35, Set up waits until the main bot runs the current release.

HELP

Troubleshooting basics

IF THIS HAPPENS	TRY THIS
The admin page won't open	Use the number address shown on the station instead of the `.local` one. If you're on a VPN or another network, the README explains how to reach it over SSH.
The browser warns about the certificate	Expected: the station makes its own. Compare the fingerprint under System › Password and security, then continue.
Forgot the admin password	Use **Forgot your password?** on the sign-in page.
The station doesn't answer "Hey Grok"	Check Home: "Ready to talk" and the microphone level. Check the Grok icon; amber means the internet or Grok can't be reached. Try Audio › Play test sound.
The mic icon shows a problem	Leave the microphone reset switches on in Audio, or use the Reset button there.
A bot doesn't reply	Its ring is red: hover its picture for the reason. Make sure the home computer that sends its replies is on.
A bot shows "Helper out of date"	Press **Update** on that bot's row.
Set up says "Update the main bot first."	Press **Update** on your main bot, wait until it shows up to date, then press Set up again.
A row says the setup timed out, or "No fingerprint yet"	The bot's key never arrived. Make sure its home computer is on, then press **Set up** again.
Bot updates don't show on the clock	Turn on that bot's **Updates** switch on Bots. Updates are hidden at night and while you're talking, and "pause updates" stops them for 10 minutes.
The screen stays bright at night	Display › Brightness: choose Schedule, Sunrise and sunset, or a light sensor. Sunset needs a location on Time and location.
A light command does nothing	Turn on Voice home control on Integrations, then Test the light.
An update failed	Updates › View update log shows why. The station keeps running the old version.