UN R174 (version 1.1.0)

Consolidated text of this version, rendered by Certivity for the hackathon. Cite pages of THIS file: the page number is printed at the bottom of every page.

Role in the hackathon: latest version.

0. Introduction

0.1. For the original version of UN Regulation No. 174:

0.1.1. During the seventy-third session of the Working Party on Passive Safety (GRSP) held in May 2023, it was decided to split UN Regulation No. 16 into three UN Regulations:

(a) safety-belts and restraint systems (components);

(b) safety-belts and child restraint systems installation (vehicle);

(c) safety-belt reminders (vehicle).

0.1.2. UN Regulation No. 174 consists of the specific requirements and approval process of a vehicle type with regard to its safety-belt reminders. The requirements are derived from UN Regulation No. 16 as amended by the 09 series of amendments. From a technical point of view, the requirements are identical. Therefore, it is important to define clear transitional provisions in the updated UN Regulation No. 16 as amended by the 10 series of amendments, explaining the equivalence between approvals issued according to this UN Regulation and UN Regulation No. 16 as amended by the 09 series of amendments.

0.2. For the 01 series of amendments:

0.2.1. The amendment of paragraph 5.1.3. aims to clarify which folding seats are exempt from the SBR requirements. The wording "fitted in the access passages of vehicles of category M_2 or M_3" means to cover folding seats located in the entry and exit areas of buses and coaches, as well as folded or stowed seats for occasional usage in the aisle areas of such vehicles. The wording "fitted to N_1 or N_2 for the safe ingress and egress of the driver via the front passenger door" means to cover folding seats that can typically be found in delivery vans, and where this front passenger door is frequently used by the driver to safely exit the vehicle (on the vehicle side away from traffic).[1]

[1] As defined in the Consolidated Resolution on the Construction of Vehicles (R.E.3.), document ECE/TRANS/WP.29/78/Rev.8 - https://unece.org/transport/vehicle-regulations/wp29/resolutions

0.2.2. The first level warning shall be activated whether the transmission is in neutral position or not. Hence Annex 3, 1. (c) is deleted.

0.2.3. For vehicles equipped without conventional devices to activate propulsion systems, "vehicle master control switch" definition is harmonized with other regulations, such as UN Regulation No. 159 and revised "master control switch" to "vehicle master control switch" in the text.

0.2.4. In the case of a remotely activated vehicle master control switch, the first cycle of the initial warning may already have ended before the driver enters the vehicle. The addition to paragraph 5.2.3.1. ensures that a driver will still receive the initial warning when entering the vehicle.

0.2.5. During an emergency call, it should be possible to have a clear voice communication inside the vehicle without additional audible warnings.

0.3. For supplement 1 the 01 series of amendments:

0.3.1. The Regulation is amended to account for vehicles of category X^1. Vehicles of category Y^1 are not in the scope of this Regulation.

[1] As defined in the Consolidated Resolution on the Construction of Vehicles (R.E.3.), document ECE/TRANS/WP.29/78/Rev.8 - https://unece.org/transport/vehicle-regulations/wp29/resolutions

0.3.2. The Regulation was originally drafted for vehicles with driver and manual driving controls and it is the intention of this amendment to keep the spirit of the regulation and to extend its application to vehicles without driver and manual driving controls. In the absence of a driver or manual driving controls, provisions related to them shall not be taken into account if not already covered by this amendment.

0.3.3. In case of vehicles equipped with an Automated Driving System (ADS)[1] other than vehicles of category X, in the manual driving mode no special provisions or exemptions apply. In a mode where an ADS feature is active the relevant ADS requirements apply.

[1] As defined in the Consolidated Resolution on the Construction of Vehicles (R.E.3.), document ECE/TRANS/WP.29/78/Rev.8 - https://unece.org/transport/vehicle-regulations/wp29/resolutions

0.3.4. Paragraph 2.1. is modified, as provisions are part of paragraph 5.

1. Scope

1.1. This Regulation applies to all seating positions in vehicles of categories M and N[1] fitted with safety belt with regard to safety-belt reminders.

[1] As defined in the Consolidated Resolution on the Construction of Vehicles (R.E.3.), document ECE/TRANS/WP.29/78/Rev.8 - https://unece.org/transport/vehicle-regulations/wp29/resolutions

1.2. This Regulation does not apply to vehicles of category Y.

2. Definitions

2.1. "*Safety-belt reminder*", means a system dedicated to alert the driver when any of the occupants do not use the safety-belt. The system is constituted by a detection of an unfastened safety-belt and by two levels of driver's alert: a first level warning and a second level warning.

Whilst an ADSF-2 is active, the "*Safety-belt reminder"* means a system dedicated to alert the unbuckled occupant and send a logic signal to the ADS when any of the occupants do not use the safety-belt.

2.2. "*Visual warning*" means a warning by visual signal (lighting, blinking or visual display of symbol or message).

2.3. "*Audible warning*" means a warning by sound signal.

2.4. "*First level warning"* means a visual warning activated when the ignition switch or vehicle master control switch is activated and any of the occupants' safety-belt is not fastened. An audible warning can be added as an option.

2.5. "*Second level warning*" means a visual and audible warning activated when the vehicle is operated in accordance with paragraphs 8.4.2.4.1.1. to 8.4.2.4.1.3. and when the safety-belt is or becomes unfastened, depending on the relevant seating position requirement.

2.6. "*Safety-belt is unfastened*" means, at the option of the manufacturer, either the safety-belt buckle of any occupant is not engaged or the length of the pulled out webbing is less than the length of the webbing which is needed to buckle an un-occupied seat in the rear most seating position.

2.7. "*Vehicle is in normal operation*" means that vehicle is in forward motion at the speed greater than 10 km/h.

2.8. *"Vehicle type with regard to its Safety-belt reminder"* means vehicles which do not differ with regard to the location of the visual warning, type of audible warning, first level warning and second level warning strategy and maximum number of seating positions.

2.9. *"Safety-belt (seat-belt, belt)"* means an arrangement of straps with a securing buckle, adjusting devices and attachments which is capable of being anchored to the interior of a power-driven vehicle and is designed to diminish the risk of injury to its wearer, in the event of collision or of abrupt deceleration of the vehicle, by limiting the mobility of the wearer's body. Such an arrangement is generally referred to as a "belt assembly", which term also embraces any device for absorbing energy or for retracting the belt.

2.9.1. *"Lap belt"* means a two-point belt which passes across the front of the wearer's pelvic region.

2.9.2. *"Diagonal belt"* means a belt which passes diagonally across the front of the chest from the hip to the opposite shoulder.

2.9.3. *"Three-point belt"* means a belt which is essentially a combination of a lap strap and a diagonal strap.

2.9.4. *"S-type belt"* means a belt arrangement other than a three-point belt or a lap belt.

2.9.5. *"Harness belt"* means an S-type belt arrangement comprising a lap belt and shoulder straps; a harness belt may be provided with an additional crotch strap assembly.

2.10. *"Strap"* means a flexible component designed to hold the body and to transmit stresses to the belt anchorages.

2.11. "*Buckle"* means a quick-release device enabling the wearer to be held by the belt. The buckle may incorporate the adjusting device, except in the case of a harness belt buckle.

2.12. *"Belt adjusting device"* means a device enabling the belt to be adjusted according to the requirements of the individual wearer and to the position of the seat. The adjusting device may be part of the buckle, or a retractor, or any other part of the safety-belt.

2.13. *"Retractor"* means a device to accommodate part or the whole of the strap of a safety-belt.

2.14. *"Seat"* means a structure which may or may not be integral with the vehicle structure complete with trim, intended to seat one adult person. The term covers both an individual seat or part of a bench seat intended to seat one person.

2.14.1. "*A front passenger seat*" means any seat where the "foremost H-point" of the seat in question is in or in front of the vertical transverse plane through the driver's R-point. For vehicles of category X, the "R" point of the most forward passenger seat shall be taken instead of the R-point of the driver's seat.

2.14.2. "*Forward-facing seat*" means a seat which can be used while the vehicle is in motion and which faces towards the front of the vehicle in such a manner that the vertical plane of symmetry of the seat forms an angle of less than +10° or -10° with the vertical plane of symmetry of the vehicle.

2.14.3. "*Rearward-facing seat*" means a seat which can be used while the vehicle is in motion and which faces towards the rear of the vehicle in such a manner that the vertical plane of symmetry of the seat forms an angle of less than +10° or -10° with the vertical plane of symmetry of the vehicle.

2.14.4. "*Side-facing seat*" means a seat which can be used while the vehicle is in motion and which faces towards the side of the vehicle in such a manner that the vertical plane of symmetry of the seat forms an angle of 90° (±10°) with the vertical plane of symmetry of the vehicle.

2.15. *"Group of seats"* means either a bench-type seat or seats which are separate but side by side (i.e. fixed so that front seat anchorages of one of these seats are in line with the front of the rear anchorages of the other or between the anchorages of the other seat) and accommodate one or more seated adult persons.

2.16. *"Bench seat"* means a structure complete with trim, intended to seat more than one adult person.

2.17. *"Seat anchorage"* means the system by which the seat assembly is secured to the vehicle structure, including the affected parts of the vehicle structure.

2.18. *"Vehicle master control switch"* means the device by which the vehicle's on-board electronics system is brought from being switched off, as in the case where a vehicle is parked without the driver being present, to a normal operation mode (i.e. the vehicle status is "ready to drive").

2.19. *"ADS feature of type 1 (ADSF-1)"* means an ADS feature which includes an ADS fallback response requiring a fallback user.

2.20. *"ADS feature of type 2 (ADSF-2)"* means an ADS feature which does not include an ADS fallback response requiring a fallback user.

3. Application for Approval

3.1.1. The application for approval of a vehicle type with regard to the safety-belt reminder shall be submitted by the vehicle manufacturer or by a duly accredited representative in accordance with the procedure set out in Schedule 3 of the Agreement (E/ECE/TRANS/505/Rev.3).

3.1.2. It shall be accompanied by the under mentioned documents and the following particulars:

3.1.2.1. Drawings of the general vehicle structure on an appropriate scale, showing the positions of the safety-belts;

3.1.2.2. A description of the type of safety-belts;

3.1.2.3. A description of the safety-belt reminder system.

3.1.3. A vehicle representative of the vehicle type to be approved shall be submitted to the Technical Service.

4. Approval

4.1. If the vehicle submitted for approval pursuant this Regulation meets the requirements of this Regulation, approval of that vehicle type shall be granted.

4.2. An approval number shall be assigned to each type approved in accordance with Schedule 4 of the Agreement (E/ECE/TRANS/505/Rev.3).

4.3. Notice of approval or of extension or refusal or withdrawal of approval or production definitively discontinued of a vehicle type pursuant to this Regulation shall be communicated to the Parties to the 1958 Agreement which apply this Regulation by means of a form conforming to the model in Annex 1 to this Regulation.

4.4. There shall be affixed, conspicuously and in a readily accessible place specified on the approval form, to every vehicle conforming to a vehicle type approved under this Regulation an international approval mark consisting of:

4.4.1. A circle surrounding the letter "E" followed by the distinguishing number of the country which has granted approval;[2]

[2] The distinguishing numbers of the Contracting Parties to the 1958 Agreement are reproduced in Annex 3 to the Consolidated Resolution on the Construction of Vehicles (R.E.3), document ECE/TRANS/WP.29/78/Rev.8, Annex 3 - https://unece.org/transport/standards/transport/vehicle-regulations

4.4.2. The number of this Regulation, followed by the letter R, a dash and the approval number to the right of the circle prescribed in paragraph 4.2. above.

4.5. If the vehicle conforms to a vehicle type approved, under one or more other Regulations annexed to the Agreement, in the country which has granted approval under this Regulation, the symbol prescribed in paragraph 4.4.1. above need not be repeated; in such a case the Regulation and approval numbers and the additional symbols of all the Regulations under which approval has been granted in the country which has granted approval under this Regulation shall be placed in vertical columns to the right of the symbol prescribed in paragraph 4.4.1.

4.6. The approval mark shall be clearly legible and be indelible.

4.7. The approval mark shall be placed close to or on the vehicle data plate affixed by the manufacturer.

4.8. Annex 2 to this Regulation gives an example of the arrangement of the approval mark.

5. General Specifications

5.1. Requirements per specific seating position and exemptions

5.1.1. The seating position of the driver of M and N categories of vehicles as well as the seating positions of the occupants of seats in the same row as the driver seat of M and N categories of vehicles shall be equipped with a safety-belt reminder satisfying the requirements of paragraph 5.3.

For vehicles of category X, the seating positions in the first row of vehicles of categories M and N shall be equipped with a safety-belt reminder satisfying the requirements of paragraph 5.3.

5.1.2. All seating positions of the rear seat row(s) of vehicles of categories M_1 and N_1 shall be equipped with a safety-belt reminder satisfying the requirements of paragraph 5.4.

Where the vehicle manufacturer provides a safety-belt reminder system on a rear seating position in another category of vehicle, the safety-belt reminder system may be approved according to this Regulation.

5.1.3. A safety-belt reminder is not compulsory on folding seats (i.e. normally folded or stowed and designed for occasional use, fitted in the access passages of vehicles of category M_2 or M_3, or fitted to N_1 or N_2 for the safe ingress and egress of the driver via the front passenger door) as well as seating positions fitted with an S-type belt (including harness belt).

Notwithstanding paragraphs 5.1.1. and 5.1.2. above, safety belt reminders are also not required for rear seats in ambulances, hearses and motor-caravans, as well as for all seats for vehicles used for transport of disabled persons, vehicles intended for use by the armed services, civil defence, fire services and forces responsible for maintaining public order.

5.1.4. An ADS may manage the safety belt reminder provided that the ADS provides at least an equivalent level of safety.

5.2. General requirements

5.2.1. Visual warning

5.2.1.1. The visual warning shall be so located as to be readily visible and recognisable in the daylight and at night time by the driver and distinguishable from other alerts.

5.2.1.2. The visual warning shall be a steady or flashing tell-tale.

5.2.2. Audible warning

5.2.2.1. The audible warning shall consist of a continuous or an intermittent (pauses shall not exceed 1 second) sound signal or of continuous vocal information. Where vocal information is employed, the vehicle manufacturer shall ensure that the alert is able to employ the languages of the market into which the vehicle is intended to be placed.

5.2.2.2. Audible warning shall be easily recognized by the driver.

5.2.3. First level warning

5.2.3.1. The first level warning shall be at least a visual warning activated for 30 seconds or longer for seating positions covered by paragraph 5.1.1. and for 60 seconds or longer for seating positions covered by paragraph 5.1.2. when the safety-belt of any of the seats is not fastened and the ignition switch or vehicle master control switch is activated.

Whilst an ADSF-2 is active, paragraph 5.1.4. shall apply.

If the vehicle master control switch has been activated remotely, the first level warning shall be (re-)initiated once the driver has entered the vehicle or driver presence is detected.

5.2.3.2. The first level warning may be discontinued when:

(a) None of the safety-belts which triggered the warning are unfastened; or

(b) The seat or seats which triggered the warning are no longer occupied.

5.2.3.3. The activation of the first level warning shall be tested according to the test procedure defined in Annex 3, paragraph 1.

5.2.4. Second level warning

5.2.4.1. The second level warning shall be a visual and audible signal activated for at least 30 seconds not counting periods in which the warning may stop for up to 3 seconds when at least one or any combination of the conditions at the choice of manufacturer, set out in paragraphs 5.2.4.1.1. to 5.2.4.1.3. is/are fulfilled. The second level warning shall supersede the first level warning when the first level warning is still active.

Whilst an ADSF-2 is active, paragraph 5.1.4. shall apply.

5.2.4.1.1. The distance driven greater than the distance threshold. The threshold shall not exceed 500 m. The distance driven when the vehicle is not in normal operation shall be excluded.

5.2.4.1.2. The vehicle speed greater than the speed threshold. The threshold shall not exceed 25 km/h.

5.2.4.1.3. The duration time (engine running, propulsion system activated, etc.) is greater than the duration time threshold. The threshold shall not exceed 60 seconds. The first level warning duration time and the duration time when the vehicle is not in normal operation shall be excluded.

5.2.4.2. The thresholds to trigger safety belt reminder listed in paragraphs 5.2.4.1.1. to 5.2.4.1.3., may be reset when:

(a) Any of the doors have been opened while the vehicle is not in normal operation; or

(b) The seat or seats which triggered the warning are no longer occupied.

5.2.4.3. The second level warning may be discontinued when:

(a) None of the safety-belts which triggered the warning are unfastened;

(b) The vehicle ceases to be in normal operation; or

(c) The seat or seats which triggered the warning are no longer occupied.

5.2.4.4. The second level warning shall be resumed for the remainder of the required duration when one or any combination of the conditions, at the choice of the manufacturer, set out in paragraphs 5.2.4.1.1. to 5.2.4.1.3. is/are again fulfilled.

5.2.4.5. For the condition that a safety belt becomes unfastened pursuant to paragraphs 5.3.3. and 5.4.5., the thresholds set out in paragraphs 5.2.4.1.1. to 5.2.4.1.3. shall be measured from the point in time at which unfastening occurs.

5.2.4.6. The activation of the second level warning shall be tested according to the test procedure defined in Annex 3, paragraph 2.

5.3. Safety-belt reminder for occupants of seats in the same row as the driver and, for vehicles of category X, safety-belt reminder for occupants of seat(s) of the first row.

5.3.1. Safety-belt reminders for driver and occupants of seats in the same row as the driver, and, for vehicles of category X, safety-belt reminder for occupants of seat(s) of the first row, shall fulfil the requirements set out in paragraph 5.2.

5.3.2. The colour and symbol of the visual warning shall be as defined in item 21 in Table 1 of UN Regulation No. 121.

5.3.3. The second level warning shall be activated when a safety-belt is or becomes unfastened while the vehicle is in normal operation and while, at the same time, any one condition or any combination of the conditions, at the choice of the manufacturer, set out in paragraphs 5.2.4.1.1. to 5.2.4.1.3. is satisfied.

5.4. Safety-belt reminder for occupants of rear seat row(s).

5.4.1. Safety-belt reminders for occupants of rear row(s) shall fulfil the requirements set out in paragraph 5.2.

5.4.2. The visual warning shall indicate at least all rear seating positions to allow the driver to identify, while facing forward as seated on the driver seat, any seating position in which the safety-belt is unfastened. Whilst an ADSF-2 is active, paragraph 5.1.4. shall apply. For vehicles that have information on the occupancy status of the rear seats, the visual warning does not need to indicate unfastened safety-belts for unoccupied seating positions. For seats, which can be fixed to different designated seating positions within the vehicle (e.g. floor rail mounted), the visual warning shall at least indicate when any rear safety belt is unfastened.

5.4.3. The colour of the visual warning may be other than red and the symbol of the visual warning for safety-belts covered by paragraph 5.1.2. may contain different symbols other than defined in Regulation No.121. In addition, the first level warning of seating positions covered by paragraph 5.1.2. may be cancellable by the driver by a deliberate action.

5.4.4. A common tell-tale may be used for safety-belts covered by paragraphs 5.1.1 and 5.1.2.

5.4.5. The second level warning shall be activated when a safety-belt becomes unfastened while the vehicle is in normal operation, or at the choice of the manufacturer when the safety-belt is or becomes unfastened while the vehicle is in normal operation, and while, at the same time, any one condition or any combination of the conditions, at the choice of the manufacturer, set out in paragraphs 5.2.4.1.1. to 5.2.4.1.3. is satisfied.

5.5. The safety-belt reminder may be designed to allow deactivation.

5.5.1. In the case that a short-term deactivation is provided, it shall be significantly more difficult to deactivate the safety-belt reminder than buckling the safety-belt on and off (i.e. it shall consist of an operation of specific controls that are not integrated in the safety-belt buckle) and this operation shall only be possible when the vehicle is stationary. When the ignition or vehicle master control switch is deactivated for more than 30 minutes and activated again, a short-term deactivated safety-belt reminder shall reactivate. It shall not be possible to provide short-term deactivation of the relevant visual warning(s).

5.5.2. In the case that a facility for a long-term deactivation is provided, it shall require a sequence of operations to deactivate, that are detailed only in the manufacturer's technical manual and/or which requires the use of tools (mechanical, electrical, digital, etc.) that are not provided with the vehicle. It shall not be possible to provide long-term deactivation of the relevant visual warning(s).

5.5.3. In case of activation of the accident emergency call system, the second level warning may be muted.

5.6. Requirement for the connection of a safety-belt reminder system for removable seats.

5.6.1. Removable seats without manual connection.

5.6.1.1. The connection shall be automatic when the seat is installed in the vehicle.

5.6.2. Removable seats with manual connection.

5.6.2.1. The connectors of the removable seats shall be easily visible during the installation process.

5.6.2.2. The vehicle shall carry a label indicating the purpose of the connection, and the connection and disconnection methods of the safety-belt reminder system, in the form of a pictogram which may include explanatory text.

5.6.2.3. The label shall be permanently attached to the vehicle and located such that it is clearly visible during the installation process.

5.6.2.4. In case a connector is misconnected or disconnected for removable seating positions covered by paragraph 5.1.1., a warning visible to the driver shall be activated for 30 seconds when the ignition switch or vehicle master control switch is activated.

5.6.2.5. When a seat is removable for seating positions covered by paragraph 5.1.2., the visual warning of paragraph 5.4.2. shall indicate at least all rear seating position to allow the driver to identify, while facing forward as seated on the driver seat, any removable seating position in which the connector is misconnected or disconnected, and it shall be activated for 60 seconds when the ignition switch or vehicle master control switch is activated.

For seats, which can be fixed to different designated seating positions within the vehicle (e.g. floor rail mounted), the visual warning shall at least indicate when any rear removable seating position connector is misconnected or disconnected.

5.6.3. The presence or absence of the removable seat shall not adversely affect the functioning of the safety-belt reminder system of other seating position.

5.6.4. The safety-belt reminder system of the removable seats shall not give any false indication of belt use, whether the seats are installed in the vehicle or not.

5.7. Vehicle types of categories M and N approved to UN Regulation No. 16, 08 series of amendments before 1 September 2026 or 09 series of amendments before 1 September 2027, are deemed to comply with this paragraph 5.

6. Conformity of Production

The conformity of production procedures shall comply with those set out in the Agreement, Schedule 1 (E/ECE/TRANS/505/Rev.3), with the following requirements:

Every vehicle bearing approval under this Regulation shall conform to the vehicle type approved by meeting the requirements set out in paragraph 5. above.

7. Penalties for Non-Conformity of Production

7.1. The approval granted in respect of a vehicle type pursuant to this Regulation may be withdrawn if the requirement laid down in paragraph 6.1. above is not complied with.

7.2. If a Contracting Party to the Agreement applying this Regulation withdraws an approval it has previously granted, it shall forthwith so notify the other Contracting Parties applying this Regulation by means of a communication form conforming to the model in Annex 1 to this Regulation.

8. Modifications and Extension of Approval

8.1. Every modification of the vehicle type with regard to this Regulation shall be notified to the Type Approval Authority which approved the vehicle type. The Type Approval Authority may then either:

(a) Decide, in consultation with the manufacturer, that a new type approval is to be granted; or

(b) Apply the procedure contained in paragraph 8.1.1. (Revision) and, if applicable, the procedure contained in paragraph 8.1.2. (Extension).

8.1.1. Revision

When particulars recorded in the information documents have changed and the Type Approval Authority considers that the modifications made are unlikely to have appreciable adverse effect, and that in any case the vehicle still meets the requirements, the modification shall be designated a "revision".

In such a case, the Type Approval Authority shall issue the revised pages of the information documents as necessary, marking each revised page to show clearly the nature of the modification and the date of re-issue. A consolidated, updated version of the information documents, accompanied by a detailed description of the modification, shall be deemed to meet this requirement.

8.1.2. Extension

The modification shall be designated an "extension" if, in addition to the change of the particulars recorded in the information folder:

(a) Further inspections or tests are required; or

(b) Any information on the communication document (with the exception of its attachments) has changed; or

(c) Approval to a later series of amendments is requested after its entry into force.

8.2. Notice of confirmation, extension, or refusal of approval shall be communicated by the procedure specified in paragraph 4.3. above, to the Contracting Parties to the Agreement applying this Regulation. In addition, the index to the information documents and to the test reports, attached to the communication document of Annex 1, shall be amended accordingly to show the date of the most recent revision or extension.

8.3. The Type Approval Authority issuing the extension of approval shall assign a series number to each communication form drawn up for such an extension.

9. Production Definitively Discontinued

If the holder of the approval completely ceases to manufacture a vehicle approved in accordance with this Regulation, the holder shall so inform the Type Approval Authority which granted the approval. Upon receiving the relevant communication that Authority shall inform thereof the other Parties to the 1958 Agreement applying this Regulation by means of a communication form conforming to the model in Annex 1 to this Regulation.

10. Names and Addresses of Technical Services Responsible for Conducting Approval Tests and of Type Approval Authorities

The Contracting Parties to the 1958 Agreement applying this Regulation shall communicate to the Secretariat of the United Nations the names and addresses of the Technical Services responsible for conducting approval tests and of the Type Approval Authorities which grant approval and to which forms certifying approval or refusal or extension or withdrawal of approval, issued in other countries, are to be sent.

11. Transitional provisions

11.1. General

11.1.1. Contracting Parties applying this Regulation may grant type approvals according to any of the preceding series of amendments to this Regulation.

11.1.2. Contracting Parties applying this Regulation shall continue to grant extensions of existing approvals to any of the preceding series of amendments to this Regulation.

11.2. Transitional provisions applicable to the 01 series of amendments

11.2.1. As from the official date of entry into force of the 01 series of amendments, no Contracting Party applying this Regulation shall refuse to grant or refuse to accept type approvals under this Regulation as amended by the 01 series of amendments.

11.2.2. As from 1 September 2027, Contracting Parties applying this Regulation shall not be obliged to accept type approvals to any of the preceding series of amendments, first issued after 1 September 2027.

11.2.3. Contracting Parties applying this Regulation shall continue to accept type approvals issued according to the original form of this Regulation, first issued before 1 September 2027.

Annex 1 Communication

(Maximum format: A4 (210 x 297 mm))



issued by: Name of administration:

.....

.....

.....

Concerning:[2] Approval granted

Approval extended

Approval refused

Approval withdrawn

Production definitively discontinued

of a vehicle type with regard to safety-belt reminders pursuant to UN Regulation No. XXX.

Approval No.

---

[1] Distinguishing number of the country which has granted/extended/refused/withdrawn approval (see approval provisions in the Regulation).

1. General

1.1. Make (trade name of manufacturer).....

1.2. Type and general commercial description(s) .....

1.3. Means of identification of type, if marked on the vehicle.....

1.3.1. Location of that marking.....

1.4. Category of vehicle.....

1.5. Name and address of manufacturer .....

1.6. Address(es) of assembly plant(s) .....

1.7. Technical Service responsible for carrying out the test .....

1.8. Date of test report .....

1.9. Number of test report .....

2. General construction characteristics of the vehicle

2.1. Photographs and/or drawings of a representative vehicle .....

3. Bodywork

3.1. Seats

3.1.1. Number

3.1.2. Position and arrangement .....

3.1.2.1. Seating position(s) designated for use only when the vehicle is stationary .....

3.1.3. Characteristics: description and drawings of: (provide where relevant)

3.1.3.1. The seats and their anchorages .....

3.1.3.2. The adjustment system .....

3.1.3.3. The displacement and locking systems .....

3.1.3.4. The seat belt anchorages if incorporated in the seat structure .....

3.2. Safety-belts and/or other restraint systems and safety-belt reminders

Number and position of safety-belts or restraint systems and safety-belt reminders and seats on which they can be used .....

		Complete type approval mark	*Variant (if applicable)*	*Safety-belt reminder (indicate yes/no/optional)*
First row of seats	R			
	C			
	L			
Second row of seats	R			
	C			
	L			
(R = right-hand seats, C = centre seats, L = left hand seats)				


4. Place

5. Date

6. Signature

Annex 2 Arrangements of approval marks

(see paragraphs 4.5. to 4.5.2. of this Regulation)

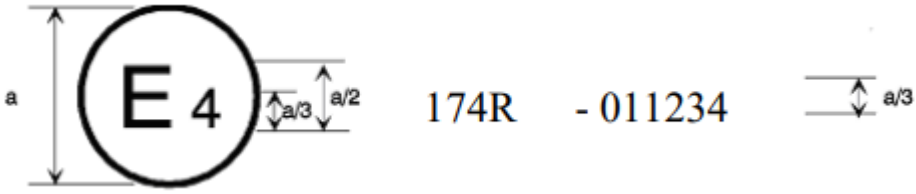

	a = 8 mm minimum

The above approval mark affixed to a vehicle shows that the vehicle type concerned was approved in the Netherlands (E4) pursuant to UN Regulation No. 174 under approval No. 011234. The first two digits (01) of the approval number indicate that the approval was granted in accordance with the requirements of the 01 series of amendments to UN Regulation No. 174.

Annex 3 Safety-Belt Reminder Tests

0. In case of a vehicle equipped with an ADSF-2, the manufacturer shall demonstrate, to the satisfaction of the Type Approval Authority, a suitable test plan for the safety-belt reminder.

1. The first level warning shall be tested according to the following conditions:

(a) Safety-belt is not fastened;

(b) Engine or propulsion system is stopped or idling, and the vehicle is not in forward or reverse motion;

(c) Ignition switch or vehicle master control switch is activated;

(d) A load of 40 kg is placed on each seat cushion in the same row as the driver's seat, or the state in which occupants are on board the vehicle is simulated by an alternative method specified by the vehicle manufacturer, provided an occupant’s load does not exceed 40 kg.

This may also be done for the rear seats at the request of the vehicle manufacturer.

Or alternatively (at the choice of the manufacturer):

An object or human representing a 5th percentile adult female [1] is placed on each seat cushion as specified by the manufacturer in the same row as the driver seat, or

the state in which occupants representing a 5th percentile adult female [1] are on board the vehicle is simulated by an alternative method specified by the vehicle manufacturer as agreed by the technical service and the approval authority.

This may also be done for the rear seats at the request of the vehicle manufacturer.

(e) The state of the safety-belt reminder is checked for all of the relevant seat(s), in conditions (a) to (d).

---

[1] The technical specifications and detailed drawings of Hybrid III, corresponding to the principal dimensions of a fifth percentile female of the United States of America, and the specifications for its adjustment for this test are deposited with the Secretary-General of the United Nations and may be consulted on request at the secretariat of the Economic Commission for Europe, Palais des Nations, Geneva, Switzerland. A female who weighs between 46.7 and 51.25 kg, and who is between 139.7 and 150 cm tall may be used.

2. The second level warning shall be tested according to the conditions set out in paragraphs 2.1. to 2.3. of this annex, respectively.

2.1. Testing the driver's seating position

2.1.1. Testing the driver’s seat when the safety-belt is unfastened before the journey:

(a) The safety-belt of the driver's seat is not fastened;

(b) The safety-belts of seats other than the driver's seat are fastened;

(c) Test vehicle driven with one or any combination of the conditions of paragraphs 2.1.1.1. to 2.1.1.3. of this annex at the manufacturer's choice;

(d) The state of the safety-belt reminder is checked for the driver’s seat, in conditions (a) to (c).

2.1.1.1. Accelerate the test vehicle to 25 -0/+10 km/h from a halt and continue on at the same speed.

2.1.1.2. The test vehicle is driven forward at least 500 m in normal operation from a halt position.

2.1.1.3. The vehicle is tested when the vehicle is in normal operation for at least 60 seconds.

2.1.2. Testing the driver’s seat when the safety-belt becomes unbuckled during the journey.

(a) The safety-belts of the driver’s seat and seats other than the driver’s seat are fastened;

(b) the vehicle is in normal operation;

(c) The safety-belt of the driver’s seat is unbuckled;

(d) The test vehicle is driven, at the choice of the manufacturer, under one of the conditions in paragraphs 2.1.2.1. to 2.1.2.3. of this annex or a combination thereof.

2.1.2.1. Accelerate the test vehicle to 25 -0/+10 km/h continue on at the same speed.

2.1.2.2. The test vehicle is driven forward at least 500 m from the safety-belt unbuckling.

2.1.2.3. The test vehicle is driven forward for at least 60 seconds from the safety-belt unbuckling.

2.2. Testing the seating position(s) in the same row as the driver's seat.

2.2.1. Testing the seat(s) in the same row as the driver's seat when the safety-belt is unfastened before the journey:

(a) The safety-belt(s) of the seat(s) in the same row as the driver's seat is/are not fastened;

(b) The safety-belts of the seats other than the seat(s) in the same row as the driver's seat are fastened;

(c) A load of 40 kg is applied to the seat(s) in the same row as the driver's seat, or the state in which occupants are on board the vehicle is simulated by a method specified by the manufacturer, provided an occupant’s load does not exceed 40 kg.

Or alternatively (at the choice of the manufacturer):

An object or human representing a 5th percentile adult female is placed on each seat cushion as specified by the manufacturer in the same row as the driver seat, or the state in which occupants are on board the vehicle is simulated by an alternative method specified by the vehicle manufacturer as agreed by the Technical Service and the Type Approval Authority. This may also be done for the rear seats at the request of the vehicle manufacturer.

(d) The test vehicle is driven, at the choice of the manufacturer, under one of the conditions in paragraphs 2.1.1.1. to 2.1.1.3. of this annex or combination thereof;

(e) The state of the safety-belt reminder is checked for all of the seat(s) in the same row as the driver's seat, in conditions (a) to (d).

2.2.2. Testing the seating position in the same row as the driver’s seat when the safety-belt becomes unbuckled during the journey.

(a) The safety-belts of the driver’s seat and seats other than the driver’s seat are fastened;

(b) A load of 40 kg is applied to the seat(s) in the same row as the driver's seat, or the state in which occupants are on board the vehicle is simulated by a method specified by the manufacturer, provided an occupant’s load does not exceed 40 kg;

Or alternatively (at the choice of the manufacturer):

An object or human representing a 5th percentile adult female is placed on each seat cushion as specified by the manufacturer in the same row as the driver seat, or the state in which occupants representing a 5th percentile adult female[1] are on board the vehicle is simulated by an alternative method specified by the vehicle manufacturer as agreed by the technical service and the approval authority. This may also be done for the rear seats at the request of the vehicle manufacturer;

(c) The vehicle is in normal operation;

(d) The safety-belt of seats other than the driver’s seat is unbuckled;

(e) The test vehicle is driven, at the choice of the manufacturer, under one of the conditions in paragraphs 2.1.2.1. to 2.1.2.3. of this annex or a combination thereof;

(f) The state of the safety-belt reminder is checked for all of the seat(s) in the same row as the driver's seat, for each condition (a) to (e).

---

[1] The technical specifications and detailed drawings of Hybrid III, corresponding to the principal dimensions of a fifth percentile female of the United States of America, and the specifications for its adjustment for this test are deposited with the Secretary-General of the United Nations and may be consulted on request at the secretariat of the Economic Commission for Europe, Palais des Nations, Geneva, Switzerland. A female who weighs between 46.7 and 51.25 kg, and who is between 139.7 and 150 cm tall may be used.

2.3. Testing the rear seats:

(a) With the test vehicle stationary, the safety-belts of all seats are fastened;

(b) The test vehicle is put in normal operation and kept running;

(c) The safety-belt of one of the rear seats is unfastened;

(d) The functioning of the safety-belt reminder is checked for all of the seating positions in all seating rows;

(e) Alternatively, at the request of the vehicle manufacturer, the test procedures specified in paragraphs 2.2. to 2.2.2. for the seating position(s) in the same row as the driver's seat may be used for any rear seating position instead.

3. The first level warning test shall have a duration of at least the minimum required time as specified in paragraph 5.2.3. of this Regulation for the first level warning. The second level warning test may be initiated after completion of the first level warning test. However, it shall also be ensured that the second level warning supersedes the first level warning when the first level warning is still active.