TinyStar'Ex

Build and assembly guide for the pointing/guiding system

Version 1.1

A STAROS project

staros-projects.org

1 Purpose

This document is the build, assembly and adjustment guide for the pointing and guiding system of the TinyStar'Ex (TSE) spectrograph. Figure 1 shows the assembled system with its guiding camera, here a Player One Ceres 462M, a well-suited model. This system complements the spectrograph part of TSE to form a complete set-up for observing the spectra of astronomical sources.

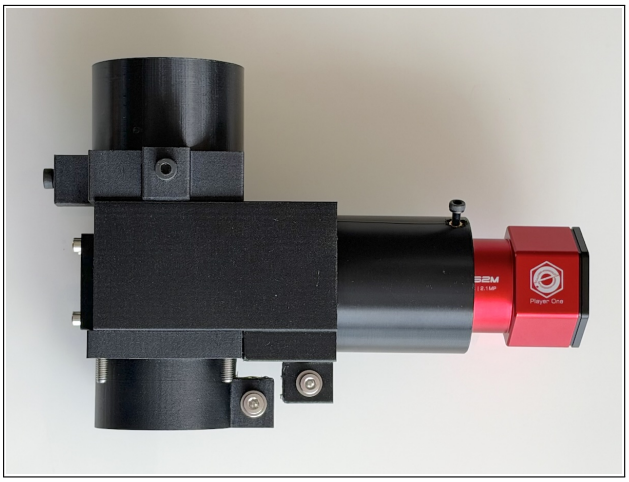


Figure 1. An operational TinyStar'Ex spectrograph.

2 The STL files

The STL files for printing the parts of the guiding system are grouped in a compressed archive, which you can download from this link: https://buil.astrosurf.com/TSE/stl_guide/stl_guide.zip.

Figure 2 shows the parts to be printed to build the 'pointing/guiding' part of the TinyStar'Ex project.






Figure 2. All the printed parts that make up the TinyStar'Ex pointing and guiding system.

Section 4 gives recommendations for printing these parts.








Table 1 is the bill of materials for the parts of the pointing/guiding system. The part names are those of the STL files.

Table 1. STL files of the TinyStar'Ex pointing/guiding system.

No.	Qty	View of the part
1G-1-cube-guidage	1	
2G-1-interface-guidage	1	
3G-1-support-miroir	1	


continued on next page...

Table 1 – continued from previous page

No.	Qty	View of the part
4G-1-tube-lentilles	1	
5G-1-bride-lentilles	1	
6G-1-entretoise-lentilles	1	
7G-1-entretoise-miroir	1	
8G-1-interface-telescope	1	
9G-1-coulant-50mm	1	
10G-1-interface-camera (stick camera version)	1	

continued on next page...

Table 1 – continued from previous page

No.	Qty	View of the part
11G-1-interface-camera (planetary camera version)	1	
12G-1-simulateur-f4	1	

Information on screws, fasteners and tools is given in the document describing the assembly of the spectrograph.

3 The source files

As with the spectrograph, you can modify the parts of the pointing and guiding system. The source files for these parts, in OpenSCAD format, are available at this address: https://buil.astrosurf.com/TSE/openSCAD/TSE_sources_guide.scad.

4 Printing

All the parts of the pointing and guiding system can be printed with a layer height of 0.18 mm.

Five perimeters are enough. You may go up to six for part `2G-1-interface-guidage`, which supports the whole spectrograph and therefore plays an important structural role. An infill of 30% with a gyroid pattern is entirely satisfactory. Supports for printing overhangs are needed only for parts `1G-1-cube-guidage` and `2G-1-interface-guidage` (see Figures 3 and 4).



Figure 3. Orientation of part `1G-1-cube-guidage` on the build plate, with its supports (here with the *Bambu Studio* slicer and a *Bambu Lab* printer). Note the use of 'tree' supports, needed to print this part correctly.

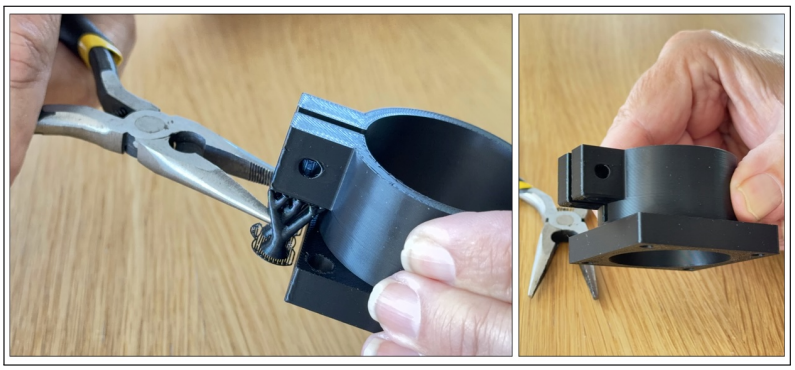


Figure 4. Removing the support used to print part `2G-1-interface-guidage`.

5 Assembling the pointing/guiding system

A number of inserts must be fitted in part `1G-1-cube-guidage`. Figures 5, 6 and 7 show their type and location.

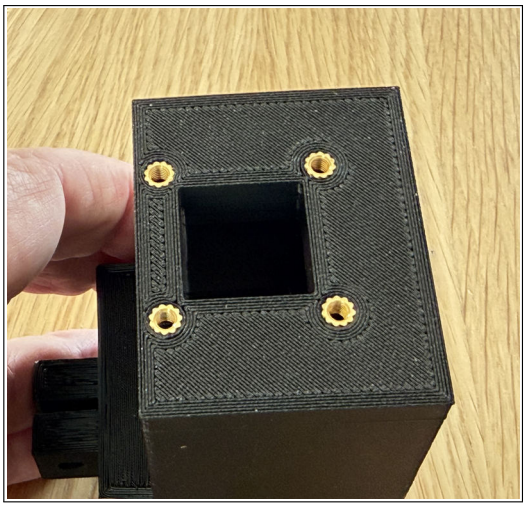


Figure 5. Inserts in part `1G-1-cube-guidage`: four M3 S (short) inserts.

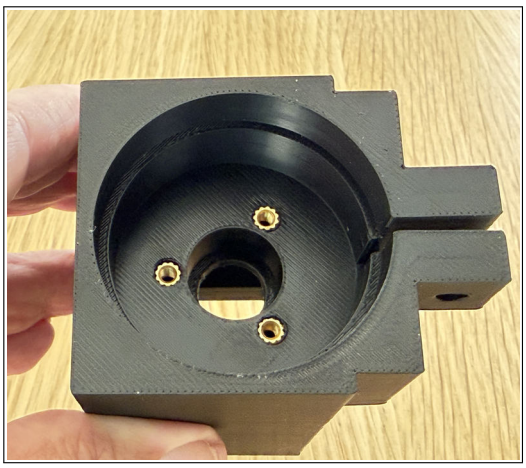


Figure 6. Inserts in part `1G-1-cube-guidage`: three M3 inserts.

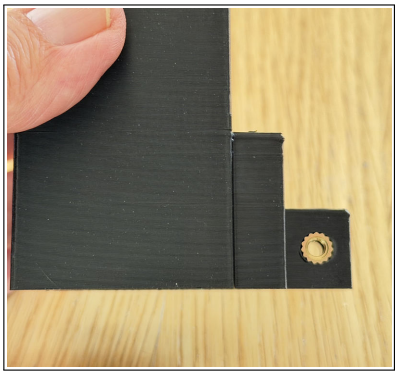


Figure 7. Insert in part `1G-1-cube-guidage`: one M4 S (short) insert.

While you are fitting inserts, you can also deal with those for the parts shown in Figures 8, 9 and 10.

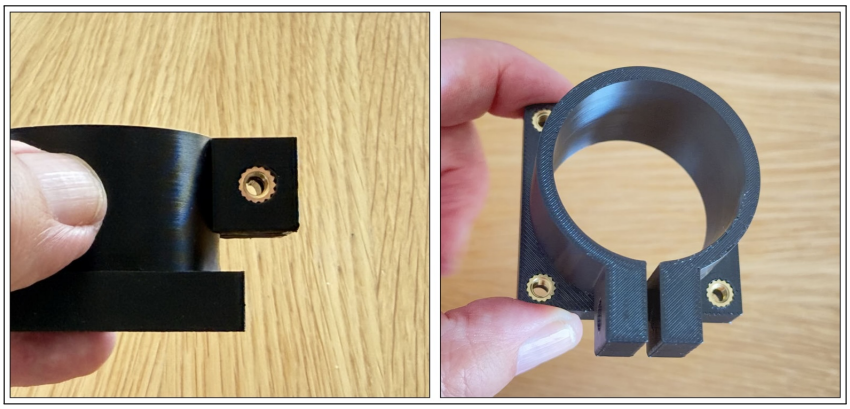


Figure 8. Inserts in part `2G-1-interface-guidage`: five M4 S (short) inserts.

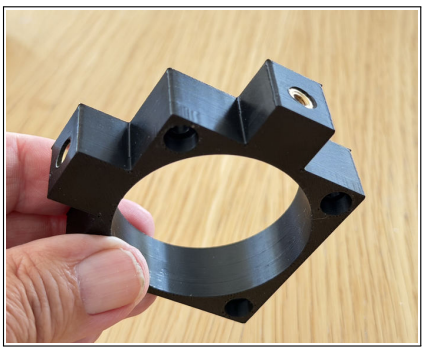


Figure 9. Inserts in part `8G-1-interface-telescope`: two M4 inserts.

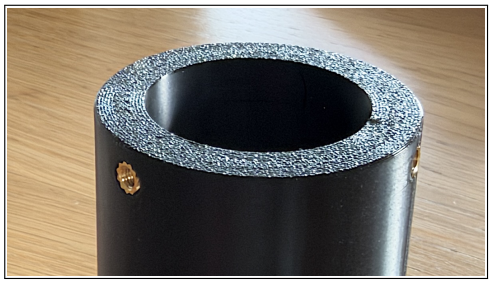


Figure 10. Inserts in part `10G-1-interface-camera`: two M3 inserts.

First of all, check that the guiding system interface fits properly over the collimator tube (Figure 11, left). The two parts must slide into each other without forcing. If they do not, the slit holder is probably not coaxial with the collimator tube (also look out for printing burrs, which are easy to remove by rubbing with abrasive cloth). Slightly loosen the three M2 screws holding the slit holder (Figure 11, right), then refit the guiding interface, pushing it fully home (yellow arrow in the left-hand view). With the interface still in place, retighten the three M2 screws of the slit holder. You can then remove the interface.

This operation is also an opportunity to see how some add-on parts are fixed: by clamping onto cylindrical bearing surfaces. This technique gives a firm hold without screws marking the printed parts. It also leaves great freedom for fitting accessories: the 40 mm diameter of the collimator tube (39.75 mm, to be precise) is a kind of 'standard' specific to TSE, onto which extensions are easily grafted.

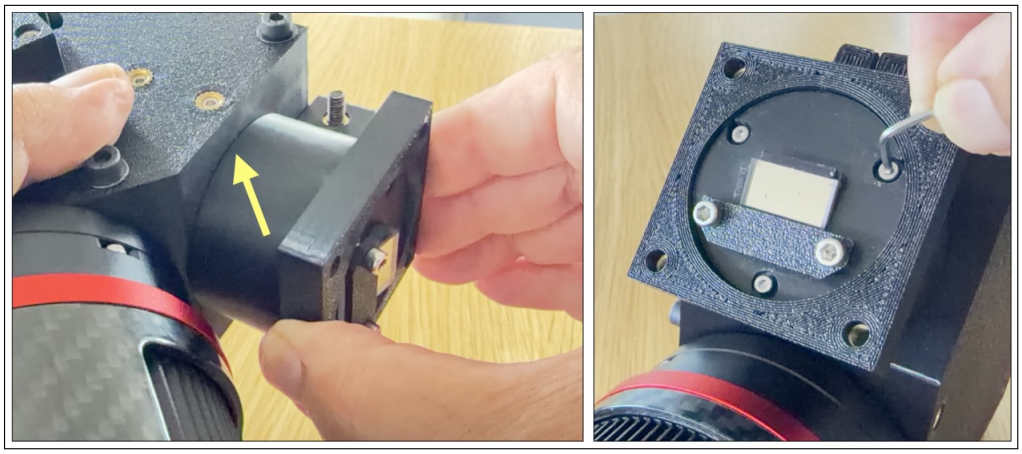


Figure 11. Checking that the collimator tube and the guiding system interface are coaxial. The two parts must meet at the yellow arrow.

Next, fit the two doublets, 12.5 mm in diameter with a focal length of 50 mm, in the bore of part `4G-1-tube-lentilles` (Figure 12). They act as relay lenses, transferring the image of the slit to the detector plane of the pointing/guiding camera.



Figure 12. The components of the guiding optics sub-assembly: two lenses facing each other, the sleeve `4G-1-tube-lentilles`, part `6G-1-entretoise-lentilles` and the retaining part `5G-1-bride-lentilles`.

The lenses are fitted head to tail in their seat. It is essential to fit them the right way round: if you look carefully at them edge-on, you will see that one face is more curved than the other. The assembly must follow the orientations given in Figure 13 to obtain a good image in the guiding camera.

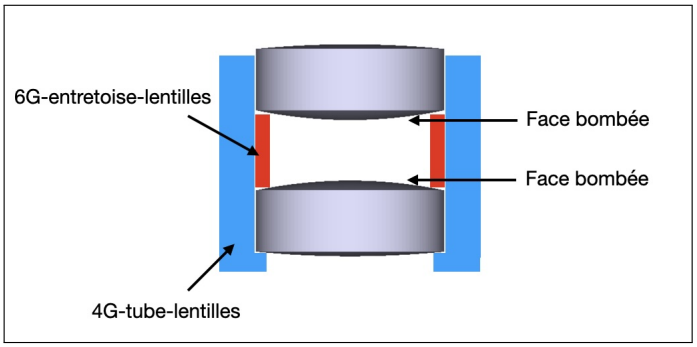


Figure 13. Assembly diagram of the guiding system lenses.

The lenses and the spacer should slide into their seat without difficulty. Insert the first lens (watch its orientation), then the spacer, then the second lens (again, watch the orientation). It is normal for the surface of the last lens to protrude from the tube, as shown in Figure 14.



Figure 14. The lenses in their seat. The outer face of the last lens must protrude slightly from the tube.

The tube fitted with the lenses is then mounted in its seat in the guiding cube (Figure 15).

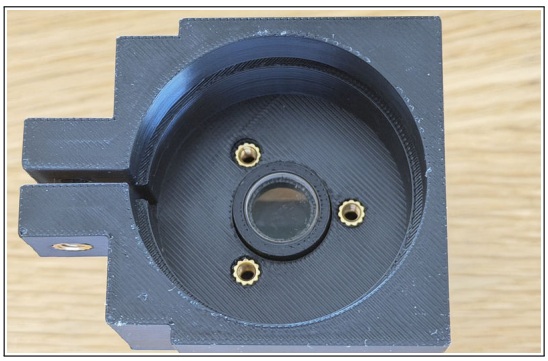


Figure 15. The lens tube in place in part `1G-1-cube-guidage`.

Next, fit part `5G-1-bride-lentilles`, held by three M3 screws 8 mm long (Figure 16). Tighten moderately, sharing the effort evenly between the three screws.

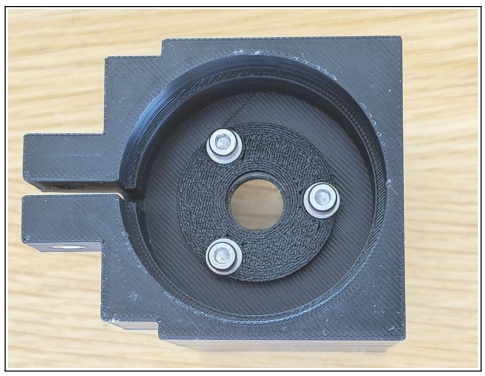


Figure 16. The lenses fixed in their seat. Take care to orient part `5G-1-bride-lentilles` so that its bore faces the lenses.

A 15 × 15 × 3 mm mirror sends to the guiding camera the image of the star field reflected by the outer parts of the slit, after the light has passed through the two lenses assembled previously.

This mirror is glued into part `3G-1-support-miroir`, a shoe inclined at 30° (see Figure 17).

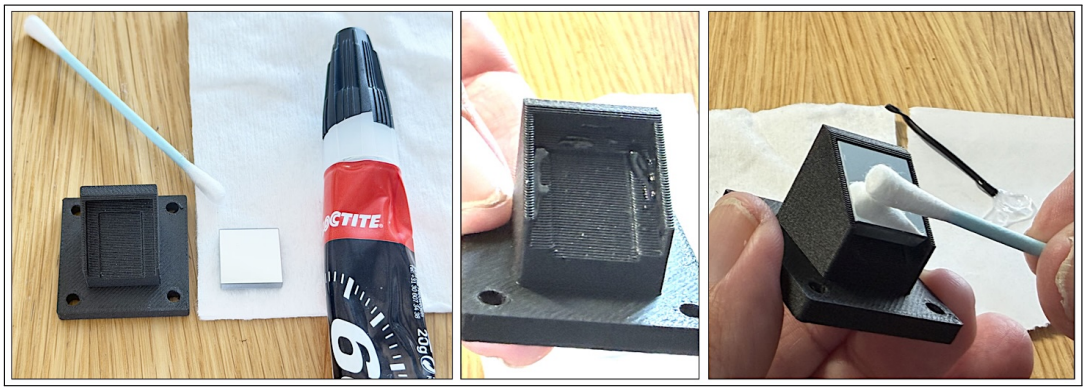


Figure 17. Assembling the fold mirror of the guiding system. An inexpensive, fairly fast-setting glue is used here. Apply very little glue to the areas on which the mirror rests (use a small stick or similar). Bring the mirror into position, pressed firmly against its stops, then press with a clean cotton bud for one minute. Leave the part to rest for a good hour before handling it.

Fix the fold mirror holder in the structure of the guiding block (Figure 18).

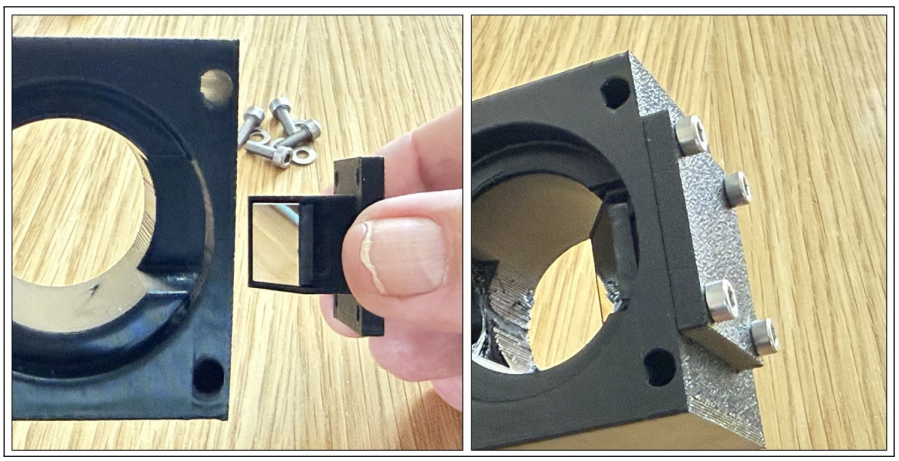


Figure 18. Fixing the flat fold mirror holder with four M3 × 10 mm screws. Do not fit it the wrong way round: refer to these photographs.

Next, fit the guiding camera interface. There are two options: a simple 3D-printed tube, part `10G-1-interface-camera`, or a more elaborate device, a helical focuser, here made by ZWO (Figure 19). We recommend the first option: it is the cheaper, and despite its apparent simplicity, it offers the best stability, both over time and whatever the region of sky at which the telescope is pointed.

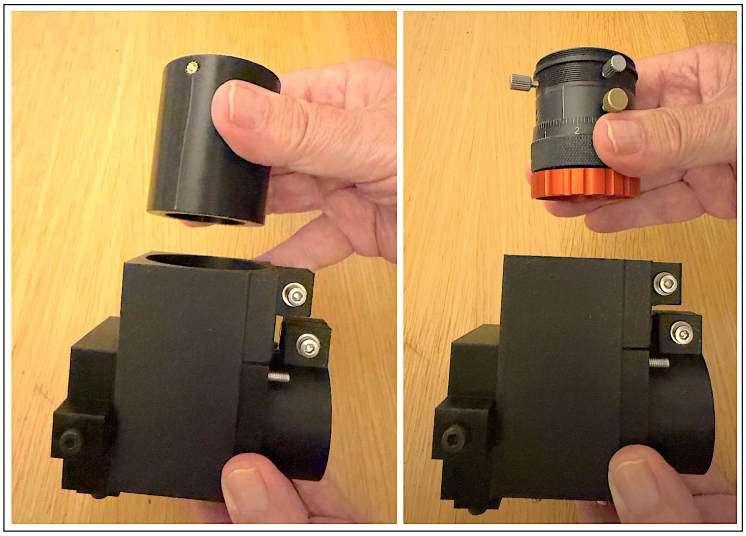


Figure 19. The two possible solutions for fitting the pointing and guiding camera.

Note also that the printed tube can take either a ‘stick’ camera or a ‘planetary’ camera (Figure 20), which the bulk of a helical focuser does not allow.

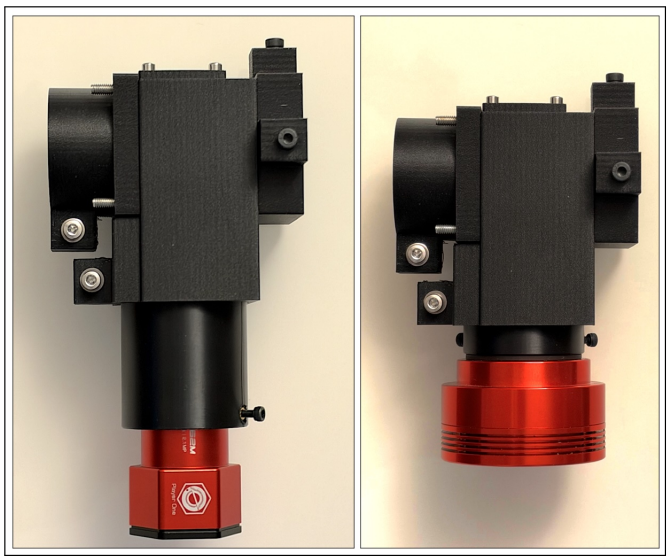


Figure 20. The pointing and guiding system is designed to accept both main families of camera. Only the length of the interface tube changes: the two configurations shown here differ by 38 mm, hence the two versions of the part, `10G-1-interface-camera` and `11G-1-interface-camera`.

In all cases, the interface is held by clamping: an M4 × 20 mm screw closes the slot of the collar to give a secure hold (Figure 21).

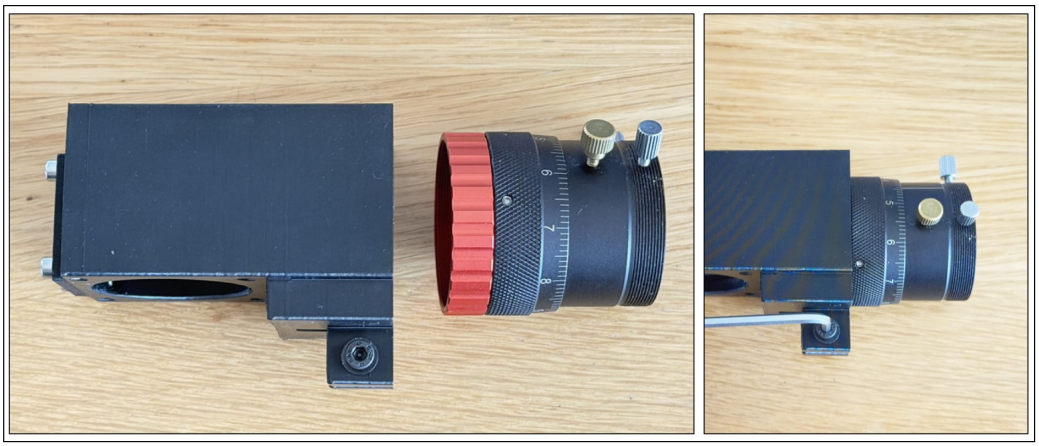


Figure 21. Fixing the camera interface, here a ZWO helical focuser.

A suggestion: fit the guiding camera with a filter that blocks the infrared (an 'IR-cut' filter, Figure 22). The detector is sensitive to infrared, but the lenses used perform only moderately well there, in particular because of chromatic aberration. If you observe from a town, this is also an opportunity to use a light-pollution filter: by increasing the contrast against the bright sky background, it will make faint objects easier to point at.

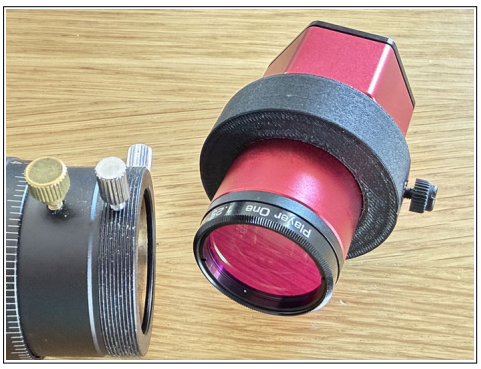


Figure 22. Guiding camera fitted with a UV and IR blocking filter ('UV/IR-cut').

Parts `1G-1-cube-guidage`, `2G-1-interface-guidage` and `8G-1-interface-telescope` are assembled with four M4 through-screws 70 mm long, as shown in Figure 23.

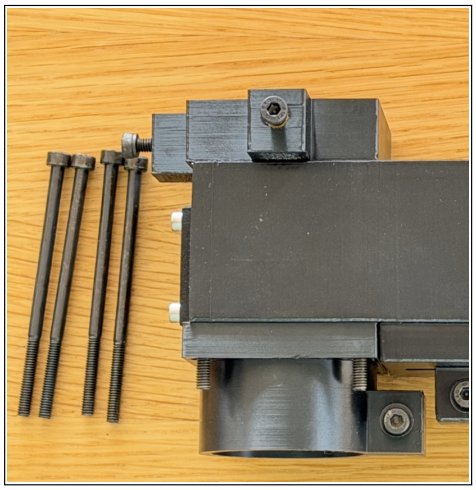


Figure 23. Assembling the guiding interface and the telescope interface on the guiding cube.

For greater rigidity, it is advisable to attach the spectrograph to the telescope with a 50 mm barrel. You can use the printed barrel, part `9G-1-coulant-50mm`, or a metal barrel combined with a male/female T2 ring 45 mm in diameter and 15 mm long (Figure 24).

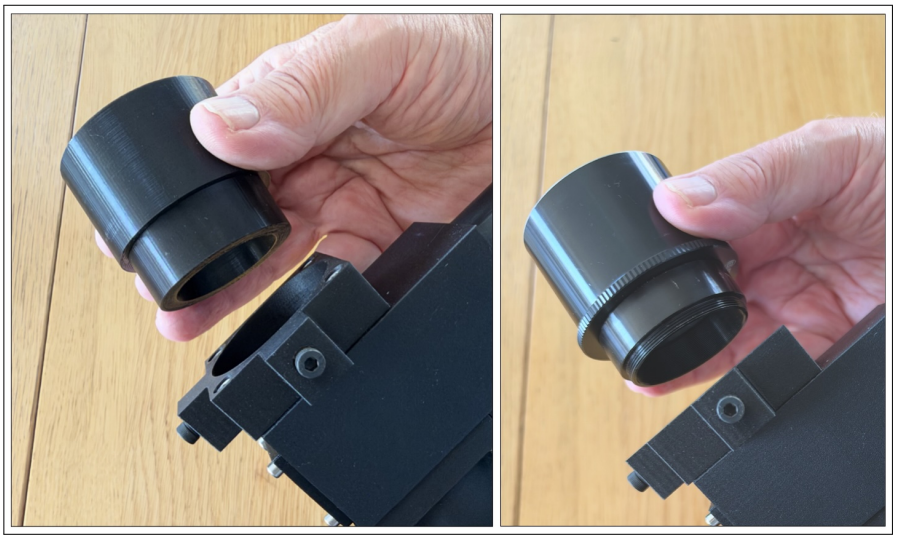


Figure 24. Fitting a 50 mm barrel to attach the spectrograph to the telescope. On the left, part `9G-1-coulant-50mm` provides this connection: a simple, effective and inexpensive solution.

Finally, the guiding system is coupled to the spectrograph through the 40 mm diameter interface (Figure 25).



Figure 25. The spectrograph about to receive its pointing and guiding system.

Push the guiding system fully home in the direction of the arrow shown in Figure 26. Then rotate it about the 40 mm interface, which allows this degree of freedom, so that the guiding housing lies in the same plane as the spectrograph; judging by eye is enough. Then firmly tighten the M4 × 20 mm screw of the spectrograph/guiding system interface.

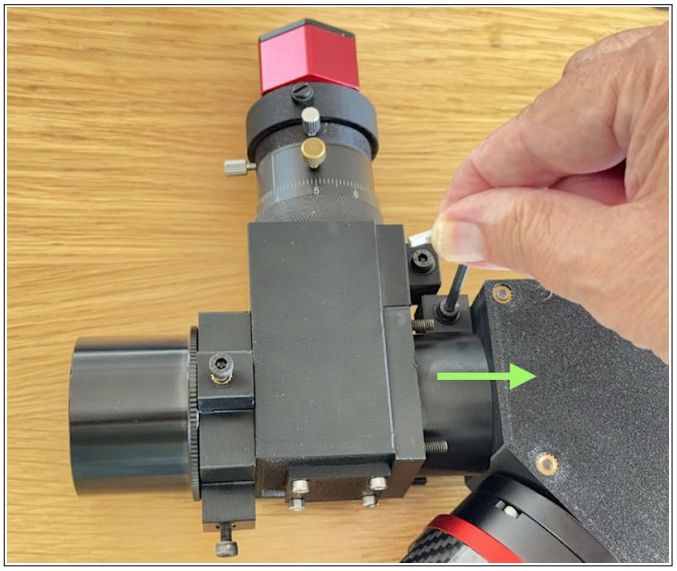


Figure 26. The TinyStar'Ex spectrograph fitted with its pointing and guiding system. Firmly tighten the M4 × 20 mm screw with an Allen key.

6 Adjustment

The only adjustment required is to orient the image of the slit correctly relative to the rows (or columns) of the guiding camera, and then to focus on this image.

A first piece of advice: if you use a telescope of less than 200 mm in diameter, work with the 14 µm slit of the GEN2 system (see the spectrograph assembly guide). From 200 mm up to 300 mm, select the 20 µm slit. For larger apertures, use the 26 µm slit. There is no absolute rule; these

are only guidelines: the actual choice depends on the turbulence (*seeing*) at the observing site, the optical quality of your telescope, the accuracy of the tracking and the type of observing programme (depending on whether you favour spectral resolution or radiometric resolution, that is, signal-to-noise ratio). A refractor may be suitable, but a reflecting telescope, even of modest diameter, is always recommended in spectroscopy, as it is free of chromatic aberration.

A second piece of advice: for optimum adjustment when working on the bench (that is, without a telescope), feed the spectrograph with a beam whose geometry is roughly the same as it will have once the spectrograph is coupled to the telescope. What matters here is the opening angle of this beam, or focal ratio F/D. Optical aberrations will then be much better taken into account, and you will get a more accurate diagnosis of the state of your instrument.

Part `12G-1-simulateur-f4` is a simple diaphragm that fits on the front of the printed barrel `9G-1-coulant-50mm` and simulates the use of an f/4 telescope (Figure 27). The aperture is set by changing the diameter d of the diaphragm. If F/D is the focal ratio you wish to simulate, print a part whose diaphragm has a diameter, in millimetres, of d = 86/(F/D), where 86 mm is the distance between the plane of the diaphragm and the slit.

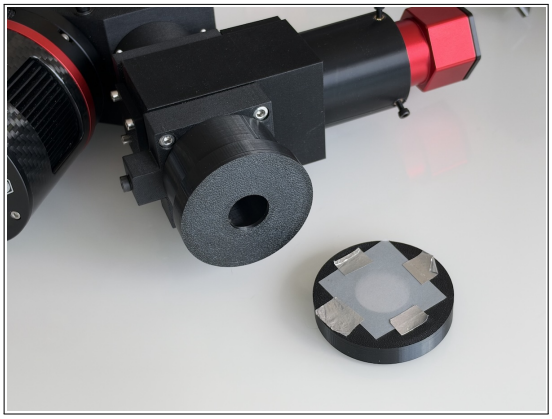


Figure 27. Fitting the entrance diaphragm to simulate a telescope of a given focal ratio. For an even better result, fix a sheet of tracing paper over the aperture to diffuse the light better. This accessory is useful for all adjustments, including those of the spectrograph itself (see the spectrograph assembly guide).

The aim is an image of the slit similar to that in Figure 28: the image is sharp, at least in its central part, the slit is horizontal and the image is centred vertically.

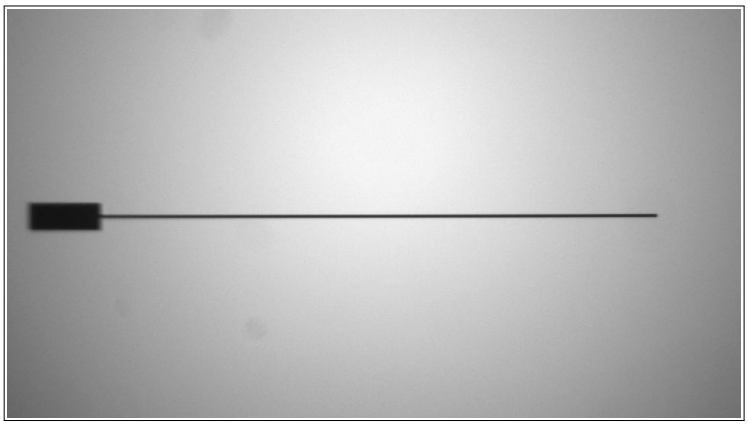


Figure 28. Image of the slit as seen by the guiding system.

For this adjustment, point the spectrograph at a lit ceiling, fitted if possible with its entrance diaphragm. If you intend to use a filter on the camera, fit it now. Display the camera image in 'live view' mode and adjust the exposure time so as not to saturate the image.

The illustrations in Figure 29 show how to proceed. Push the interface tube fully home in its seat, find the best focus by moving the camera forwards or backwards, then tighten the camera retaining screws. Next, orient the interface tube, and finally tighten the clamp of the guiding block.

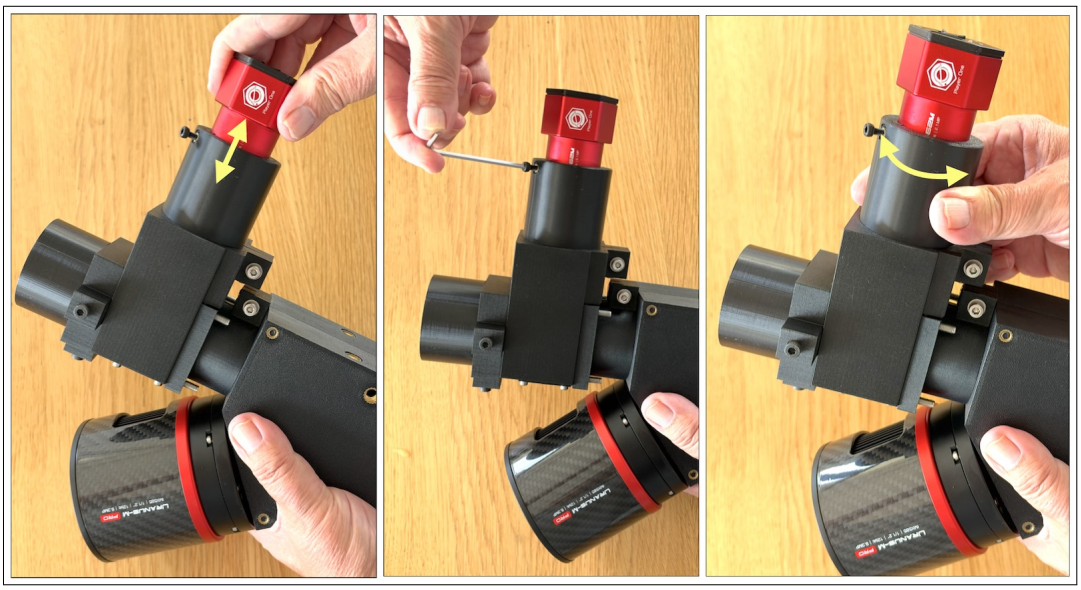


Figure 29. The operations required to adjust the image of the slit.

Work with a light touch, adjusting the tightness of the screws so that the parts can move without excessive play. After a few attempts and a little patience, you will achieve the precision of a helical focuser, with excellent stability into the bargain.

This adjustment should not normally need to be repeated. Bear in mind that your performance at the telescope will depend greatly on it. Enlarge the image of the slit on the screen and aim for really sharp edges. A slit oriented to within two or three tenths of a degree of the detector rows also makes observing much more comfortable. So take the time needed: a great deal depends on it.

If the image of the slit does not seem well enough centred vertically (a small offset is of no consequence), remove the mirror holder (`3G-1-support-miroir`) and add the shim `7G-1-entretoise-miroir` before refitting it. You will then need to refocus on the slit.

TinyStar'Ex is now assembled and adjusted. Clear skies!

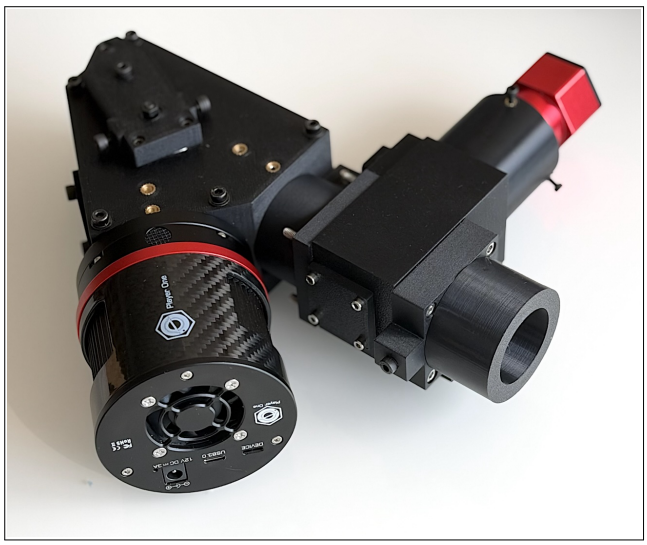


Figure 30. The complete `TinyStar'Ex` spectrograph, ready for use on the sky.