

## Thomas Fischl

[Home](#) | [Projects](#) | [Conta](#)

### USBasp - USB programmer for Atmel AVR controllers

*USBasp is a USB in-circuit programmer for Atmel AVR controllers. It simply consists of an ATmega88 or an ATmega8 and a couple of passive components. The programmer uses a firmware-only USB driver, no special USB controller is needed.*

#### Features

- Works under multiple platforms. Linux, Mac OS X and Windows are tested.
- No special controllers or smd components are needed.
- Programming speed is up to 5kBytes/sec.
- SCK option to support targets with low clock speed (< 1,5MHz).
- Planned: serial interface to target (e.g. for debugging).

#### Download

##### Firmware and circuit

The following packages include circuit and firmware.

[usbasp.2011-05-28.tar.gz](#) (519 kB) TPI support (upcoming release of avrdude will use it), supports programmers with ATmega88 and ATmega8.

[usbasp.2009-02-28.tar.gz](#) (260 kB)

[usbasp.2007-10-23.tar.gz](#) (172 kB)

[usbasp.2007-07-23.tar.gz](#) (176 kB)

[usbasp.2006-12-29.tar.gz](#) (118 kB) Supports programmers with ATmega48 and ATmega8.

[usbasp.2006-09-16.tar.gz](#) (116 kB) New VID/PID!

[usbasp.2005-11-14.tar.gz](#) (175 kB)

[usbasp.2005-07-03.tar.gz](#) (166 kB)

[usbasp.2005-04-21.tar.gz](#) (169 kB)

Please refer to [Readme.txt](#) for details on building, installing and using USBasp.

##### Drivers

On Linux and MacOS X no kernel driver is needed. Windows requires a driver for USBasp. Please use this driver installation tool for Windows:

 [Zadig - USB driver installation made easy](#)

##### Software

- [AVRDUDE](#) supports USBasp since version 5.2.
- [BASCOM-AVR](#) supports USBasp since version 1.11.9.6.
- [Khazama AVR Programmer](#) is a Windows XP/Vista GUI application for USBasp and avrdude.
- [eXtreme Burner - AVR](#) is a Windows GUI Software for USBasp based USB AVR programmers.

#### Hardware

##### Schematic



##### Official USBasp product by MSX

A portion of each sale goes to this project!



€ 9,90

incl. VAT excl. shipping

**Order USBasp now!**


##### USBasp is OpenSource, it's free!

Like it? You can support via PayPal:

€ 5

€ 10

€ 15

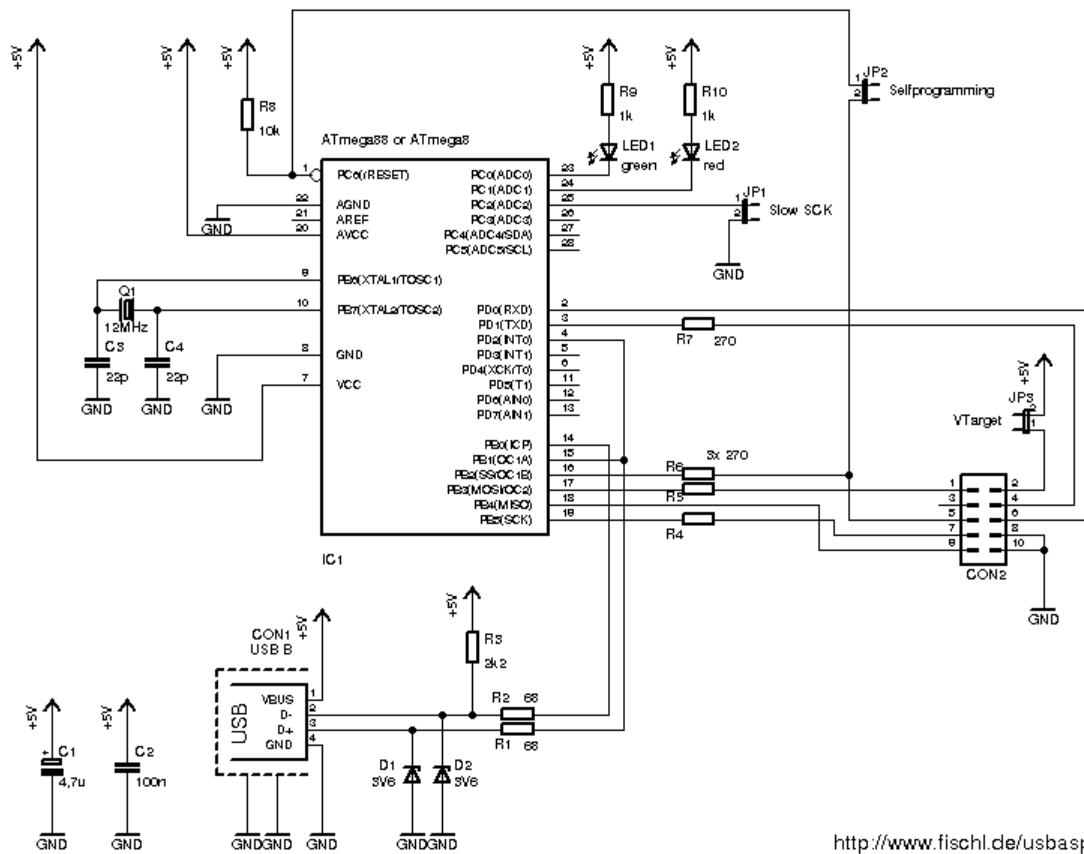

<http://www.fischl.de/usba.sp>

## Partlist

Partnumber	Value	Reichelt No
C1	4,7u	RAD 4,7/35
C2	100n	X7R-5 100N
C3, C4	22p	KERKO 22P
D1, D2	3V6 zener	ZF 3,6
CON1	USB-B	USB BW
CON2	10pol	WSL 10W
IC1	ATmega8-16	ATMEGA 8-16 (not programmed!)
JP1, JP2	2pol 2,54mm	SL 1X36G 2,54
LED1	3mm LED green	LED 3MM 2MA GN
LED2	3mm LED red	LED 3MM 2MA RT
Q1	12Mhz	12,0000-HC49U-S
R1, R2	68	1/4W 68
R3	2,2k	1/4W 2,2k
R4, R5, R6, R7	270	1/4W 270
R8	10k	1/4W 10k
R9, R10	1k	1/4W 1k
M1, M2	Jumper	JUMPER 2,54GL SW
M3	Socket 28S	GS 28-S
M4	Case	TEKO 10007
M5	PCB	-

## User PCB layouts

Here is a list of tested PCB layouts. If you have designed your own PCB, please let me know.


[usbasp\\_single\\_side.t3001.zip](#)

by Thomas Fischl


Single-Side PCB, TARGET 3001! layout file

Size: 90x40 mm (optimized for case [Hammond 1591ATBU](#))
[lv\\_usbasp.tar.gz](#)

by Pawel Szramowski (11/2007)


With **Low-voltage front-end**.

Single-Side PCB, EAGLE layout files, some SMD components



by Bernhard Walle

Double-Side PCB, EAGLE layout files, part list with order numbers for Reichelt.de and Conrad.de

Size: optimized for case [Hammond 1591ATBU](#)
[http://thomaspfeifer.net/atmel\\_usb\\_programmer.htm](http://thomaspfeifer.net/atmel_usb_programmer.htm)

by Thomas Pfeifer

Single-Side PCB, PDF layout files, SMD components



by Tomasz Ostrowski

Single-Side PCB, PDF and EPS layout files, only four 0805 SMD parts, rest discrete components


[USBasp\\_CH.zip](#)

by Christian Heigemeyr

Single-Side PCB, with some SMD 0805 components, PDF-files


With additional buttons for reset and disconnection of the target


[USBasp.sch, USBasp.pcb](#)
[ComponentSide.pdf, TopSide.pdf, Schematics.pdf](#)

by Zhurov Pavel

Single-Side PCB, P-CAD 2002 format and PDF files

Crosspiece TXD and RXD are added for the ISP connector


[usbasp\\_gr.rar](#)

by J.A. de Groot

The board is single sided (EAGLE format), measures 3 by 8 cm and uses only regular components.


[usbaspb\\_mg.zip](#)

by Matthias Görner

Single-Side PCB, eagle-format, with PS/PDF-files

integrated sockets for target chips ATmega8 and ATmega32


[Tarball with layout](#)

by Hannes Östlund

Doubleside-Side PCB, SMD components, very small



by Sergiy Bogdancev (01/2010)

3.3V version, ATmega48 only. Single-side PCB, ExpressPCB layout format + socket board for various AVR's.

Without future serial interface, chip initially must be programmed with another programmer.


[Eaglefiles \(sch/brd\) and CAD case design \(dxf\)](#)
by Hans Hafner, HTL Mössingerstrasse-Klagenfurt, Österreich, [hans.hafner \(at\) htl-klu \(dot\) at](mailto:hans.hafner@htl-klu.at) (01/2010)

CNC-milled case (DXF file available), Eagle layout, only a few SMD parts



[Different USBasp versions: Easy to built non-smd, smd version and a very small USBasp](#)  
by Sven Hedin (01/2011)  
Eagle files available.




[USB Key AVR Programmer](#)  
by Fabio Baltieri (09/2011)  
Very small USB key like dimensions. SMD parts.



[AVR ISP Programmer](#)  
by Jaroslav Vadel (04/2012)  
Small programmer. SMD parts.







[Target project and PDFs \(layout/schematics\)](#)  
by Marius Schäfer (09/2013)



[tinyUSBboard with USBasp-compatible firmware](#)  
by Stephan Bärwolf (04/2014)

## Links

-  <http://www.obdev.at/products/avrusb/> Firmware-only AVR USB driver
-  <http://libusb.sourceforge.net/> libusb
-  <http://libusb-win32.sourceforge.net/> LibUsb-Win32
-  <http://www.nongnu.org/avrdude/> AVRDUDE - AVR Downloader/UploaDEr

[HEX file checksum online calculati](#)

© 1998 - 2017 Thomas Fischl · [Privacy Policy](#) · [Imprint/Impressu](#)