



Langkah – langkah upload:


- 1 Buka aplikasi SR14+ABC Firmware Update Ver2.0.
(*terlebih dahulu harus install .NET Framework 3.5).

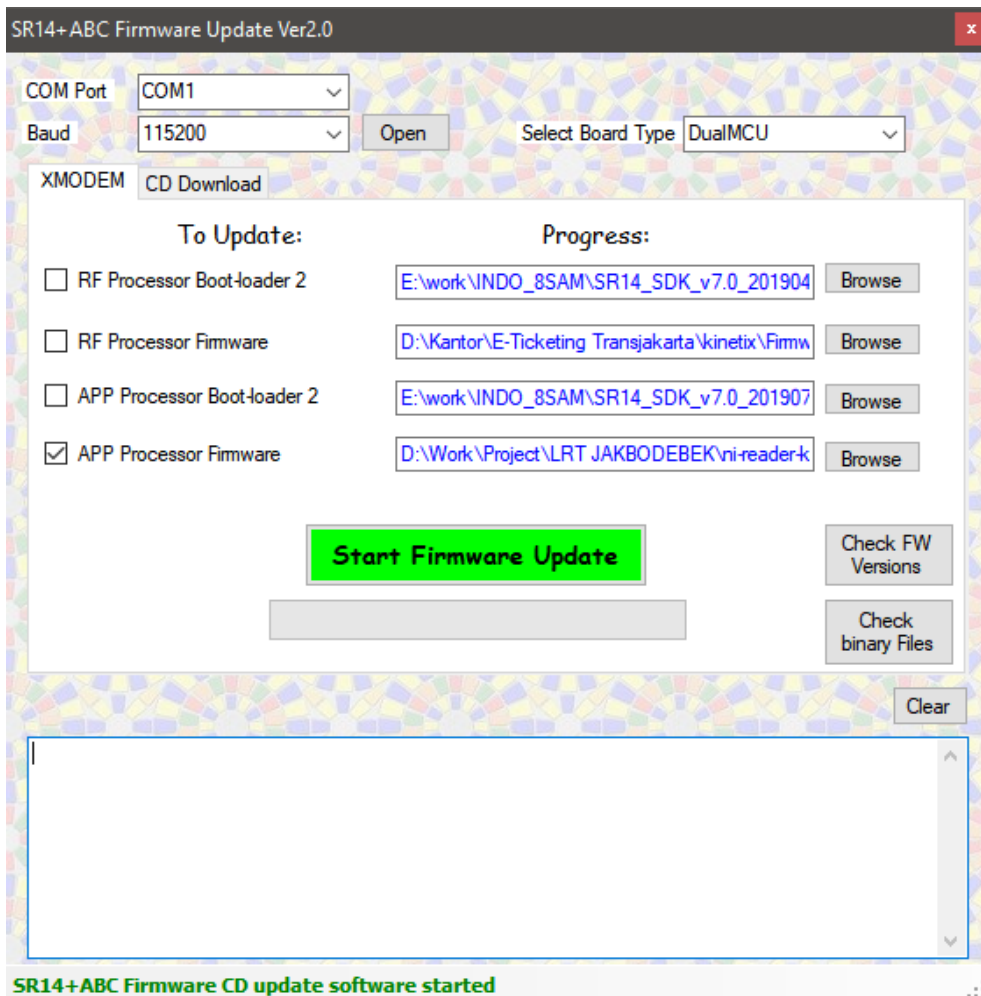

- 2 Atur COM Port, lalu pilih dan pastikan Port nya tersedia.
- 3 Atur Baud ke 115200.
- 4 Atur Select Board Type jadi DualMCU.
- 5 Lalu klik Open. Lalu, tunggu sampai ada notifikasi opened di kiri bawah pojok.




- 6 Centang APP Processor Firmware saja. Lalu klik Browse

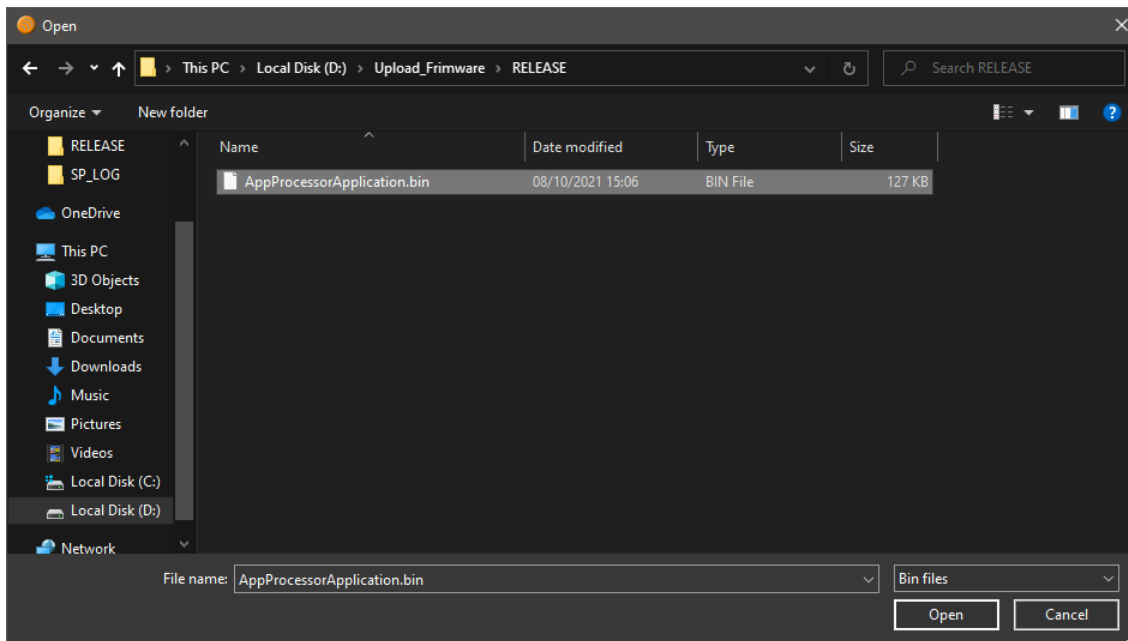

- 7 Klik file AppProcessorApplicaiton.bin, lalu klik Open



- 8 Klik Start Firmware Update, dan tunggu hingga selesai.

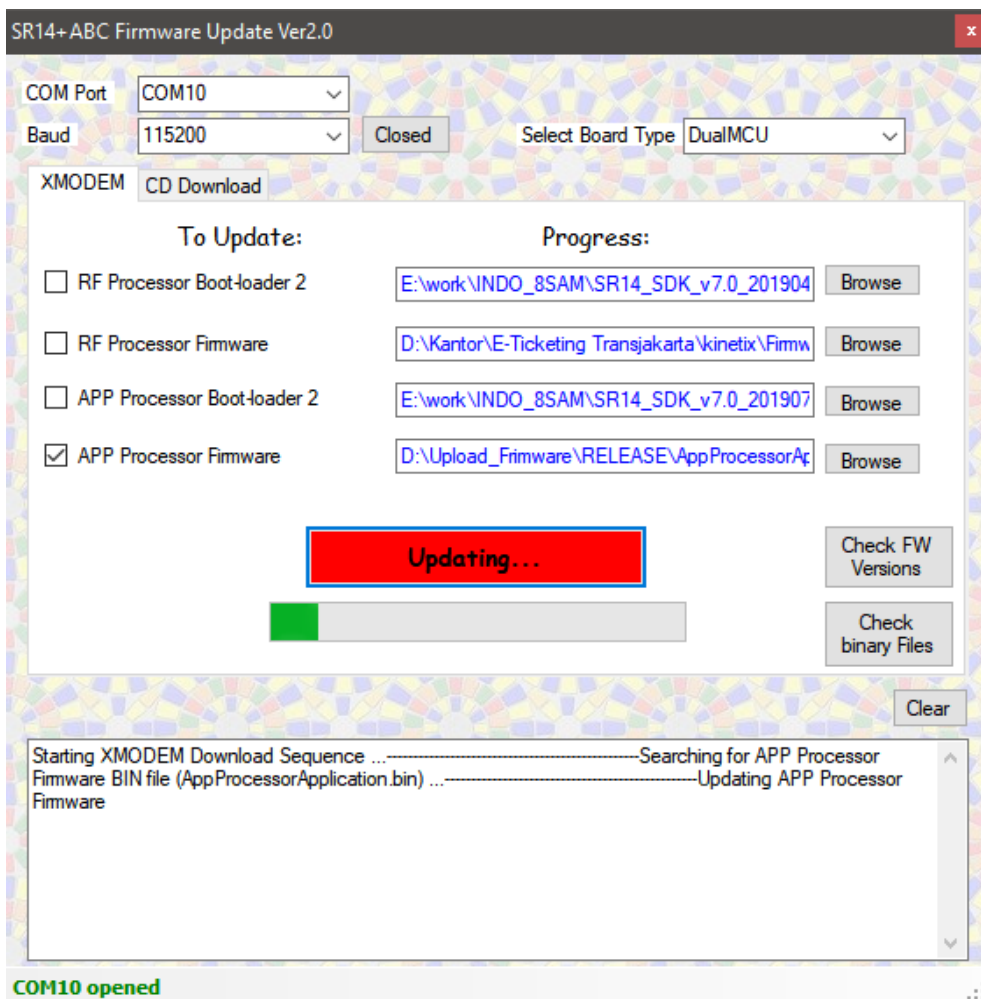

- 9 Jika, berhasil dan sukses. Maka tampilannya akan seperti ini.

SR14+ ABC Firmware Update Ver2.0

COM Port

COM10

Baud

115200

Closed

Select Board Type

DualMCU

XMODEM

CD Download

To Update:

Progress:

☐ RF Processor Boot-loader 2

E:\work\INDO_8SAM\SR14_SDK_v7.0_201904

Browse

☐ RF Processor Firmware

D:\Kantor\E-Ticketing Transjakarta\kinetix\Firmw

Browse

☐ APP Processor Boot-loader 2

E:\work\INDO_8SAM\SR14_SDK_v7.0_201907

Browse

☒ APP Processor Firmware

OK

D:\Upload_Firmware\RELEASE\AppProcessorAp

Browse

Start Firmware Update

Check FW Versions

Check binary Files

Clear

Starting XMODEM Download Sequence ...

Searching for APP Processor

Firmware BIN file (AppProcessorApplication.bin) ...

Updating APP Processor

Firmware

COM10 opened