


HEADBOARD — SHOP DRAWINGS · OVERALL ENVELOPE

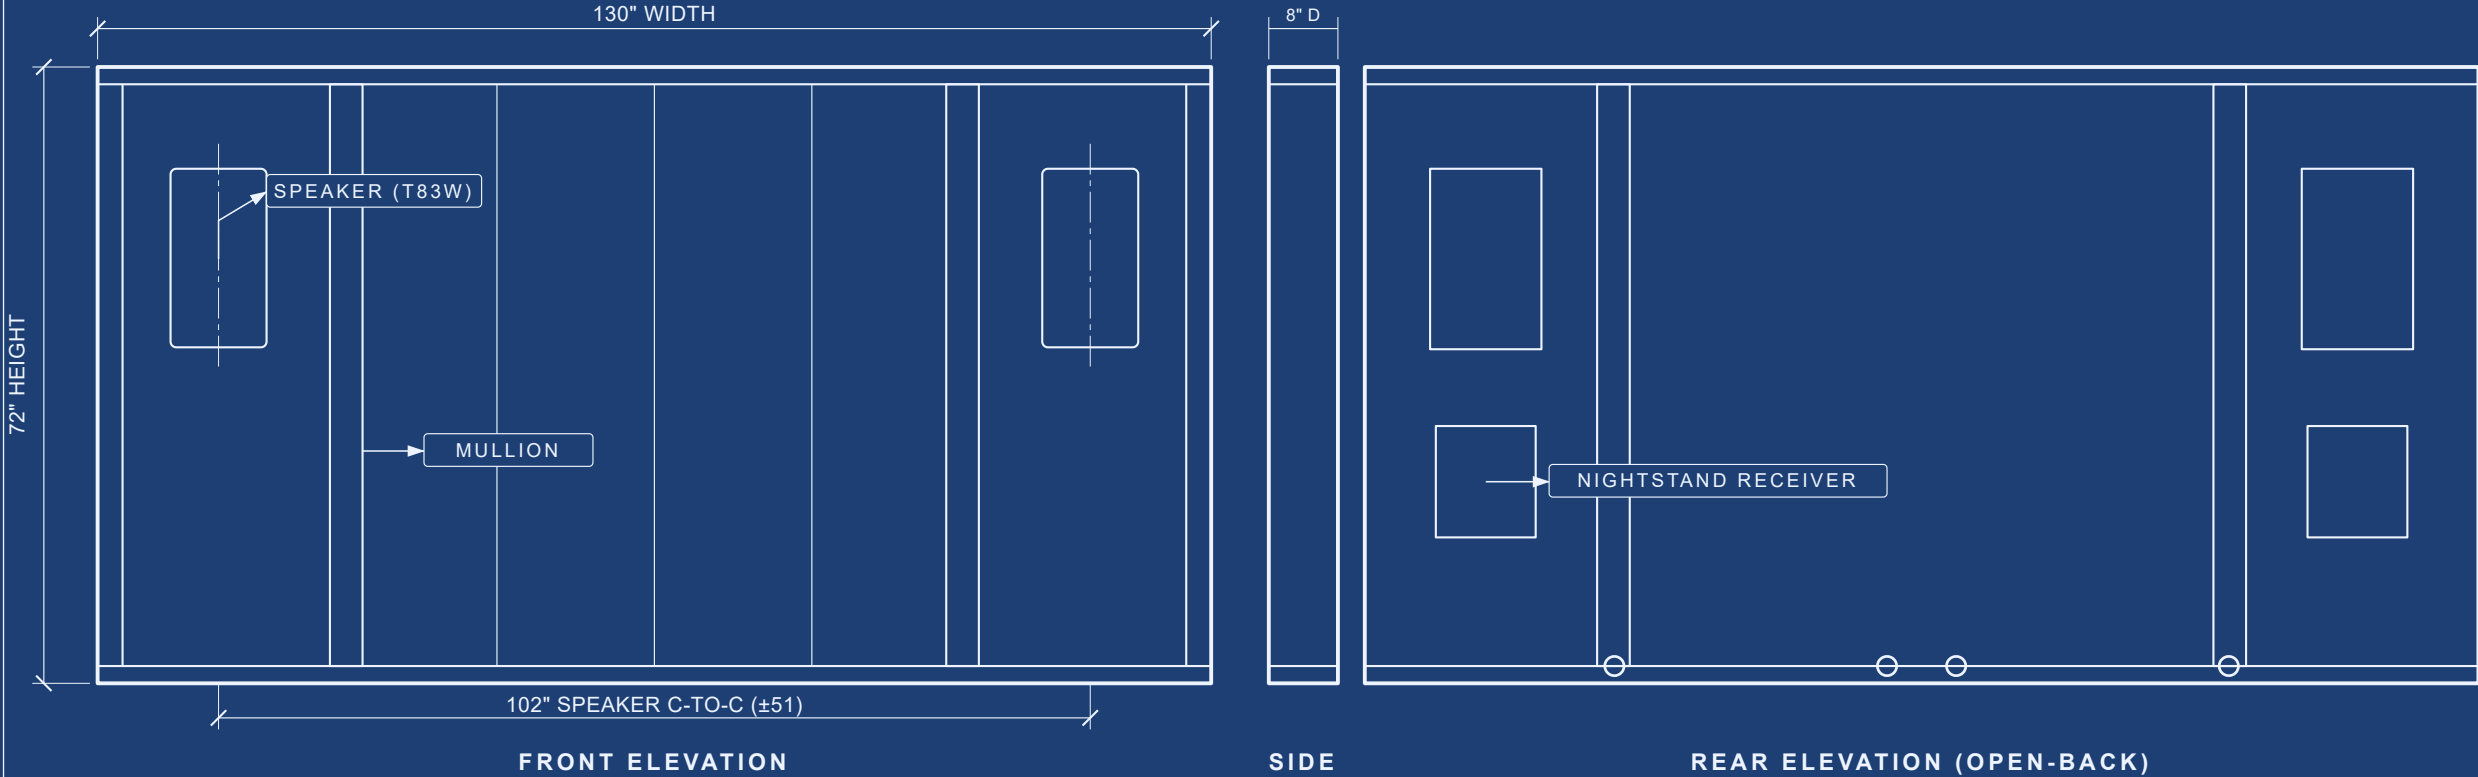

SHEETS IN THIS SET

- 1 OVERALL ENVELOPE (this sheet)
- 2 PART DRAWINGS + CUT LIST
- 3 SECTION DETAILS
- 4 CRITICAL INTERFACES
- 5 HARDWARE SCHEDULE

GENERAL NOTES

- All dimensions in inches ("). AFF = above finished floor. Figured dimensions govern — DO NOT scale.
- Headboard overall 130 W × 72 H × 8 D. Open-back rail-and-stile frame; six 1" front panels.
- Mullions at ±36; bolts to the base at ±36 + ±4. Speakers / receivers / USB-C centered at ±51.
- Joinery method + grain at builder's discretion. Parts (sheet 2) NOT to a single scale — the cut list governs.

GRAPHIC SCALE (FEET) · ELEVATIONS s = 4.46 px/in



PROJECT HEIRLOOM BED	
DRAWING Headboard — Shop Drawings	DRAWING NO. Headboard-Shop_Blueprint
REV 1.4	SHEET 1 OF 5

PART DRAWINGS & CUT LIST

1 TOP CAP
2" THK · ×1



2 BOTTOM RAIL
2" THK · ×1




3 SIDE STILE
2" W · ×2



4 MULLION
4" W · ×2 (at ±36)



5 PANEL — OUTER
1" THK · ×2

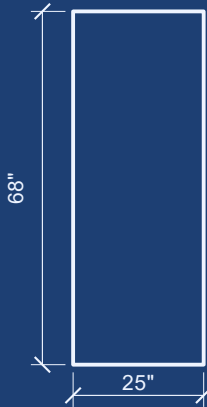

6 PANEL — CENTER
1" THK · ×4



CUT LIST

#	PART	QTY	THK	WIDTH	LENGTH	NOTES
1	Top cap	1	2"	8"	130"	LED channels routed — see TopCap-LED
2	Bottom rail	1	2"	8"	130"	full-width bottom frame member
3	Side stile	2	2"	8"	68"	captured between the rails (mirror pair)
4	Mullion	2	4"	8"	68"	at x = ±36; W-relief at top for the LED channels
5	Front panel — outer	2	1"	25"	68"	stile-to-mullion bay; fit to the frame opening
6	Front panel — center	4	1"	~17"	68"	between the mullions; four equal; fit to opening

PROJECT
HEIRLOOM BED

DRAWING
Headboard — Shop Drawings


REV
1.4

DRAWING NO.
Headboard-Shop_Blueprint

SHEET
2 OF 5


SECTION DETAILS

SECTION A-A

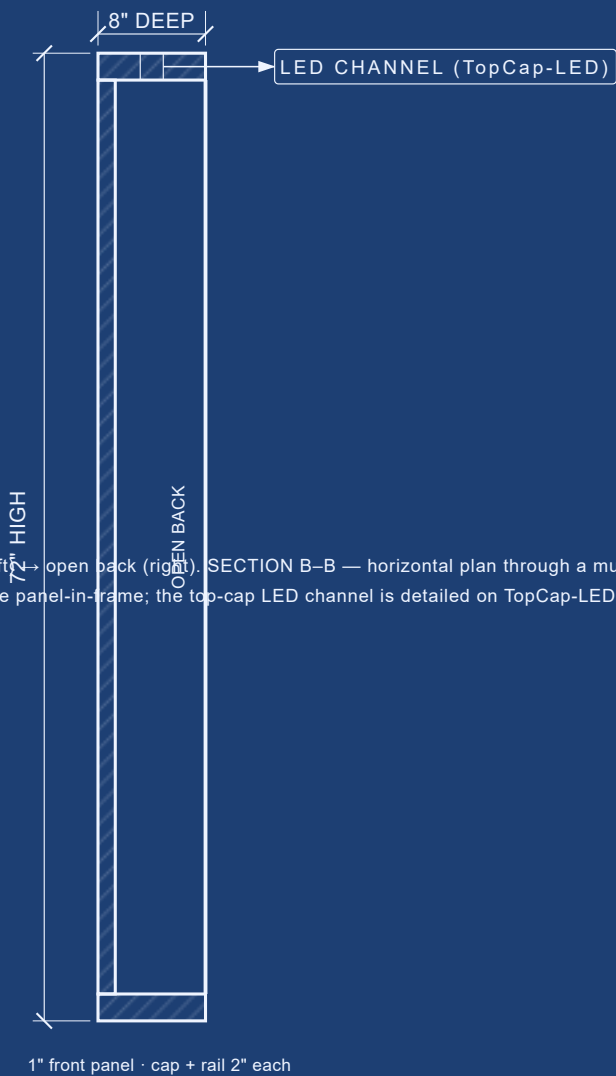

SECTION B-B

PLAN THROUGH A MULLION · OPEN BACK AT TOP

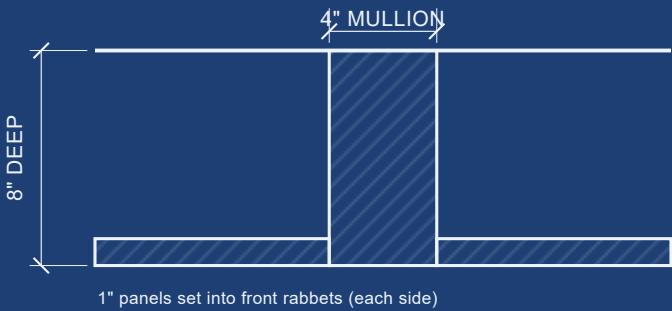


SECTION A-A — vertical, front (left) → open back (right). SECTION B-B — horizontal plan through a mullion.
Sections show the depth build + the panel-in-frame; the top-cap LED channel is detailed on TopCap-LED. Joint method + grain at builder's discretion. Not to a single scale.

PROJECT HEIRLOOM BED		
DRAWING Headboard — Shop Drawings		DRAWING NO. Headboard-Shop_Blueprint
REV	1.4	SHEET 3 OF 5

CRITICAL INTERFACES

HEADBOARD REAR (OPEN-BACK) · base bolts · nightstand receivers · speakers · USB-C

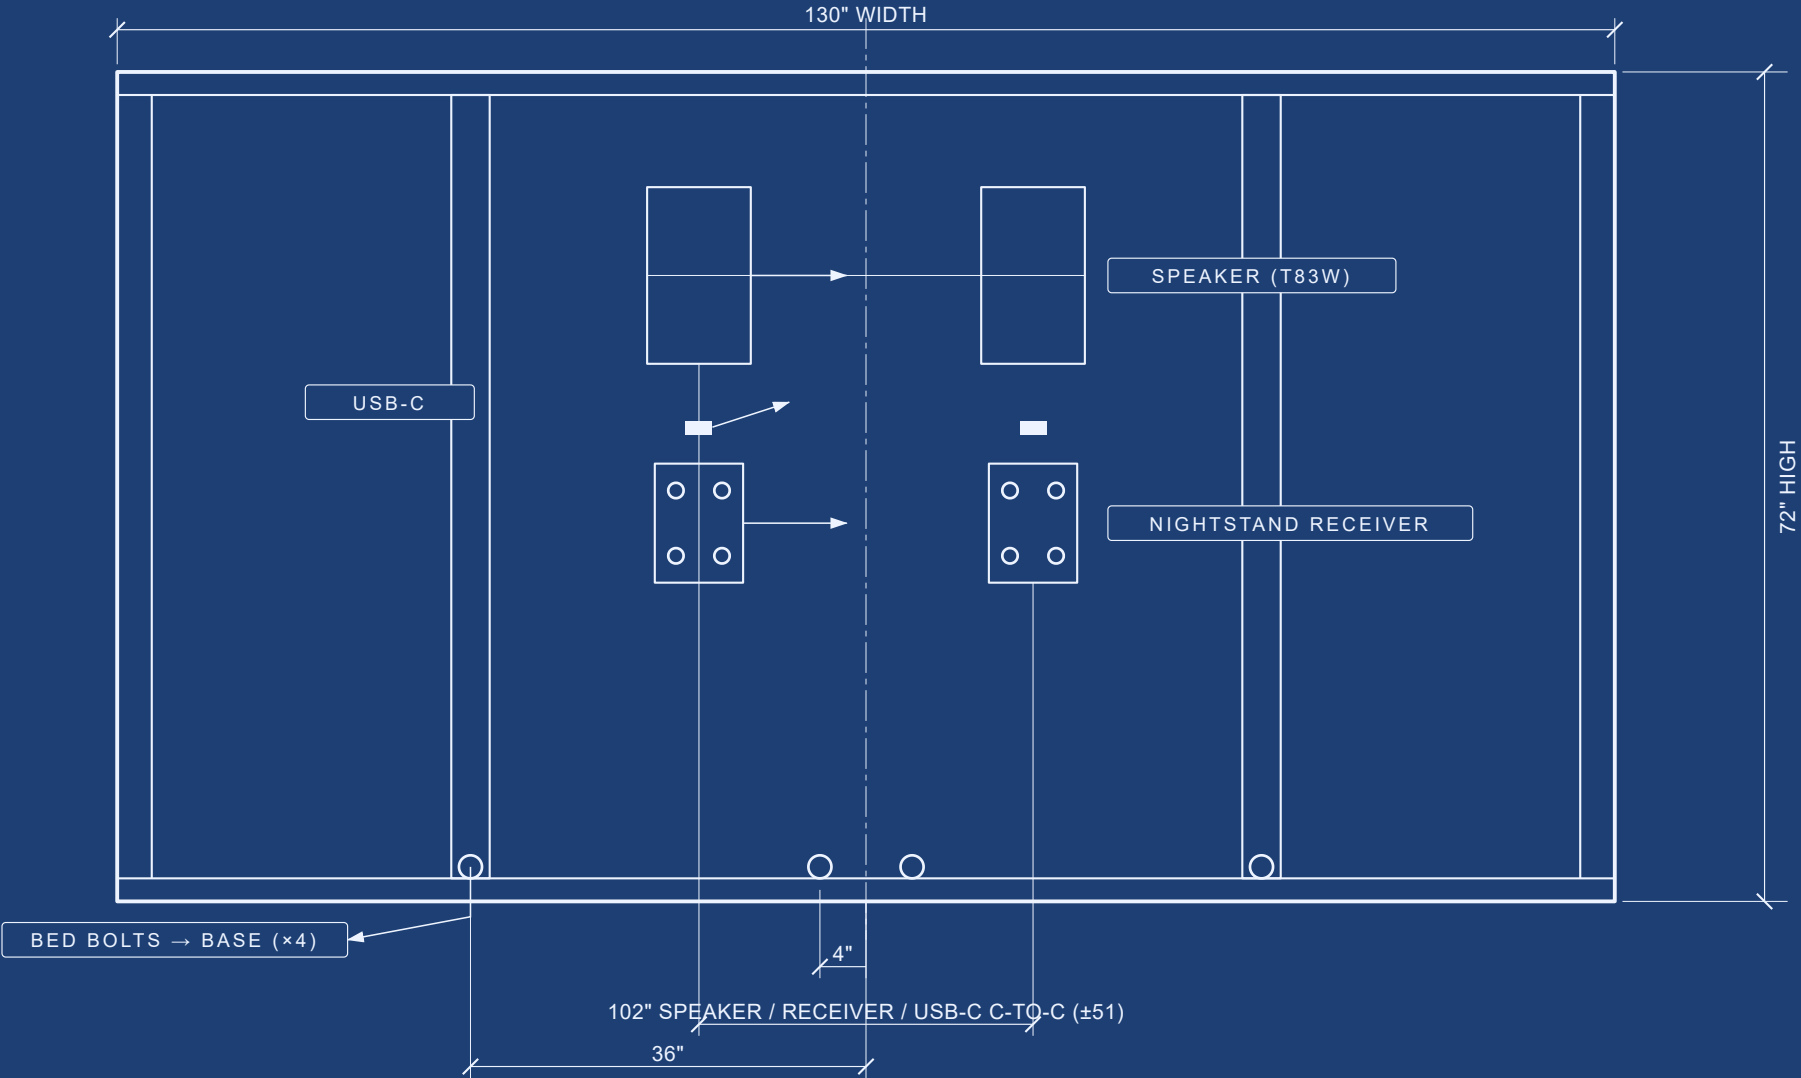


Open-back rail-and-stile frame. Mullions bolt to the base with 4 bed bolts at $x = \pm 36 \pm 4$ (through the bottom rail).
Speakers, nightstand receivers, and USB-C ports all center at ± 51 . Bolt + receiver hardware on sheet 5. Cutouts straight/flush — no toe-in.

PROJECT HEIRLOOM BED	
DRAWING Headboard — Shop Drawings	DRAWING NO. Headboard-Shop_Blueprint
REV 1.4	SHEET 4 OF 5

HARDWARE SCHEDULE

#	ITEM	QTY	SPECIFICATION	LOCATION / NOTE
1	Bed bolt	4	3/8"-16 steel, hex head; length to suit	Bottom rail → base · x = ±36 + ±4
2	Cross-dowel (barrel nut)	4	3/8"-16 steel	In the base; receives each bed bolt
3	Nightstand receiver bolt	8	Captive square-nut + machine bolt	Nightstand → rear receiver (4 per side)
4	USB-C insert	4	Owner-supplied 4-port, locking	Headboard face · ±51 · ~30" AFF — builder cuts the opening
5	In-wall speaker	2	Owner-supplied in-wall	Cutout ±51 · 11.26 × 20.71 — straight/flush; builder cuts

DETAIL — BED-BOLT CONNECTION (HEADBOARD → BASE)

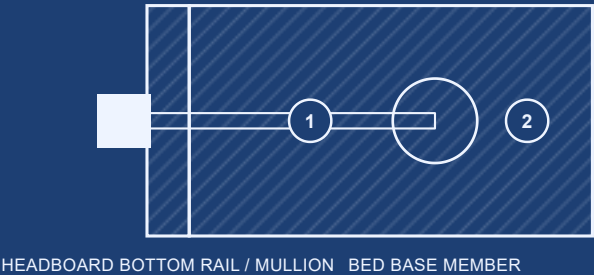

- 1

3/8" bed bolt — steel, hex head (×4 at ±36 / ±4)
- 2

Cross-dowel / barrel nut — set in the base (×4)

Case joinery + grain at builder's discretion. USB-C inserts + in-wall speakers are owner-installed — the builder provides the cutouts only.
Bed-bolt + receiver positions locate on sheet 4 (Critical Interfaces). The top-cap LED hardware is on the TopCap-LED sheet.

PROJECT HEIRLOOM BED	
DRAWING Headboard — Shop Drawings	DRAWING NO. Headboard-Shop_Blueprint
REV 1.4	SHEET 5 OF 5