

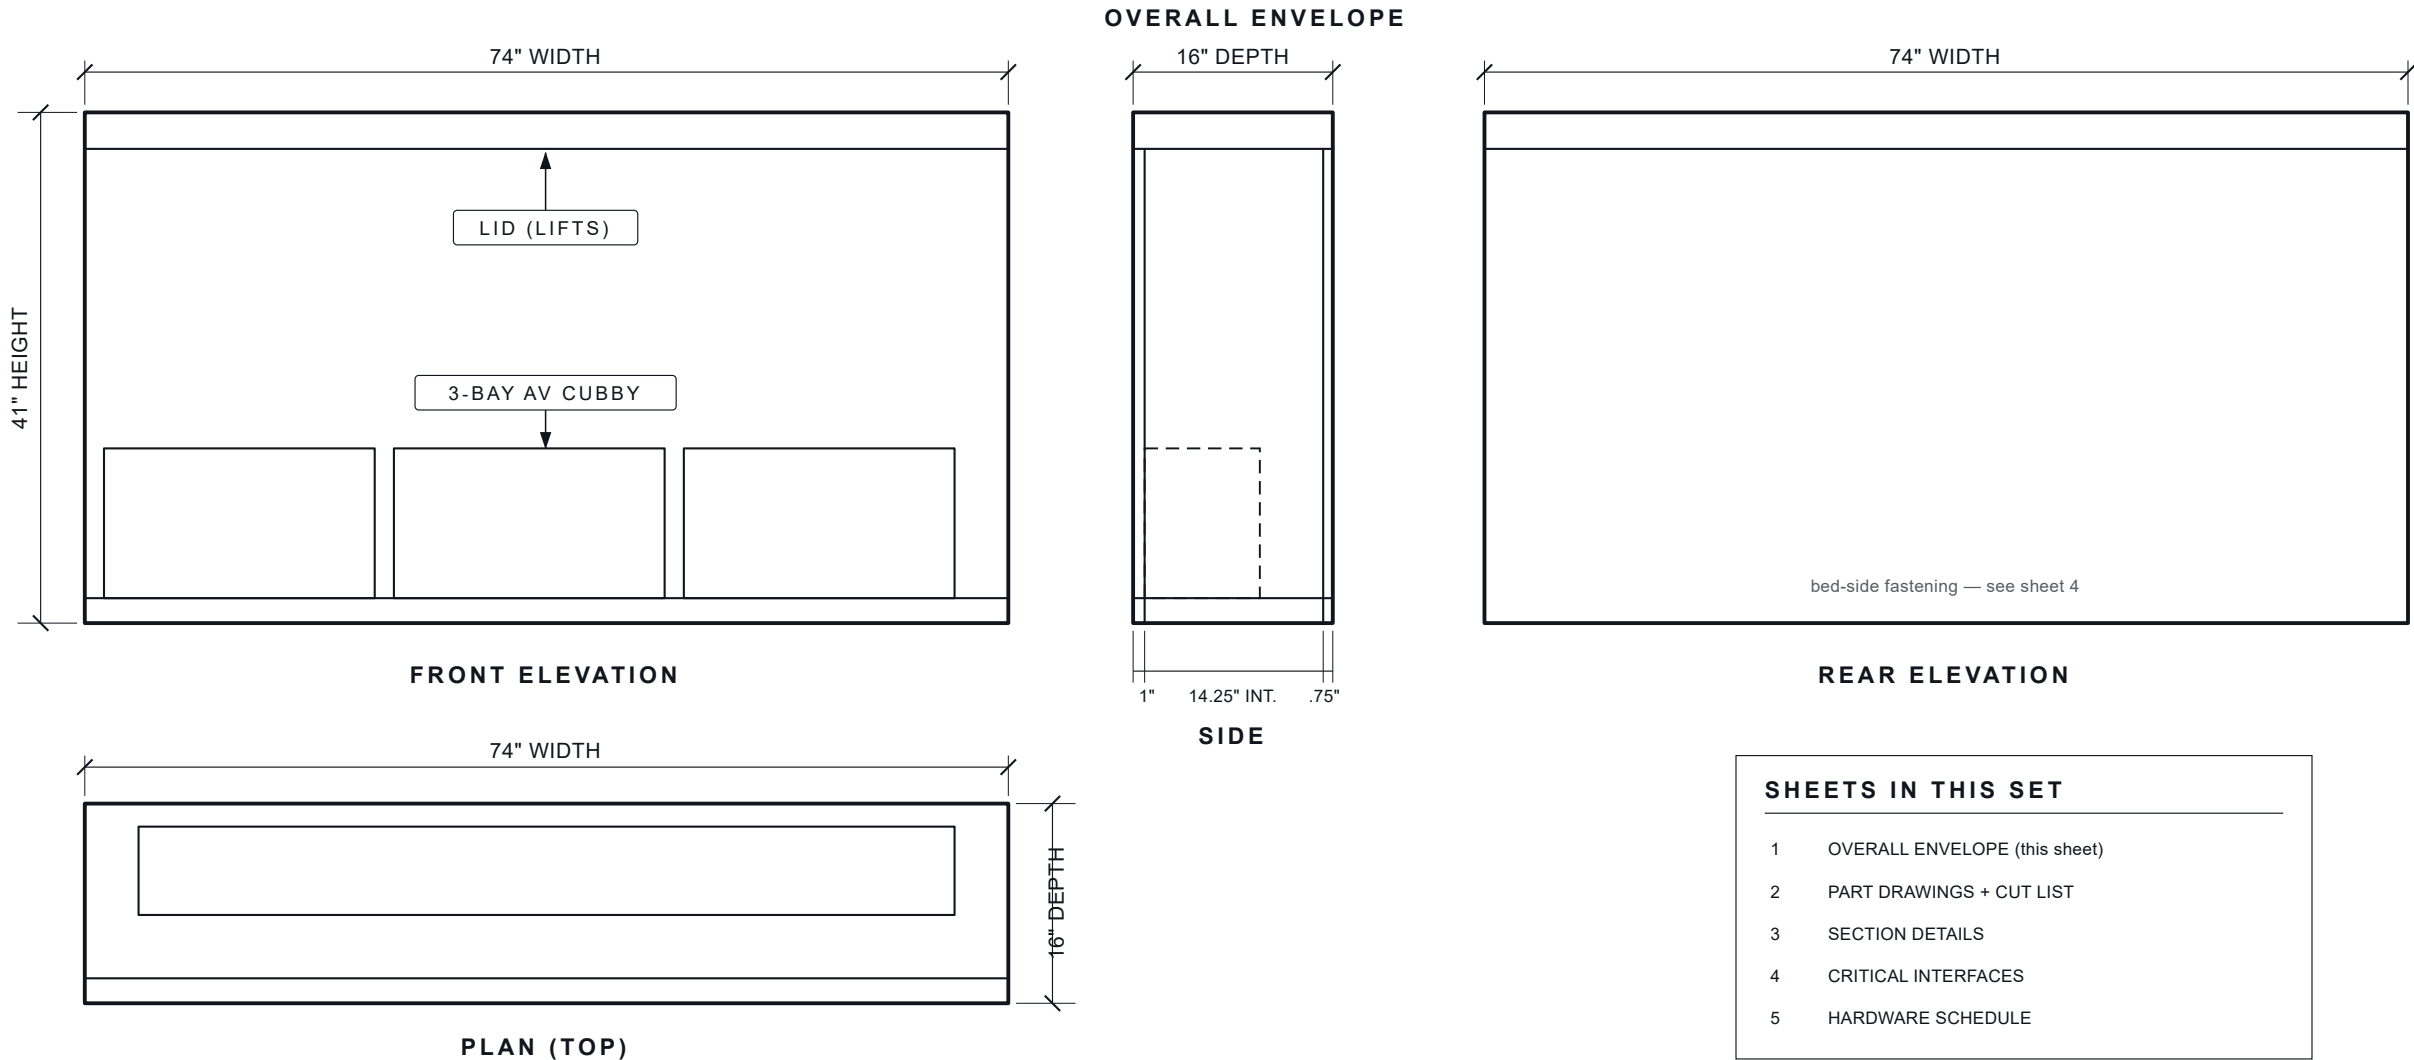
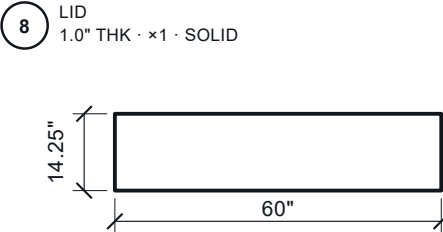
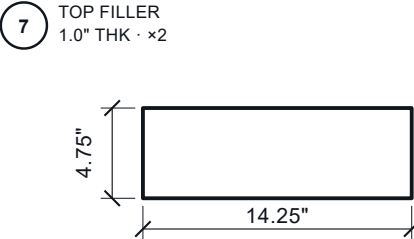
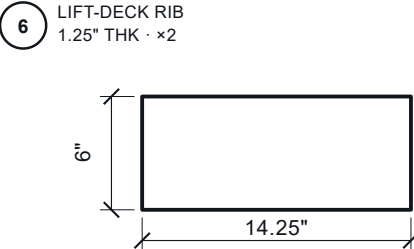
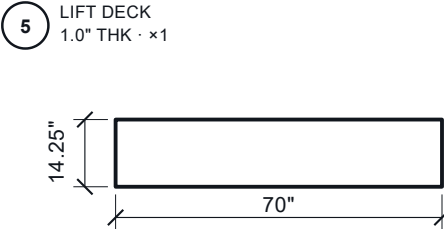
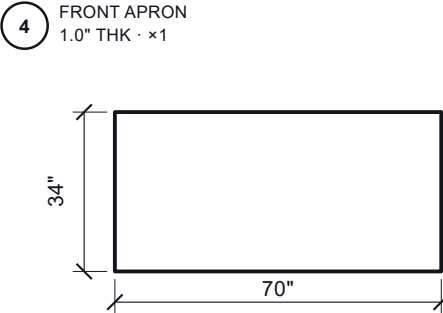
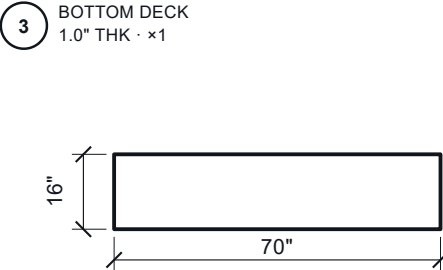


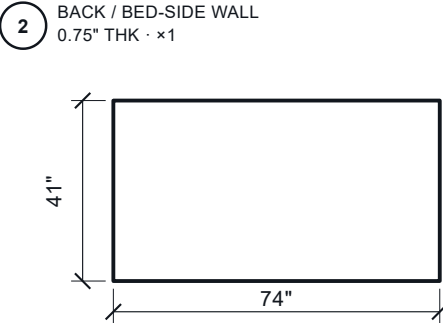

PROJECT HEIRLOOM BED	
DRAWING TV Cabinet — Shop Drawings	DRAWING NO. TV-Cabinet-Shop_Blueprint
REV 2.18	SHEET 1 OF 5

PART DRAWINGS & CUT LIST

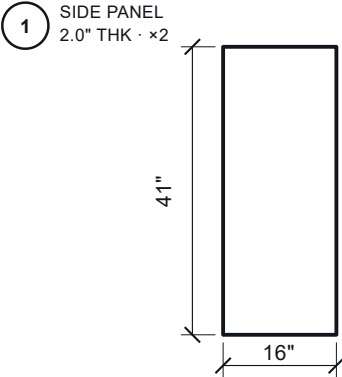



CUT LIST

#	PART	QTY	THICK	WIDTH	LENGTH	NOTES
1	SIDE PANEL	2	2.0"	16"	41"	mirror pair (L + R)
2	BACK / BED-SIDE WALL	1	0.75"	41"	74"	solid; wire pass-through at base (see sheet 4)
3	BOTTOM DECK (cubby floor)	1	1.0"	16"	70"	between the side panels
4	FRONT APRON	1	1.0"	34"	70"	closes the front above the open cubby
5	LIFT DECK (cubby ceiling)	1	1.0"	14.25"	70"	carries the owner-installed lift
6	LIFT-DECK RIB	2	1.25"	6"	14.25"	at x = ±15.625"; splits the 3 cubby bays
7	TOP FILLER	2	1.0"	4.75"	14.25"	flanks the lid slot
8	LID	1	1.0"	14.25"	60"	solid, screwed; rides the lift

GENERAL NOTES

1. Finished sizes shown — builder adds joinery allowance; joinery method at builder's discretion.
2. Grain direction + matching at builder's discretion.
3. Parts NOT to a single scale — the cut-list dimensions govern. DO NOT scale from the print.

PROJECT HEIRLOOM BED	
DRAWING TV Cabinet — Shop Drawings	DRAWING NO. TV-Cabinet-Shop_Blueprint
REV 2.18	SHEET 2 OF 5

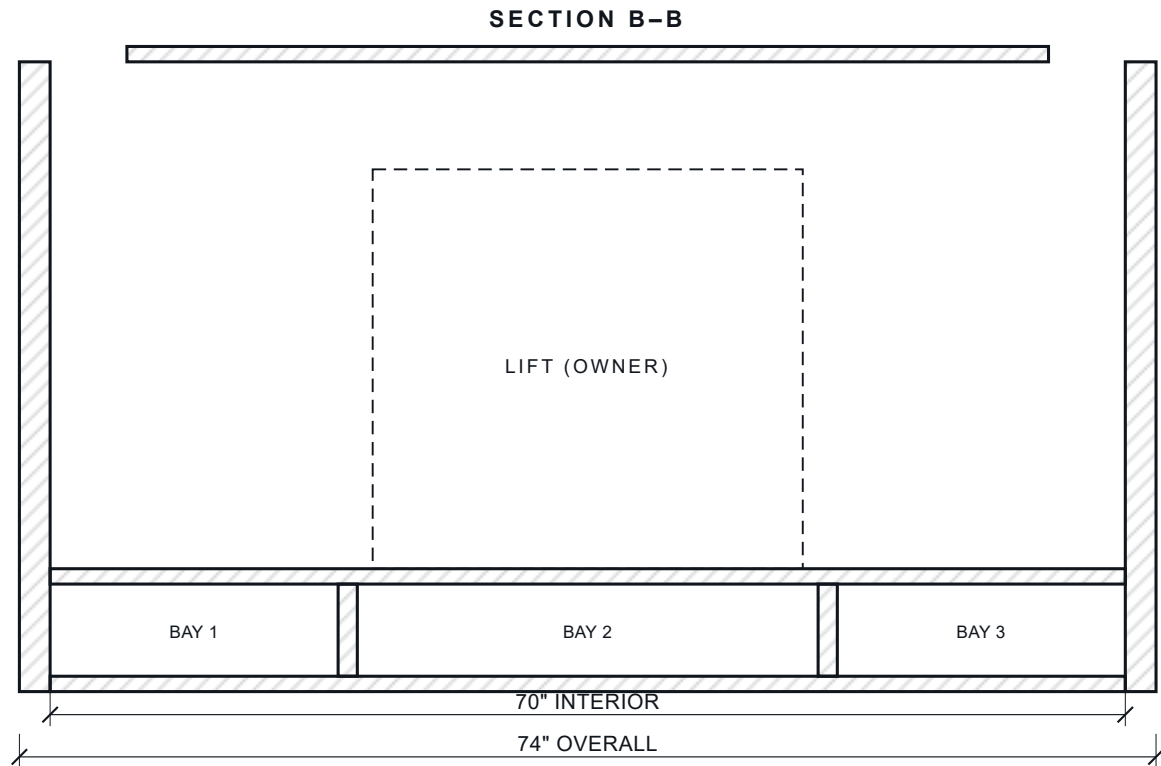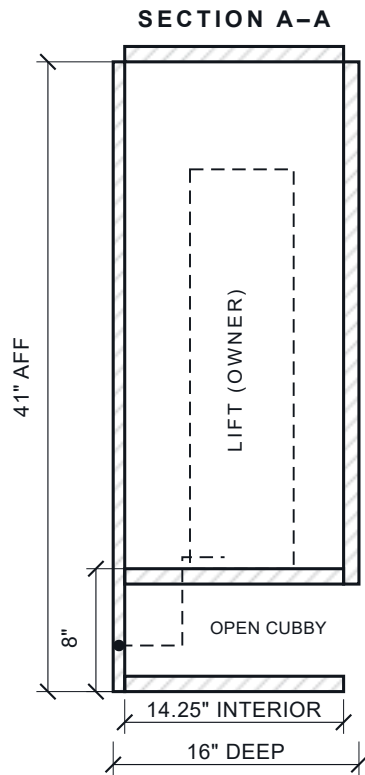

SECTION A-A — vertical, front-to-back (bed-side → room). SECTION B-B — transverse, across the width.
Internal arrangement + interior clearances only — joint method + grain at builder's discretion.




KEY INTERIOR CLEARANCES

Interior depth (front → back)	14.25"
Interior width (between sides)	70"
Open-cubby clear height	6"
Lift-deck height (AFF)	8"
Lift cavity (deck → lid)	33"

PROJECT HEIRLOOM BED		
DRAWING TV Cabinet — Shop Drawings		DRAWING NO. TV-Cabinet-Shop_Blueprint
REV 2.18	SHEET 3 OF 5	


CRITICAL INTERFACES

BED-SIDE FACE — BOLTS TO THE BED BASE

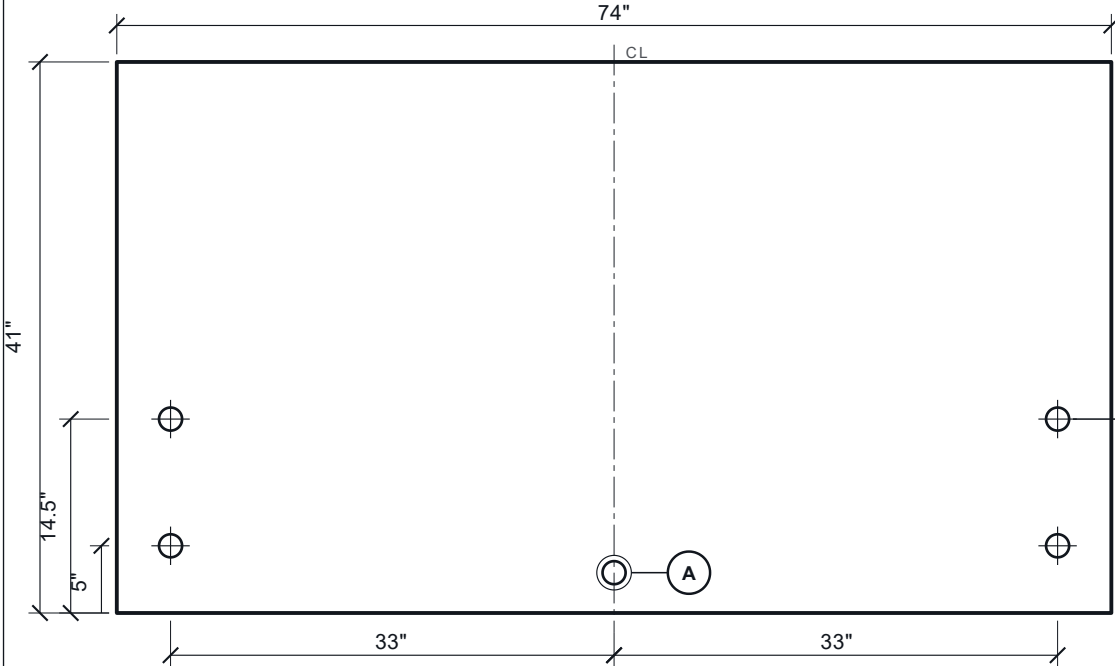


DETAIL A — WIRE PASS-THROUGH

ENLARGED · Ø¼" BORE + RUBBER GROMMET · ON CL, 3" AFF

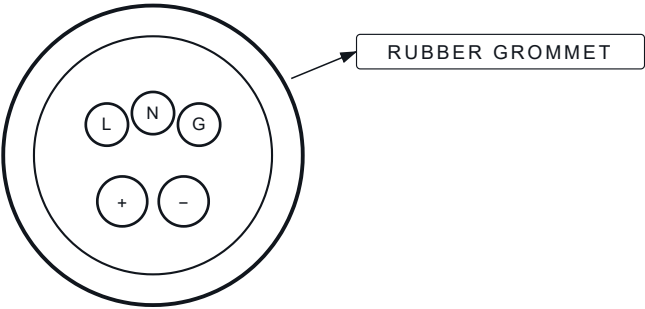

120V mains (L · N · ground) + 2× 12 AWG speaker — bare wires

TOP — LIFT OPENING (PLAN)

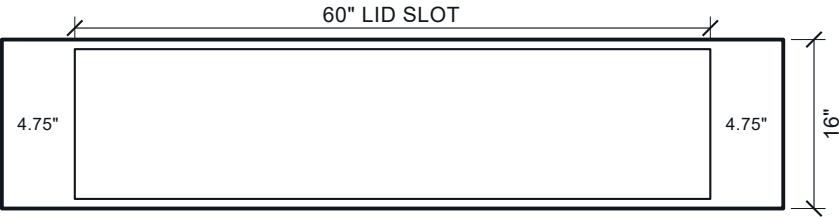

Owner's custom interfaces — the bed-side face bolts to the bed base (4 bolts) and passes power + audio through one grommeted hole.
The top opening accepts the owner-installed lift + lid. Bolt + grommet hardware specified on sheet 5.

GRAPHIC SCALE (FEET) · BED-SIDE FACE s = 7 px/in




PROJECT HEIRLOOM BED		
DRAWING TV Cabinet — Shop Drawings		DRAWING NO. TV-Cabinet-Shop_Blueprint
REV	2.18	SHEET 4 OF 5

HARDWARE SCHEDULE

#	ITEM	QTY	SPECIFICATION	LOCATION / NOTE
1	Bed bolt	4	3/8"-16 steel, hex head; length to suit base member	Bed-side face → bed base · x = ±33" · rows 5" / 14.5" AFF
2	Cross-dowel (barrel nut)	4	3/8"-16 steel · ~1/2" Ø × ~3/4"	Set in the bed base; receives each bed bolt
3	Rubber grommet	1	3/4" ID panel-mount · EPDM / rubber	Wire pass-through · on CL · 3" AFF (DETAIL A, sheet 4)
4	Lid fasteners	a/r	Wood screws — builder's choice	Lid is solid stock, screw-assembled

DETAIL — BED-BOLT CONNECTION

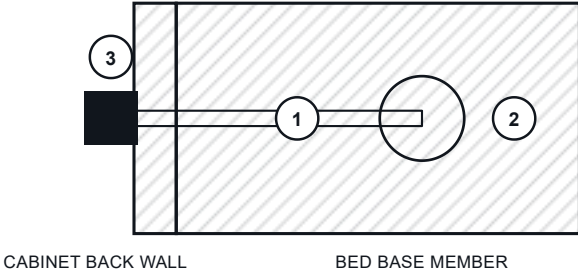

- 1 3/8" bed bolt — steel, hex head (×4)
- 2 Cross-dowel / barrel nut — set in the base (×4)
- 3 Counterbore — bolt head recessed in the back wall

Case + lid joinery hardware at builder's discretion. Bolt length set to the base member at install.
The bed-bolt pattern + wire grommet locate on sheet 4 (Critical Interfaces).

PROJECT HEIRLOOM BED	
DRAWING TV Cabinet — Shop Drawings	DRAWING NO. TV-Cabinet-Shop_Blueprint
REV 2.18	SHEET 5 OF 5