



Front

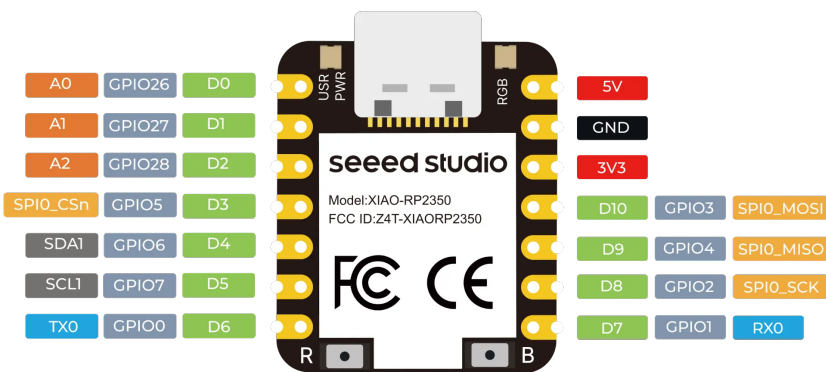

Digital Analog GPIO IIC UART SPI Power GND ALL PWM

Back

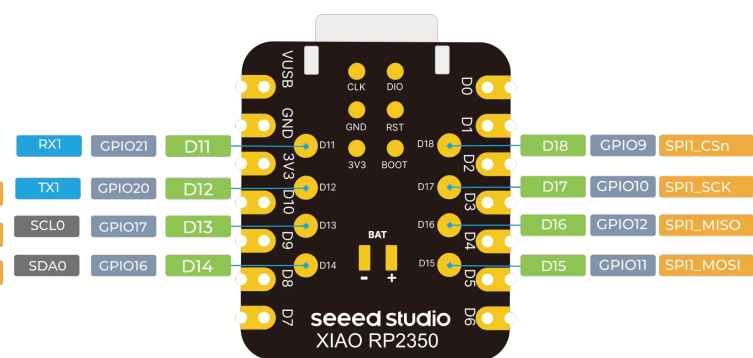

Digital Analog GPIO IIC UART SPI Power GND ALL PWM



TTLtoRS485

D11(GP21) UART1_RX

D12(GP20) UART1_TX

3.3V


ICM45686(IMU)

D3(GP5) SPI0_CS_n

D8(GP2) SPI0_SCK

D9(GP4) SPI0_MISO

D10(GP3) SPI0_MOSI



TTLtoCAN

D6(GP0) UART0_TX

D7(GP1) UART0_RX

5V

Power:

12V->5V

5V->3.3V

PWM:

5V, GND, D0(GP26)

5V, GND, D1(GP27)

SOS Leak Sensor(漏水传感器)

D4(GP6)

Reset Button

Boot Button

智能协议转换模块

型号: BCAN-S01

支持AT指令

支持Modbus RTU转换

支持上位机参数配置

串口波特率: 600~921600bps

CAN波特率: 6K~1Mbps

产品尺寸: 21.5*20*4.5mm



CAN互转TTL 支持透明转换+透明带标识转换 + 协议转换 + 自定义协议转换

