

## 触发硬件接线（采集卡端）

### 一、端口定义

采集卡是 cameralink full 卡，外部 i/o 端口为 3 排 26pin 接口；

**Grablink Hardware Manual**

### External I/O Connector

Applies to: **Full** **FullXR**

#### Connector description

| Property | Value                                            |
|----------|--------------------------------------------------|
| Name     | External I/O                                     |
| Type     | 26-pin 3-row high-density female sub-D connector |
| Location | Card bracket                                     |
| Usage    | General purpose I/O and power output             |



## Pin assignments


| Pin | Signal | Usage                                            |
|-----|--------|--------------------------------------------------|
| 1   | GND    | Ground                                           |
| 2   | DIN2+  | High-speed differential input #2 – Positive pole |
| 3   | IIN1+  | Isolated input #1 – Positive pole                |
| 4   | IIN3-  | Isolated input #3 – Negative pole                |
| 5   | IIN4-  | Isolated input #4 – Negative pole                |
| 6   | IOUT2- | Isolated contact output #2 – Negative pole       |
| 7   | IOUT4- | Isolated contact output #4 – Negative pole       |
| 8   | +5V    | +5V Power output                                 |
| 9   | GND    | Ground                                           |
| 10  | GND    | Ground                                           |
| 11  | DIN2-  | High-speed differential input #2 – Negative pole |
| 12  | IIN1-  | Isolated input #1 – Negative pole                |
| 13  | IIN2+  | Isolated input #2 – Positive pole                |
| 14  | IIN3+  | Isolated input #3 – Positive pole                |
| 15  | IIN4+  | Isolated input #4 – Positive pole                |

## Grablink Hardware Manual



| Pin | Signal | Usage                                            |
|-----|--------|--------------------------------------------------|
| 16  | IOUT2+ | Isolated contact output #2 – Positive pole       |
| 17  | IOUT4+ | Isolated contact output #4 – Positive pole       |
| 18  | GND    | Ground                                           |
| 19  | DIN1-  | High-speed differential input #1 – Negative pole |
| 20  | DIN1+  | High-speed differential input #1 – Positive pole |
| 21  | IIN2-  | Isolated input #2 – Negative pole                |
| 22  | IOUT1- | Isolated contact output #1 – Negative pole       |
| 23  | IOUT1+ | Isolated contact output #1 – Positive pole       |
| 24  | IOUT3- | Isolated contact output #3 – Negative pole       |
| 25  | IOUT3+ | Isolated contact output #3 – Positive pole       |
| 26  | +12V   | +12 V Power output                               |

## 二、接线

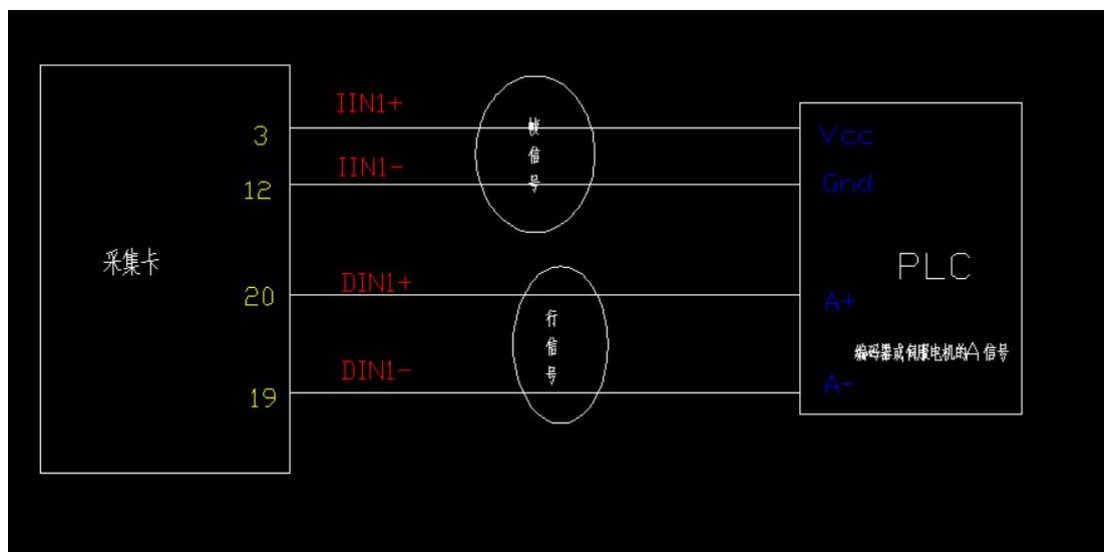

注释： IIN1+,IIN1- 为一组，总共 4 组，是 TTL 电压信号（5V,12V,24VDC），任何一组都可以作为采集图像的帧信号使用；  
DIN1+,DIN1-为一组，总共 2 组，是差分信号，任何一组都可以作为采集图像的行信号使用；